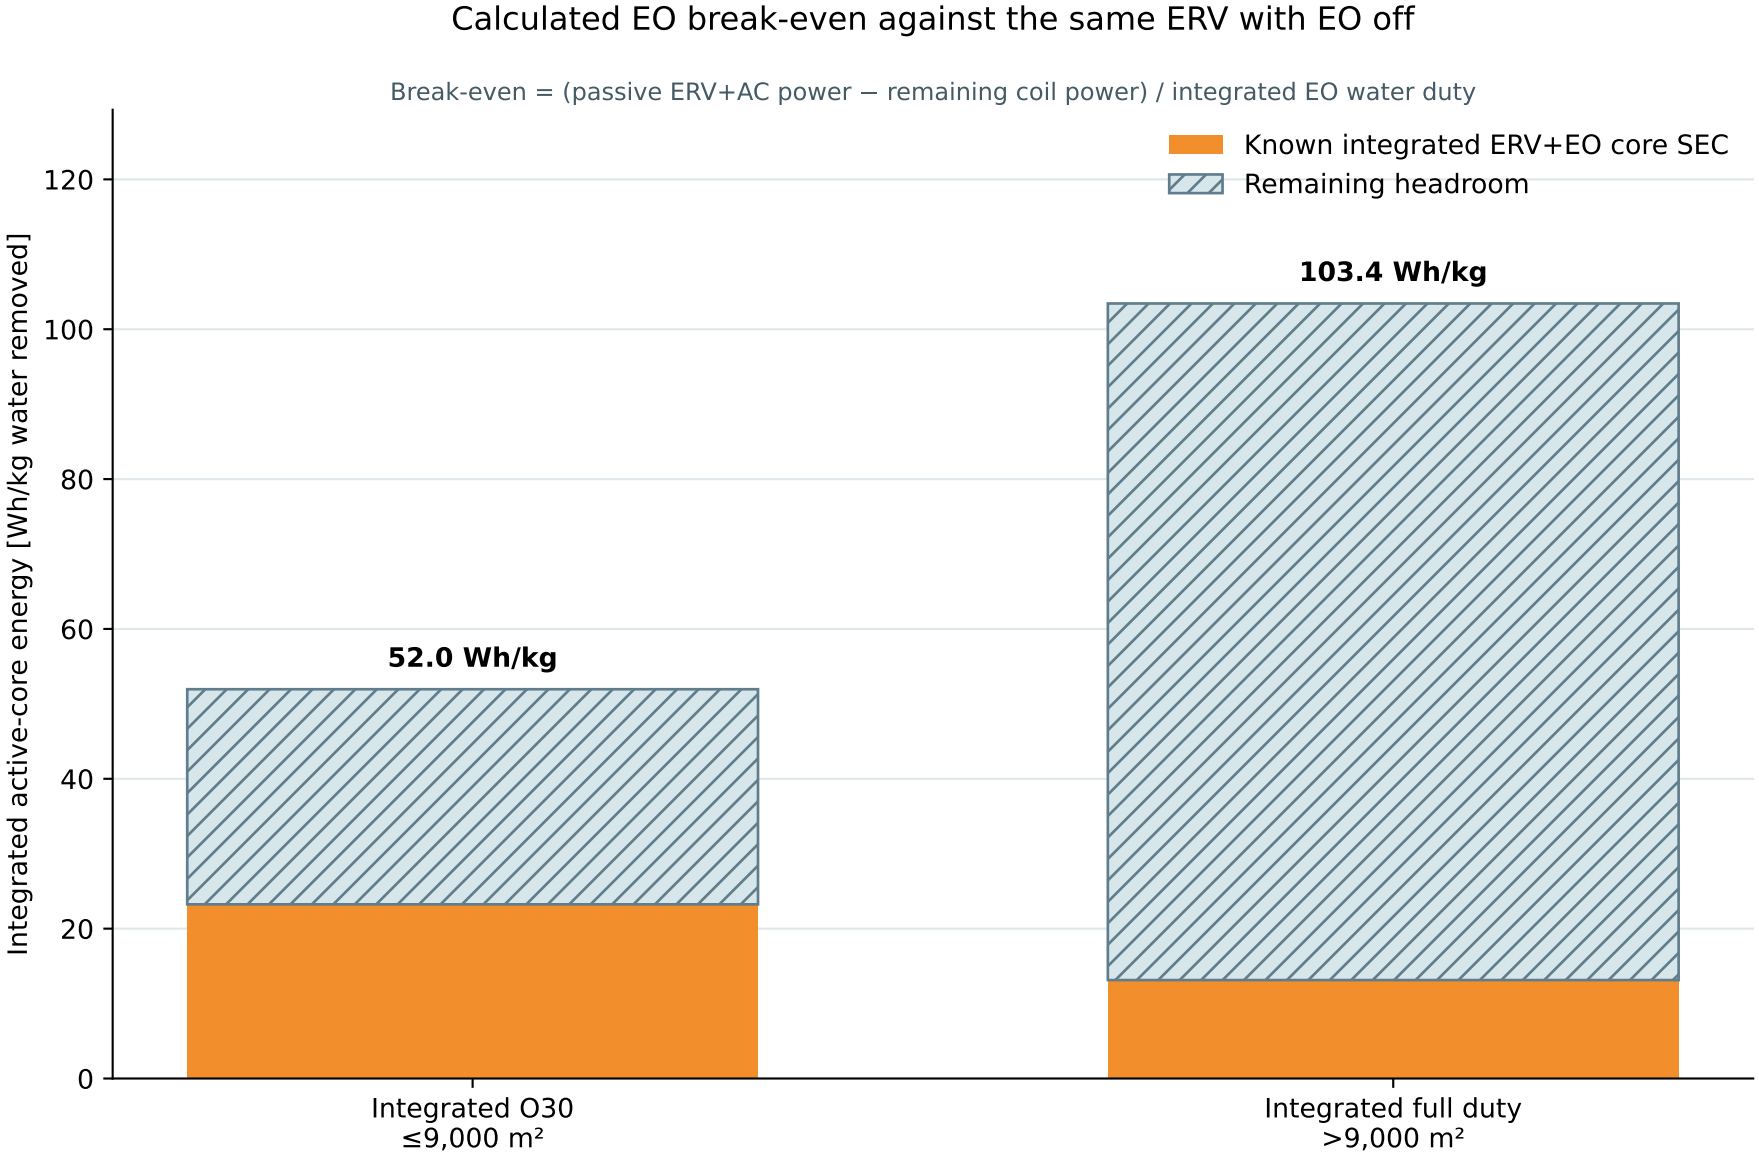
Calculated EO break-even against the same ERV with EO off
Break-even = (passive ERV+AC power − remaining coil power) / integrated EO water duty
Known integrated ERV+EO core SEC
Remaining headroom
Integrated active-core energy [Wh/kg water removed]
0
20
40
60
80
100
120
52.0 Wh/kg
103.4 Wh/kg
Integrated O30
≤9,000 m²
Integrated full duty
>9,000 m²