



B E Y O N D B R I G H T

**OUTDOOR
CATALOG
2026**



✦ LEDLUM

B E Y O N D
B R I G H T



V I S I O N



VISION

To shape spaces that are comfortable, balanced, and thoughtfully designed. We envision environments where light and air work in harmony. Enhancing everyday living through intelligent, design-led solutions.



V I S I O N





MISSION

To design lighting and air solutions that elevate how spaces look, feel, and function by combining innovation, efficiency, and refined design. We deliver solutions tailored to real spaces and real needs.



M I S S I O N





V A L U E S



VALUES

Design with Purpose

Every product is created with intent, performance, and comfort.

Innovation & Efficiency

We embrace smart technology to deliver energy-efficient, future-ready solutions.

Quality & Trust

We commit to reliability, durability, and consistent excellence in everything we create.





What We Do

From illumination to air circulation, we design solutions that shape comfort, mood, and movement within a space. Because how a space feels matters as much as how it looks.



o o o o o

o o o o o o o o o o

o

o

o

o



About

Since 2005, LEDLUM has been at the forefront of architectural lighting innovation, creating solutions that transform spaces and enhance experiences.

20+

YEARS
EXPERIENCE

350+


CHANNEL
PARTNERS

1000+

PROJECTS
COMPLETED

200+

TEAM
MEMBERS





Products

We're a fully dedicated corporate service agency collaborating with brands all over the world.

OUTDOOR

INDOOR

ARTIZAN

ASTARA

VOLARIS

KLEWE

ICON



REFRACTION

DISPERSION

SPECTRUM

RADIANCE

CHROMATIC



WHITE LIGHT RAY
DISPERSING IN
LEDLUM COLOURS



ILLUMINATE YOUR WORLD.
ENHANCE YOUR LIFE.

○
○
○
○

REFLECTION

EFFULGENCE

○○○○

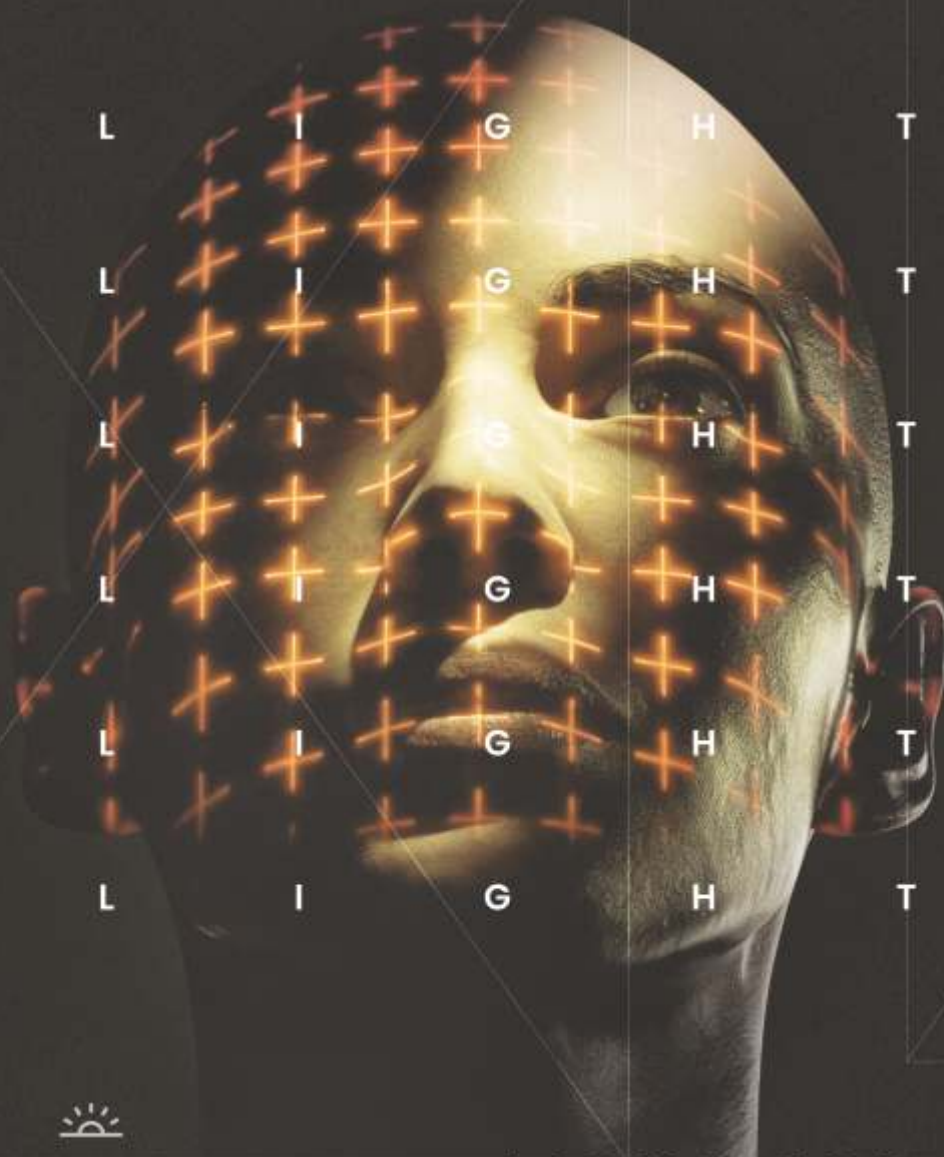
○○○○ ○○○○

○

○

○

○



LIGHT FOR THE
HUMAN SPIRIT















✦ LEDLUM








OUR
HERO PRODUCTS

O U T D O O R
I N D O O R
A R T I Z A N
A S T A R A
V O L A R I S
K L E W E

**COMING
SOON**

							
P-002	P-002	P-002	P-002	P-003	P-003	P-004	P-004
							
P-005	P-005	P-005	P-005	P-006	P-006	P-007	P-007
							
P-009	P-009	P-009	P-009	P-011	P-011	P-011	P-011
							
P-012	P-012	P-012	P-013	P-013	P-014	P-014	P-015
							
P-015	P-017	P-017	P-017	P-017	P-019	P-019	P-019
							
P-019	P-020	P-020	P-021	P-021	P-021	P-022	P-022
							
P-023	P-023	P-023	P-024	P-024	P-025	P-025	P-026
							
P-026	P-027	P-027	P-027	P-028	P-028	P-029	P-029
							
P-029	P-030	P-030	P-030	P-031	P-031	P-032	P-032
							
P-033	P-033	P-033	P-034	P-035	P-036	P-036	P-037

							
P-037	P-038	P-038	P-038	P-038	P-039	P-039	P-040
							
P-040	P-040	P-040	P-042	P-042	P-042	P-042	P-043
							
P-043	P-043	P-044	P-044	P-044	P-045	P-045	P-045
							
P-045	P-046	P-046	P-046	P-046	P-047	P-047	P-048
							
P-048	P-048	P-049	P-049	P-049	P-049	P-050	P-050
							
P-051	P-051	P-052	P-052	P-052	P-053	P-053	P-053
							
P-053	P-054	P-055	P-055	P-055	P-055	P-056	P-056
							
P-056	P-056	P-057	P-057	P-057	P-057	P-058	P-058
							
P-058	P-059	P-059	P-059	P-060	P-060	P-060	P-061
							
P-062	P-062	P-063	P-063	P-063	P-065	P-065	P-066

							
P-066	P-067	P-067	P-067	P-068	P-070	P-070	P-070
							
P-070	P-071	P-071	P-072	P-072	P-072	P-073	P-073
							
P-073	P-074	P-074	P-074	P-074	P-075	P-075	P-076
							
P-076	P-077	P-077	P-077	P-078	P-078	P-078	P-079
							
P-079	P-079	P-080	P-080	P-080	P-081	P-081	P-081
							
P-081	P-082	P-082	P-082	P-083	P-083	P-084	P-084
							
P-084	P-084	P-085	P-085	P-086	P-086	P-086	P-087
							
P-087	P-087	P-088	P-088	P-088	P-088	P-089	P-089
							
P-089	P-089	P-091	P-091	P-091	P-091	P-092	P-093
							
P-093	P-094	P-094	P-094	P-095	P-095	P-095	P-095



P-096




P-096



P-096



P-097



P-097



P-098



P-098



P-099



P-099



P-099



P-100




P-100




P-100



P-101



P-101




P-101



P-102



P-102



P-102



P-104



P-104



P-104



P-104



P-105



P-105



P-105



P-105



P-106



P-107



P-107



P-107



P-108



P-108



P-108



P-109



P-109



P-109



P-109



P-110



P-110



P-110



P-110



P-112



P-112



P-112



P-113



P-113



P-114



P-114



P-114



P-114



P-115



P-115



P-116



P-116



P-117



P-117



P-117



P-118



P-118



P-118



P-119



P-119



P-119



P-120



P-120



P-120



P-120



P-121



P-121




P-121



P-122



P-122



P-122



P-123



P-123



P-124









P-124



P-125



P-125

							
P-125	P-125	P-126	P-126	P-126	P-126	P-127	P-127
							
P-127	P-128	P-128	P-129	P-129	P-129	P-130	P-130
							
P-130	P-131	P-131	P-132	P-132	P-132	P-133	P-133
							
P-134	P-134	P-134	P-135	P-135	P-135	P-136	P-136
							
P-137	P-137	P-137	P-137	P-138	P-138	P-138	P-139
							
P-139	P-140	P-140	P-140	P-140	P-141	P-141	P-142
							
P-142	P-143	P-143	P-144	P-144	P-145	P-145	P-146
							
P-146	P-147	P-147	P-147	P-147	P-148	P-148	P-148
							
P-149	P-149	P-149	P-150	P-150	P-150	P-151	P-151
							
P-151	P-151	P-152	P-152	P-152	P-153	P-153	P-153



P-153



P-154



P-154



P-154



P-154



P-155



P-155



P-156



P-156



P-156



P-156



P-157



P-157



P-158



P-158



P-158



P-159



P-159



P-160



P-160



P-161



P-161



P-161



P-162



P-162



P-162



P-163



P-163




P-164



P-164



P-165



P-165



P-165



P-166




P-166




P-167




P-167



P-167



P-168



P-168



P-169



P-169



P-169



P-169



P-170



P-170



P-170



P-170



P-171



P-171



P-172



P-172



P-172



P-173



P-173



P-173



P-174



P-174



P-174



P-174




P-175



P-175



P-175



P-175



P-176



P-176



P-176



P-177



P-177



P-177



P-178



P-178



P-178



P-178



P-179



P-179



P-179












P-179



P-180



P-180

							
P-180	P-181	P-181	P-181	P-182	P-182	P-182	P-182
							
P-183	P-183	P-184	P-184	P-184	P-185	P-185	P-185
							
P-185	P-186	P-186	P-186	P-187	P-187	P-187	P-188
							
P-188	P-188	P-189	P-189	P-189	P-190	P-191	P-191
							
P-192	P-193	P-194	P-195	P-195	P-196	P-196	P-196
							
P-197	P-197	P-198	P-198	P-199	P-200	P-201	P-201
							
P-201	P-201	P-202	P-202	P-202	P-202	P-203	P-203
							
P-203	P-204	P-204	P-204	P-205	P-205	P-205	P-206
							
P-206	P-206	P-208	P-208	P-208	P-209	P-209	P-209
							
P-210	P-210	P-210	P-210	P-211	P-211	P-211	P-212



P-212



P-212



P-213



P-215



P-215



P-215



P-216



P-216



P-216



P-217



P-217




P-217



P-218



P-218



P-218



P-219



P-219



P-219



P-220



P-220



P-220



P-221



P-221



P-221



P-223



P-223



P-223




P-224




P-224




P-224



P-226



P-226




P-226



P-227



P-227



P-227



P-228



P-228



P-228



P-228



P-229



P-229



P-229



P-229



P-230



P-230



P-230



P-230



P-231



P-231



P-231



P-231



P-232



P-232



P-232



P-232




P-233



P-233



P-233



P-233



P-234



P-234



P-234




P-234



P-235



P-235



P-235



P-236



P-236



P-236



P-236



P-237



P-237



P-237



P-237



P-238



P-238



P-239



P-239



P-239



P-240



P-240



P-241



P-241



P-241



P-242



P-242



P-242



P-243



P-243



P-243



P-243



P-245



P-245



P-245



P-246



P-246



P-247



P-247



P-247



P-247



P-248



P-248



P-248



P-249



P-249




P-249



P-250



P-250



P-250



P-251



P-251



P-251



P-252



P-252



P-252



P-254



P-254



P-254



P-254



P-255



P-255



P-255



P-256



P-256



P-256



P-257



P-257



P-257



P-258



P-258



P-258



P-258



P-259



P-259



P-259



P-259



P-260



P-260



P-260



P-260



P-261



P-261



P-261



P-261



P-262



P-262



P-262



P-263



P-263




P-263




P-263



P-264



P-264



P-264



P-264



P-265



P-265



P-266



P-266




P-266




P-266



P-267



P-267




P-267




P-268



P-268



P-268



P-268



P-269



P-269



P-270



P-270



P-270



P-270



P-271



P-271



P-271



P-272



P-272



P-272



P-273



P-273



P-273



P-273




P-274




P-274




P-274



P-275



P-275



P-275



P-275



P-276



P-276



P-276



P-277



P-277



P-277



P-278



P-278



P-279



P-279



P-279



P-279



P-280



P-280



P-280



P-281



P-281



P-281



P-282



P-282



P-282



P-283



P-283



P-283



P-283



P-284



P-284



P-284



P-285



P-285



P-285



P-285



P-286



P-286



P-287



P-287



P-287




P-287



P-288

OUTDOOR WALL LIGHT




LLO-005

Dimension : 80x50x78




Dark Grey

Material :
Aluminium**Watts :**
1x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
81°**CRI :**
≥80**Luminous :**
121lm**IP Rating :**
IP54**LLO-006**

Dimension : 150x50x78




Dark Grey

Material :
Aluminium**Watts :**
2x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°/85°**CRI :**
≥80**Luminous :**
162lm**IP Rating :**
IP54**LLO-006A**

Dimension : 150x50x78




Dark Grey

Material :
Aluminium**Watts :**
2x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
16°/16°**CRI :**
≥80**Luminous :**
82lm**IP Rating :**
IP54**LLO-1049****New**


Dimension : 85x120x88



Sand Black

Material :
Aluminium**Watts :**
2x3W**Powered By :**
CREE-XP-E2**CCT :**
3000K**Beam Angle :**
1°/1°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**CREE** 

LLO-013



Dimension : 100x100x52



Dark Grey

Material :
Die-Cast Aluminium

Watts :
4x1W

Powered By :
CREE

CCT :
3000K

Beam Angle :
11°/4°


CRI :
≥80

Luminous :
179lm

IP Rating :
IP54



LLO-035



Dimension : 100x52



Dark Grey

Material :
Die-Cast Aluminium

Watts :
4x1W

Powered By :
CREE

CCT :
3000K

Beam Angle :
11°/4°


CRI :
≥80

Luminous :
179lm

IP Rating :
IP54




CREE



100-240V
50-60Hz

LLO-007



Dimension : 138x132x100



Dark Grey

Material :
Aluminium+Glass

Watts :
1x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
10°


CRI :
≥80

Luminous :
846lm

IP Rating :
IP54



LLO-007A



Dimension : 220x132x100



Dark Grey

Material :
Aluminium + Glass

Watts :
2x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
44°


CRI :
≥80

Luminous :
1577lm


IP Rating :
IP54



CREE




100-240V
50-60Hz

LLO-008

Dimension : 116.5x120x121




Dark Grey

Material :
Aluminium+Glass**Watts :**
1x7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
31°**CRI :**
≥80**Luminous :**
512lm**IP Rating :**
IP54**LLO-009**

Dimension : 121x120x116.5




Dark Grey

Material :
Die-Cast Aluminium**Watts :**
2x6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
31°**CRI :**
≥80**Luminous :**
935lm**IP Rating :**
IP54**LLO-099D**

Dimension : 240x106x94



Dark Grey

Material :
Die-Cast Aluminium**Watts :**
2x6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
73°**CRI :**
≥80**Luminous :**
725lm**IP Rating :**
IP54**LLO-099E**

Dimension : 240x105x120




Dark Grey

Material :
Aluminium+Glass**Watts :**
2x6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
73°**CRI :**
≥80**Luminous :**
725lm**IP Rating :**
IP54

100-240V
50-60Hz

LLO-099B



Dimension : 133x182x90



Dark Grey

Material :
Aluminium+Glass

Watts :
12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
44°


CRI :
≥80

Luminous :
846lm

IP Rating :
IP54



LLO-099C



Dimension : 133x220x90



Dark Grey

Material :
Aluminium+Glass

Watts :
2x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
44°

CRI :
≥80

Luminous :
1577lm

IP Rating :
IP54




CREE



100-240V
50-60Hz

LLO-084



Dimension : 88x65x40



Dark Grey

Material :
Die-Cast Aluminium

Watts :
1x3W

Powered By :
CREE

CCT :
3000K

Beam Angle :
101°


CRI :
≥80

Luminous :
85lm/w

IP Rating :
IP54



LLO-085



Dimension : 125x90x43



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x4W

Powered By :
CREE

CCT :
3000K

Beam Angle :
50°


CRI :
≥80

Luminous :
320lm

IP Rating :
IP54




CREE



100-240V
50-60Hz



LLO-015

Dimension : 90x90x110



Dark Grey

Material :
Aluminium+Glass

Watts :
2x4W


Powered By :
CREE

CCT :
3000K

Beam Angle :
22°/90°

CRI :
≥80

Luminous :
404lm

IP Rating :
IP54
**LLO-016**

Dimension : 130x90x120



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
21°

CRI :
≥80

Luminous :
1208lm

IP Rating :
IP54
**LLO-017**

Dimension : 92x90x120



Dark Grey

Material :
Die-CastAluminium

Watts :
1x7W

Powered By :
CREE

CCT :
3000K


Beam Angle :
21°

CRI :
≥80

Luminous :
541lm

IP Rating :
IP54
**LLO-089**

Adjustable Beam Angle



Dimension : 119x110x105



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x5W

Powered By :
CREE

CCT :
3000K

Beam Angle :
30°-130°


CRI :
≥80

Luminous :
893lm

IP Rating :
IP54

CREE
200-240V
50Hz



LLO-031

Dimension : 135x135x96



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
18°

CRI :
≥80

Luminous :
1153lm

IP Rating :
IP54
**LLO-032**

Dimension : 100x135x96



Dark Grey

Material :
Die-Cast Aluminium

Watts :
1x7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
18°

CRI :
≥80

Luminous :
540lm

IP Rating :
IP54
**LLO-033**

Dimension : 85x106x84



Dark Grey

Material :
Die-Cast Aluminium

Watts :
3x1W


Powered By :
CREE

CCT :
3000K

Beam Angle :
24°

CRI :
≥80

Luminous :
211lm

IP Rating :
IP54
**LLO-034**

Dimension : 110x108x84



Dark Grey

Material :
Die-Cast Aluminium

Watts :
6x1W

Powered By :
CREE

CCT :
3000K

Beam Angle :
25°


CRI :
≥80

Luminous :
368lm

IP Rating :
IP54

CREE
200-240V
50Hz

LLO-090



Dimension : 145x82x62



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x7W

Powered By :
CREE

CCT :
3000K

Beam Angle :
72°


CRI :
≥80

Luminous :
1116lm

IP Rating :
IP54



LLO-091



Dimension : 95x82x62



Dark Grey

Material :
Die-Cast Aluminium

Watts :
1x7W

Powered By :
CREE

CCT :
3000K

Beam Angle :
72°


CRI :
≥80

Luminous :
577lm

IP Rating :
IP54



LLO-092



Dimension : 108x68x90



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x4W

Powered By :
CREE

CCT :
3000K

Beam Angle :
44°


CRI :
≥80

Luminous :
565lm

IP Rating :
IP54




CREE



200-240V
50Hz

LLO-096



Dimension : 125x125x63



Dark Grey

Material :
Die-Cast Aluminium

Watts :
1x7W

Powered By :
CREE

CCT :
3000K

Beam Angle :
108°


CRI :
≥80

Luminous :
389lm

IP Rating :
IP54



LLO-098



Dimension : 109x173x63



Black

Material :
Die-Cast Aluminium

Watts :
2x3W

Powered By :
CREE

CCT :
3000K

Beam Angle :
15°/78°


CRI :
≥80

Luminous :
160lm

IP Rating :
IP54








100-240V
50-60Hz

LLO-099G



**TILTABLE /
ADJUSTABLE**



Dimension : 231x77x48



Dark Grey

Material :
Aluminium+Glass

Watts :
6x1W

Powered By :
CREE

CCT :
3000K

Beam Angle :
28°

CRI :
≥80

Luminous :
724lm


IP Rating :
IP54



LLO-099F



**TILTABLE /
ADJUSTABLE**



Dimension : 185x156x45



Dark Grey

Material :
Aluminium+ Glass

Watts :
5x2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
26°


CRI :
≥80

Luminous :
724lm

IP Rating :
IP54



CREE



100-240V
50-60Hz

LLO-094A



Dimension : 135x42



Black

Material :
Aluminium

Watts :
1x6W

Powered By :
CREE

CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
560lm

IP Rating :
IP54

LLO-095A



Dimension : 180x42



Black

Material :
Aluminium

Watts :
1x12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
360°


CRI :
≥80

Luminous :
840lm

IP Rating :
IP54




CREE



100-240V
50-60Hz



LLO-099J

Dimension : 90x160



Dark Grey

Material :
Aluminium

Watts :
6W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
≥80

Luminous :
100lm/w

IP Rating :
IP65
**LLO-099K**

Dimension : 90x220



Dark Grey

Material :
Aluminium

Watts :
2x6W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
≥80

Luminous :
100lm/w

IP Rating :
IP65
**LLO-099W****New**

Dimension : 50x150



Dark Grey

Material :
Aluminium

Watts :
8W


Powered By :
CREE

CCT :
2700K

Beam Angle :
12°

CRI :
≥90

Luminous :
90lm/w

IP Rating :
IP65
**LLO-099X****New**

Dimension : 50x198



Dark Grey

Material :
Aluminium

Watts :
2x8W


Powered By :
CREE

CCT :
2700K


Beam Angle :
12°

CRI :
≥90

Luminous :
90lm/w

IP Rating :
IP65
**CREE** 200-240V
50Hz




LLO-099L

Dimension : 90x160




Dark Grey

Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
100lm**IP Rating :**
IP65**LLO-099M**

Dimension : 90x220




Dark Grey

Material :
Aluminium**Watts :**
2x12W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
100lm**IP Rating :**
IP65**LLO-099U****New**

Dimension : 90x160




Dark Grey

Material :
Aluminium**Watts :**
24W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
25°**CRI :**
≥90**Luminous :**
90lm**IP Rating :**
IP65**LLO-099V****New**


Dimension : 90x220



Dark Grey

Material :
Aluminium**Watts :**
2x24W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
25°**CRI :**
≥90**Luminous :**
90lm**IP Rating :**
IP65**CREE** 200-240V
50Hz

LLO-099N



Dimension : 120x61x157



Dark Grey

Material :
Aluminium

Watts :
7W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
60°


CRI :
≥80

Luminous :
305lm

IP Rating :
IP65



LLO-099O



Dimension : 120x61x240



Dark Grey

Material :
Aluminium

Watts :
13W

Powered By :
CREE

CCT :
3000K

Beam Angle :
120°

CRI :
≥80


Luminous :
610lm

IP Rating :
IP65



OSRAM 


CREE 



200-240V
50Hz

LLO-099P


MOVEABLE



Dimension : 172x52x141




Dark Grey

Material :
Aluminium**Watts :**
13W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
127°**CRI :**
≥80**Luminous :**
652lm**IP Rating :**
IP65**LLO-099Q**

Dimension : 215x128x183




Dark Grey

Material :
Aluminium+PC**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
322lm**IP Rating :**
IP65**LLO-099R**

Dimension : 210x40x210




Dark Grey

Material :
Aluminium**Watts :**
11W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
202°**CRI :**
≥80**Luminous :**
720lm**IP Rating :**
IP65**OSRAM** **CREE** 

LLO-099T



SPOON LENSE



Dimension : 205x111x60



Dark Grey

Material :
Aluminium / Glass

Watts :
10W

Powered By :
CREE

CCT :
3000K

Beam Angle :
57°

CRI :
≥80

Luminous :
598lm


IP Rating :
IP54

LLO-1027

SPOON LENSE



**1 Way / 2 Way Pole
Available - 1000mm**



Dimension : 295x95x62.2



Graphite Black

Material :
Aluminium Die Casting

Watts :
20W

Powered By :
BRIDGELUX (5050X4 LED)

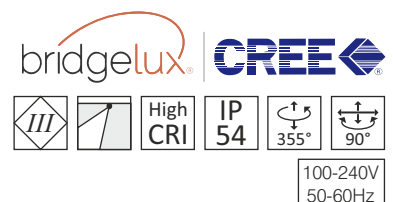
LED :
5050x4 LED


CCT :
3000K

Beam Angle :
120°x90°

CRI :
≥80

IP Rating :
IP66



LLO-103

Dimension : 230x72x56



Dark Grey

Material :
 Aluminium + PC

Watts :
 10W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 275lm

IP Rating :
 IP65
LLO-027

Dimension : 200x69x103



Dark Grey

Material :
 Die-Cast Aluminium+PC

Watts :
 9W


Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 350°

CRI :
 ≥80

Luminous :
 364lm

IP Rating :
 IP54
**LLO-028**

Dimension : 219x55x169



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 12W

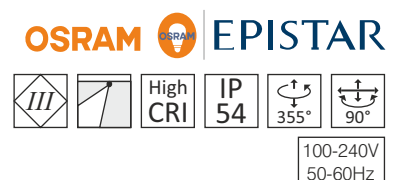
Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 621lm

IP Rating :
 IP54


LLO-102

Dimension : 240x120x45.5



Dark Grey

Material :
 Aluminium+PC

Watts :
 10W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 450lm

IP Rating :
 IP65
LLO-099H

Dimension : 200x55



Dark Grey

Material :
 Aluminium+PC

Watts :
 11W

Powered By :
 SMD LED


CCT :
 3000K

Beam Angle :
 114°

CRI :
 ≥80

Luminous :
 872lm

IP Rating :
 IP54
**EVERLIGHT | EPISTAR**
 100-240V
 50-60Hz

LLO-079

Dimension : 185x122x170



Dark Grey

Material :
Aluminium + PC

Watts :
10W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
110°

CRI :
≥80

Luminous :
465lm

IP Rating :
IP54

LLO-078

Dimension : 210x60x43



Dark Grey

Material :
Die-Cast Aluminium /PC

Watts :
7W

Powered By :
EPISTAR


CCT :
3000K


Beam Angle :
114°

CRI :
≥80

Luminous :
310lm

IP Rating :
IP54

**EPISTAR**

LLO-074

Dimension : 161x100x98



Dark Grey

Material :
Aluminium/PC

Watts :
6W


Powered By :
OSRAM

CCT :
3000K

Beam Angle :
110°

CRI :
≥80

Luminous :
388lm

IP Rating :
IP54
LLO-073

Dimension : 242x239x149



Dark Grey

Material :
Aluminium/PC

Watts :
12W

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
110°

CRI :
≥80

Luminous :
754lm


IP Rating :
IP54


LLO-079N

Dimension : 180x88x130




Dark Grey

Material :
Aluminium+PC**Watts :**
10W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
600lm**IP Rating :**
IP54**LLO-079E**

Dimension : 120x37



Dark Grey


Material :
Aluminium+PC**Watts :**
2W**Powered By :**
EVERLIGHT**CCT :**
3000K**Beam Angle :**
72°**CRI :**
≥80**Luminous :**
117lm**IP Rating :**
IP65**LLO-079F**

Dimension : 120x37



Dark Grey

Material :
Aluminium+PC**Watts :**
3W**Powered By :**
EVERLIGHT**CCT :**
3000K**Beam Angle :**
72°**CRI :**
≥80**Luminous :**
176lm**IP Rating :**
IP65**EVERLIGHT | EPISTAR**100-240V
50-60Hz

LLO-079A

Dimension : 222x118x65.5



Dark Grey

Material :
 Aluminium /PC

Watts :
 10W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 127°

CRI :
 ≥80

Luminous :
 1081lm

IP Rating :
 IP54
LLO-079B

Dimension : 266x106x76



Dark Grey

Material :
 Aluminium + PC

Watts :
 12W

Powered By :
 OSRAM

CCT :
 3000K


Beam Angle :
 121°

CRI :
 ≥80

Luminous :
 1202lm

IP Rating :
 IP54

OSRAM  **EPISTAR**
High
CRIIP
54100-240V
50-60Hz

LLO-079H

Dimension : 201x69xH86




Dark Grey

Material :
Aluminium+Glass**Watts :**
10W**Powered By :**
SMD-EVERLIGHT**CCT :**
3000K**Beam Angle :**
113°**CRI :**
≥80**Luminous :**
662lm**IP Rating :**
IP54**LLO-079I**

Dimension : 183x130x163



Dark Grey


Material :
Aluminium+PC**Watts :**
16W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
960lm**IP Rating :**
IP65**LLO-079J**

Dimension : 230x55x230



Dark Grey


Material :
Aluminium+PC**Watts :**
16W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
960lm**IP Rating :**
IP65**EVERLIGHT | EPISTAR**100-240V
50-60Hz

LLO-079K

Dimension : 150x105x150



Dark Grey

Material :
Aluminium+PC**Watts :**
9W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
540lm**IP Rating :**
IP54**LLO-079L**

Dimension : 200x105x200




Dark Grey


Material :
Aluminium+PC**Watts :**
18W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
1080lm**IP Rating :**
IP54**LLO-079M**

Dimension : 150x105x280



Dark Grey

Material :
Aluminium+PC**Watts :**
18W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
1080lm**IP Rating :**
IP54**EPISTAR**

LLO-079X

Dimension : 37x95x600



Dark Grey

Material :
Aluminium / PC

Watts :
13W



Powered By :
OSRAM

CCT :
3000K

Beam Angle :
78°

CRI :
≥80

Luminous :
556lm

IP Rating :
IP65
LLO-079Y

Dimension : 37x95x1000



Dark Grey

Material :
Aluminium / PC

Watts :
20W

Powered By :
OSRAM


CCT :
3000K



Beam Angle :
78°

CRI :
≥80

Luminous :
847lm

IP Rating :
IP65


OSRAM 


LLO-079Z

Dimension : 37x95x1200



Dark Grey

Material :
Aluminium / PC**Watts :**
26W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
78°**CRI :**
≥80**Luminous :**
1079lm**IP Rating :**
IP65**LLO-0790**

Dimension : 530x75x45




Sand Black

Material :
Aluminium**Watts :**
20W**Powered By :**
SMD - EDISON**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
1800lm**IP Rating :**
IP54**OSRAM** 100-240V
50-60Hz

LLO-1007



New



Dimension : 95x65x300

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
160°

CRI :
≥90

Luminous :
576lm


IP Rating :
IP65

Dark Grey

LLO-1008



New



Dimension : 95x65X500

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
160°

CRI :
≥90

Luminous :
768lm


IP Rating :
IP65

Dark Grey

LLO-1009



New



Dimension : 95x65x1000

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
160°

CRI :
≥90


Luminous :
1200lm


IP Rating :
IP65

Dark Grey



EPISTAR




LLO-1050**New**


Dimension : 140x165x300

Material :
Aluminium**Watts :**
12W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65

Graphite Black

OSRAM 100-240V
50-60Hz

LLO-1024

**New**

Dimension : 210x150x54



Rose Gold



Chrome




Copper

Material :
Aluminium Die Casting**Watts :**
8W**Powered By :**
LUMILED'S 4014**CCT :**
3000K**Beam Angle :**
182°**CRI :**
≥80**Luminous :**
940lm**IP Rating :**
IP65High
CRIIP
54

355°

90°

100-240V
50-60Hz

LLO-079V

Dimension : 230x324x106



Dark Grey

Material :
 Aluminium / PMMA

Watts :
 10W


Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 78°

CRI :
 ≥80

Luminous :
 1153lm

IP Rating :
 IP54
LLO-079T

Dimension : 200x185x200



Dark Grey

Material :
 Aluminium / Acrylic

Watts :
 5W


Powered By :
 SMD

CCT :
 3000K

Beam Angle :
 268°

CRI :
 ≥80


Luminous :
 450lm

IP Rating :
 IP54


LLO-1010



New



Dimension : Ø80
55mm Pole Size

Dark Grey

Material :
Aluminium / Acrylic

Watts :
8W

Powered By :
CREE

CCT :
3000K

Beam Angle :
36°

CRI :
≥90

Luminous :
696lm

IP Rating :
IP65

LLO-1011



New



Dimension : Ø110
55mm Pole Size

Dark Grey

Material :
Aluminium / Acrylic

Watts :
12W

Powered By :
CREE


CCT :
3000K


Beam Angle :
50°

CRI :
≥90

Luminous :
1044lm

IP Rating :
IP65



LLO-094

Dimension : 258x72x41

Dark Grey

Material :
Die-Cast Aluminium

Watts :
15W


Powered By :
CREE

CCT :
3000K

Beam Angle :
74°

CRI :
≥80

Luminous :
360lm

IP Rating :
IP65
**LLO-095**

Dimension : 180x45x30

Dark Grey

Material :
Die-Cast Aluminium

Watts :
7W



Powered By :
CREE

CCT :
3000K

Beam Angle :
90°

CRI :
≥80

Luminous :
233lm

IP Rating :
IP65
**LLO-100**

Dimension : 90x38x60

Dark Grey

Material :
Aluminium+PC

Watts :
2W


Powered By :
EVERLIGHT

CCT :
3000K

Beam Angle :
98°

CRI :
≥80

Luminous :
130lm

IP Rating :
IP54
**LLO-101**

Dimension : 150x38x70

Dark Grey

Material :
Aluminium+PC

Watts :
3.6W

Powered By :
EVERLIGHT


CCT :
3000K


Beam Angle :
98°

CRI :
≥80

Luminous :
234lm

IP Rating :
IP54

EVERLIGHT | **CREE**

 200-240V
50Hz

LLO-104

Dimension : 82x82x58



Dark Grey

Material :
 Aluminium

Watts :
 1x7W


Powered By :
 Philips-AC LED

CCT :
 3000K

Beam Angle :
 93°

CRI :
 ≥80

Luminous :
 218lm

IP Rating :
 IP54
**LLO-105**

Dimension : 122x82x59



Dark Grey

Material :
 Aluminium

Watts :
 1x7W

Powered By :
 Philips-AC LED

CCT :
 3000K

Beam Angle :
 118°


CRI :
 ≥80

Luminous :
 261lm

IP Rating :
 IP54
**PHILIPS**100-240V
50-60Hz

LLO-152

New With Driver



Dimension : 95x95x31



Dark Grey

Material :
Die-Cast Aluminium

Watts :
4W

Powered By :
CREE

CCT :
3000K

Beam Angle :
33°


CRI :
≥80

Luminous :
185lm

IP Rating :
IP65

**LLO-153**

New With Driver



Dimension : 250x95x31



Dark Grey

Material :
Die-Cast Aluminium

Watts :
9W

Powered By :
CREE

CCT :
3000K

Beam Angle :
47°


CRI :
≥80

Luminous :
487lm

IP Rating :
IP65

**LLO-154**

New With Driver



Dimension : 250x65x31



Dark Grey

Material :
Die-Cast Aluminium

Watts :
8W

Powered By :
CREE


CCT :
3000K

Beam Angle :
53°

CRI :
≥80

Luminous :
250lm

IP Rating :
IP65

**LLO-002**

Dimension : 95x68x32



Dark Grey

Material :
Aluminium

Watts :
1x3W

LED CHIP :
CREE

CCT :
3000K

Beam Angle :
64°

CRI :
≥80

Luminous :
92lm

IP Rating :
IP54




PHILIPS | **CREE**



200-240V
50Hz

OUTDOOR STEP LIGHT



LLO-159K

Dimension : 110x22



Dark Grey

Material :
Aluminium+PC

Watts :
3W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
180lm

IP Rating :
IP54
**LLO-159L**

Dimension : 160x30



Dark Grey

Material :
Aluminium+PC

Watts :
6W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
360lm

IP Rating :
IP54
**LLO-159M**

Dimension : 105x22x105



Dark Grey

Material :
Aluminium

Watts :
3W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
180lm

IP Rating :
IP54
**LLO-159N**

Dimension : 160x30x160



Dark Grey

Material :
Aluminium

Watts :
6W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
360lm


IP Rating :
IP54
**EPISTAR**100-240V
50-60Hz

LLO-159H

Dimension : 128x30




Dark Grey

Material :
ABS+PC**Watts :**
2W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
120lm**IP Rating :**
IP65**LLO-159I**

Dimension : 210x30x85



Dark Grey


Material :
ABS+PC**Watts :**
3W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP65**LLO-159J**

Dimension : 210x30x85



Dark Grey


Material :
ABS+PC**Watts :**
5W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP65**EPISTAR**100-240V
50-60Hz

LLO-159O

Dimension : 155x37x75




Dark Grey

Material :
Aluminium+PC**Watts :**
3W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP65**LLO-159P**

Dimension : 240x37x75




Dark Grey


Material :
Aluminium+PC**Watts :**
5W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
300lm**IP Rating :**
IP65**LLO-159Q**

Dimension : 250x100x46



Dark Grey


Material :
Aluminium**Watts :**
13W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
69°**CRI :**
≥80**Luminous :**
1500lm**IP Rating :**
IP54**EPISTAR**100-240V
50-60Hz

LLO-059H

Dimension : 190x75




Dark Grey

Material :
ABS+PC**Watts :**
8W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
580lm**IP Rating :**
IP65**LLO-059I**

Dimension : 245x75




Dark Grey

Material :
ABS+PC**Watts :**
13W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
970lm**IP Rating :**
IP65**LLO-059J**

Dimension : 310x75



Dark Grey


Material :
ABS+PC**Watts :**
18W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
1300lm**IP Rating :**
IP65**LLO-052**

Dimension : 300x70x53



Dark Grey

Material :
Aluminium / Acrylic**Watts :**
9W**Powered By :**
EVERLIGHT**CCT :**
3000K**Beam Angle :**
127°**CRI :**
≥80**Luminous :**
278lm**IP Rating :**
IP65**EVERLIGHT | EPISTAR**100-240V
50-60Hz

LLO-042

Dimension : 140x100



Dark Grey

Material :
Aluminium+Glass

Watts :
1x12W


Powered By :
CREE

CCT :
3000K

Beam Angle :
46°

CRI :
≥80

Luminous :
846lm

IP Rating :
IP54
LLO-046

Dimension : 90x94



Dark Grey

Material :
Die-Cast Aluminium

Watts :
6W


Powered By :
CREE

CCT :
3000K

Beam Angle :
23°

CRI :
≥80

Luminous :
502lm

IP Rating :
IP54
LLO-043

Dimension : 140x145



Dark Grey

Material :
Aluminium+Glass

Watts :
18W


Powered By :
CREE

CCT :
3000K

Beam Angle :
46°

CRI :
≥80

Luminous :
1429lm

IP Rating :
IP54
LLO-045

Dimension : 95x90



Dark Grey

Material :
Die-Cast Aluminium

Watts :
1x7W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
17°


CRI :
≥80

Luminous :
581lm

IP Rating :
IP54



100-240V
50-60Hz

LLO-047

Dimension : 205x130



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 15W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 55°

CRI :
 ≥80

Luminous :
 854lm

IP Rating :
 IP65
LLO-053

Dimension : 90x137



Dark Grey

Material :
 Aluminium+Glass

Watts :
 12W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 44°

CRI :
 ≥80

Luminous :
 846lm


IP Rating :
 IP54

CREE

100-240V
50-60Hz220-240V
50-60Hz

LLO-059

Outdoor Flat Surface




Dimension : 52x10



Black / White

Material :
Aluminium**Watts :**
5W**Powered By :**
DOB**CCT :**
3000K / 4000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
450-500lm**IP Rating :**
IP54**LLO-059A**

Outdoor Flat Surface




Dimension : 100x10



Black White

Material :
Aluminium**Watts :**
10W**Powered By :**
DOB**CCT :**
3000K / 4000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
900-1000lm**IP Rating :**
IP54**LLO-059C**

Outdoor Flat Surface




Dimension : 50x50x10



Black/ White

Material :
Aluminium**Watts :**
5W**Powered By :**
DOB**CCT :**
3000K / 4000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
450-500lm**IP Rating :**
IP54**EPISTAR**100-240V
50-60Hz

LLO-059D


Dimension : 65x45



Black



White

Material :
Aluminium**Watts :**
8W**Powered By :**
LUMENS / DOB**CCT :**
3000K / 4000K**Beam Angle :**
35°**CRI :**
≥90**Luminous :**
430lm**IP Rating :**
IP54**LLO-059E**


Dimension : 80x45



Black



White

Material :
Aluminium**Watts :**
15W**Powered By :**
LUMENS / DOB**CCT :**
3000K / 4000K**Beam Angle :**
35°**CRI :**
≥90**Luminous :**
865lm**IP Rating :**
IP54**LLO-059F**


Dimension : 95x55



Black



White

Material :
Aluminium**Watts :**
20W**Powered By :**
LUMENS / DOB**CCT :**
3000K**Beam Angle :**
35°**CRI :**
≥90**Luminous :**
1198lm**IP Rating :**
IP54**LLO-059G**

Dimension : 120x62





Black



White

Material :
Aluminium**Watts :**
30W**Powered By :**
LUMENS / DOB**CCT :**
3000K**Beam Angle :**
35°**CRI :**
≥90**Luminous :**
2281lm**IP Rating :**
IP54



LLO-059L**New**


Dimension : 68.5x62



Dark Grey



White

Material :
Aluminium**Watts :**
5W**Powered By :**
BRIDGELUX**CCT :**
3000K /4000K /6000K**Beam Angle :**
38°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP54**LLO-059M****New**

Dimension : 90x73




Dark Grey




White

Material :
Aluminium**Watts :**
9W**Powered By :**
BRIDGELUX**CCT :**
3000K /4000K /6000K**Beam Angle :**
38°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP54



LLO-130

Window Light



Dimension : 180x118



White

Material :
Die Cast Aluminium

Watts :
1x7W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
17°


CRI :
≥80

Luminous :
630lm

IP Rating :
IP65

LLO-131

Concealed Window Light



Dimension : 107x85



Dark Grey



Matt White

Material :
Aluminium

Watts :
3x2W

Powered By :
BRIDGELUX

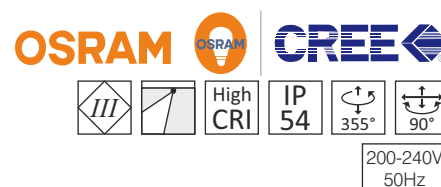
CCT :
3000K

Beam Angle :
5°

CRI :
≥80


Luminous :
540lm

IP Rating :
IP54



LLO-139C

Small Flat



Dimension : 55x45x60



Dark Grey



White

Material :
Die-Casting Aluminium

Watts :
2W

Powered By :
CREE

CCT :
3000K


Beam Angle :
60°

CRI :
≥80

Luminous :
180-200lm

IP Rating :
IP65
**LLO-139D**

Small Flat



Dimension : 85x85x57



Dark Grey



White

Material :
Die-Cast Aluminium

Watts :
4W


Powered By :
CREE

CCT :
3000K

Beam Angle :
30°

CRI :
≥80

Luminous :
240lm

IP Rating :
IP65
**LLO-139E**

Dimension : 55x45x60



Dark Grey



White

Material :
Aluminium

Watts :
1W

Powered By :
CREE


CCT :
3000K


Beam Angle :
60°

CRI :
≥80

Luminous :
70-80lm

IP Rating :
IP54

LLO-139F


Dimension : 115x105x60



Dark Grey



White

Material :
Aluminium+PC**Watts :**
2x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
540-600lm**IP Rating :**
IP54**LLO-139G**

Dimension : 40x50x40




Dark Grey



White

Material :
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-139H**

Small Flat



Dimension : 40x50x40



Dark Grey



White

Material :
Aluminium**Watts :**
1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
90-100lm/w**IP Rating :**
IP54**LLO-139I**

Dimension : 70x80x70




Dark Grey



White

Material :
Aluminium**Watts :**
2x2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54



LLO-139J

Dimension : 70x80x70




Dark Grey





White

Material :
Aluminium**Watts :**
4x2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54




LLO-139S


Dimension : 70x65x28

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-139T**

Dimension : 35x50

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP54**LLO-139U**


Dimension : 40x40x50

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP54**LLO-139V**

Dimension : 43x59

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180lm**IP Rating :**
IP54


100-240V
50-60Hz

LLO-139O

Dimension : 150x80x55




Dark Grey

Material :
Aluminium**Watts :**
2x3+2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
720-800lm**IP Rating :**
IP54**LLO-139P**

Dimension : 200x110x60




Dark Grey

Material :
Aluminium**Watts :**
2x5+2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
1080-1200lm**IP Rating :**
IP54**LLO-139Q**

Dimension : 97x50x54



Matt Black


Material :
Aluminium / PC**Watts :**
2x1+1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
270-300lm**IP Rating :**
IP54**LLO-139R**

Dimension : 97x54x30





Matt Black



Material :
Aluminium / PC**Watts :**
2x1+1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
270-300lm**IP Rating :**
IP54

LLO-139W


Dimension : 45x45x50

**Material :**
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LLO-139X**


Dimension : 35x35x50

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-139Y**


Dimension : 25x25x70

**Material :**
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-139Z**

Dimension : 35x35x83

**Material :**
Aluminium**Watts :**
2x1+W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54


86-265V
280-300Hz

LLO-139K

Dimension : 190x91x65




Dark Grey

Material :
Aluminium**Watts :**
4x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
1080-1200lm**IP Rating :**
IP54**LLO-139M**

Dimension : 98x92x70



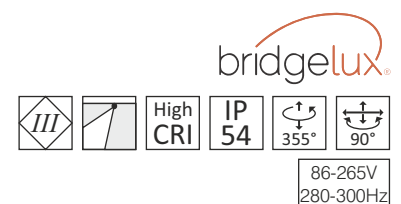
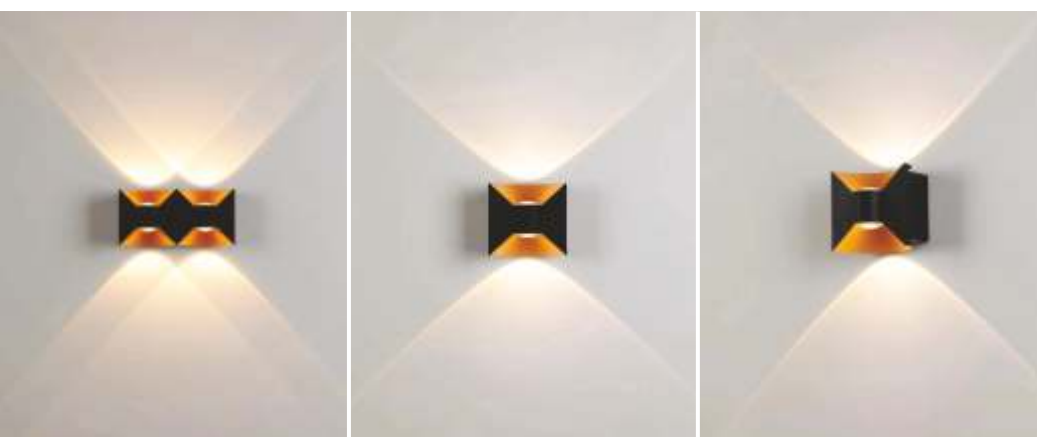
Dark Grey

Material :
Aluminium**Watts :**
2x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
540-600lm**IP Rating :**
IP54**LLO-139N**

Dimension : 127x137x90



Dark Grey

Material :
Aluminium**Watts :**
2x5W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
900-1000lm**IP Rating :**
IP54

LLO-137A

Dimension : 130x100x35



Dark Grey



Gold

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LLO-137B**

Dimension : 180x100x35



Dark Grey



Gold

Material :
Aluminium**Watts :**
6x1W**Powered By :**
BRIDGELUX**CCT :**
3000K / 4000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
540-600lm**IP Rating :**
IP54**LLO-137C**

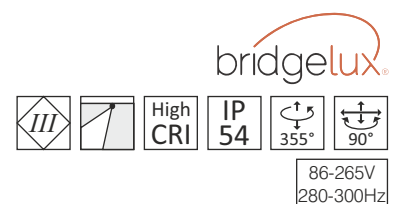
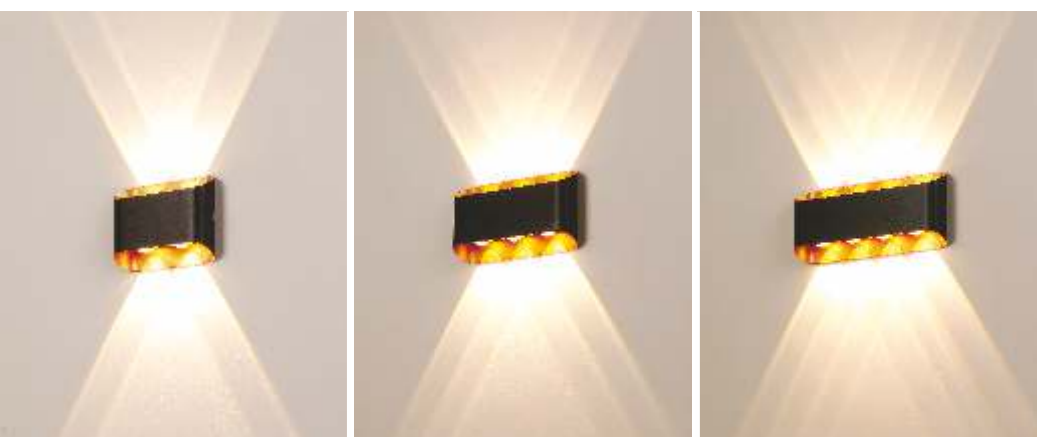
Dimension : 235x100x35



Dark Grey



Gold

Material :
Aluminium**Watts :**
2x5W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
720-800lm**IP Rating :**
IP54

LLO-139ZA (DOT OVER LENSE)

Dimension : 145x100x35



Dark Grey

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LLO-139ZB (DOT OVER LENSE)**

Dimension : 190x100x35



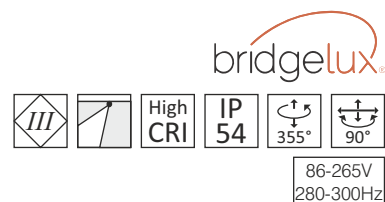
Dark Grey

Material :
Aluminium**Watts :**
6x1W**Powered By :**
BRIDGELUX**CCT :**
3000K / 4000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
540-600lm**IP Rating :**
IP54**LLO-139ZC (DOT OVER LENSE)**


Dimension : 240x100x35



Dark Grey

Material :
Aluminium**Watts :**
2x5W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
720-800lm**IP Rating :**
IP54

LLO-139L



MOVEABLE HEAD - 2WAY
(LIGHT CAN BE CHANGED TO
ANY DIRECTION)

Dimension : 30x30x45



Dark Grey



White

Material :
Aluminium

Watts :
2x3W

Powered By :
CREE

CCT :
3000K

Beam Angle :
90°

CRI :
≥80

Luminous :
450-600lm

IP Rating :
IP54



CREE 



High
CRI

IP
54

35°
90°

86-265V
280-300Hz



LLO-1005A**New**

Dimension : 80x70

Material :
Aluminium

Watts :
3W

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
630lm

IP Rating :
IP65

 Dark Grey
LLO-1006**New**

Dimension : 80x70

Material :
Aluminium

Watts :
3x2W

Powered By :
CREE

CCT :
3000K


Beam Angle :
40°

CRI :
≥80


Luminous :
540-600lm

IP Rating :
IP54


 Dark Grey


LLO-1034COLOR CHANGING
SWITCH

Dimension : 110x65

Material :
Aluminium**Watts :**
5W**Powered By :**
BRIDGELUX**CCT :**
2700K - 3000K - 4000K**Beam Angle :**
130°**CRI :**
≥80**Luminous :**
300lm**IP Rating :**
IP65


Graphite Black

LLO-1035COLOR CHANGING
SWITCH

Dimension : 130x65

Material :
Aluminium**Watts :**
8W**Powered By :**
BRIDGELUX**CCT :**
2700K - 3000K - 4000K**Beam Angle :**
130°**CRI :**
≥80**Luminous :**
480lm**IP Rating :**
IP65

Graphite Black

LLO-1036COLOR CHANGING
SWITCH


Dimension : 130x65

Material :
Aluminium**Watts :**
12W**Powered By :**
BRIDGELUX**CCT :**
2700K - 3000K - 4000K**Beam Angle :**
130°**CRI :**
≥80**Luminous :**
750lm**IP Rating :**
IP65

Graphite Black






LLO-1037COLOR CHANGING
SWITCH

Dimension : 100x70



Graphite Black

Material :
Aluminium**Watts :**
6W**Powered By :**
BRIDGELUX**CCT :**
2700K / 3000K / 4000K**Beam Angle :**
130°**CRI :**
≥80**Luminous :**
750lm**IP Rating :**
IP65**LLO-1038**COLOR CHANGING
SWITCH

Dimension : 150x90




Graphite Black

Material :
Aluminium**Watts :**
12W**Powered By :**
BRIDGELUX**CCT :**
2700K / 3000K / 4000K**Beam Angle :**
130°**CRI :**
≥80**Luminous :**
960lm**IP Rating :**
IP65

bridgelux®

86-265V
280-300Hz

LLO-132


Dimension : 42x40



Dark Grey



Sand White

Material :
Aluminium**Watts :**
2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°-5°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-133**

Dimension : 42x40




Dark Grey



Sand White

Material :
Aluminium**Watts :**
1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°-5°**CRI :**
≥80**Luminous :**
90-100lm**IP Rating :**
IP54

86-265V
280-300Hz

LLO-134

Dimension : 35x35x50



Dark Grey



Sand White

Material :
Aluminium**Watts :**
2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60-5°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-135**


Dimension : 55x45x60



Dark Grey



Sand White

Material :
Aluminium**Watts :**
2W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60-5°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54**LLO-136**

Dimension : 70x50x70




Dark Grey



Sand White

Material :
Aluminium**Watts :**
4W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60-5°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54

LLO-138

Dimension : 100x100



Dark Grey



White


Material :
Die-Cast Aluminium**Watts :**
2x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
0-120°**CRI :**
≥80**Luminous :**
80lm/w**IP Rating :**
IP6586-265V
280-300Hz

LED Under ground Light

Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs




LLO-129

Dimension : 117x67




SS Finish

Material :
Aluminium**Watts :**
1W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
28°**CRI :**
≥80**Luminous :**
890lm**IP Rating :**
IP65**LLO-129C**

Dimension : 31x46




SS Finish

Material :
Aluminium**Watts :**
1W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
45°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP65**LLO-129D**

Dimension : 42x80



SS Finish

Material :
Aluminium**Watts :**
3W**Powered By :**
BRIDGELUX**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
130lm**IP Rating :**
IP65**LLO-129E**

Dimension : 62x85



SS Finish

Material :
304 Stainless Steel**Watts :**
3W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
140lm**IP Rating :**
IP67

EPISTAR


OSRAM



CREE

bridgelux®

110-240V
50-60Hz100-240V
50-60Hz

LLO-122

Dimension : 105x120



SS Finish

Material :
 Aluminium

Watts :
 3W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 96°

CRI :
 ≥80

Luminous :
 1800lm

IP Rating :
 IP65
LLO-127

Dimension : 105x125x103



SS Finish

Material :
 Aluminium

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 27°

CRI :
 ≥80

Luminous :
 597lm


IP Rating :
 IP65



 86-265V
 280-300Hz


LLO-129F

WALL WASHER



Dimension : 110x100



SS Finish

Material :
Die-Cast Aluminium+PC

Watts :
3x3W

Powered By :
CREE

CCT :
2700K


Beam Angle :
15°

CRI :
≥80

Luminous :
2700lm

IP Rating :
IP65
LLO-129G

WALL WASHER



Dimension : 160x110



SS Finish

Material :
Die-Cast Aluminium+PC

Watts :
6x2W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
≥80

Luminous :
360lm

IP Rating :
IP65
LLO-129H

Dimension : 160x110



SS Finish

Material :
Die-Cast Aluminium+PC

Watts :
9x2W

Powered By :
CREE


CCT :
2700K


Beam Angle :
15°

CRI :
≥80

Luminous :
480lm

IP Rating :
IP65

CREE

100-240V
50-60Hz

LLO-124

Dimension : 140x125



Dark Grey

Material :
 Die-Cast Aluminium+PC

Watts :
 7W


LED CHIP :
 CREE

CCT :
 3000K

Beam Angle :
 110°

CRI :
 ≥80

Luminous :
 67lm

IP Rating :
 IP65
**LLO-125**

Dimension : 140x125



Dark Grey

Material :
 Die-Cast Aluminium+PC

Watts :
 7W


LED CHIP :
 CREE

CCT :
 3000K

Beam Angle :
 99°

CRI :
 ≥80

Luminous :
 135lm

IP Rating :
 IP65
**LLO-126**

Dimension : 140x125



Dark Grey

Material :
 Die-Cast Aluminium+PC

Watts :
 7W

LED CHIP :
 CREE

CCT :
 3000K


Beam Angle :
 70°

CRI :
 ≥80

Luminous :
 188lm


IP Rating :
 IP54

CREE


 100-240V
 50-60Hz

LLO-129I

2 WAY



Dimension : 85x110
Cutout : 75



Stainless Steel

Material :
Aluminium

Watts :
6W

Powered By :
EPISTAR

CCT :
2700K

Beam Angle :
2x20x90°


CRI :
≥80

Luminous :
360lm

IP Rating :
IP65

**LLO-129J**

4 WAY



Dimension : 85x100
Cutout : 75



Stainless Steel

Material :
Aluminium

Watts :
6W

Powered By :
EPISTAR

CCT :
2700K

Beam Angle :
4x20x90°


CRI :
≥80

Luminous :
720lm

IP Rating :
IP65

**LLO-129K**

2 WAY



Dimension : 120x125
Cutout : 100



Stainless Steel

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR

CCT :
2700K

Beam Angle :
9x20x90°


CRI :
≥80

Luminous :
360lm

IP Rating :
IP65

**LLO-129L**

4 WAY



Dimension : 120x125
Cutout : 100



Stainless Steel

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR


CCT :
2700K

Beam Angle :
4x20x90°


CRI :
≥80

Luminous :
720lm

IP Rating :
IP65

**EPISTAR**

86-265V
280-300Hz

LLO-129IA**New**

Dimension : 85x110
Cutout : 75



Stainless Steel

Material :
Aluminium

Watts :
6W

Powered By :
EPISTAR


CCT :
2700K

Beam Angle :
1x20x90°

CRI :
≥80

Luminous :
360lm

IP Rating :
IP65

**LLO-129KA****New**

Dimension : 120x125
Cutout : 100



Stainless Steel

Material :
Aluminium

Watts :
12W

Powered By :
EPISTAR

CCT :
2700K

Beam Angle :
1x20x90°


CRI :
≥80

Luminous :
720lm

IP Rating :
IP65

**EPISTAR**

86-265V
280-300Hz


LLO-129T**New**

SURFACE / RECESSED / WALL

Dimension : 78x30



Sand Grey

Material :
Aluminium**Watts :**
1x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
240lm**IP Rating :**
IP65**LLO-129U****New**


SURFACE / RECESSED / WALL

Dimension : 78x30



Sand Grey


Material :
Aluminium**Watts :**
2x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
480lm**IP Rating :**
IP65

86-265V
280-300Hz

LLO-129P

WALL WASHER

New



Dimension : 130x130

Material :
Die-Cast Aluminium+PC

Watts :
9W

Powered By :
CREE

CCT :
2700K

Beam Angle :
30x75°

CRI :
≥80

Luminous :
70lm

IP Rating :
IP67



SS Finish

LLO-129S

WALL WASHER

New



Dimension : 160x130

Material :
Die-Cast Aluminium+PC

Watts :
18W

Powered By :
CREE

CCT :
2700K

Beam Angle :
30x75°

CRI :
≥80

Luminous :
70lm


IP Rating :
IP67



SS Finish

LLO-129R

New



Dimension : 190x130

Material :
Aluminium+PC

Watts :
32W

Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
≥80


Luminous :
2500lm

IP Rating :
IP67




Dark Grey





100-240V
50-60Hz

LLO-1040
New


Dimension : 60x105
Cutout : 62

Material :
Aluminium+PC

Watts :
4W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
20°

CRI :
≥90

Luminous :
-

IP Rating :
IP67

 Black
LLO-1041
New


Dimension : 70x110
Cutout : 72

Material :
Aluminium

Watts :
7W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
15°

CRI :
≥90

Luminous :
-

IP Rating :
IP67

 Black
LLO-1042
New


Dimension : 80x110
Cutout : 82

Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
15°

CRI :
≥90

Luminous :
-

IP Rating :
IP67


 Black

LLO-140

Dimension : 80x60




Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
50°**CRI :**
≥90**Luminous :**
146lm**IP Rating :**
IP54**LLO-159Y**

Dimension : 80x42



Dark Grey


Material :
Aluminium+Glass**Watts :**
2W**Powered By :**
EPISTAR SMD**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
14lm**IP Rating :**
IP65**LLO-159Z**

Dimension : 80x42x80



Dark Grey

Material :
Aluminium+Glass**Watts :**
2W**Powered By :**
EPISTAR SMD**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥90**Luminous :**
140lm**IP Rating :**
IP65**EPISTAR** | **CREE** 100-240V
50-60Hz

LLO-159A

Dimension : 92x73



SS Finish

Material :
 Aluminium+PC

Watts :
 5W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 45°

CRI :
 ≥80

Luminous :
 610lm

IP Rating :
 IP65
LLO-159B

Dimension : 92x73



SS Finish

Material :
 Aluminium+PC

Watts :
 5W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 20°

CRI :
 ≥80

Luminous :
 610lm

IP Rating :
 IP65
LLO-159C

Dimension : 170x70x58



SS Finish

Material :
 Aluminium+PC

Watts :
 5W

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 20°

CRI :
 ≥80

Luminous :
 610lm

IP Rating :
 IP65
**EPISTAR**
 100-240V
 50-60Hz

LLO-159D

Dimension : 35x70
Cutout : 30



Stainless Steel

Material :
Aluminium+PC

Watts :
3W

Powered By :
CREE


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP65

LLO-159E

Dimension : 35x35x70
Cutout : 30



Stainless Steel

Material :
Aluminium+PC

Watts :
3W

Powered By :
CREE


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
310lm

IP Rating :
IP65

LLO-159F

Dimension : 35x70
Cutout : 30



Stainless Steel

Material :
Aluminium+PC

Watts :
3W

Powered By :
CREE


CCT :
3000K

Beam Angle :
10°

CRI :
≥80

Luminous :
310lm

IP Rating :
IP65

LLO-159G

Dimension : 35x70
Cutout : 30



Stainless Steel

Material :
Aluminium+PC

Watts :
3W

Powered By :
CREE


CCT :
3000K

Beam Angle :
30°


CRI :
≥80

Luminous :
310lm

IP Rating :
IP65

200-240V
50-60Hz

LLO-142

Dimension : 114x114x65



Dark Grey

Material :
Die-Cast Aluminium

Watts :
2x1W

Powered By :
CREE


CCT :
3000K

Beam Angle :
29°

CRI :
≥80

Luminous :
169lm

IP Rating :
IP65

LLO-143

Dimension : 114x170x65



Dark Grey

Material :
Die-Cast Aluminium

Watts :
5W

Powered By :
CREE


CCT :
3000K

Beam Angle :
31°

CRI :
≥80

Luminous :
327lm

IP Rating :
IP65

LLO-144

Dimension : 114x226x65



Dark Grey

Material :
Die-Cast Aluminium

Watts :
6x1W

Powered By :
CREE

CCT :
3000K


Beam Angle :
29°

CRI :
≥80

Luminous :
529lm

IP Rating :
IP65






LED Outdoor Step Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

LLO-159R



Dimension : 43x43



Material :
Aluminium+PC

Watts :
2W

Powered By :
CREE

CCT :
3000K


Beam Angle :
-

CRI :
≥80

Luminous :
160lm

IP Rating :
IP54

LLO-159S



Dimension : 43



Material :
Aluminium+PC

Watts :
2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
-

CRI :
≥80


Luminous :
160lm

IP Rating :
IP54

CREE 



100-240V
50-60Hz

LLO-159T

Dimension : 90x71x90



Dark Grey

Material :
Aluminium+Glass

Watts :
3W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65

LLO-159U

Dimension : 140x71x70



Dark Grey

Material :
Aluminium+Glass

Watts :
3W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65

LLO-159V

Dimension : 250x73x98



Dark Grey

Material :
Aluminium+PC

Watts :
12W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65

LLO-159W

Dimension : 250x73x98



Dark Grey

Material :
Aluminium+PC

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80


Luminous :
90lm

IP Rating :
IP65

EPISTAR200-240V
50-60Hz

LLO-1025

New



Dimension : 180x80
 Cutout Size : 98x62
 Hood : 56x20



Graphite Black

Material :
 Aluminium Die Casting

Watts :
 4W

Powered By :
 LUMILED'S 4014

CCT :
 3000K

Beam Angle :
 82°


CRI :
 ≥80

Luminous :
 323lm

IP Rating :
 IP65

LLO-1026

New



Dimension : 230x90
 Cutout Size : 240x74
 Hood : 64x20



Graphite Black

Material :
 Aluminium Die Casting

Watts :
 7W

Powered By :
 LUMILED'S 4014


CCT :
 3000K


Beam Angle :
 82°

CRI :
 ≥80

Luminous :
 660lm

IP Rating :
 IP65




LFO-001 (Magnetic Plate)

Dimension : 180x40x48.5




Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥90**Luminous :**
262.5lm**IP Rating :**
IP65**LFO-002 (Magnetic Plate)**

Dimension : 90x90x50.4



Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP65**LFO-003 (Magnetic Plate)**

Dimension : 90x90x50.4




Dark Grey




White





Gold



Material :
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP65
 
100-240V
50-60Hz

LFO-004 (Magnetic Plate)


Dimension : 90x90x50.4

**Material :**
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥90**Luminous :**
262.5lm**IP Rating :**
IP65**LFO-005 (Magnetic Plate)**


Dimension : 90x90x50.4

**Material :**
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP65**LFO-006 (Magnetic Plate)**

Dimension : 90x90x50.4

**Material :**
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP65


100-240V
50-60Hz

LFO-007

Dimension : 102x58x53.5





Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP66**LFO-008**

Dimension : 146x71x53.5




Dark Grey

Material :
Aluminium+Glass**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP65**LFO-009**

Dimension : 170x53x70



Dark Grey


Material :
Aluminium**Watts :**
3W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
262.5lm**IP Rating :**
IP66**LFO-010**

Dimension : 255x53x75



Dark Grey

Material :
Aluminium**Watts :**
8W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
700lm**IP Rating :**
IP66

LFO-018**New**

Dimension : 45x35



Black



White

Material :
Aluminium

Watts :
1W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
90-100lm

IP Rating :
IP54
LFO-019**New**

Dimension : 45x35



Black



White

Material :
Aluminium

Watts :
1W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
15°

CRI :
≥80

Luminous :
90-100lm

IP Rating :
IP54
LFO-020**New**

Black



White

Dimension : 55x35
Cutout : 40
Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
≥80

Luminous :
90-100lm

IP Rating :
IP54
LFO-021**New**

Black



White

Dimension : 55x35
Cutout : 40
Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
-


CRI :
≥80

Luminous :
90-100lm

IP Rating :
IP54


100-240V
50-60Hz



LLO-160

Dimension : 315x76x150



Dark Grey

Material :
 Aluminium+Glass

Watts :
 7W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 23°

CRI :
 ≥80

Luminous :
 433lm

IP Rating :
 IP65
LLO-162

Dimension : 146x71x53.5



Dark Grey

Material :
 Aluminium+Glass

Watts :
 3W


Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 80°

CRI :
 ≥80

Luminous :
 262.5lm

IP Rating :
 IP65
LLO-163

Dimension : 170x53x70



Dark Grey

Material :
 Aluminium+Glass

Watts :
 12W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 23°

CRI :
 ≥80

Luminous :
 864lm

IP Rating :
 IP65
LLO-170

Dimension : 380x73x107



Dark Grey

Material :
 Die-cast Aluminium

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 24°

CRI :
 ≥80


Luminous :
 436lm

IP Rating :
 IP65

OSRAM


 200-240V
 50-60Hz

LLO-175



Dimension : 210x247x120



Dark Grey

Material :
Die-cast Aluminium

Watts :
15W

Powered By :
AC COB

CCT :
3000K

Beam Angle :
41°

CRI :
≥80

Luminous :
934lm

IP Rating :
IP65

OSRAM



High
CRI


IP
54

355°

90°

200-240V
50-60Hz



LLO-173

Dimension : 70x80x117

Material :
Die-Cast Aluminium

Watts :
4x2W

Powered By :
CREE

CCT :
3000K


Beam Angle :
27°

CRI :
≥80

Luminous :
460lm

IP Rating :
IP65


Dark Grey

LLO-174

Dimension : 70x80x117

Material :
Die-Cast Aluminium

Watts :
1x7W

Powered By :
CREE

CCT :
3000K


Beam Angle :
39°


CRI :
≥80

Luminous :
602lm

IP Rating :
IP65


Dark Grey


CREE 


LLO-176

Dimension : 66x45x190




Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
300-360lm**IP Rating :**
IP65**LLO-177**

Dimension : 100x66x200



Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
520-660lm**IP Rating :**
IP65**LLO-178**

Dimension : 100x66x200



Dark Grey

Material :
Die-Cast Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
1050-1300lm**IP Rating :**
IP65

High
CRIIP
54

355°


90°

100-240V
50-60Hz

LLO-179


Dimension : 30x65

Silver Grey

Material :
Aluminium**Watts :**
2W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
140lm**IP Rating :**
IP65**LLO-180**


Dimension : 36x85

Silver Grey

Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
140lm**IP Rating :**
IP65**LLO-181**

Dimension : 50x120


Silver Grey

Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
140lm**IP Rating :**
IP65**LLO-186**

Dimension : 60x128

Dark Grey


Material :
Aluminium**Watts :**
20W**Powered By :**
BRIDGELUX**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
1800lm**IP Rating :**
IP65

LLO-179A

Dimension : 35x80




Dark Grey

Material :
Aluminium**Watts :**
2W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
220lm**IP Rating :**
IP65**LLO-180A**

Dimension : 35x110



Dark Grey


Material :
Aluminium**Watts :**
6W**Powered By :**
BRIDGELUX**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
560lm**IP Rating :**
IP65**LLO-181A**

Dimension : 49x155



Dark Grey


Material :
Aluminium**Watts :**
10W**Powered By :**
BRIDGELUX**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
900lm**IP Rating :**
IP65

LLO-182

Dimension : 90x139x173




Dark Grey


Material :
Aluminium+Glass**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
13°**CRI :**
≥80**Luminous :**
1077lm**IP Rating :**
IP65**LLO-183**

Dimension : 88x153x317



Dark Grey

Material :
Aluminium+Glass**Watts :**
12W**LED CHIP : Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
13°**CRI :**
≥80**Luminous :**
1077lm**IP Rating :**
IP65**CREE** 100-240V
50-60Hz

LLO-190

Dimension : 90x90X75




Dark Grey


Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
680lm**IP Rating :**
IP65**LLO-191**

Dimension : 60x110



Dark Grey

Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
100lm/w**IP Rating :**
IP67**CREE** 

LLO-192**New**

Dimension : 45x70

Material :
 Aluminium

Watts :
 5W

Powered By :
 CREE


CCT :
 2700K

Beam Angle :
 12°/24°

CRI :
 ≥80

Luminous :
 80lm

IP Rating :
 IP66

 Dark Grey
LLO-193**New**

Dimension : 65x105

Material :
 Aluminium

Watts :
 10W

Powered By :
 CREE


CCT :
 2700K

Beam Angle :
 12°/24°

CRI :
 ≥80

Luminous :
 80lm

IP Rating :
 IP66

 Dark Grey
LLO-194**New**

Dimension : 82x125

Material :
 Aluminium

Watts :
 20W

Powered By :
 CREE

CCT :
 2700K


Beam Angle :
 12°/24°


CRI :
 ≥80

Luminous :
 80lm

IP Rating :
 IP66

 Dark Grey




 100-240V
 50-60Hz

LLO-187

Dimension : 99x93x305




Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**LLO-188**

Dimension : 143x128x490



Dark Grey


Material :
Aluminium**Watts :**
20W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**LLO-189**


Dimension : 201x174x544



Dark Grey

Material :
Aluminium**Watts :**
30W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65

100-240V
50-60Hz

LLO-1043**New**

Dimension : 101x60
 Head Size : 50x62

Black

Material :
 Aluminium

Watts :
 1x5W

Powered By :
 24V CSP


CCT :
 3000K

Beam Angle :
 24°

CRI :
 ≥980

Luminous :
 -

IP Rating :
 IP65

LLO-1044**New**

Dimension : 274x60
 Head Size : 50x62

Black

Material :
 Aluminium

Watts :
 3x5W

Powered By :
 24V CSP


CCT :
 3000K

Beam Angle :
 24°

CRI :
 ≥90

Luminous :
 -

IP Rating :
 IP65

LLO-1045**New**

Dimension : 488x60
 Head Size : 50x62

Black

Material :
 Aluminium

Watts :
 5x5W

LED CHIP :
 CREE

CCT :
 3000K

Beam Angle :
 24°

CRI :
 ≥90


Luminous :
 -

IP Rating :
 IP65

LLO-1046



New



Dimension : 208x67
Head Size : 50x62



Black

Material :
Aluminium

Watts :
1x5W

Powered By :
24V CSP

CCT :
3000K

Beam Angle :
24°

CRI :
≥90


Luminous :
-

IP Rating :
IP65

LLO-1047



New



Dimension : 273x208
Head Size : 50x62



Black

Material :
Aluminium

Watts :
3x5W

Powered By :
24V CSP

CCT :
3000K

Beam Angle :
24°

CRI :
≥90


Luminous :
-

IP Rating :
IP65

LLO-1048



New



Dimension : 488x208
Head Size : 50x62



Black

Material :
Aluminium

Watts :
5x5W

LED CHIP :
CREE


CCT :
3000K

Beam Angle :
24°

CRI :
≥90

Luminous :
-

IP Rating :
IP65





BEAM ANGLE (NOMINAL)



15°

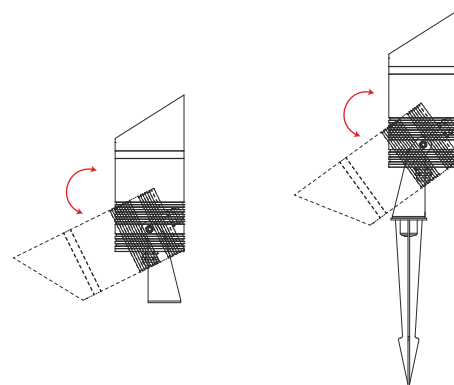



38°

CERTIFICATIONS



Housing Material	CNC cutting 6063 aluminium
Bracket Material	CNC cutting 6063 aluminium
Gasket Material	Silicone
Lens Material	PMMA
Voltage	AC 220-240V
Controls	NO: NO/OFF
Rated Frequency	50/60Hz
Operating Temperature	-20 ~55
Colour Rendering	CRI 80+ (applicable to 30K, colour temperatures only) Consult sales for CRI 90+
Optical Accessories	SH: Shield
Warranty	AC Single CCT: 3-year limited warranty




LLO-1052**New**

Dimension : 54x123

Material :
Aluminium**Watts :**
5W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°/38°**CRI :**
≥80**Luminous :**
85lm/w**IP Rating :**
IP68


Grey

LLO-1053**New**

Dimension : 64x146

Material :
Aluminium**Watts :**
8W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°/38°**CRI :**
≥80**Luminous :**
85lm/w**IP Rating :**
IP68


Grey

LLO-1054**New**

Dimension : 77x176

Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°/38°**CRI :**
≥80**Luminous :**
85lm/w**IP Rating :**
IP68


Grey


LLO-1055**New**

Dimension : 84x193

Material :
Aluminium**Watts :**
18W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°/38°**CRI :**
≥80**Luminous :**
85lm/w**IP Rating :**
IP68

Grey


**Honey Comb
Reflector Available****CREE** 200-240V
50-60Hz

LGLS-003

Dimension : 135x135x96




Dark Grey

Material :
Aluminium**Watts :**
MAX 20W**Powered By :**
CREE**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
1153lm**IP Rating :**
IP65**LGLS-004**

Dimension : 115x60x245




Dark Grey

Material :
Aluminium + Glass**Watts :**
MAX 35W**Powered By :**
CREE**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
1153lm**IP Rating :**
IP65**LGLS-005**

Dimension : 110x50x254



Dark Grey

Material :
ABC+PC**Watts :**
MAX 8W**Powered By :**
CREE**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
1153lm**IP Rating :**
IP65**LGLS-006**

Dimension : 130x80x273




Dark Grey

Material :
ABC+PC**Watts :**
6x1W**Powered By :**
CREE**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
1153lm**IP Rating :**
IP65
CREE

200-240V
50Hz

LGLS-007



Dimension : 135x135x96



Dark Grey

Material :
Aluminium + Glass

Watts :
MAX 35W

Powered By :
CREE

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
1153lm

IP Rating :
IP65



CREE



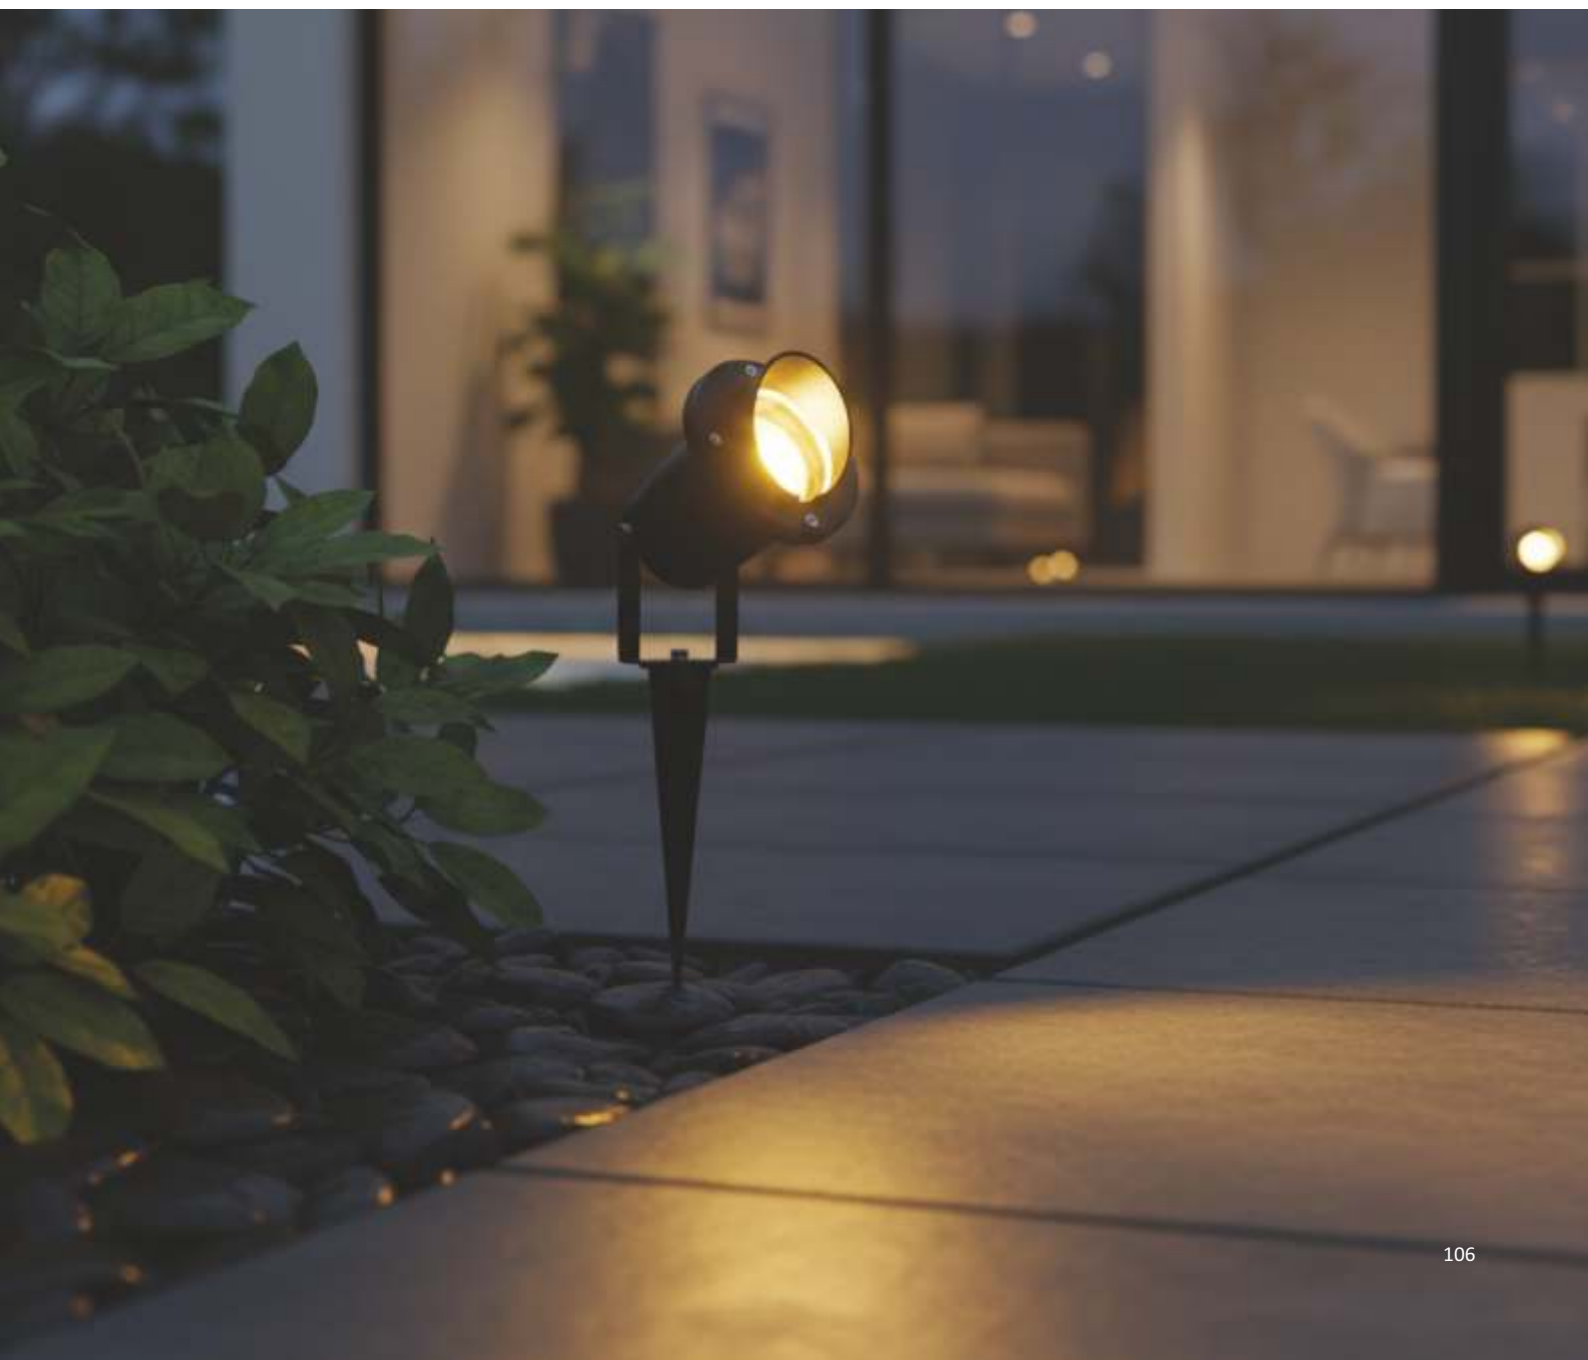
High
CRI

IP
54


355°

90°

200-240V
50Hz



LSP-001



Dimension : 68x73

Material :
Stainless Steel

Watts :
2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
30°

CRI :
≥80

Luminous :
-

IP Rating :
IP68

Silver Grey

LSP-005



Dimension : 135x58

Material :
Stainless Steel

Watts :
4x2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
30°

CRI :
≥80

Luminous :
-

IP Rating :
IP68

Silver Grey

LSP-009



Dimension : 180x58

Material :
Stainless Steel

Watts :
6X2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
30°

CRI :
≥80


Luminous :
-

IP Rating :
IP68


Silver Grey



CREE



LSP-021



Dimension : 135x135x96



SS Finish

Material :
Die-Cast Aluminium

Watts :
2x7W

Powered By :
OSRAM

CCT :
3000K


Beam Angle :
18°

CRI :
≥80

Luminous :
1153lm

IP Rating :
IP54

LSP-028



Dimension : 135x135x96



SS Finish

Material :
Die-Cast Aluminium

Watts :
2x7W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
18°

CRI :
≥80

Luminous :
1153lm

IP Rating :
IP54

LSP-029



Dimension : 135x135x96



SS Finish

Material :
Die-Cast Aluminium

Watts :
2x7W

Powered By :
OSRAM

CCT :
3000K / BLUE / 6000K


Beam Angle :
18°

CRI :
≥80

Luminous :
1153lm

IP Rating :
IP54



LSP-030**New**

Dimension : 95x55
Cutout : 80x60



SS Finish

Material :
Stainless Steel

Watts :
3x1W

Powered By :
OSRAM


CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68

LSP-031**New**

Dimension : 115x55
Cutout : 100x60



SS Finish

Material :
Stainless Steel

Watts :
6x1W

Powered By :
OSRAM


CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68

LSP-032**New**

Dimension : 135x60
Cutout : 145x55



SS Finish

Material :
Stainless Steel

Watts :
9x1W

Powered By :
EPISTAR


CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68

LSP-033**New**

Dimension : 145x55
Cutout : 160x60



SS Finish

Material :
Stainless Steel

Watts :
12x1W

Powered By :
OSRAM


CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68

LSP-034**New**

Dimension : 75x95



SS Finish

Material :
Stainless Steel

Watts :
3x1W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68
LSP-035**New**

Dimension : 100x95



SS Finish

Material :
Stainless Steel

Watts :
6x1W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68
LSP-036**New**

Dimension : 135x95



SS Finish

Material :
Stainless Steel

Watts :
9x1W


Powered By :
CREE

CCT :
2700K

Beam Angle :
15°

CRI :
-

Luminous :
-

IP Rating :
IP68
LSP-037**New**

Dimension : 160x95



SS Finish

Material :
Stainless Steel

Watts :
12x1W

Powered By :
CREE


CCT :
2700K

Beam Angle :
15°

CRI :
-


Luminous :
-

IP Rating :
IP68



200-240V
50Hz

BOLLARDS



LB-032

Dimension : 250x90



Graphite Black

Material :
 Aluminium + Glass

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 55°

CRI :
 ≥80

Luminous :
 477lm

IP Rating :
 IP54
LB-033

Dimension : 450x90



Graphite Black

Material :
 Aluminium + Glass

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 55°

CRI :
 ≥80

Luminous :
 477lm

IP Rating :
 IP54
LB-034

Dimension : 650x90



Graphite Black

Material :
 Aluminium + Glass

Watts :
 7W

Powered By :
 CREE


CCT :
 3000K


Beam Angle :
 55°

CRI :
 ≥80

Luminous :
 477lm

IP Rating :
 IP54


REACH |  **RoHS** COMPLIANT | **CE** | **CREE** 

 100-240V
 50-60Hz

LB-036

Dimension : 230x180




Graphite Black


Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
360°**CRI :**
≥80**Luminous :**
870lm**IP Rating :**
IP54**LB-037**

Dimension : 500x180



Graphite Black

Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
360°**CRI :**
≥80**Luminous :**
1100lm**IP Rating :**
IP54**CREE** 

LB-038

Dimension : 300x160x54




Graphite Black

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
329°**CRI :**
≥80**Luminous :**
497lm**IP Rating :**
IP54**LB-039**

Dimension : 650x160x54



Graphite Black

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
329°**CRI :**
≥80**Luminous :**
497lm**IP Rating :**
IP54**LB-063**

Dimension : 300x160x54



Graphite Black


Material :
Aluminium**Watts :**
6W**Powered By :**
EVERLIGHT**CCT :**
3000K**Beam Angle :**
117°/320°**CRI :**
≥80**Luminous :**
433lm**IP Rating :**
IP54**LB-064**

Dimension : 650x160x54



Graphite Black

Material :
Aluminium**Watts :**
6W**Powered By :**
EVERLIGHT**CCT :**
3000K**Beam Angle :**
117°/320°**CRI :**
≥80**Luminous :**
433lm**IP Rating :**
IP54**EVERLIGHT** | **CREE**100-240V
50-60Hz

LB-042

Dimension : 600x75x75



Graphite Black

Material :
Die-Cast Aluminium

Watts :
5W

Powered By :
PHILIPS AC LED


CCT :
3000K

Beam Angle :
43°

CRI :
≥80

Luminous :
195lm

IP Rating :
IP54

LB-054

Dimension : 600x75x75



Graphite Black

Material :
Die-Cast Aluminium

Watts :
5W

Powered By :
PHILIPS AC LED


CCT :
3000K


Beam Angle :
42°

CRI :
≥80

Luminous :
98lm

IP Rating :
IP54

PHILIPS

LB-088

Dimension : 600x120x82



Graphite Black

Material :
Die-Cast Aluminium

Watts :
10W

Powered By :
Philips AC LED

CCT :
3000K

Beam Angle :
52°

CRI :
≥80

Luminous :
526lm

IP Rating :
IP54

LB-096

Dimension : 500x141x141



Graphite Black

Material :
Die-Cast Aluminium

Watts :
15W

Powered By :
Philips AC LED


CCT :
3000K


Beam Angle :
47°

CRI :
≥80

Luminous :
858lm

IP Rating :
IP54

PHILIPS

LLO-014

Dimension : 160x108x108



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 7W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 36°

CRI :
 ≥80

Luminous :
 353lm

IP Rating :
 IP54
LB-058

Dimension : 200x108x108



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 7W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 36°

CRI :
 ≥80

Luminous :
 400m

IP Rating :
 IP54
LB-059

Dimension : 650x108x108



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 7W

Powered By :
 CREE


CCT :
 3000K


Beam Angle :
 29°

CRI :
 ≥80

Luminous :
 356m

IP Rating :
 IP54


CREE

 200-240V
 50-60Hz

LLO-097

Dimension : 270x125x40




Dark Grey

Material :
Die-Cast Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
160°**CRI :**
≥80**Luminous :**
290lm**IP Rating :**
IP54**LB-056**

Dimension : 350x120x40




Dark Grey


Material :
Die-Cast Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
45°**CRI :**
≥80**Luminous :**
290lm**IP Rating :**
IP54**LB-057**

Dimension : 650x120x40



Dark Grey


Material :
Die-Cast Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
45°**CRI :**
≥80**Luminous :**
290lm**IP Rating :**
IP54
REACH |  **RoHS** COMPLIANT | **CE** | **CREE** 
200-240V
50-60Hz

LLO-070

Dimension : 80x110x176




Dark Grey

Material :
Aluminium +PC**Watts :**
9W**Powered By :**
EVERLIGHT - AC LED**CCT :**
3000K**Beam Angle :**
185°**CRI :**
≥80**Luminous :**
659lm**IP Rating :**
IP65**LB-072**

Dimension : 500x10



Dark Grey

Material :
Aluminium + PC**Watts :**
9W**Powered By :**
EVERLIGHT - AC LED**CCT :**
3000K**Beam Angle :**
185°**CRI :**
≥80**Luminous :**
659lm**IP Rating :**
IP65**LB-073**

Dimension : 900x10



Dark Grey


Material :
Aluminium + PC**Watts :**
9W**Powered By :**
EVERLIGHT - AC LED**CCT :**
3000K**Beam Angle :**
185°**CRI :**
≥80**Luminous :**
659lm**IP Rating :**
IP65**EVERLIGHT**100-240V
50-60Hz

LLO-076

Dimension : 200x128x169




Dark Grey

Material :
Aluminium**Watts :**
6W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
175°**CRI :**
≥80**Luminous :**
215lm**IP Rating :**
IP54**LB-074**

Dimension : 200x128x123




Graphite Black

Material :
Aluminium**Watts :**
6W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
175°**CRI :**
≥80**Luminous :**
201lm**IP Rating :**
IP54**LB-075**

Dimension : 500x128x123



Graphite Black


Material :
Aluminium**Watts :**
6W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
175°**CRI :**
≥80**Luminous :**
258lm**IP Rating :**
IP54**LB-076**

Dimension : 800x128x123



Graphite Black

Material :
Aluminium**Watts :**
6W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
175°**CRI :**
≥80**Luminous :**
254lm**IP Rating :**
IP54100-240V
50Hz

LB-083

Dimension : 200x90



Graphite Black

Material :
Die-Cast Aluminium

Watts :
7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
40°

CRI :
≥80

Luminous :
419lm

IP Rating :
IP54
LB-084

Dimension : 650x90



Graphite Black

Material :
Die-Cast Aluminium

Watts :
7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
40°

CRI :
≥80

Luminous :
420lm

IP Rating :
IP54
LB-108

Dimension : 165x650x120



Graphite Black

Material :
Die-Cast Aluminium

Watts :
7W

Powered By :
Philips


CCT :
3000K

Beam Angle :
47°

CRI :
≥80

Luminous :
565lm

IP Rating :
IP54
**REACH**36V
270mA100-240V
50-60Hz

LB-100

Dimension : 300x151x151



Graphite Black

Material :
 Die-Cast Aluminium

Watts :
 10W


Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 197°

CRI :
 ≥80

Luminous :
 290lm

IP Rating :
 IP54
LB-101

Dimension : 150x151x151



Graphite Black

Material :
 Aluminium

Watts :
 12W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 270°

CRI :
 ≥80

Luminous :
 580lm

IP Rating :
 IP54
LB-102

Dimension : 800x151x151



Graphite Black

Material :
 Aluminium

Watts :
 12W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 270°


CRI :
 ≥80

Luminous :
 580lm

IP Rating :
 IP54

OSRAM



LB-122

Dimension : 145x500



Graphite Black

Material :
Aluminium+PC

Watts :
18W


Powered By :
SMD-EVER LIGHT

CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
1062lm

IP Rating :
IP54
LB-123

Dimension : 145x900



Graphite Black

Material :
Aluminium+PC

Watts :
18W

Powered By :
SMD-EVER LIGHT


CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
1062lm

IP Rating :
IP54
EVERLIGHT
100-240V
50-60Hz


LB-124

Dimension : 500x147



Dark Grey

Material :
Aluminium+PC

Watts :
9W

Powered By :
SMD-EVER LIGHT


CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
814lm

IP Rating :
IP54

LB-125

Dimension : 900x147



Dark Grey

Material :
Aluminium+ PC

Watts :
9W

Powered By :
SMD-EVER LIGHT


CCT :
3000K


Beam Angle :
360°

CRI :
≥80

Luminous :
814lm

IP Rating :
IP54

EVERLIGHT

LLO-079D

Dimension : 135x131x101



Graphite Black

Material :
 Aluminium + PC

Watts :
 6W


Powered By :
 EVER LIGHT

CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 439lm

IP Rating :
 IP54
LB-126

Dimension : 101x250



Graphite Black

Material :
 Aluminium + PC

Watts :
 6W


Powered By :
 EVER LIGHT

CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 439lm

IP Rating :
 IP54
LB-127

Dimension : 101x500



Graphite Black

Material :
 Aluminium + PC

Watts :
 6W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 439lm

IP Rating :
 IP54
LB-128

Dimension : 101x750



Graphite Black

Material :
 Aluminium + PC

Watts :
 6W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 439lm

IP Rating :
 IP54
**EVERLIGHT**

LLO-079P

Dimension : 107x120x275



Graphite Black

Material :
Aluminium + PC

Watts :
9W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
540lm

IP Rating :
IP65
LB-137

Dimension : 107x400



Graphite Black

Material :
Aluminium + PC

Watts :
9W


Powered By :
EPISTAR-SMD

CCT :
3000K

Beam Angle :
329°

CRI :
≥80

Luminous :
540lm

IP Rating :
IP54
LB-138

Dimension : 107x600



Graphite Black

Material :
Aluminium + PC

Watts :
9W


Powered By :
EPISTAR-SMD

CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
540lm

IP Rating :
IP65
LB-139

Dimension : 107x800



Graphite Black

Material :
Aluminium + PC

Watts :
9W

Powered By :
EPISTAR-SMD


CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
540lm


IP Rating :
IP54
**EPISTAR**

LLO-079Q

Dimension : 150x100x100




Graphite Black

Material :
Aluminium + PC**Watts :**
12W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
720lm**IP Rating :**
IP65**LB-140**

Dimension : 100x100x500




Graphite Black

Material :
Aluminium + PC**Watts :**
12W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
720lm**IP Rating :**
IP65**LB-141**

Dimension : 100x100x800



Graphite Black

Material :
Aluminium + PC**Watts :**
12W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
720lm**IP Rating :**
IP65**EPISTAR**

LB-146

Dimension : 178x69x300



Graphite Black

Material :
 Aluminium+ PC

Watts :
 12W

Powered By :
 CREE LED

CCT :
 3000K

Beam Angle :
 296°

CRI :
 ≥80

Luminous :
 894lm

IP Rating :
 IP65
LB-147

Dimension : 178x69x650



Graphite Black

Material :
 Aluminium + PC

Watts :
 12W

Powered By :
 CREE LED


CCT :
 3000K


Beam Angle :
 296°

CRI :
 ≥80

Luminous :
 894lm

IP Rating :
 IP65

CREE 


LB-148

Dimension : 276x140x430



Graphite Black

Material :
 Aluminium + PC

Watts :
 24W


Powered By :
 EVER LIGHT SMD LED

CCT :
 3000K

Beam Angle :
 144°

CRI :
 ≥80

Luminous :
 1850lm

IP Rating :
 IP65
LB-149

Dimension : 276x75x380



Graphite Black

Material :
 Aluminium+ PC

Watts :
 24W

Powered By :
 EVER LIGHT SMD LED

CCT :
 3000K

Beam Angle :
 144°

CRI :
 ≥80

Luminous :
 1850lm

IP Rating :
 IP65
LB-129

Dimension : 240x260



Graphite Black

Material :
 Aluminium+ PC

Watts :
 18W


Powered By :
 EVER LIGHT SMD LED


CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 1118lm


IP Rating :
 IP54
**EVERLIGHT**200-240V
50Hz

LB-175

Dimension : 80x50x78




Dark Grey

Material :
Aluminium**Watts :**
6.5W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
540lm**IP Rating :**
IP65**LB-271****New**

Dimension : 155x120x155



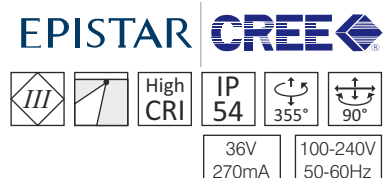
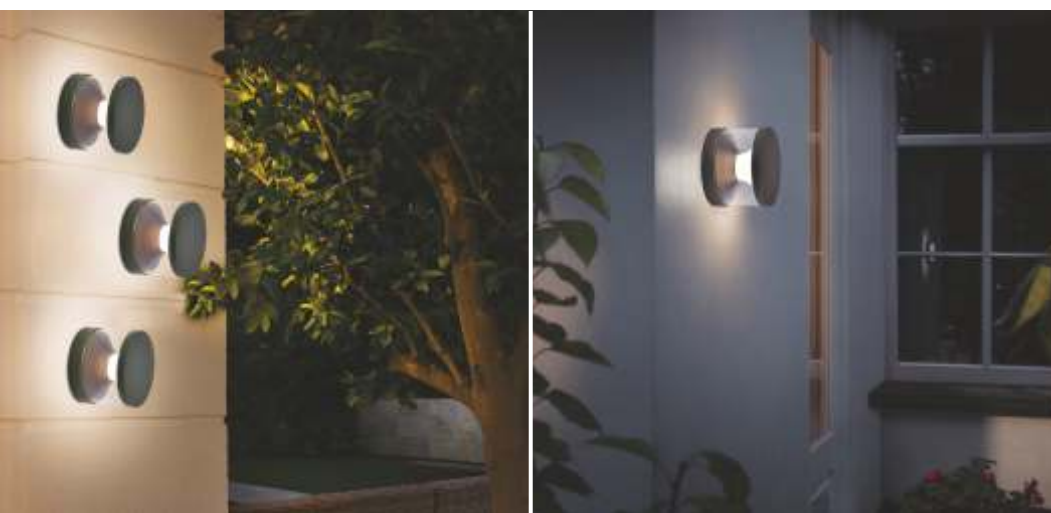
Dark Grey


Material :
Aluminium**Watts :**
17W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**LB-272****New**

Dimension : 185x140x185



Dark Grey

Material :
Aluminium**Watts :**
21W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65

LB-152

Dimension : 220.5x270



Dark Grey

Material :
Aluminium + Iron/PC

Watts :
6W

Powered By :
SMD LED

CCT :
3000K

Beam Angle :
174°

CRI :
≥80

Luminous :
429lm

IP Rating :
IP65

LB-153

Dimension : 185x156x45



Dark Grey

Material :
Aluminium+ Irony/PC

Watts :
12W

Powered By :
SMD LED


CCT :
3000K


Beam Angle :
154°

CRI :
≥80

Luminous :
992lm

IP Rating :
IP65



LB-150

Dimension : 161x55x250



Graphite Black

Material :
 Aluminium / PMMA

Watts :
 6W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 28°

CRI :
 ≥80

Luminous :
 345lm

IP Rating :
 IP65
LB-151

Dimension : 166x55x800



Graphite Black

Material :
 Aluminium / PMMA

Watts :
 12W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 28°

CRI :
 ≥80

Luminous :
 690lm

IP Rating :
 IP65
LB-154

Dimension : 120x700



Graphite Black

Material :
 Aluminium/Glass

Watts :
 6W

Powered By :
 CREE


CCT :
 3000K


Beam Angle :
 21°

CRI :
 ≥80

Luminous :
 223m

IP Rating :
 IP54

LLO-079S

Dimension : 180x62



Dark Grey

Material :
 Aluminium/PC

Watts :
 10W

Powered By :
 SMD LED

CCT :
 3000K

Beam Angle :
 99°

CRI :
 ≥80

Luminous :
 936lm

IP Rating :
 IP54
LB-159

Dimension : 180x500



Graphite Black

Material :
 Aluminium/PC

Watts :
 10W


Powered By :
 SMD LED


CCT :
 3000K

Beam Angle :
 97°

CRI :
 ≥80

Luminous :
 761lm


IP Rating :
 IP54


LB-163

Dimension : 164x47x400




Dark Grey

Material :
Aluminium**Watts :**
13W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
219°**CRI :**
≥80**Luminous :**
487lm**IP Rating :**
IP65**LB-163A**

Dimension : 167x47x400




Dark Grey


Material :
Aluminium**Watts :**
13W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
219°**CRI :**
≥80**Luminous :**
487lm**IP Rating :**
IP65**LB-163B**

Dimension : 150x50x78



Dark Grey


Material :
Aluminium**Watts :**
13W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
219°**CRI :**
≥80**Luminous :**
487lm**IP Rating :**
IP65**OSRAM** 

LLO-079W

Dimension : 160x194x231




Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**LB-161**

Dimension : 160x244x400



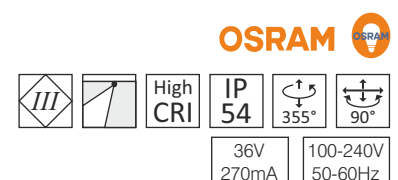
Dark Grey


Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65**LB-161A**

Dimension : 160x244x600



Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
82lm**IP Rating :**
IP54

LB-164

Dimension : 400x70x206

Material :
 Aluminium

Watts :
 20W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 327°

CRI :
 ≥80

Luminous :
 458lm

IP Rating :
 IP65


Dark Grey

LLO-1018

Dimension : 120x176x239

Material :
 Aluminium/Acrylic

Watts :
 13W

Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 176°

CRI :
 ≥80


Luminous :
 159lm

IP Rating :
 IP65


Dark Grey

OSRAM


100-240V
50-60Hz

LB-167

Dimension : 400x70x206




Dark Grey

Material :
Aluminium**Watts :**
20W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
327°**CRI :**
≥80**Luminous :**
458lm**IP Rating :**
IP65**LB-167A**

Dimension : 900x70x206




Dark Grey

Material :
Aluminium**Watts :**
20W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
327°**CRI :**
≥80**Luminous :**
540lm**IP Rating :**
IP65**LB-168**

Dimension : 300x80x175




Dark Grey


Material :
Aluminium**Watts :**
20W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
257°**CRI :**
≥80**Luminous :**
492lm**IP Rating :**
IP65**LB-168A**

Dimension : 500x80x175



Dark Grey


Material :
Die-Cast Aluminium**Watts :**
20W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
284°**CRI :**
≥80**Luminous :**
460lm**IP Rating :**
IP65
OSRAM 
200-240V
50Hz

LB-169

Dimension : 430x438




Dark Grey

Material :
Aluminium**Watts :**
5W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
≥80**Luminous :**
487lm**IP Rating :**
IP65**LB-170**

Dimension : 1010x140



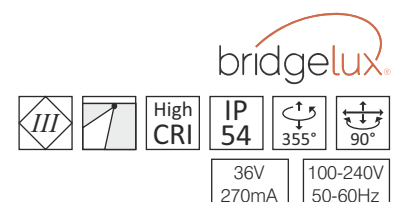
Dark Grey


Material :
Aluminium**Watts :**
5W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
540lm**IP Rating :**
IP65**LB-171**

Dimension : 1010x140



Dark Grey

Material :
Aluminium**Watts :**
3X4.5W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
24°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65

LB-173

Dimension : 40x1200

Material :
 Aluminium

Watts :
 2X3W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 60°

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP65


Dark Grey

LB-174

Dimension : 40x800

Material :
 Aluminium

Watts :
 3x2W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 60°


CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP65


Dark Grey

CREE



LLO-1001**New**

Dimension : 160x112



Dark Grey

Material :
 Aluminium/PC

Watts :
 9W

Powered By :
 SMD LED

CCT :
 3000K

Beam Angle :
 90°

CRI :
 ≥80

Luminous :
 955lm

IP Rating :
 IP65
LB-200**New**

Dimension : 160x300



Dark Grey

Material :
 Aluminium/PC

Watts :
 9W


Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 90°

CRI :
 ≥80

Luminous :
 955lm

IP Rating :
 IP65
LB-201**New**

Dimension : 160x500



Dark Grey

Material :
 Aluminium/PC

Watts :
 9W


Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 90°

CRI :
 ≥80

Luminous :
 955lm

IP Rating :
 IP65
LB-202**New**

Dimension : 160x700



Dark Grey

Material :
 Aluminium/PC

Watts :
 9W

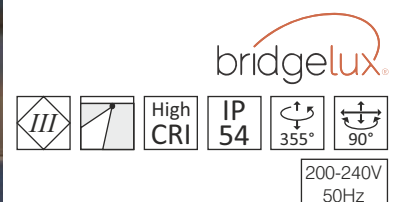
Powered By :
 BRIDGELUX


CCT :
 3000K

Beam Angle :
 90°

CRI :
 ≥80

Luminous :
 955lm

IP Rating :
 IP65


LB-203**New**

ROTATABLE HEAD TO CREATE
ANY DIRECTION LIGHT

Dimension : 110x500

Material :
Aluminium/PC

Watts :
10W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
265°


CRI :
≥80

Luminous :
625lm

IP Rating :
IP65



Dark Grey

LB-204**New**

ROTATABLE HEAD TO CREATE
ANY DIRECTION LIGHT

Dimension : 110x900

Material :
Aluminium/PC

Watts :
10W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
265°

CRI :
≥80


Luminous :
625lm

IP Rating :
IP65



Dark Grey



LB-205**New**

Dimension : 145x500

Material :
 Aluminium/PC

Watts :
 10W

Powered By :
 BRIDGELUX


CCT :
 3000K

Beam Angle :
 146°

CRI :
 ≥80

Luminous :
 875lm

IP Rating :
 IP65

 Dark Grey
LB-206**New**

Dimension : 145x900

Material :
 Aluminium/PC

Watts :
 10W

Powered By :
 BRIDGELUX

CCT :
 3000K


Beam Angle :
 146°

CRI :
 ≥80

Luminous :
 875lm

IP Rating :
 IP65


 Dark Grey

LB-207

Light Throws Upto
4mx12m
SPOON LENSE

New



Dimension : 130x150x500

Material :
Aluminium / Glass

Watts :
1x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
20°

CRI :
≥80

Luminous :
767lm

IP Rating :
IP65




Dark Grey

LB-208

Light Throws Upto
4mx12m
SPOON LENSE

New



Dimension : 130x150x900

Material :
Aluminium / Glass

Watts :
1x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
36°

CRI :
≥80

Luminous :
838lm


IP Rating :
IP65



Dark Grey




CREE 



100-240V
50-60Hz

LB-209

1mt Circular Throw

New

Dimension : 134x185x500

Material :
 Aluminium / PC

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 50°

CRI :
 ≥80


Luminous :
 536lm

IP Rating :
 IP65


Dark Grey

LB-210

1mt Circular Throw

New

Dimension : 134x185x900

Material :
 Aluminium / PC

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 50°

CRI :
 ≥80

Luminous :
 536lm

IP Rating :
 IP65


Dark Grey

CREE 

LLO-1003

DOT'S ON WALL

New

Dimension : 120x103

Material :
 Aluminium / PC

Watts :
 6W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 43lm

IP Rating :
 IP65


Dark Grey

**LED BOLLARD'S / WALL LIGHT
 (DOT'S ON FLOOR)**
LB-211

DOT'S ON WALL

New

Dimension : 121x200

Material :
 Aluminium / PC

Watts :
 1x7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 123°

CRI :
 ≥80

Luminous :
 43lm

IP Rating :
 IP65


Dark Grey


CREE


 100-240V
 50-60Hz

LLO-1004



New



Dimension : 172x110x137

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
600lm

IP Rating :
IP54



Dark Grey

LLO-1005



SUSPENDED

New



Dimension : 110x110x700

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
600lm

IP Rating :
IP54



Dark Grey

EPISTAR



LB-212

SPIKE

New



Dimension : 110x110x500

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
600lm

IP Rating :
IP54

 Dark Grey
LB-213

SPIKE

New



Dimension : 110x110x900

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
600lm

IP Rating :
IP54

 Dark Grey
LB-214

SPIKE

New



Dimension : 110x110x1300

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
600lm

IP Rating :
IP54

 Dark Grey
LB-215

BASE

New



Dimension : 110x110x1300

Material :
Aluminium + PC

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°


CRI :
≥80

Luminous :
600lm

IP Rating :
IP54

 Dark Grey
**EPISTAR**

200-240V
50Hz

LB-218**New**

Dimension : 160x365



Dark Grey



Green

Material :
Aluminium Die Casting

Watts :
12W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
110°

CRI :
≥90

Luminous :
1256lm

IP Rating :
IP65
LB-219**New**

Dimension : 160x550



Dark Grey



Green

Material :
Aluminium

Watts :
12W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
110°

CRI :
≥90

Luminous :
1052lm

IP Rating :
IP65
LB-220**New**

Dimension : 160x800



Dark Grey



Green

Material :
Aluminium

Watts :
12W


Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
110°

CRI :
≥90

Luminous :
1052lm

IP Rating :
IP65
**EPISTAR**
100-240V
50-60Hz

LB-221**New**


Dimension : 180x250



Dark Grey



Green

Material :
Aluminium**Watts :**
17W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥90**Luminous :**
1479lm**IP Rating :**
IP65**LB-222****New**


Dimension : 180x460



Dark Grey



Green

Material :
Aluminium**Watts :**
17W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥90**Luminous :**
1479lm**IP Rating :**
IP65**LB-223****New**

Dimension : 180x960



Dark Grey



Green

Material :
Aluminium**Watts :**
17W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥90**Luminous :**
1479lm**IP Rating :**
IP65**EPISTAR**100-240V
50-60Hz

LLO-1012

New



Dimension : 130x80



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°


CRI :
≥80

Luminous :
725lm

IP Rating :
IP65

LLO-1013

New



Dimension : 165x130x200



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°


CRI :
≥80

Luminous :
725lm

IP Rating :
IP65

LB-225

New



Dimension : 150x180x600



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°


CRI :
≥90


Luminous :
725lm

IP Rating :
IP65



EPISTAR



LLO-1014**New**

Dimension : 245x150x425



Matt Black

Material :
Aluminium + Glass

Watts :
12W


Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
694lm

IP Rating :
IP65
LLO-1015**New**

Dimension : 150x370



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
685lm

IP Rating :
IP65
LLO-1016**New**

Dimension : 150x1500



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
712lm

IP Rating :
IP65
LB-226**New**

Dimension : 150x600



Matt Black

Material :
Aluminium + Glass

Watts :
12W


Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
687lm

IP Rating :
IP65
EPISTAR200-240V
50Hz

LLO-1017**New**

Dimension : 80x130

Material :
 Aluminium / PC

Watts :
 10W


Powered By :
 OSRAM

CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 810.12lm

IP Rating :
 IP65

 Dark Grey
LB-229**New**

Dimension : 80x600

Material :
 Aluminium

Watts :
 10W


Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 992.5lm

IP Rating :
 IP65

 Dark Grey
LB-230**New**

Dimension : 80x400

Material :
 Aluminium

Watts :
 10W

Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 1027.1lm

IP Rating :
 IP65

 Dark Grey


LLO-1020**New**

Dimension : 180D70



Dark Grey

Material :
Aluminium / Glass

Watts :
3W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
≥80

Luminous :
155.3lm

IP Rating :
IP65
LLO-1021**New**

Dimension : 150x70



Dark Grey

Material :
Aluminium / Glass

Watts :
3W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
≥80

Luminous :
145.3lm

IP Rating :
IP65
LB-233**New**

Dimension : 180x750



Dark Grey

Material :
Aluminium

Watts :
3W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
≥80

Luminous :
992.05lm

IP Rating :
IP65
LB-234**New**

Dimension : 150x520



Dark Grey

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
-

CRI :
≥80

Luminous :
150.35lm

IP Rating :
IP65

LB-231**New**

Dimension : 80x700




Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥90**Luminous :**
507.09lm**IP Rating :**
IP65**LB-232****New**

Dimension : 80x500



Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥90**Luminous :**
513.22lm**IP Rating :**
IP65**LB-236****New**

Dimension : 200x90x1350

Moveable Head
with Hood (Spot Effect)

Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
24°**CRI :**
≥90**Luminous :**
944.17lm**IP Rating :**
IP65**LB-237****New**

Dimension : 175x600

Moveable Head
with Plate

Dark Grey

Material :
Aluminium**Watts :**
7W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥90**Luminous :**
729.55lm**IP Rating :**
IP65

200-240V
50Hz

LLO-1022**New**

Dimension : 90

Material :
 Aluminium

Watts :
 7W

Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 24°

CRI :
 ≥90

Luminous :
 850.23lm

IP Rating :
 IP65

 Dark Grey
LB-235**New**

Dimension : 90x600

Material :
 Aluminium

Watts :
 7W

Powered By :
 BRIDGELUX

CCT :
 3000K


Beam Angle :
 24°

CRI :
 ≥90

Luminous :
 798.05lm

IP Rating :
 IP65

 Dark Grey




 100-240V
 50-60Hz


LB-241**New**

Dimension : 80x400




Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
270lm**IP Rating :**
IP65**LB-242****New**

Dimension : 80x600




Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
300lm**IP Rating :**
IP65**LB-243****New**

Dimension : 80x800



Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
300lm**IP Rating :**
IP65**LB-244****New**


Dimension : 120x300


MOVEABLE HEAD
WITH LENSE / SPIKE

Dark Grey



Green

Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥90**Luminous :**
522lm**IP Rating :**
IP65**CREE** 200-240V
50Hz

LB-245**New**


Dimension : 80x125x530



Dark Grey



Green

Material :
Aluminium**Watts :**
12W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥90**Luminous :**
1044lm**IP Rating :**
IP65**LB-246****New**

Dimension : 80x125x830




Dark Grey




Green


Material :
Aluminium**Watts :**
12W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
80°**CRI :**
≥90**Luminous :**
1044lm**IP Rating :**
IP65**EPISTAR**100-240V
50-60Hz

LLO-1023BLACK LIGHT
WALL LITE

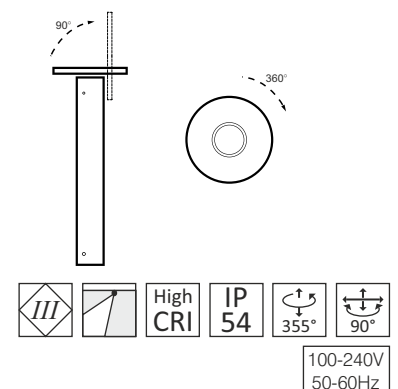
Dimension : 240x70x85

New**Material :**
Aluminium Die Casting**Watts :**
8W**Powered By :**
LUMILED'S 4014**CCT :**
3000K**Beam Angle :**
105°**CRI :**
≥80**Luminous :**
802lm**IP Rating :**
IP65
 Graphite Black
LB-247

Dimension : 240x500


New**Material :**
Aluminium Die Casting**Watts :**
9.5W**Powered By :**
Lumi LED's 4014**CCT :**
3000K**Beam Angle :**
108°**CRI :**
≥80**Luminous :**
732lm**IP Rating :**
IP65
 Graphite Black
LB-248

Dimension : 240x650

New**Material :**
Aluminium Die Casting**Watts :**
9.5W**Powered By :**
Lumi LED's 4014**CCT :**
3000K**Beam Angle :**
108°**CRI :**
≥80**Luminous :**
732lm**IP Rating :**
IP65
 Graphite Black


LB-249

New



Dimension : 73x500



Graphite Black

Material :
Aluminium Die Casting
PMMA Diffuser

Watts :
7.5W

Powered By :
LUMILED'S 4014

CCT :
3000K

Beam Angle :
105°


CRI :
≥80

Luminous :
878lm

IP Rating :
IP65

LB-250

New



Dimension : 73x750



Graphite Black

Material :
Aluminium Die Casting
PMMA Diffuser

Watts :
7.5W

Powered By :
LUMILED'S 4014


CCT :
3000K


Beam Angle :
105°

CRI :
≥80

Luminous :
878lm

IP Rating :
IP65



LB-251
New


Dimension : 220x230x50

Material :
 Aluminium

Watts :
 7W

Powered By :
 LUMILED'S 4014

CCT :
 3000K


Beam Angle :
 78°

CRI :
 ≥80

Luminous :
 561lm

IP Rating :
 IP67

Graphite Black

LB-252
New


Dimension : 160x500x65

Material :
 Aluminium

Watts :
 7W

Powered By :
 LUMILED'S 4014

CCT :
 3000K


Beam Angle :
 80°


CRI :
 ≥80

Luminous :
 685lm

IP Rating :
 IP54

Graphite Black



LLO-1030**New**

Dimension : 135x90x91

Material :
Aluminium Die Casting/
Acrylic

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
110°

CRI :
≥90

Luminous :
860lm

IP Rating :
IP65

Graphite Black

LB-254**New**

Dimension : 120x60x450

Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
160°

CRI :
≥90

Luminous :
750lm

IP Rating :
IP65

Dark Grey

LB-255**New**

Dimension : 120x60x600

Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K

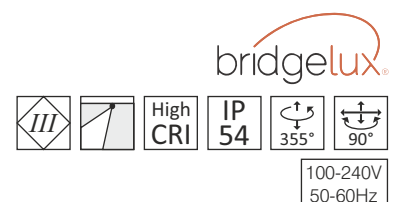
Beam Angle :
160°


CRI :
≥90

Luminous :
750lm

IP Rating :
IP65

Dark Grey



LLO-1033
New


Dimension : 65x106x290

Material :
 Aluminium Die Casting
 Ribbed

Watts :
 12W

Powered By :
 BRIDGELUX


CCT :
 3000K

Beam Angle :
 160°

CRI :
 ≥80

Luminous :
 750lm

IP Rating :
 IP65

 Graphite Black
LB-256
New


Dimension : 65x600

Material :
 Aluminium

Watts :
 12W

Powered By :
 BRIDGELUX


CCT :
 3000K

Beam Angle :
 160°

CRI :
 ≥90

Luminous :
 750lm

IP Rating :
 IP65

 Graphite Black
LB-257
New


Dimension : 65x900

Material :
 Aluminium

Watts :
 12W

Powered By :
 BRIDGELUX

CCT :
 3000K

Beam Angle :
 160°

CRI :
 ≥90

Luminous :
 750lm

IP Rating :
 IP65

 Graphite Black


LB-227
New


Dimension : 640x460

Material :
 Aluminium+Glass

Watts :
 12W

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 650lm

IP Rating :
 IP65

 Dark Grey
LLB-228
New


Dimension : 640x380

Material :
 Aluminium+ Glass

Watts :
 12W

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 650lm


IP Rating :
 IP65

 Dark Grey
EPISTAR

LB-260



New



Dimension : 500x56x300

Sand Black

Material :
Aluminium Die Casting

Watts :
6W

Powered By :
EDISON DOB-220V

CCT :
3000K

Beam Angle :
-

CRI :
≥90


Luminous :
-

IP Rating :
IP65

LB-261



New



Dimension : 600x56x400

Sand Black

Material :
Aluminium Die Casting

Watts :
6W

Powered By :
EDISON DOB-220V

CCT :
3000K


Beam Angle :
-

CRI :
≥90

Luminous :
-

IP Rating :
IP65



LLO-1051**New**

Dimension : 135x90x91

Material :
 Aluminium / Acrylic

Watts :
 12W

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP65

 Graphite Black
LB-262**New**

Dimension : 140x140x390

Material :
 Aluminium Die /
 Ribbed Acrylic

Watts :
 12W

Powered By :
 BRIDGELUX


CCT :
 3000K

Beam Angle :
 -

CRI :
 ≥90

Luminous :
 -

IP Rating :
 IP65

 Graphite Black
LB-263**New**

Dimension : 140x140x530

Material :
 Aluminium Die /
 Ribbed Acrylic

Watts :
 16W

Powered By :
 BRIDGELUX

CCT :
 3000K


Beam Angle :
 -

CRI :
 ≥90

Luminous :
 -

IP Rating :
 IP65


 Graphite Black


LB-264**New**

Dimension : 170x170x500

Material :
AluminiumWatts :
12WPowered By :
EPISTARCCT :
3000KBeam Angle :
-CRI :
≥80Luminous :
869.3lmIP Rating :
IP65


Dark Grey

LB-265**New**

Dimension : 170x170x900

Material :
AluminiumWatts :
12WPowered By :
EPISTARCCT :
3000KBeam Angle :
-CRI :
≥80Luminous :
869.3lmIP Rating :
IP65

Dark Grey

EPISTAR

LB-266
New


Dimension : 50x600

Graphite Black

Material :
 Aluminium Die /
 Ribbed Acrylic

Watts :
 16W

Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 25°

CRI :
 ≥80

Luminous :
 1708.08lm

IP Rating :
 IP65
LB-267
New


Dimension : 50x900

Graphite Black

Material :
 Aluminium Die /
 Ribbed Acrylic

Watts :
 18W

Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 25°

CRI :
 ≥80

Luminous :
 3448.59lm

IP Rating :
 IP65
LB-268
New


Dimension : 50x1200

Graphite Black

Material :
 Aluminium Die /
 Ribbed Acrylic

Watts :
 18W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 25°

CRI :
 ≥80

Luminous :
 2562.12lm

IP Rating :
 IP65
**EPISTAR**

LB-269
New


Dimension : 50x115x900

Material :
 Aluminium Die Casting

Watts :
 10W

Powered By :
 CREE


CCT :
 3000K

Beam Angle :
 24°

CRI :
 ≥80

Luminous :
 649.1lm

IP Rating :
 IP65

 Dark Grey
LB-270
New


Dimension : 170x170x900

Material :
 Aluminium Die Casting

Watts :
 2X10W

Powered By :
 CREE


CCT :
 3000K


Beam Angle :
 24°

CRI :
 ≥80

Luminous :
 1330.625lm

IP Rating :
 IP65

 Dark Grey
EPISTAR

LB-009

Dimension : 200x108



Graphite Black

Material :
Aluminium+Glass

Light Source :
E27


Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP44
LB-010

Dimension : 65x108



Graphite Black

Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP44
LB-011

Dimension : 200x108



Graphite Black

Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP44
LB-012

Dimension : 65x108



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-


CRI :
-

Luminous :
-


IP Rating :
IP44

200-240V
50Hz

LB-001



Dimension : 200x110



Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
-


Luminous :
-

IP Rating :
IP44

LB-002



Dimension : 650x110



Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
-


Luminous :
-

IP Rating :
IP44

LB-003



Dimension : 200x110



Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
-


Luminous :
-

IP Rating :
IP44

LB-004



Dimension : 650x110



Material :
Aluminium+Glass

Light Source :
E27

Powered By :
-


CCT :
-


Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP44



LB-007

Dimension : 200x220



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-008

Dimension : 650x220



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -


CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44


LWL-004

Dimension : 200x200x277



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44
LB-013

Dimension : 200x220



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44
LB-014

Dimension : 650x220



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44


LB-015

Dimension : 300x168x175



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44
LB-016

Dimension : 500x168x175



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44
LB-017

Dimension : 800x168x175



Graphite Black

Material :
 Aluminium+PC


Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥ 80
Luminous :
 -

IP Rating :
 IP44


LWL-007

Dimension : 250x120x170


Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP44
LB-018

Dimension : 300x120x120


Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP44
LB-019

Dimension : 500x120x120


Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP44
LB-020

Dimension : 800x120x120


Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -


CCT :
 -

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP44


LWL-035

Dimension : 250x128.5x172



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-026

Dimension : 300x128x123



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-027

Dimension : 500x128x123



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-028

Dimension : 800x128x123



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -


Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44


LB-023




Dimension : 300x101.8x104.1




Graphite Black

Material :	Beam Angle :
Aluminium+PC	-
Light Source :	CRI :
E27	-
Powered By :	Luminous :
-	-
CCT :	IP Rating :
-	IP44

LB-024




Dimension : 500x101.8x104.1



Graphite Black

Material :	Beam Angle :
Aluminium+PC	-
Light Source :	CRI :
E27	-
Powered By :	Luminous :
-	-
CCT :	IP Rating :
-	IP44

LB-025





Dimension : 800x101.8x104.1



Graphite Black

Material :	Beam Angle :
Aluminium+PC	-
Light Source :	CRI :
E27	-
Powered By :	Luminous :
-	-
CCT :	IP Rating :
-	IP44



LB-029

Dimension : 300x100x100



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-029A

Dimension : 500x100x100



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27


Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP44
LB-029B

Dimension : 800x100x100



Graphite Black

Material :
 Aluminium+PC

Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -


Luminous :
 -

IP Rating :
 IP44

E-27 Bollard's/ wall Lites

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs


 100-240V
 50-60Hz

LWL-051

Dimension : 276x160x215



Black

Material :
 Die-cast Aluminium

Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 ≥80

Luminous :
 -

IP Rating :
 IP65
LB-113

Dimension : 220x160x215



Graphite Black

Material :
 Die-cast Aluminium

Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP65
LB-114

Dimension : 350x160



Graphite Black

Material :
 Die-cast Aluminium

Light Source :
 E27

Powered By :
 -

CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP65
LB-115

Dimension : 500x160



Graphite Black

Material :
 Die-cast Aluminium

Light Source :
 E27


Powered By :
 -


CCT :
 -

Beam Angle :
 -

CRI :
 -

Luminous :
 -

IP Rating :
 IP65


LWL-052

Dimension : 276x145x215



Black

Material :
Die-cast Aluminium

Light Source :
E27


Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP65
LB-116

Dimension : 145x145x220



Graphite Black

Material :
Die-cast Aluminium

Light Source :
E27


Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP65
LB-117

Dimension : 145x145x350



Graphite Black

Material :
Die-cast Aluminium

Light Source :
E27


Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP65
LB-118

Dimension : 145x145x500



Graphite Black

Material :
Die-cast Aluminium

Light Source :
E27


Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP65


LWL-061



Dimension : 135x202x260



Anthracite

Material :
Aluminium

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-


Luminous :
-

IP Rating :
IP54

LB-142



Dimension : 135x382



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP54

LB-143



Dimension : 135x800



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-


CCT :
-


Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP54





LB-162

Dimension : 230x210x700




Dark Grey

Material :
Aluminium**Light Source :**
Max-23W**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
-**IP Rating :**
IP54**LB-165**

Dimension : 520x330




Dark Grey


Material :
Aluminium**Light Source :**
Max-23W**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
-**Luminous :**
-**IP Rating :**
IP54**LB-166**

Dimension : 250x250x250



Dark Grey

Material :
Aluminium/Acrylic**Light Source :**
LED-20W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
238°**CRI :**
≥80**Luminous :**
2000lm**IP Rating :**
IP65

LWL-063**New**

Dimension : 145x110x300



Matt Black

Material :
Aluminium + Glass

Watts :
E27x2


Powered By :
-

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP65
LWL-064**New**

Dimension : 110x220



Matt Black

Material :
Aluminium + Glass

Watts :
E27x1

Powered By :
-

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP65
LWL-065**New**

Dimension : 110x1500



Matt Black

Material :
Aluminium + Glass

Light Source :
E27x1

Powered By :
-

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP65
LB-224**New**

Dimension : 110x610



Matt Black

Material :
Aluminium + Glass

Watts :
E27x1


Powered By :
-

CCT :
3000K


Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP65


LB-021




Dimension : 150x150x161

 Graphite Black

Material :	Beam Angle :
Aluminium+PC	-
Light Source :	CRI :
E27	-
Powered By :	Luminous :
-	-
CCT :	IP Rating :
-	IP65


LB-022



Dimension : 251x251x270

 Graphite Black


Material :	Beam Angle :
Aluminium+PC	-
Light Source :	CRI :
E27	-
Powered By :	Luminous :
-	-
CCT :	IP Rating :
-	IP65



LB-119



Dimension : 227x227x255



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP65

LB-120



Dimension : 170x170x210



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-


Luminous :
-

IP Rating :
IP65

LB-121



Dimension : 350x350x395



Graphite Black

Material :
Aluminium+PC

Light Source :
E27

Powered By :
-


CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP65




LWL-041

Dimension : 220x220x82




Black

Material :
Aluminium+PC**Light Source :**
E27**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54**LWL-042**

Dimension : 251x251x270




Black

Material :
Aluminium+PC**Light Source :**
E27**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54**LWL-043**

Dimension : 265x95x90




Black


Material :
Aluminium+PC**Light Source :**
E27**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54**LWL-044**

Dimension : 256x86x88



Black

Material :
Aluminium+PC**Light Source :**
E27**Powered By :**
-**CCT :**
-**Beam Angle :**
-**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54

LWL-045

Dimension : 108x90



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-


CCT :
-

Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54

LWL-047

Dimension : 108x120x90



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-


CCT :
-

Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54

LWL-049

Dimension : 155x120x90



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54


E-27/Gu-10 Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



100-240V
50-60Hz

LWL-046



Dimension : 108x85x85



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54

LWL-048



Dimension : 108x115x85



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54

LWL-050



Dimension : 155x115x85



Black

Material :
Aluminium+Glass

Light Source :
GU-10

Powered By :
-

CCT :
-


Beam Angle :
-

CRI :
≥80

Luminous :
-

IP Rating :
IP54



LLO-072

Dimension : 335x280x196



Black

Material :
 Aluminium + PC

Watts :
 9W


Powered By :
 EVERLIGHT-SMD

CCT :
 3000K

Beam Angle :
 132°

CRI :
 ≥80

Luminous :
 1088lm

IP Rating :
 IP54
LPL-004

Dimension : 100x295



Graphite Black

Material :
 Aluminium + PC

Watts :
 9W


Powered By :
 EVERLIGHT-SMD

CCT :
 3000K

Beam Angle :
 132°

CRI :
 ≥80

Luminous :
 1088lm

IP Rating :
 IP54
LPL-005

Dimension : 2300x575



Graphite Black

Material :
 Aluminium + PC

Watts :
 2x9W


Powered By :
 EVERLIGHT-SMD

CCT :
 3000K

Beam Angle :
 132°

CRI :
 ≥80


Luminous :
 2177lm

IP Rating :
 IP54
**EVERLIGHT**
 100-240V
 50-60Hz

LPL-006



Dimension : 1250x120x80



Graphite Black

Material :
Aluminium + PC

Watts :
18W

Powered By :
EVERLIGHT-SMD

CCT :
3000K


Beam Angle :
354°

CRI :
≥80


Luminous :
1070lm

IP Rating :
IP54

LPL-007



Dimension : 2000x120x80



Graphite Black

Material :
Aluminium + PC

Watts :
27W

Powered By :
EVERLIGHT-SMD

CCT :
3000K

Beam Angle :
354°

CRI :
≥80

Luminous :
1600lm

IP Rating :
IP54

LPL-008



Dimension : 750x120x80



Graphite Black

Material :
Aluminium + PC

Watts :
9W

Powered By :
EVERLIGHT-SMD

CCT :
3000K


Beam Angle :
354°

CRI :
≥80


Luminous :
535lm

IP Rating :
IP54

EVERLIGHT



LPL-010



Dimension : 2200x300

Material :
Die-cast Aluminium

Watts :
12x2W

Powered By :
CREE

CCT :
3000K

Beam Angle :
54°

CRI :
≥80


Luminous :
879lm

IP Rating :
IP54


 Black



CREE 



100-240V
50-60Hz

LPL-011

Dimension : 145x1200

Material :
 Aluminium + PC

Watts :
 36W

Powered By :
 EVERLIGHT-SMD


CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 2300lm

IP Rating :
 IP54

 Dark Grey
LPL-012

Dimension : 145x1700

Material :
 Aluminium + PC

Watts :
 36W

Powered By :
 EVERLIGHT-SMD


CCT :
 3000K

Beam Angle :
 360°

CRI :
 ≥80

Luminous :
 2300lm

IP Rating :
 IP54

 Dark Grey
EVERLIGHT

LPL-013



Dimension : 240x2200



Dark Grey

Material :
Aluminium + PC

Watts :
18W

Powered By :
EVERLIGHT-SMD


CCT :
3000K

Beam Angle :
360°

CRI :
≥80

Luminous :
1118lm

IP Rating :
IP54

EVERLIGHT

LPL-015



Dimension : 230x69x1500



Dark Grey

Material :
Aluminium + PC

Watts :
18W

Powered By :
CREE

CCT :
3000K


Beam Angle :
328°

CRI :
≥80

Luminous :
1559lm

IP Rating :
IP65

CREE 



LPL-018



Dimension : 276x140x2500



Dark Grey

Material :
Aluminium + PC

Watts :
36W

Powered By :
EVERLIGHT-SMD


CCT :
3000K

Beam Angle :
144°

CRI :
≥80


Luminous :
1850lm

IP Rating :
IP65

EVERLIGHT

100-240V
50-60Hz

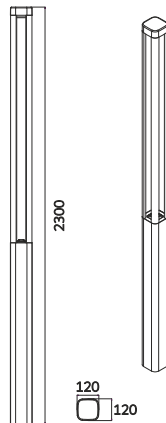


LPL-019

Dimension : 164x80x2300



Graphite Black

Material :
Aluminium**Watts :**
30W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
2029lm**IP Rating :**
IP65**LPL-020**

Dimension : 120x120x2300




Graphite Black

Material :
Aluminium**Watts :**
30W**Powered By :**
OSRAM**CCT :**
3000K**Beam Angle :**
334°**CRI :**
≥80**Luminous :**
1323lm**IP Rating :**
IP65**OSRAM** 100-240V
50-60Hz

LPL-021



New



Dimension : 160x1050

Material :
Aluminium/Acrylic

Watts :
59W

Powered By :
SMD LED

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
4000lm


IP Rating :
IP65

Graphite Black

LPL-022



New



Dimension : 160x1550

Material :
Aluminium/Acrylic

Watts :
89W

Powered By :
SMD LED

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
4000lm


IP Rating :
IP65

Graphite Black

LPL-023



New



Dimension : 160x2050

Material :
Aluminium/Acrylic

Watts :
100W

Powered By :
SMD LED

CCT :
3000K


Beam Angle :
180°

CRI :
≥80

Luminous :
4000lm

IP Rating :
IP65


Graphite Black



LWL-062



New



Dimension : 292x230x308

Material :
Aluminium+PC

Light Source :
E27 Max.60W

Powered By :
-

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm/w

IP Rating :
IP44



Dark Grey

LPL-024



New



Dimension : 230x230x1350

Material :
Aluminium + Glass

Light Source :
E27 Max.60W

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
70lm/w

IP Rating :
IP44



Dark Grey



200-240V
50Hz



LPL-025**New**

Dimension : 602x230x2300



Dark Grey

Material :
Aluminium + PC

Light Source :
E27 Max.2x60W

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
70lm/w

IP Rating :
IP44

LPL-026**New**

Dimension : 530x530x2300



Dark Grey

Material :
Aluminium + PC

Light Source :
E27 Max.3x60W

Powered By :
-

CCT :
-

Beam Angle :
-

CRI :
-

Luminous :
70lm/w


IP Rating :
IP44




200-240V
50Hz



LPL-027

**New**


Dimension : 170x170x2300

Material :
Aluminium Die Cast /
Ribbed PC**Watts :**
25W**Powered By :**
EPISTAR**CCT :**
3000K**Beam Angle :**
144°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP65 Dark Grey**EPISTAR**100-240V
50-60Hz

LPL-028



New



Dimension : 250x180x1600

Material :
Aluminium Diecast

Light Source :
3x10W

Powered By :
CREE LED

CCT :
3000K

Beam Angle :
-

CRI :
≥80


Luminous :
-

IP Rating :
IP65

Dark Grey



CREE 



LWO-001

Dimension : 60x65x500


Material :
 Aluminium / SPC Wood

Watts :
 20W


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 107°

CRI :
 ≥80

Luminous :
 1742lm

IP Rating :
 IP65
LWO-002

Dimension : 60x65x500


Material :
 Aluminium / SPC Wood

Watts :
 15W


Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 107°

CRI :
 ≥80

Luminous :
 1263lm

IP Rating :
 IP65
LWO-003

Dimension : 60x65x200


Material :
 Aluminium / SPC Wood

Watts :
 15W

Powered By :
 CREE

CCT :
 3000K


Beam Angle :
 110°

CRI :
 ≥80

Luminous :
 1140lm

IP Rating :
 IP65
LWO-004

Dimension : 60x65x200


Material :
 Aluminium / SPC Wood

Watts :
 7W

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 110°


CRI :
 ≥80

Luminous :
 668lm

IP Rating :
 IP65

CREE

 200-240V
 50Hz

LWO-005

Dimension : 110x105x200



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
15W

Powered By :
CREE

CCT :
3000K

Beam Angle :
112°

CRI :
≥80

Luminous :
416lm

IP Rating :
IP54
LWO-006

Dimension : 87x65x144



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
2x7W


Powered By :
CREE

CCT :
3000K

Beam Angle :
73°

CRI :
≥80

Luminous :
1365lm

IP Rating :
IP54
LWO-007

Dimension : 115x90x90



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
8W

Powered By :
CREE

CCT :
3000K

Beam Angle :
22°/90°

CRI :
≥80

Luminous :
70lm

IP Rating :
IP54
LWO-008

Dimension : 101x58x145



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
2x7W

Powered By :
CREE


CCT :
3000K


Beam Angle :
36°

CRI :
≥80

Luminous :
1108lm

IP Rating :
IP54



 200-240V
50Hz

LWO-009

Dimension : 133x130x42



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
5.5W

Powered By :
CREE


CCT :
3000K

Beam Angle :
59°

CRI :
≥80

Luminous :
250lm

IP Rating :
IP54

LWO-010

Dimension : 125x126x250



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
7W

Powered By :
CREE

CCT :
3000K

Beam Angle :
66°


CRI :
≥80

Luminous :
70lm

IP Rating :
IP54

LLO-1002

MOVEABLE HEAD
(UP/DOWN AND 1 WAY)



Dimension : 140x140x94



Dark Grey

Material :
Aluminium

Watts :
10W

Powered By :
SMD LED / HI POWER

CCT :
3000K


Beam Angle :
82° / 90°

CRI :
≥80


Luminous :
719 / 836lm

IP Rating :
IP65





100-240V
50-60Hz

LWO-101

Dimension : 175x157x300



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
7W

Powered By :
SMD LED


CCT :
3000K

Beam Angle :
49°

CRI :
≥80

Luminous :
300lm

IP Rating :
IP65

LWO-102

Dimension : 175x157x600



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
7W

Powered By :
SMD LED


CCT :
3000K

Beam Angle :
49°

CRI :
≥80

Luminous :
300lm

IP Rating :
IP65

LB-253

Dimension : 140x165x800



Graphite Black



Wood

Material :
Aluminium / SPC Wood

Watts :
7W

Powered By :
LUMILED 4014


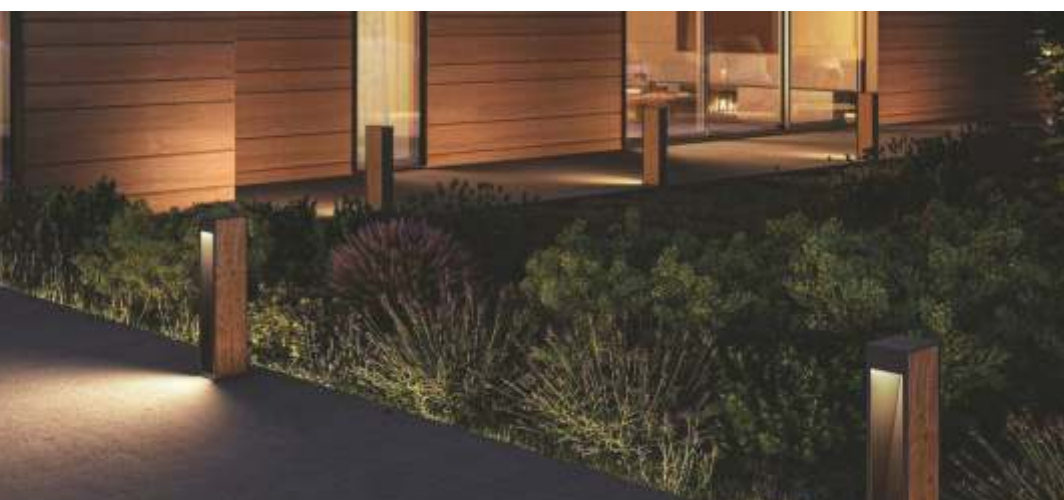
CCT :
3000K


Beam Angle :
80°

CRI :
≥80

Luminous :
480lm

IP Rating :
IP54



LWO-103

Dimension : 157x157x300



Dark Grey



Wood

Material :
 Aluminium / SPC Wood

Watts :
 7W

Powered By :
 SMD LED

CCT :
 3000K

Beam Angle :
 45°

CRI :
 ≥80

Luminous :
 200lm

IP Rating :
 IP65
LWO-104

Dimension : 157x157x600



Dark Grey



Wood

Material :
 Aluminium / SPC Wood

Watts :
 7W

Powered By :
 SMD LED

CCT :
 3000K

Beam Angle :
 45°

CRI :
 ≥80

Luminous :
 200lm

IP Rating :
 IP65
LWO-105

Dimension : 142x142x500



Dark Grey



Wood

Material :
 Aluminium / SPC Wood

Watts :
 7W


Powered By :
 SMD LED


CCT :
 3000K

Beam Angle :
 39°

CRI :
 ≥80

Luminous :
 319lm

IP Rating :
 IP65


LWO-106

Dimension : 267x46x911



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
6W

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
-

IP Rating :
IP65

LWO-107

Dimension : 267x46x711



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
6W

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
-

IP Rating :
IP65

LWO-108

Dimension : 267x46x911



Dark Grey



Wood

Material :
Aluminium / SPC Wood

Watts :
12W

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
-

IP Rating :
IP65

100-240V
50-60Hz

OUTDOOR WALL WASHER



LLWW-001A

Dimension : 40x60x300



Silver Grey

Material :
Aluminium+Glass

Watts :
6W


Powered By :
OSRAM

CCT :
3000K

Beam Angle :
45°/15°

CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65
LLWW-001

Dimension : 40x60x500



Silver Grey

Material :
Aluminium+Glass

Watts :
18W


Powered By :
OSRAM

CCT :
3000K

Beam Angle :
45°/15°

CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65
LLWW-004

Dimension : 40x60x1000



Silver Grey

Material :
Aluminium+Glass

Watts :
36W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
45°/15°


CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65

OSRAM 

100-240V
50-60Hz

LLWW-014

Dimension : 40x60x300



Stainless Steel

Material :
Stainless Steel / Glass

Watts :
24V-9W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
45°/15°

CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65
LLWW-015

Dimension : 500x90x75



Stainless Steel

Material :
Stainless Steel / Glass

Watts :
24V-18W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
45°/15°

CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65
LLWW-016

Dimension : 1000x90x75



Stainless Steel

Material :
Stainless Steel / Glass

Watts :
24V-36W

Powered By :
OSRAM

CCT :
3000K


Beam Angle :
45°/15°

CRI :
≥80

Luminous :
140lm/w

IP Rating :
IP65


OSRAM 
100-240V
50-60Hz

LLWW-007

Dimension : 140x145x105




Silver Grey

Material :
Aluminium+PC**Watts :**
8W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°**CRI :**
≥80**Luminous :**
147lm**IP Rating :**
IP65**LLWW-008**

Dimension : 165x165x105




Silver Grey

Material :
Aluminium+PC**Watts :**
20W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°**CRI :**
≥80**Luminous :**
149lm**IP Rating :**
IP65**LLWW-010**

Dimension : 120x120x80



Silver Grey

Material :
Aluminium+PC**Watts :**
18W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
25°**CRI :**
≥80**Luminous :**
110-120lm**IP Rating :**
IP65**LLWW-012**


Dimension : 120x120x80



Silver Grey

Material :
Aluminium+PC**Watts :**
25W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
25°**CRI :**
≥80**Luminous :**
110-120lm**IP Rating :**
IP65


200-240V
50Hz

LLWW-009

Dimension : 150x90x42




Black

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
120°-5°**CRI :**
≥80**Luminous :**
180lm/w**IP Rating :**
IP65**LLWW-017**

Dimension : 183x70x76



Graphite Black


Material :
Aluminium**Watts :**
9x2W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
5°-180°**CRI :**
≥80**Luminous :**
120lm/w**IP Rating :**
IP65**LLWW-021**


Dimension : 100x64



Graphite Black

Material :
Die-Cast Aluminium**Watts :**
5W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°-52°**CRI :**
≥80**Luminous :**
138lm/w**IP Rating :**
IP54

100-240V
50-60Hz

LLWW-018TOP / SIDE 2 WAY -
CORNER LAMP


Dimension : 92x65x65



Graphite Black

Material :
Aluminium**Watts :**
24V-6W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
5°**CRI :**
≥80**Luminous :**
120lm/w**IP Rating :**
IP65**LLWW-019**

Stair Lamp




Dimension : 92x92x38



Graphite Black

Material :
Aluminium**Watts :**
24V-2W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
120lm/w**IP Rating :**
IP65**LLWW-020**

Stair / Floor Lamp



Dimension : 100x38



Graphite Black

Material :
Aluminium**Watts :**
24V-3W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
120lm/w**IP Rating :**
IP65

100-240V
50-60Hz

LLWW-022

**New**

Dimension : 130x160



Dark Grey

Material :
Aluminium**Watts :**
20W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
12°**CRI :**
-**Luminous :**
70lm/w**IP Rating :**
IP66**CREE** 100-240V
50-60Hz

209





The Elliptical Wall Washer is engineered for controlled, uniform illumination across vertical surfaces. Its elliptical beam distribution delivers wider horizontal coverage with minimal spill, making it ideal for feature walls, galleries retail displays, and architectural highlights.

Advanced optical control ensures smooth light gradients with reduced glare, while precision reflectors maintain consistent brightness from top to bottom. Designed for visual comfort and performance, it enhances textures, artwork, and architectural elements with clarity and depth.

SPECIFICATIONS	LLWW-023	LLWW-024	LLWW-025
WATTS	36W	18W	12W
MATERIAL	Aluminium Die Cast	Aluminium Die Cast	Aluminium Die Cast
DIMENSION	1000x49x55	5000x49x55	3000x49x55
BODY COLOR	Graphite Black	Graphite Black	Graphite Black
CCT (K)	2700K / 3000K	2700K / 3000K	2700K / 3000K
POWERED BY	CREE	CREE	CREE
BEAM ANGLE	20°x15°	20°x15°	20°x15°
IP RATING	IP66	IP66	IP66
LUMINOUS	90lm/w	90lm/w	90lm/w
CRI	≥80	≥80	≥80



LLWW-023**New**

Dimension : 1000x49x55

 Sand Grey

Material :
 Aluminium Die

Watts :
 36W

Powered By :
 CREE

CCT :
 2700K/3000K

Beam Angle :
 20°/15°

CRI :
 ≥80

Luminous :
 90lm/w

IP Rating :
 IP66
LLWW-024**New**

Dimension : 500x49x55

 Sand Grey

Material :
 Aluminium Die

Watts :
 18W

Powered By :
 CREE

CCT :
 2700K/3000K

Beam Angle :
 20°/15°

CRI :
 ≥80

Luminous :
 90lm/w

IP Rating :
 IP66
LLWW-025**New**

Dimension : 300x49x55

 Sand Grey

Material :
 Aluminium Die

Watts :
 12W

Powered By :
 CREE


CCT :
 2700K/3000K


Beam Angle :
 20°/15°

CRI :
 ≥80

Luminous :
 90lm/w

IP Rating :
 IP66



 100-240V
 50-60Hz

LLO-24V-1

Dimension : 38x48x1000



Grey

Material :
 Die-Cast Aluminium

Watts :
 24W


Powered By :
 OSRAM

CCT :
 2200 / 3000K

Beam Angle :
 15°/45°

CRI :
 ≥80

Luminous :
 1800lm

IP Rating :
 IP65
LLO-24V-2

Dimension : 38x48x500



Grey

Material :
 Aluminium

Watts :
 12W


Powered By :
 OSRAM

CCT :
 2200 / 3000K

Beam Angle :
 15°/45°

CRI :
 ≥80

Luminous :
 900lm

IP Rating :
 IP65
LLO-24V-3

Dimension : 38x48x300



Grey

Material :
 Aluminium

Watts :
 6W

Powered By :
 OSRAM

CCT :
 2200 / 3000K

Beam Angle :
 15°/45°


CRI :
 ≥80

Luminous :
 500lm

IP Rating :
 IP65

OSRAM


 100-240V
 50-60Hz

LLO-24V-7

Dimension : 28x87x1000



Grey

Material :
Die-Cast Aluminium

Watts :
24W

Powered By :
OSRAM


CCT :
2200 / 2700K

Beam Angle :
15°/45°

CRI :
≥80

Luminous :
180lm

IP Rating :
IP65

LLO-24V-8

Dimension : 28x87x500



Grey

Material :
Aluminium

Watts :
12W

Powered By :
OSRAM


CCT :
2200 / 2700K

Beam Angle :
15°/45°

CRI :
≥80

Luminous :
900lm

IP Rating :
IP65

LLO-24V-9

Dimension : 28x87x300



Grey

Material :
Aluminium

Watts :
6W

Powered By :
OSRAM


CCT :
2200 / 3000K


Beam Angle :
15°/45°

CRI :
≥80

Luminous :
500lm

IP Rating :
IP65



OSRAM 

100-240V
50-60Hz

LLO-24V-10

Dimension : 22x25x1000




Grey

Material :
Aluminium**Watts :**
12W-SMD**Powered By :**
OSRAM**CCT :**
2200 / 3000K**Beam Angle :**
15°/45°**CRI :**
≥80**Luminous :**
900lm**IP Rating :**
IP65**LLO-24V-11**

Dimension : 22x25x500




Grey


Material :
Aluminium**Watts :**
6W-SMD**Powered By :**
OSRAM**CCT :**
2200 / 3000K**Beam Angle :**
15°/45°**CRI :**
≥80**Luminous :**
450lm**IP Rating :**
IP65**LLO-24V-12**

Dimension : 22x25x300



Grey

Material :
Aluminium**Watts :**
3W-SMD**Powered By :**
OSRAM**CCT :**
2200 / 3000K**Beam Angle :**
15°/45°**CRI :**
≥80**Luminous :**
230lm**IP Rating :**
IP65**OSRAM** 100-240V
50-60Hz

LLO-24V-25**New**

Dimension : 60x40x250



Grey

Material :
Pure Aluminium

Watts :
6W


Powered By :
OSRAM

CCT :
2700K

Beam Angle :
15°-45° ELEPTICAL

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65
LLO-24V-26**New**

Dimension : 48x38x500



Grey

Material :
Aluminium

Watts :
12W


Powered By :
OSRAM

CCT :
2700K

Beam Angle :
15°-45° ELEPTICAL

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65
LLO-24V-27**New**

Dimension : 60x40x1000



Grey

Material :
Pure Aluminium

Watts :
24W

Powered By :
OSRAM


CCT :
2700K


Beam Angle :
15°-45° ELEPTICAL

CRI :
≥80

Luminous :
90lm

IP Rating :
IP65


OSRAM 

100-240V
50-60Hz

LLO-24V-13

Dimension : 42x60




Graphite Black

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
280lm**IP Rating :**
IP65**LLO-24V-14**

Dimension : 60x100



Graphite Black

Material :
Aluminium**Watts :**
8W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
780lm**IP Rating :**
IP65**LLO-24V-15**


Dimension : 60x100



Graphite Black

Material :
Aluminium**Watts :**
12W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
1100lm**IP Rating :**
IP65



100-240V
50-60Hz

LLO-24V-16

Dimension : 30x65




Silver Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
220lm**IP Rating :**
IP65**LLO-24V-17**

Dimension : 38x85



Silver Grey

Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
560lm**IP Rating :**
IP65**LLO-24V-18**

Dimension : 48x140




Silver Grey

Material :
Aluminium**Watts :**
10W**Powered By :**
CREE**CCT :**
2700K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
1000lm**IP Rating :**
IP65


100-240V
50-60Hz



LLO-24V-19

Dimension : 42x80

Stainless Steel

Material :
 Aluminium/Glass

Watts :
 2W


Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 36°

CRI :
 ≥80

Luminous :
 220lm

IP Rating :
 IP67
LLO-24V-20

Dimension : 42x80

Stainless Steel

Material :
 Aluminium/Glass

Watts :
 2W


Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 15°

CRI :
 ≥80

Luminous :
 220lm

IP Rating :
 IP67
LLO-24V-21WITH HONEY COMB
REFLECTOR

Dimension : 62x85

Stainless Steel

Material :
 Aluminium/Glass

Watts :
 2W

Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 15°

CRI :
 ≥80

Luminous :
 280lm

IP Rating :
 IP67



 100-240V
 50-60Hz

LLO-24V-22

Dimension : 110x100



Stainless Steel

Material :
 Aluminium/Glass

Watts :
 9W


Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 15°

CRI :
 ≥80

Luminous :
 380lm

IP Rating :
 IP67
LLO-24V-23

Dimension : 160x110



Stainless Steel

Material :
 Aluminium/Glass

Watts :
 12W


Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 15°

CRI :
 ≥80

Luminous :
 720lm

IP Rating :
 IP67
LLO-24V-24

Dimension : 160x110



Stainless Steel

Material :
 Aluminium/Glass

Watts :
 18W

Powered By :
 CREE

CCT :
 2700K

Beam Angle :
 15°

CRI :
 ≥80

Luminous :
 1100lm

IP Rating :
 IP67




 100-240V
 50-60Hz

OUTDOOR STICK SERIES



LSO-001

New



Dimension : 120x80x660



Black

Material :
Aluminium

Watts :
3W (24V)

Powered By :
CREE

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP65

LSO-002

New



Dimension : 120x80x860



Black

Material :
Aluminium

Watts :
3W (24V)

Powered By :
CREE

CCT :
3000K

Beam Angle :
-


CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-003

New



Dimension : 120x80x1060



Black

Material :
Aluminium

Watts :
3W (24V)

Powered By :
CREE

CCT :
3000K

Beam Angle :
-


CRI :
-

Luminous :
70lm

IP Rating :
IP54



CREE



LSO-004**New**

Dimension : 120x80x660

Material :
Aluminium**Watts :**
3W (24V)**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54

Red Bronze / Iron

LSO-005**New**

Dimension : 120x80x860

Material :
Aluminium**Watts :**
3W (24V)**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54

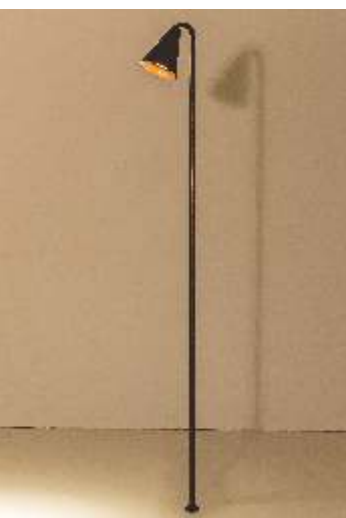
Red Bronze / Iron

LSO-006**New**

Dimension : 120x80x1060

Material :
Aluminium**Watts :**
3W (24V)**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54

Red Bronze / Iron

**CREE** 200-240V
50Hz

LSO-007**New**

Dimension : 58x245



Matt White



Black

Material :
 Aluminium / Acrylic

Watts :
 3W (24V)


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-008**New**

Dimension : 58x345



Matt White



Black

Material :
 Aluminium / Acrylic

Watts :
 3W (24V)

Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-009**New**

Dimension : 98x432



Matt White



Black

Material :
 Aluminium / Acrylic

Watts :
 3W (24V)


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-010**New**

Dimension : 98x542



Matt White



Black

Material :
 Aluminium / Acrylic

Watts :
 3W (24V)

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
**EPISTAR**
 200-240V
 50Hz

LSO-011**New**

Dimension : 60x600



Matt Black

Material :
 Aluminium

Watts :
 3W (24V)


Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-012**New**

Dimension : 60x800



Matt Black

Material :
 Aluminium

Watts :
 3W (24V)

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-013**New**

Dimension : 75x1000



Matt Black

Material :
 Aluminium

Watts :
 5W (24V)

Powered By :
 CREE

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-014**New**

Dimension : 75x1200



Matt Black

Material :
 Aluminium

Watts :
 5W (24V)

Powered By :
 CREE


CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54

CREE

 200-240V
 50Hz

LSO-015**New**

Dimension : 25x450



Black

Material :
Aluminium / Glass

Watts :
5W (24V) COB

Powered By :
CREE

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-016**New**

Dimension : 25x650



Black

Material :
Aluminium / Glass

Watts :
5W (24V) COB

Powered By :
CREE

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-017**New**

Dimension : 25x850



Black

Material :
Aluminium / Glass

Watts :
5W (24V) COB

Powered By :
CREE

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-018**New**

Dimension : 25x1050



Black

Material :
Aluminium / Glass

Watts :
5W (24V) COB

Powered By :
CREE

CCT :
3000K


Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54





200-240V
50Hz

LSO-019

New



Dimension : 15x400



Sand Black / Brushed Brass

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM LED

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-020

New



Dimension : 15x800



Sand Black / Brushed Brass

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM LED

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-021

New



Dimension : 15x1100



Sand Black / Brushed Brass

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM LED

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-022

New



Dimension : 15x1400



Sand Black / Brushed Brass

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM LED

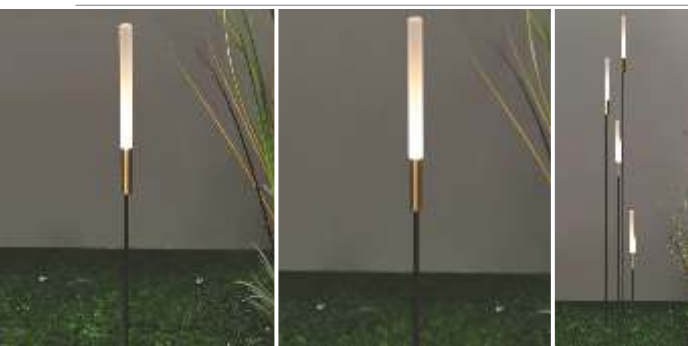
CCT :
3000K

Beam Angle :
-


CRI :
-

Luminous :
70lm

IP Rating :
IP54



OSRAM 



200-240V
50Hz

LSO-023**New**

Dimension : 15x400

All Black

Material :
 Aluminium / Acrylic

Watts :
 1W (24V)

Powered By :
 OSRAM LED

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-024**New**

Dimension : 15x800

All Black

Material :
 Aluminium / Acrylic

Watts :
 1W (24V)

Powered By :
 OSRAM LED

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-025**New**

Dimension : 15x1100

All Black

Material :
 Aluminium / Acrylic

Watts :
 1W (24V)

Powered By :
 OSRAM LED

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54
LSO-026**New**

Dimension : 15x1400

All Black

Material :
 Aluminium / Acrylic

Watts :
 1W (24V)

Powered By :
 OSRAM LED

CCT :
 3000K

Beam Angle :
 -

CRI :
 -

Luminous :
 70lm

IP Rating :
 IP54

OSRAM 

 200-240V
 50Hz

LSO-027**New**

Dimension : 13x400



All Gold

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-028**New**

Dimension : 13x600



All Gold

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-029**New**

Dimension : 13x800



All Gold

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-030**New**

Dimension : 13x1000



All Gold

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

OSRAM 

200-240V
50Hz

LSO-031

New



Dimension : 13x400

 All Black

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-032

New



Dimension : 13x600

 All Black

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-033

New



Dimension : 13x800

 All Black

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM


CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-034

New



Dimension : 13x1000

 All Black

Material :
Aluminium / Acrylic

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K


Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

OSRAM 



200-240V
50Hz

LSO-035



New



Dimension : 30x600

Black / Glass Ball

Material :
Aluminium / Glass

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-036



New



Dimension : 30x800

Black / Glass Ball

Material :
Aluminium / Glass

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-037



New



Dimension : 30x1000

Black / Glass Ball

Material :
Aluminium / Glass

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54



OSRAM



LSO-038**New**

Dimension : 100x350



White / Crystal Ball

Material :
Aluminium**Watts :**
1W (24V)**Powered By :**
OSRAM LED**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54**LSO-039****New**

Dimension : 100x550



White / Crystal Ball

Material :
Aluminium**Watts :**
1W (24V)**Powered By :**
OSRAM LED**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54**LSO-040****New**

Dimension : 100x750




White / Crystal Ball

Material :
Aluminium**Watts :**
1W (24V)**Powered By :**
OSRAM LED**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54**LSO-041****New**

Dimension : 100x950



White / Crystal Ball

Material :
Aluminium**Watts :**
1W (24V)**Powered By :**
OSRAM ILED**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
70lm**IP Rating :**
IP54**OSRAM** 200-240V
50Hz

LSO-042**New**

Dimension : 80x100 with Base

☐ White

Material :
Aluminium

Watts :
3x1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-043**New**

Dimension : 60x100 with Base

☐ White

Material :
Aluminium

Watts :
2x1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-044**New**

Dimension : 50x150 with Base

☐ White

Material :
Aluminium

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54
LSO-045**New**

Dimension : 40x130 with Base

☐ White / Crystal Ball

Material :
Aluminium

Watts :
1x1W (24V)

Powered By :
OSRAM ILED

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

OSRAM 

 200-240V
50Hz

LSO-046



New

Dimension : 40x100

☐ White

Material :
Aluminium

Watts :
1x1W (24V)

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

LSO-047



New

Dimension : 130x150

☐ White

Material :
Aluminium

Watts :
4x1W (24V)

Powered By :
OSRAM

CCT :
3000K


Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

OSRAM



LSO-059



New

Material :
Aluminium / Glass

Watts :
1W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 60x600



LSO-060



New

Material :
Aluminium / Glass

Watts :
1W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 80x800



LSO-061



New

Material :
Aluminium / Glass

Watts :
1W (24V)

Powered By :
OSRAM

CCT :
3000K

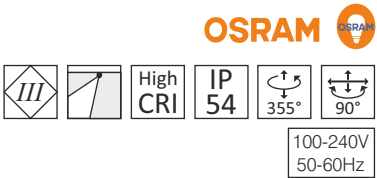
Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

Dimension : 80x1000



LSO-062



New

Material :
Aluminium / Glass

Watts :
3Wx2+5Wx1

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
-

IP Rating :
IP65

Dimension : 60x2 + 80x1



Orange

LSO-048



New

Material :
Aluminium / Acrylic

Watts :
1x6W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65


6 HEADS

Dimension : 30x160



White

OSRAM



LSO-049



New

Material :
Aluminium / PC

Watts :
3W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 220x170x120

Gold Mable

LSO-050



New

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 320x260x160

Gold Mable

LSO-051



New

Material :
Aluminium / PC

Watts :
8W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
70lm

IP Rating :
IP54

Dimension : 400x300x200

Gold Mable



OSRAM



100-240V
50-60Hz

LSO-052



New

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 120



Print Ball



Orange Moon Color

LSO-053



New

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

Dimension : 150



Print Ball



Orange Moon Color

LSO-054



New

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP54

Dimension : 200



Print Ball



Orange Moon Color



OSRAM



100-240V
50-60Hz

LSO-055



New

Dimension : 300

 Light Coffee Color

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

LSO-056



New

Dimension : 400

 Light Coffee Color

Material :
Aluminium / PC

Watts :
5W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

LSO-057



New

Dimension : 500

 Light Coffee Color

Material :
Aluminium / PC

Watts :
7W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°

CRI :
-

Luminous :
70lm

IP Rating :
IP65

LSO-058



New

Dimension : 600

 Light Coffee Color

Material :
Aluminium / PC

Watts :
10W

Powered By :
OSRAM

CCT :
3000K

Beam Angle :
180°


CRI :
-

Luminous :
70lm

IP Rating :
IP65



OSRAM 





LLF-312

Dimension : 80x72
Cutout : 75



Material :
Aluminium

Watts :
7W

Powered By :
BRIDGELUX

CCT :
3000/4000K/6000K

Beam Angle :
100°

CRI :
≥90

Luminous :
80lm/w

IP Rating :
IP54

LLF-313

Dimension : 105x82
Cutout : 85



Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000/4000K/6000K

Beam Angle :
100°

CRI :
≥90

Luminous :
80lm/w

IP Rating :
IP54

LLF-314

Dimension : 155x92
Cutout : 95



Material :
Aluminium

Watts :
20W

Powered By :
BRIDGELUX


CCT :
3000/4000K/6000K

Beam Angle :
100°


CRI :
≥90

Luminous :
80lm/w

IP Rating :
IP54

LLF-317



Dimension : 70x40
Cutout : 760



Material :
Aluminium

Watts :
7W

Powered By :
BRIDGELUX

CCT :
3000/4000K/6000K


Beam Angle :
36°

CRI :
≥90

Luminous :
80lm/w

IP Rating :
IP54

LLF-318



Dimension : 90x50
Cutout : 90



Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000/4000K/6000K


Beam Angle :
36°


CRI :
≥90

Luminous :
80lm/w

IP Rating :
IP54

bridgelux®



LLF-292

Dimension : 88x72
Cutout : 80

**Material :**

-

Beam Angle :

38°

Watts :

12W

CRI :

≥90

Powered By :

BRIDGELUX

Luminous :


80lm/W

CCT :

3000/4000/6000

IP Rating :

IP54 / IP65

LLF-292A

Dimension : 108x81
Cutout : 102

**Material :**

-

Beam Angle :

38°

Watts :

20W

CRI :

≥90

Powered By :

BRIDGELUX

Luminous :


80lm/W

CCT :

3000/4000/6000

IP Rating :

IP54 / IP65

LLF-275B

Dimension : 41x82.5
Cutout : 35

**Material :**

-

Beam Angle :

24°/40°

Watts :

7W

CRI :

≥90

Powered By :

BRIDGELUX

Luminous :


80lm/W

CCT :

3000/4000/6000

IP Rating :

IP44

LLF-276B

Dimension : 57x100
Cutout : 50

**Material :**

-

Beam Angle :

24°/40°

Watts :

12W

CRI :

≥90

Powered By :

BRIDGELUX

Luminous :

80lm/W

CCT :

3000/4000/6000

IP Rating :

IP44




200-240V
50Hz

LLF-337**New**

Dimension : 43x43x45
Cutout : 40x40



Black



White

Material :
Aluminium

Watts :
7W

Powered By :
BRIDGELUX

CCT :
3000/4000K

Beam Angle :
40°

CRI :
≥90

Luminous :
327.89lm

IP Rating :
IP65

LLF-338**New**

Dimension : 73x43x45
Cutout : 70x40



Black



White

Material :
Aluminium

Watts :
14W

Powered By :
BRIDGELUX

CCT :
3000/4000K

Beam Angle :
40°

CRI :
≥90

Luminous :
616.9lm

IP Rating :
IP5.4

LLF-339**New**

Dimension : 103x43x45
Cutout : 100x40



Black



White

Material :
Aluminium

Watts :
18W

Powered By :
BRIDGELUX


CCT :
3000/4000K


Beam Angle :
40°

CRI :
≥90

Luminous :
982.96lm

IP Rating :
IP65

LHR-001

Dimension : 18x26




Stainless Steel

Material :
Stainless Steel**Watts :**
1.2W**Powered By :**
12-24V DC**CCT :**
3000**Beam Angle :**
30°**CRI :**
≥80**Luminous :**
80lm/w**IP Rating :**
IP67**LHR-002**

Dimension : 18x30




Stainless Steel


Material :
Stainless Steel**Watts :**
1.2W**Powered By :**
12-24V DC**CCT :**
3000**Beam Angle :**
55°**CRI :**
≥80**Luminous :**
162lm**IP Rating :**
IP67**LHR-003**

Dimension : 33x39.5



Stainless Steel

Material :
Aluminium**Watts :**
1.5W**Powered By :**
12-24V DC**CCT :**
3000**Beam Angle :**
65°**CRI :**
≥80**Luminous :**
80lm/w**IP Rating :**
IP67

LHR-004

Dimension : 18.5x17.5x21
Cutout : 170xB14



Silver

Material :
Aluminium

Watts :
1.5W

Powered By :
24V DC


CCT :
3000

Beam Angle :
110°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP65

LHR-005

Dimension : 285x17.5x21
Cutout : 268xB14



Stainless Steel

Material :
Aluminium

Watts :
2.5W

Powered By :
24V DC


CCT :
3000

Beam Angle :
110°

CRI :
≥80

Luminous :
80lm

IP Rating :
IP65

LHR-006

Dimension : 124x30x32
Cutout : 98xB25



Stainless Steel

Material :
Aluminium

Watts :
4W

Powered By :
24V DC


CCT :
3000


Beam Angle :
10°x100°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP65



LLU-001

Dimension : 24.7x20.7x300



Stainless Steel

Material :
Aluminium / Silicon

Watts :
5W


Powered By :
2835 SMD LED

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP67
LLU-002

Dimension : 24.7x20.7x500



Stainless Steel

Material :
Aluminium / Silicon

Watts :
7.5W

Powered By :
2835 SMD LED

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP67
LLU-003

Dimension : 24.7x20.7x1000



Stainless Steel

Material :
Aluminium / Silicon

Watts :
15W


Powered By :
2835 SMD LED

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP67


LLU-004

Dimension : 24.9x34.2x300



Stainless Steel

Material :
 Aluminium / Silicon

Watts :
 5W

Powered By :
 2835 SMD LED

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 80lm/w

IP Rating :
 IP67
LLU-005

Dimension : 24.9x34.2x500



Stainless Steel

Material :
 Aluminium / Silicon

Watts :
 7.5W

Powered By :
 2835 SMD LED

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80

Luminous :
 80lm/w

IP Rating :
 IP67
LLU-006

Dimension : 24.9x34.2x1000



Stainless Steel

Material :
 Aluminium / Silicon

Watts :
 15W


Powered By :
 2835 SMD LED

CCT :
 3000K

Beam Angle :
 120°

CRI :
 ≥80


Luminous :
 80lm/w

IP Rating :
 IP67


HIGH-POWER ECO SERIES



LEO-001



Dimension : 63x83



Dark Grey

Material :
Aluminium

Watts :
1x6W

Powered By :
CREE

CCT :
3000/2200K


Beam Angle :
36°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP44

LEO-002



Dimension : 83x97



Dark Grey

Material :
Aluminium

Watts :
1x12W

Powered By :
CREE

CCT :
3000K


Beam Angle :
36°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP44

LEO-021



Dimension : 130x65



Dark Grey

Material :
Aluminium

Watts :
1x5W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
60°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP54

LEO-018



Dimension : 43x65



Dark Grey

Material :
Aluminium

Watts :
3x1W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
24°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP54

LEO-019



Dimension : 43x65



Dark Grey

Material :
Aluminium

Watts :
1x3W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
36°

CRI :
≥80


Luminous :
80lm/w

IP Rating :
IP54

LEO-123



ADJUSTABLE
BEAM ANGLE



Dimension : 56x83x236



Sand Grey

Material :
Aluminium

Watts :
6W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
20°-50° Adjustable

CRI :
≥80

Luminous :
480lm

IP Rating :
IP65

LEO-124



ADJUSTABLE
BEAM ANGLE



Dimension : 73x96x246



Sand Grey

Material :
Aluminium

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
20°-50° Adjustable

CRI :
≥80

Luminous :
960lm

IP Rating :
IP65

LEO-003



Dimension : 100x80
Cutout : 90

Stainless Steel

Material :
Aluminium

Watts :
1x6W

Powered By :
CREE

CCT :
3000/2200K

Beam Angle :
60°

CRI :
≥80

Luminous :
130lm

IP Rating :
IP44

LEO-004



Dimension : 105x95
Cutout : 105

Stainless Steel

Material :
Aluminium

Watts :
1x12W

Powered By :
CREE

CCT :
3000K

Beam Angle :
60°

CRI :
≥80


Luminous :
130lm

IP Rating :
IP44

LEO-110



WALL WASHER



Dimension : 88x83x78

Stainless Steel

Material :
Aluminium/PC

Watts :
10W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
45°

CRI :
≥80

Luminous :
950-1000lm

IP Rating :
IP54

LEO-012



Dimension : 42x82
Cutout : 40



Dark Grey

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°


CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP54



LEO-012A



Dimension : 42x82
Cutout : 40



Dark Grey

Material :
Aluminium

Watts :
2W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
20°x60°


CRI :
≥80

Luminous :
80lm

IP Rating :
IP67



LEO-013



Dimension : 42x82
Cutout : 40



Dark Grey

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°


CRI :
≥80


Luminous :
300-310lm

IP Rating :
IP54



EPISTAR



LEO-014

Dimension : 62x85
Cutout : 40



Dark Grey

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP54

**LEO-015**

Dimension : 62x85



Dark Grey

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP54

**LEO-016**

Dimension : 42x80
Cutout : 40



Stainless Steel

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP54

LEO-017

Dimension : 42x42x80
Cutout : 40



Stainless Steel

Material :
Aluminium

Watts :
3W

Powered By :
EPISTAR

CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
300-310lm

IP Rating :
IP54

EPISTAR




200-240V
50Hz

LEO-005

Dimension : 173x54x60




Dark Grey

Material :
Aluminium**Watts :**
1x6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°/36°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44**LEO-006**

Dimension : 100x100x51




Dark Grey

Material :
Aluminium**Watts :**
4x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44**LEO-006A**ADJUSTABLE
BEAM ANGLE

Dimension : 120x56



Dark Grey

Material :
Aluminium**Watts :**
8W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5°/45°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP54**LEO-007**

Dimension : 100x100x51



Dark Grey

Material :
Aluminium**Watts :**
4x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
15°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44

LEO-008

Dimension : 92x70





Dark Grey

Material :
Aluminium**Watts :**
2W SMD**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44**LEO-009**

Dimension : 150x72




Dark Grey

Material :
Aluminium**Watts :**
4W SMD**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
120°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44**LEO-010**

Dimension : 76x81x63



Dark Grey


Material :
Aluminium**Watts :**
1x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44**LEO-011**

Dimension : 142x81x63



Dark Grey

Material :
Aluminium**Watts :**
2x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
80lm**IP Rating :**
IP44


200-240V
50Hz

LEO-032

Dimension : 40x40x120




Dark Grey

Material :
Aluminium**Watts :**
2x3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-032A**

Dimension : 40x60x120




Dark Grey

Material :
Die-Cast Aluminium**Watts :**
2x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
10°/60°**CRI :**
≥80**Luminous :**
500/550lm**IP Rating :**
IP54**LEO-032B**

Dimension : 40x60x120



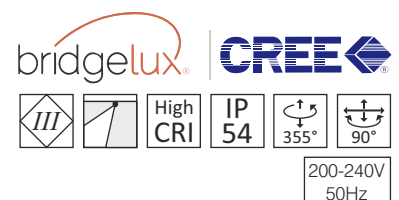
Dark Grey


Material :
Die-Cast Aluminium**Watts :**
2x3W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
500-550lm**IP Rating :**
IP54**LEO-033A**

Dimension : 40x60x90



Dark Grey


Material :
Die-Cast Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
250-270lm**IP Rating :**
IP54200-240V
50Hz

LEO-033

Dimension : 40x40x90




Dark Grey

Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
5°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-035**

Dimension : 66x70x42



Dark Grey


Material :
Aluminium**Watts :**
3W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
300-310lm**IP Rating :**
IP54**LEO-036**

Dimension : 88x70x42



Dark Grey

Material :
Aluminium**Watts :**
6W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
540-600lm**IP Rating :**
IP54

LEO-049

Dimension : 80x60x35



Dark Grey

Material :
 Die-Casting

Watts :
 3W


Powered By :
 EPISTAR

CCT :
 3000K

Beam Angle :
 85°

CRI :
 ≥80

Luminous :
 240lm

IP Rating :
 IP54
**LEO-050**

Dimension : 80x60x35



Dark Grey

Material :
 Die-Casting

Watts :
 2x3W


Powered By :
 EPISTAR COB

CCT :
 3000K

Beam Angle :
 85°

CRI :
 ≥80

Luminous :
 480lm

IP Rating :
 IP54
**LEO-051**

Dimension : 90x50



Dark Grey

Material :
 Die-Casting

Watts :
 2x3W


Powered By :
 EPISTAR COB

CCT :
 3000K

Beam Angle :
 85°

CRI :
 ≥80

Luminous :
 480lm

IP Rating :
 IP54
**LEO-052**

Dimension : 90x50



Dark Grey

Material :
 Die-Cast Aluminium

Watts :
 4x3W

Powered By :
 EPISTAR


CCT :
 3000K

Beam Angle :
 85°

CRI :
 ≥80

Luminous :
 960lm



IP Rating :
 IP54
**EPISTAR**
 200-240V
 50Hz

LEO-059**New**

Dimension : 45x45x45





Graphite Black

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-060****New**

Dimension : 45x45x45




Graphite Black

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-061****New**

Dimension : 50x50x30



Graphite Black


Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-062****New**


Dimension : 70x65x32



Graphite Black

Material :
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
180-200lm**IP Rating :**
IP54

200-240V
50Hz

LEO-063**New**

Dimension : 25x25x75

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
10°

CRI :
≥80

Luminous :
270-300lm

IP Rating :
IP54


Graphite Black

LEO-064**New**

Dimension : 25x25x120

Material :
Aluminium

Watts :
2x3W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
10°

CRI :
≥80

Luminous :
540-600lm


IP Rating :
IP54


Graphite Black


100-240V
50-60Hz

LEO-065UP/ DOWN
DOT OVER LENSE


Graphite Black



Dimension : 35x20x96

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
360-400lm**IP Rating :**
IP54**LEO-066**UP/ DOWN
DOT OVER LENSE


Graphite Black



Dimension : 35x20x203

Material :
Aluminium**Watts :**
8x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
720-800lm**IP Rating :**
IP54**LEO-067**UP/ DOWN
DOT OVER LENSE

Graphite Black



Dimension : 35x20x290

Material :
Aluminium**Watts :**
12x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
1080-1200lm**IP Rating :**
IP54**LEO-068**UP/ DOWN
DOT OVER LENSE


Graphite Black




Dimension : 35x20x35

Material :
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54


200-240V
50Hz

LEO-069**New**ONE WAY
DOT OVER LENSE

Dimension : 35x20x96


 Graphite Black
Material :
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54**LEO-070****New**ONE WAY
DOT OVER LENSE

Dimension : 35x20x203

 Graphite Black
Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54**LEO-071****New**ONE WAY
DOT OVER LENSE

Dimension : 35x20x290

 Graphite Black
Material :
Aluminium**Watts :**
6x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
5-60°**CRI :**
≥80**Luminous :**
-**IP Rating :**
IP54



LEO-072**New**

COB STRIP

Dimension : 25x25x85



Graphite Black



White

Material :
Aluminium

Watts :
3W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP54
**LEO-073****New**

COB STRIP

Dimension : 25x25x145



Graphite Black



White

Material :
Aluminium

Watts :
6W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP54
**LEO-074****New**

COB STRIP

Dimension : 25x25x205



Graphite Black



White

Material :
Aluminium

Watts :
10W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
-

IP Rating :
IP54
**LEO-075****New**

COB STRIP

Dimension : 25x25x300



Graphite Black



White

Material :
Aluminium

Watts :
15W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
-

CRI :
-

Luminous :
-


IP Rating :
IP54


LEO-076



DOT OVER LENSE



Dimension : 60x35



Material :
Aluminium

Watts :
6x1W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
5-60°



CRI :
≥80

Luminous :
-


IP Rating :
IP54



LEO-077



Dimension : 60x35



Material :
Aluminium

Watts :
6x1W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
-

CRI :
=

Luminous :
-

IP Rating :
IP54



LEO-078**New**

UP/DOWN


Dimension : 25x25x70



Graphite Black



White

Material :
AluminiumWatts :
2x1WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
-CRI :
-Luminous :
-IP Rating :
IP54**LEO-079****New**

UP/DOWN

Dimension : 25x25x120



Graphite Black



White

Material :
AluminiumWatts :
2x3WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
-CRI :
-Luminous :
-IP Rating :
IP54**LEO-084****New**ONE WAY
DOB

Dimension : 50x45x12



Graphite Black


Material :
AluminiumWatts :
1x1WPowered By :
DOBCCT :
3000KBeam Angle :
-CRI :
-Luminous :
-IP Rating :
IP54**LEO-085****New**UP/DOWN
DOB


Dimension : 50x45x12



Graphite Black

Material :
AluminiumWatts :
2x1WPowered By :
DOBCCT :
3000KBeam Angle :
-CRI :
-Luminous :
-IP Rating :
IP54

200-240V
50Hz

LEO-080**New**ONE WAY
FLAT SQUARE


Dimension : 40x40x30

Material :
Aluminium**Watts :**
1x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
-**IP Rating :**
IP54

Graphite Black



White

LEO-081**New**TWO WAY
FLAT SQUARE


Dimension : 45x45x30

Material :
Aluminium**Watts :**
2x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
-**IP Rating :**
IP54

Graphite Black



White

LEO-083**New**FOUR WAY
FLAT SQUARE


Dimension : 50x50x30

Material :
Aluminium**Watts :**
4x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
-**CRI :**
-**Luminous :**
-**IP Rating :**
IP54


Graphite Black




White

LEO-086

**New**

Dimension : 50x50x160

Material :
AluminiumWatts :
2x3WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
-CRI :
≥80Luminous :
-IP Rating :
IP54

LEO-087

**New**


Dimension : 60x55x250


Material :
AluminiumWatts :
2x5WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
-CRI :
≥80Luminous :
-IP Rating :
IP54

LEO-088


**New**

Dimension : 60x55x355


Material :
AluminiumWatts :
2x5WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
-CRI :
≥80Luminous :
-IP Rating :
IP54

LEO-115**New**


Dimension : 56x60x85

Material :
AluminiumWatts :
2x3WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
60°CRI :
≥80Luminous :
480lmIP Rating :
IP54
 Graphite Black
LEO-116**New**

Dimension : 102x76x80


Material :
Die-Cast AluminiumWatts :
2x3WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
60°CRI :
≥80Luminous :
480lmIP Rating :
IP54
 Graphite Black
LEO-120**New**

Dimension : 80x68x80


Material :
AluminiumWatts :
2x3WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
36°CRI :
≥80Luminous :
480lmIP Rating :
IP54
 Graphite Black
LEO-121**New**

Dimension : 150x68x80

Material :
AluminiumWatts :
2x6WPowered By :
BRIDGELUXCCT :
3000KBeam Angle :
36°CRI :
≥80Luminous :
960lmIP Rating :
IP54
 Graphite Black


200-240V
50Hz

LEO-117

**New**

Dimension : 97x90x50



Graphite Black



Gold

Material :
Aluminium**Watts :**
4W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
320lm**IP Rating :**
IP54

LEO-118

**New**

Dimension : 153x90x50



Graphite Black



Gold

Material :
Aluminium**Watts :**
6X1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
480m/w**IP Rating :**
IP54

LEO-119

**New**

Dimension : 210x90x50




Graphite Black




Gold

Material :
Aluminium**Watts :**
8x1W**Powered By :**
BRIDGELUX**CCT :**
3000K**Beam Angle :**
60°**CRI :**
≥80**Luminous :**
640lm/w**IP Rating :**
IP54



LEO-125



RIBBED ACRYLIC /
SURFACE STEP LIGHT

 Graphite Black

New



Dimension : 158x86x40

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
180°

CRI :
≥80

Luminous :
240lm

IP Rating :
IP54

LEO-126



RIBBED ACRYLIC /
SURFACE STEP LIGHT

 Graphite Black

New



Dimension : 186x86x40

Material :
Aluminium

Watts :
6W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
480lm

IP Rating :
IP54


LEO-127



RIBBED ACRYLIC /
CONCEALED STEP LIGHT

 Graphite Black

New



Dimension : 92x78x53
Cutout : 88x66

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
240lm

IP Rating :
IP54


LEO-128



RIBBED ACRYLIC /
CONCEALED STEP LIGHT

 Graphite Black

New



Dimension : 150x70x53
Cutout : 146x66

Material :
Aluminium

Watts :
6W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
480lm

IP Rating :
IP54

bridgelux®



200-240V
50Hz

LEO-108

Dimension : 102x100x107



Dark Grey

Material :
Aluminium / Glass

Watts :
12W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
120°

CRI :
≥80

Luminous :
80lm

IP Rating :
IP54
LEO-109

Dimension : 168x150x124



Dark Grey

Material :
Aluminium

Watts :
10W


Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
STREAK'S

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP54
LEO-089**New**
 AUTO COLOR CHANGING
RGB


Dimension : 70x50x70



Graphite Black

Material :
Aluminium

Watts :
4x1W

Powered By :
-

CCT :
RGB

Beam Angle :
5-60°

CRI :
≥80

Luminous :
-

IP Rating :
IP54


LEO-129**New**

Dimension : Ø42.5x107

Material :
Aluminium Die Cast

Watts :
5W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
36°

CRI :
≥80

Luminous :
400lm

IP Rating :
IP65

 Graphite Black
LEO-130**New**

Dimension : Ø70x150

Material :
Aluminium Die Cast

Watts :
12W

Powered By :
BRIDGELUX

CCT :
3000K

Beam Angle :
36°

CRI :
≥80

Luminous :
960lm

IP Rating :
IP65

 Graphite Black
LEO-131**New**

Dimension : Ø80x190

Material :
Aluminium Die Cast

Watts :
18W

Powered By :
BRIDGELUX

CCT :
3000K


Beam Angle :
36°

CRI :
≥80

Luminous :
1440lm

IP Rating :
IP65

 Graphite Black

LEO-045


Dimension : 47x70x170



Black



White

Material :
Aluminium+PC**Watts :**
8W**Powered By :**
SMD**CCT :**
3000 / 6000**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
788lm**IP Rating :**
IP54**LEO-046**

Dimension : 47x70x210




Black



White

Material :
Aluminium+PC**Watts :**
15W**Powered By :**
SMD**CCT :**
3000/6000**Beam Angle :**
90°**CRI :**
≥80**Luminous :**
1442lm**IP Rating :**
IP54100-240V
50-60Hz

LEO-037

Dimension : 90x46



Black

Material :
Aluminium + PC

Watts :
8W


Powered By :
SMD

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
95-100lm

IP Rating :
IP54
LEO-038

Dimension : 140x46



Black

Material :
Aluminium + PC

Watts :
16W


Powered By :
SMD

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
95-100lm/w

IP Rating :
IP54
LEO-039

Dimension : 90x90x46



Black

Material :
Aluminium + PC

Watts :
8W


Powered By :
CREE

CCT :
3000K

Beam Angle :
180°

CRI :
≥80

Luminous :
95-100lm/w

IP Rating :
IP54
LEO-040

Dimension : 140x140x46



Black

Material :
Aluminium + PC

Watts :
6x1W

Powered By :
CREE

CCT :
3000K

Beam Angle :
180°


CRI :
≥80

Luminous :
95-100lm/w

IP Rating :
IP54




 200-240V
50Hz

LEO-053

Dimension : 90x136




Dark Grey

Material :
Die - Casting**Watts :**
14W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
1120lm**IP Rating :**
IP54**LEO-054**

Dimension : 90x90x36



Dark Grey


Material :
Die - Casting**Watts :**
14W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
1680lm**IP Rating :**
IP54**LEO-055**


Dimension : 145x140



Dark Grey

Material :
Die - Casting**Watts :**
21W**Powered By :**
CREE**CCT :**
3000K**Beam Angle :**
36°**CRI :**
≥80**Luminous :**
1680lm**IP Rating :**
IP54



LEO-024

Dimension : 80x80x40
Cutout : 72x72



Dark Grey/White

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
240-260lm

IP Rating :
IP54

LEO-025

Dimension : 80x80x40
Cutout : 72x72



Dark Grey/white

Material :
Aluminium

Watts :
3W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
60°

CRI :
≥80

Luminous :
240-260lm

IP Rating :
IP54

LEO-034

Dimension : 60x60x35
Cutout : 45x45



Dark Grey/White

Material :
Aluminium

Watts :
2x3W

Powered By :
BRIDGELUX


CCT :
3000K

Beam Angle :
90°


CRI :
≥80

Luminous :
270-280lm

IP Rating :
IP54

LEO-041



Dimension : 14x114x65
Cutout : 114x105x60



Dark Grey

Material :
Aluminium

Watts :
2W

Powered By :
CREE

CCT :
3000K


Beam Angle :
30°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP65

LEO-042



Dimension : 170x114x65
Dimension : 170x105x60



Dark Grey

Material :
Aluminium

Watts :
4W

Powered By :
CREE

CCT :
3000K


Beam Angle :
30°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP65

LEO-043



Dimension : 226x114x65
Dimension : 226x105x60



Dark Grey

Material :
Aluminium

Watts :
6W

Powered By :
CREE


CCT :
3000K

Beam Angle :
30°

CRI :
≥80

Luminous :
80lm/w

IP Rating :
IP65



LEO-111**New**

Dimension : L10x110x200



Matt Black

Material :
Aluminium + Glass

Watts :
10W


Powered By :
EPISTAR

CCT :
3000

Beam Angle :
120°

CRI :
≥80

Luminous :
667lm

IP Rating :
IP65
LEO-112**New**

Dimension : 110x110x400



Matt Black

Material :
Aluminium + Glass

Watts :
12W


Powered By :
EPISTAR

CCT :
3000

Beam Angle :
120°

CRI :
≥80

Luminous :
667lm

IP Rating :
IP65
LEO-113**New**

Dimension : 110x110x600



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000

Beam Angle :
120°

CRI :
≥80

Luminous :
667lm

IP Rating :
IP65
LEO-114**New**

Dimension : 110x110x800



Matt Black

Material :
Aluminium + Glass

Watts :
12W

Powered By :
EPISTAR

CCT :
3000

Beam Angle :
120°

CRI :
≥80

Luminous :
667lm

IP Rating :
IP65
EPISTAR
200-240V
50Hz

LEO-056



Dimension : 45x25x1000



Grey

Material :
Aluminium

Watts :
24W

Powered By :
OSRAM

CCT :
3000


Beam Angle :
15°/45°

CRI :
≥80

Luminous :
120lm

IP Rating :
IP65

LEO-057



Dimension : 45x25x500



Grey

Material :
Aluminium

Watts :
12W

Powered By :
OSRAM

CCT :
3000


Beam Angle :
15°/45°

CRI :
≥80

Luminous :
120lm

IP Rating :
IP65

LEO-058



Dimension : 45x25x300



Grey

Material :
Aluminium

Watts :
6W

Powered By :
OSRAM

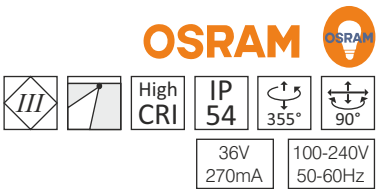
CCT :
3000


Beam Angle :
15°/45°

CRI :
≥80

Luminous :
120lm

IP Rating :
IP65



LFL-030

Dimension : 120x100x25



Black

Material :
Die Cast Aluminium+Glass

Beam Angle :
120°

Watts :
20W DOB

CRI :
≥80

Powered By :
SANAN

Luminous :
80-90lm/w

CCT :
3000K / 6000K

IP Rating :
IP65
LFL-031

Dimension : 140x120x30



Black

Material :
Die Cast Aluminium+Glass

Beam Angle :
120°

Watts :
30W DOB

CRI :
≥80

Powered By :
SANAN

Luminous :
80-90lm/w

CCT :
3000K / 6000K

IP Rating :
IP65
LFL-032

Dimension : 180x160x30



Black

Material :
Die Cast Aluminium+Glass

Beam Angle :
120°

Watts :
50W DOB

CRI :
≥80

Powered By :
SANAN

Luminous :
80-90lm/w

CCT :
3000K / 6000K

IP Rating :
IP65
LFL-033

Dimension : 300x265x35



Black

Material :
Die Cast Aluminium+Glass

Beam Angle :
120°

Watts :
100W DOB

CRI :
≥80

Powered By :
SANAN

Luminous :
80-90lm/w

CCT :
3000K / 6000K

IP Rating :
IP65

 **SANAN**

200-240V
50Hz

LFL-034



Dimension : 300x265x35

Black

Material :
Die Cast Aluminium+Glass

Watts :
150W DOB

Powered By :
SANAN

CCT :
3000K / 6000K


Beam Angle :
120°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65

LFL-035



Dimension : 360x320x40

Black

Material :
Die Cast Aluminium+Glass

Watts :
200W DOB

Powered By :
SANAN

CCT :
3000K / 6000K

Beam Angle :
120°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65




SANAN



200-240V
50Hz

LFL-036



Dimension : 126x180x30

Black

Material :
Aluminium / Glass

Watts :
30W with Driver

Powered By :
SANAN

CCT :
3000K / 6000K


Beam Angle :
90°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65

LFL-037



Dimension : 140x200x30

Black

Material :
Aluminium / Glass

Watts :
50W with Driver

Powered By :
SANAN

CCT :
3000K / 6000K


Beam Angle :
90°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65

LFL-038



Dimension : 196x200x30

Black

Material :
Aluminium / Glass

Watts :
100W with Driver

Powered By :
SANAN

CCT :
3000K / 6000K


Beam Angle :
90°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65

LFL-039



Dimension : 230x330x30

Black

Material :
Aluminium / Glass

Watts :
150W with Driver

Powered By :
SANAN


CCT :
3000K / 6000K


Beam Angle :
90°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65



LFL-040

Dimension : 245x350x30



Black

Material :
Aluminium / Glass

Watts :
30W with Driver

Powered By :
SANAN


CCT :
3000K / 4000K / 6000K

Beam Angle :
90°

CRI :
≥80

Luminous :
80-90lm/w

IP Rating :
IP65

 **SANAN**




B E Y O N D B R I G H T

IMPORTED AND MARKETING BY:

Led Lum Lighting Solutions LLP

#22A, 1st Floor, 7th Street, Sector 3, Ambattur Industrial Estate,
Ambattur, Chennai - 600 098.

Mobile : +91 97907 99997, Customer Care : +91 96631 02951,

Email : sumeet@ledlumlighting.com / sales@ledlumlighting.com,

Web : www.ledlumlighting.com