

Report No.:

Test Time: 2024/11/8 10:59:22

LUMINAIRE PHOTOMETRIC TEST REPORT

Luminaire Property

Manufacturer: 0
Luminaire Type: 筒灯5寸
Lamp Type:
Luminous Width: 0 mm
Luminous Length: 0 mm
Luminous Height: 0 mm


Voltage(V): 219.50 V
Current(A): 0.1310 A
Power(W): 16.87 W
Power Factor: 0.5850
Lamp Luminous Flux: 2082.11

Photometric Results


CIE Class: Direct
Luminaire Luminous Flux: 2082.109 lm
Downward Ratio: 100.00%
Luminaire Efficacy Rating(LER): 123.42 lm/W
Beam Angle(50%) C0-180,C90-270: 70.2,70.5
Field Angle(10%) C0-180,C90-270: 134.9,147.9
S/MH C0-180,C90-270: 1.019,0.975

Max. Intensity: 1339.22 cd
Max.Intensity Angle: C=180 Gamma=3
Upward Ratio: 0.00%
Efficacy: 100.00%
Center Intensity: 1331.91 cd
Effective Luminous Flux: 1907.69 lm
ERP(ϕ use)(120deg): 1811.87 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

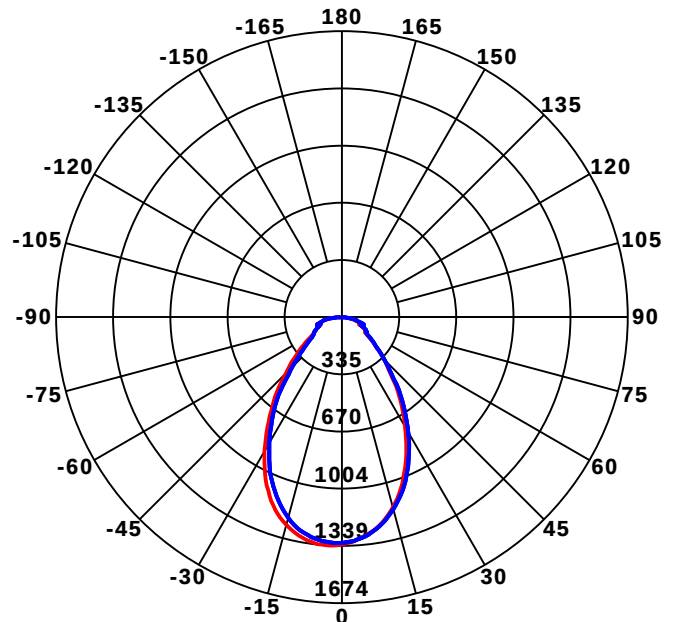

Beam Angle(50%) C0-180,C90-270: 70.2 deg,70.5 deg

C0-180 — C90-270 —



C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

Luminous Intensity Distribution Curve

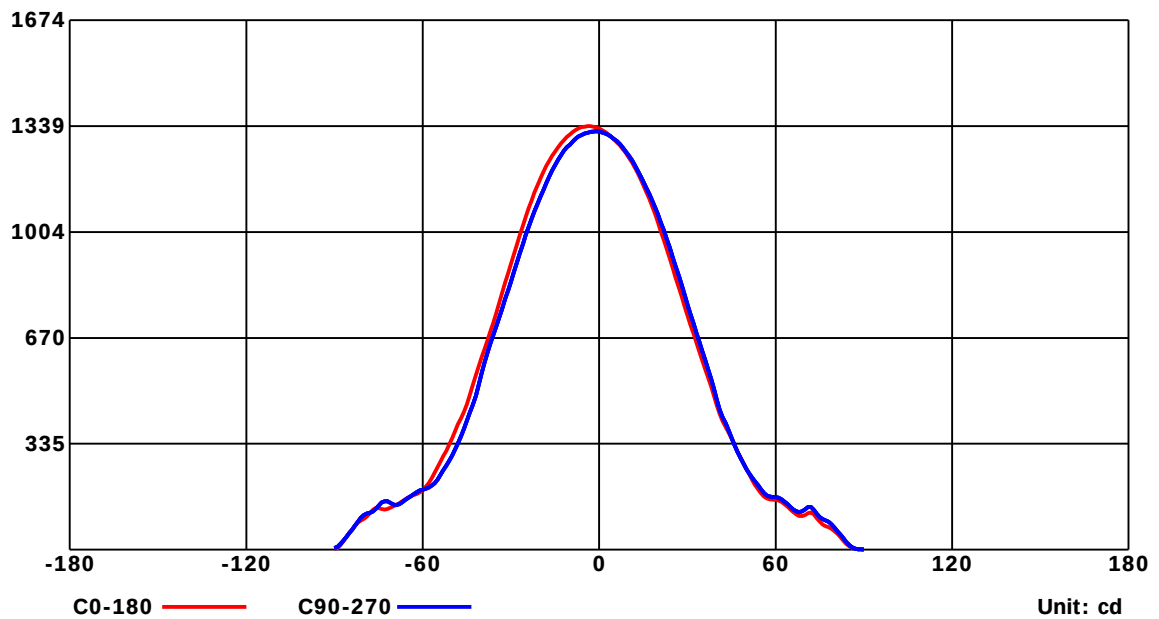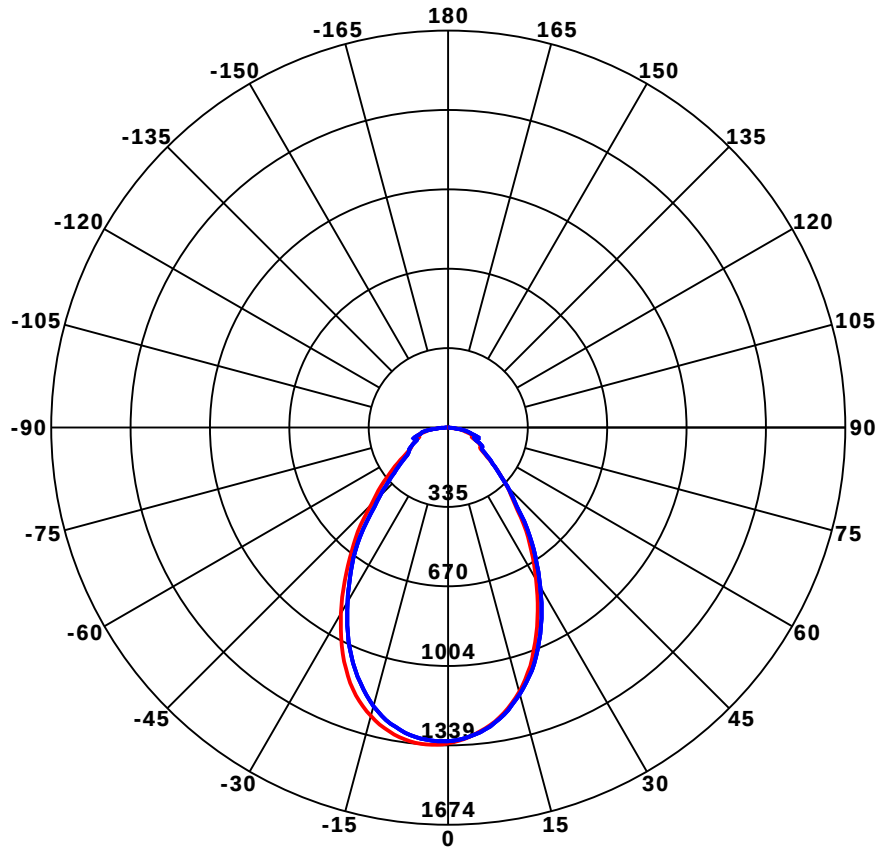

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

Luminous Intensity Distribution Curve

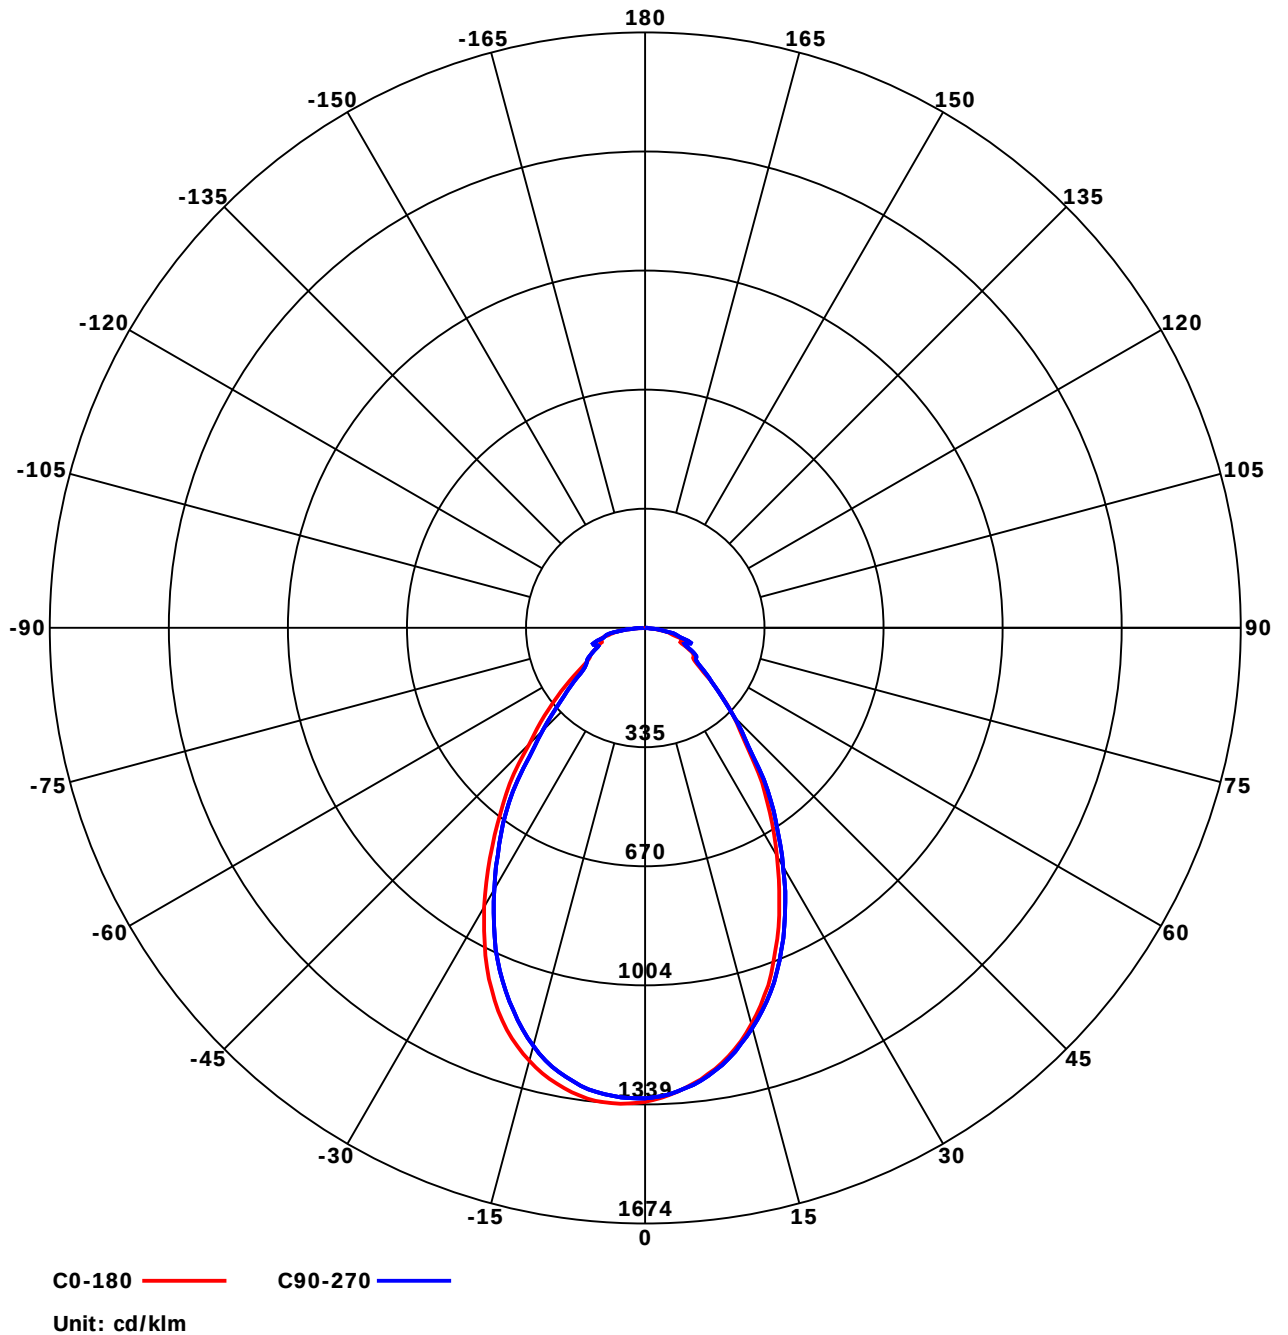

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:


Report No.:

Test Time: 2024/11/8 10:59:22

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFCIENTS OF UTILIZATION FOR RHOFC=20															
0	1.17	1.17	1.17	1.14	1.14	1.14	1.09	1.09	1.09	1.05	1.05	1.05	1.00	1.00	1.00	0.98
1	1.07	1.06	1.05	1.06	1.04	1.03	1.02	1.00	0.99	0.97	0.95	0.94	0.90	0.88	0.87	0.82
2	0.95	0.93	0.91	0.94	0.91	0.90	0.91	0.88	0.86	0.87	0.84	0.81	0.82	0.79	0.76	0.71
3	0.84	0.82	0.80	0.84	0.81	0.79	0.82	0.78	0.75	0.79	0.75	0.72	0.75	0.71	0.67	0.63
4	0.75	0.73	0.72	0.75	0.72	0.70	0.74	0.70	0.67	0.72	0.67	0.64	0.69	0.64	0.60	0.56
5	0.68	0.66	0.64	0.68	0.65	0.63	0.67	0.63	0.60	0.66	0.61	0.57	0.64	0.58	0.54	0.50
6	0.62	0.59	0.58	0.62	0.59	0.57	0.62	0.57	0.54	0.61	0.56	0.52	0.59	0.53	0.49	0.45
7	0.56	0.54	0.53	0.57	0.54	0.52	0.57	0.52	0.49	0.56	0.51	0.47	0.55	0.49	0.45	0.41
8	0.52	0.50	0.48	0.52	0.49	0.47	0.52	0.48	0.45	0.52	0.47	0.43	0.51	0.45	0.41	0.38
9	0.48	0.46	0.44	0.48	0.45	0.44	0.49	0.44	0.42	0.48	0.43	0.40	0.48	0.42	0.38	0.35
10	0.44	0.42	0.41	0.45	0.42	0.40	0.45	0.41	0.39	0.45	0.40	0.37	0.45	0.39	0.35	0.32


LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

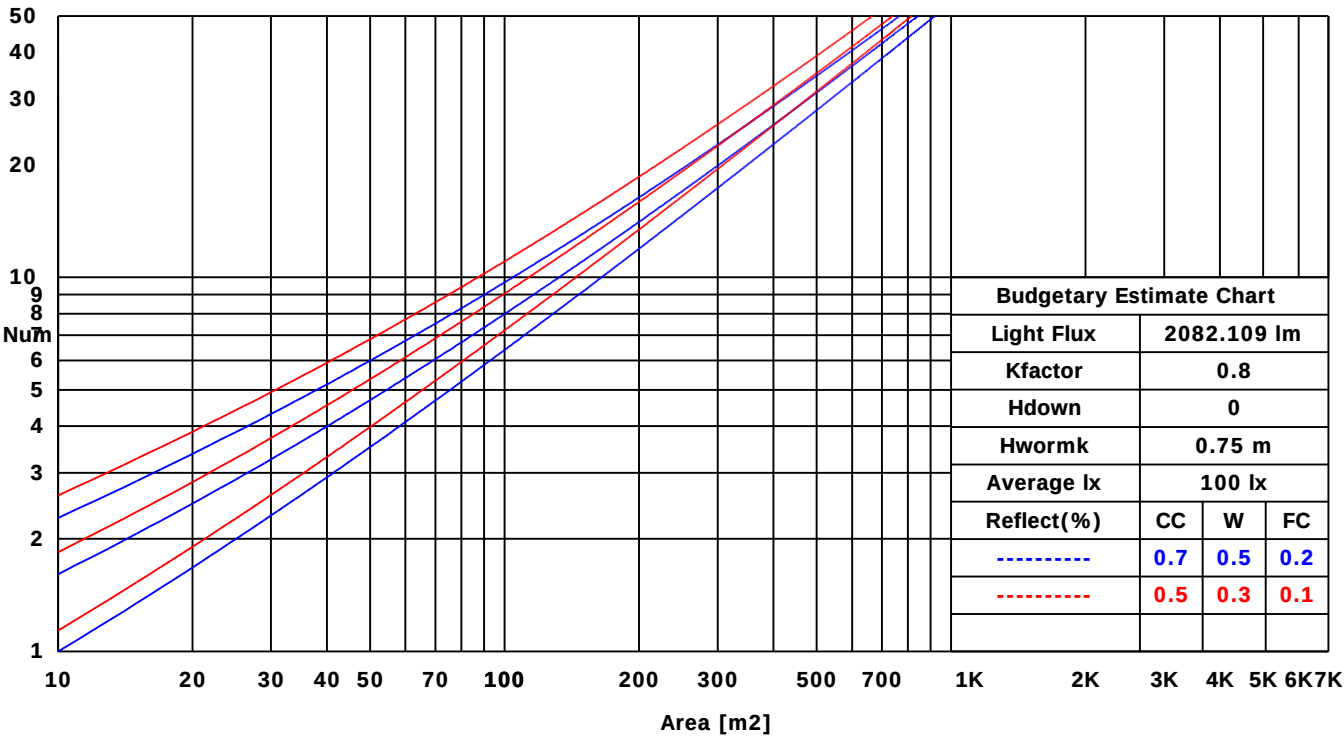

Report No.:

Test Time: 2024/11/8 10:59:22

ISOCANDELA DIAGRAM (RECTANGULAR)

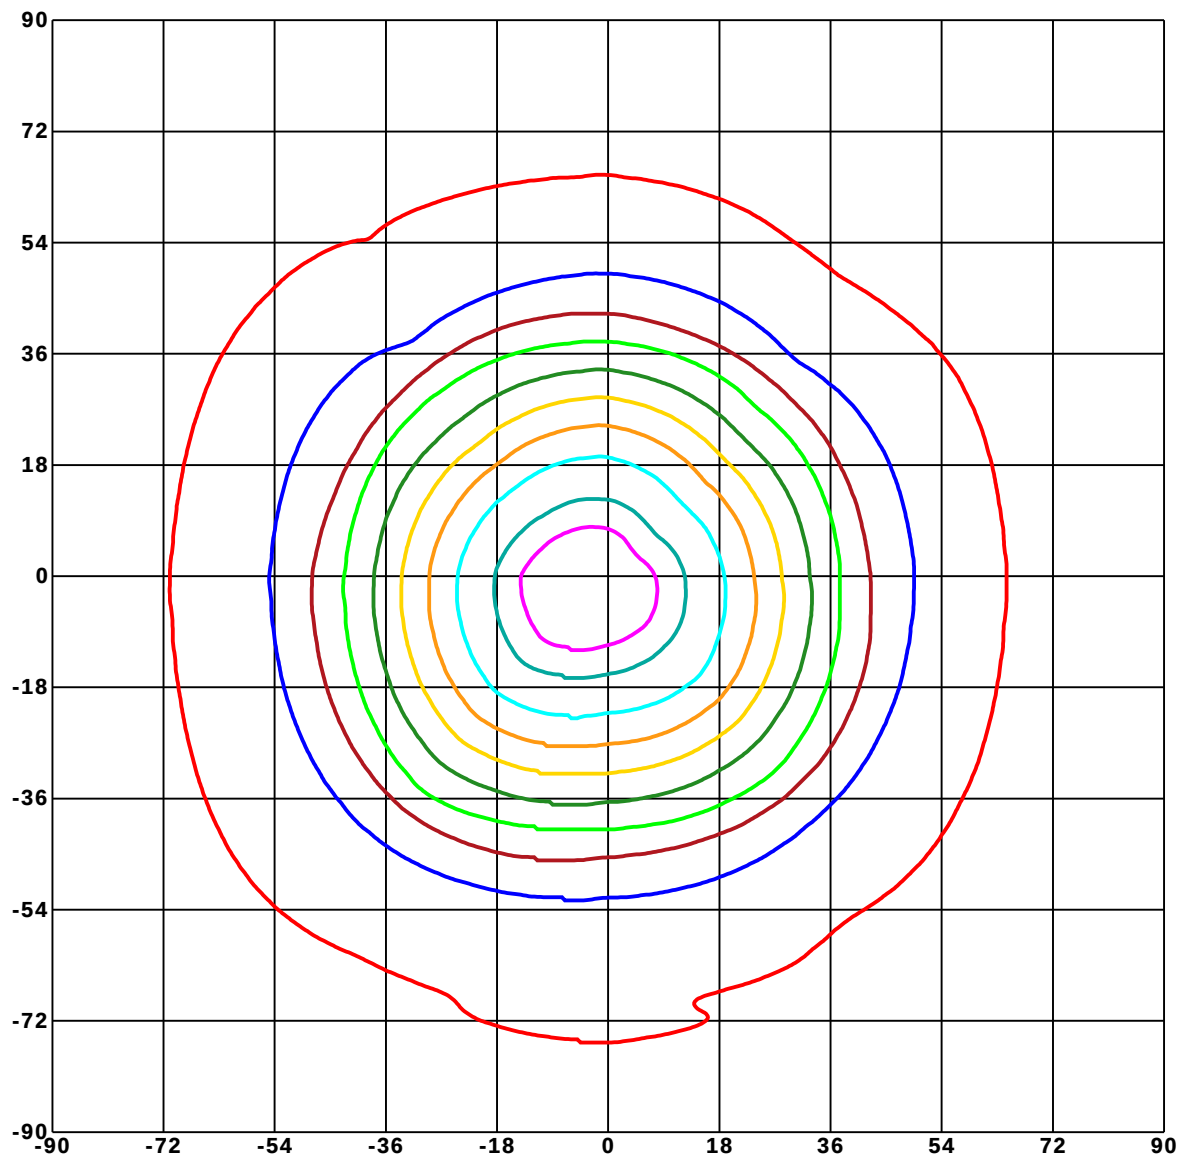

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

ISOCANDELA DIAGRAM (SPHERE)

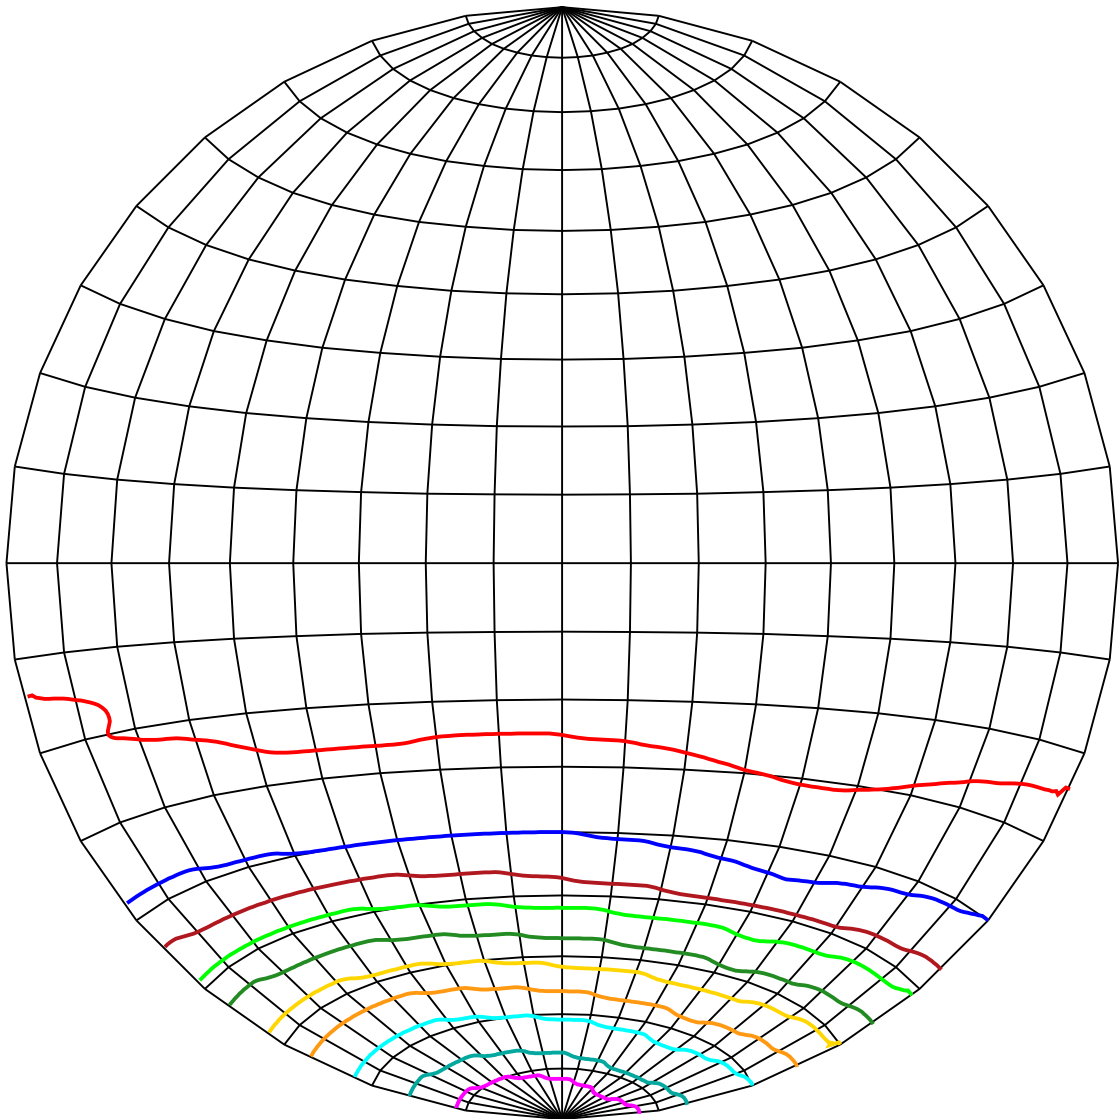

Unit of intensity:cd Imax(100%): 1339.219 cd

1272.258(95%Imax)
1205.297(90%Imax)
1071.375(80%Imax)
937.453(70%Imax)
803.531(60%Imax)

669.609(50%Imax)
535.688(40%Imax)
401.766(30%Imax)
267.844(20%Imax)
133.922(10%Imax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

ISOLX DIAGRAM

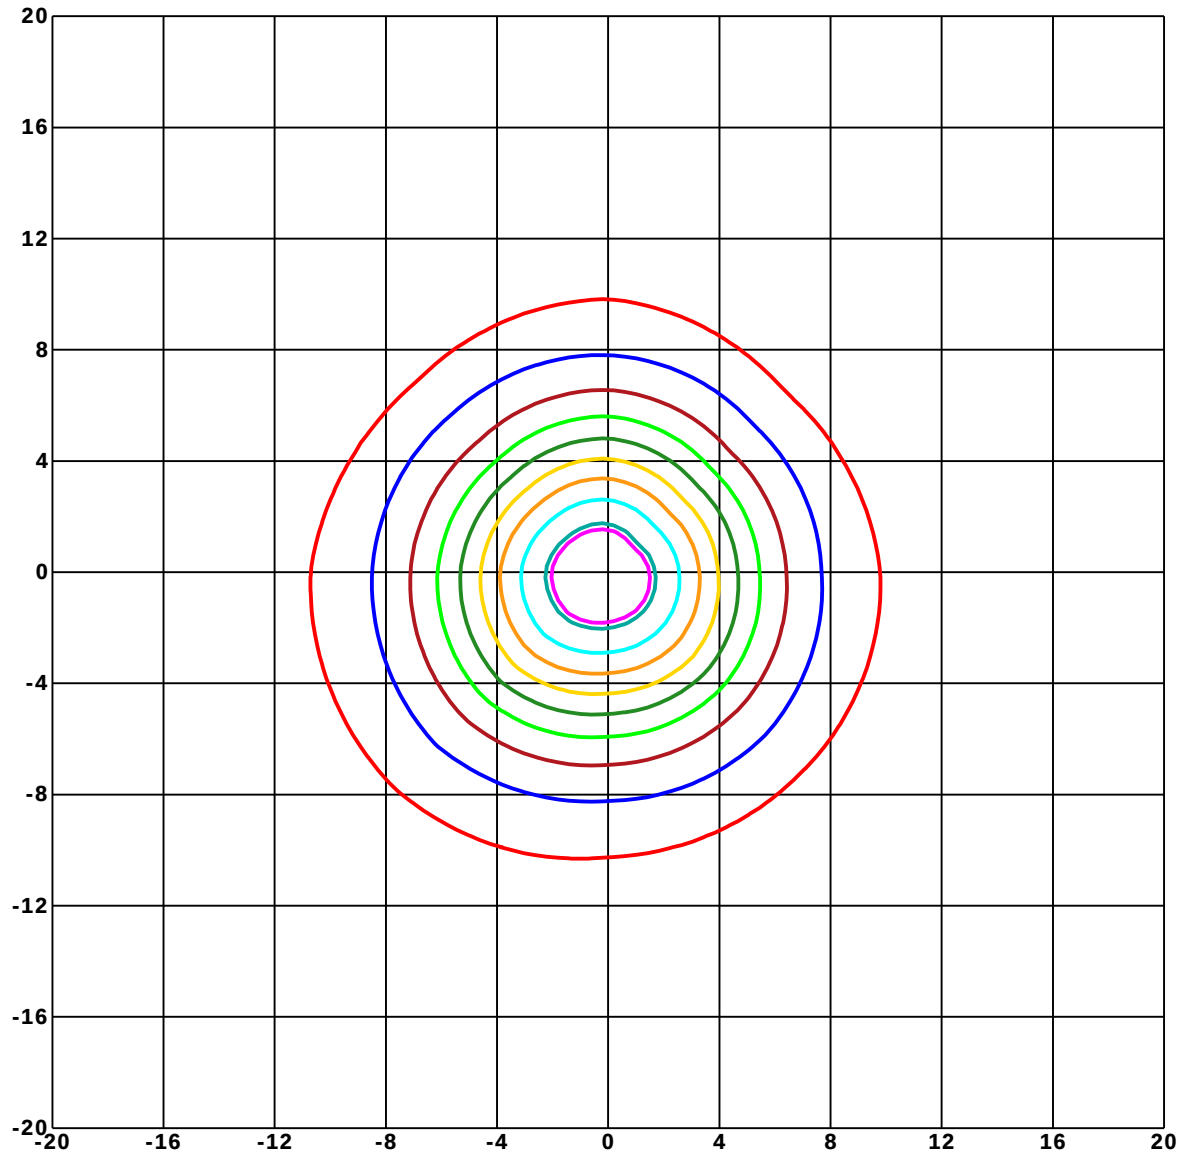

Unit of illumination:lx Height of plane:10.0(m)/32.81(ft)

12.284(92%E _{max})	6.676(50%E _{max})
12.017(90%E _{max})	5.341(40%E _{max})
10.682(80%E _{max})	4.006(30%E _{max})
9.347(70%E _{max})	2.671(20%E _{max})
8.012(60%E _{max})	1.335(10%E _{max})

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

UTILIZATION FACTOR DIAGRAM (ROAD)

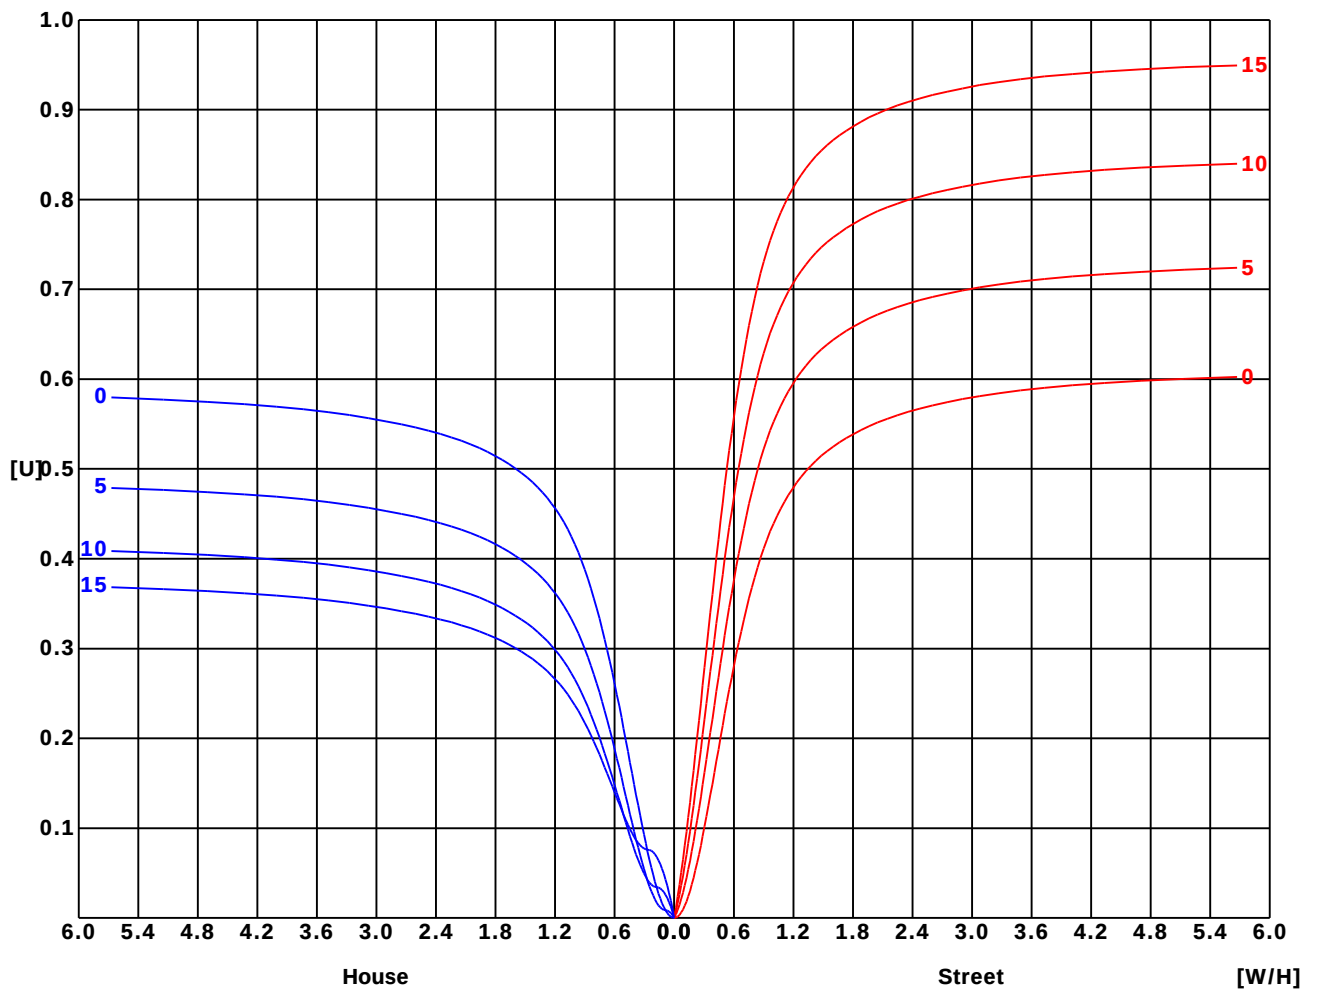

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:59:22


G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	6285	5577	4764	4098	3970	3640	3205	2242	0
C90	7674	6548	5981	4978	5064	5054	3997	4008	1449
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

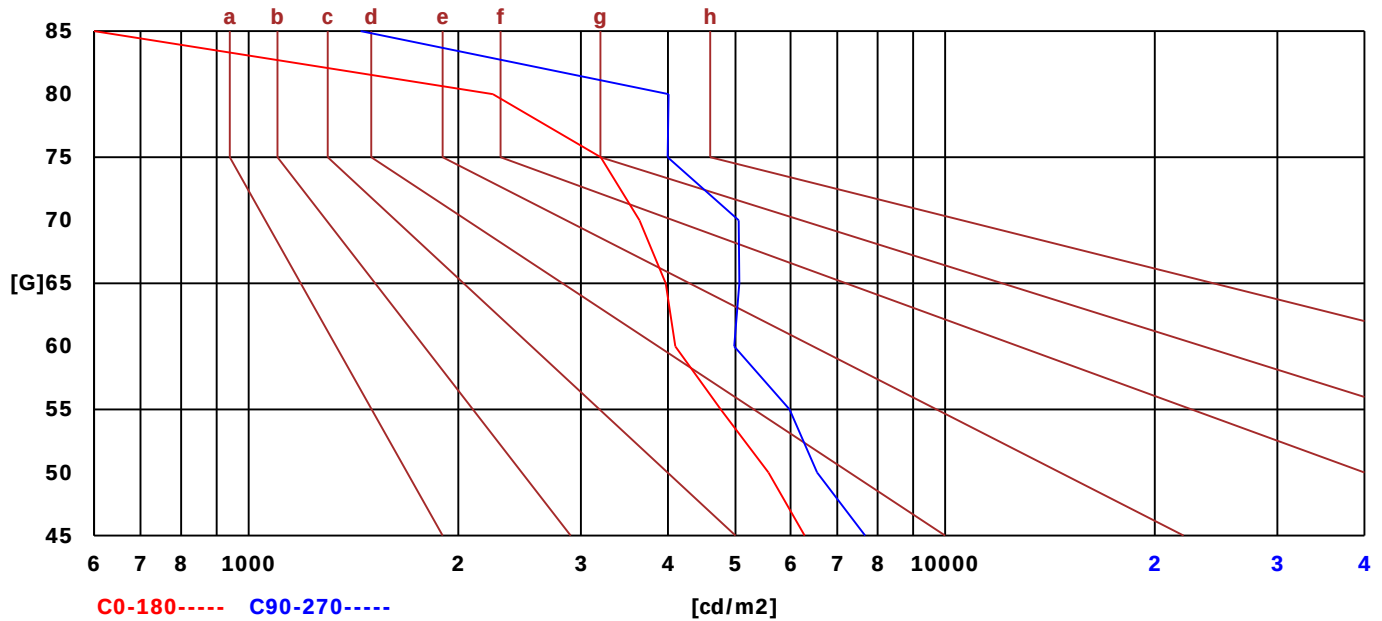

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

LX-DISTANCE DIAGRAM

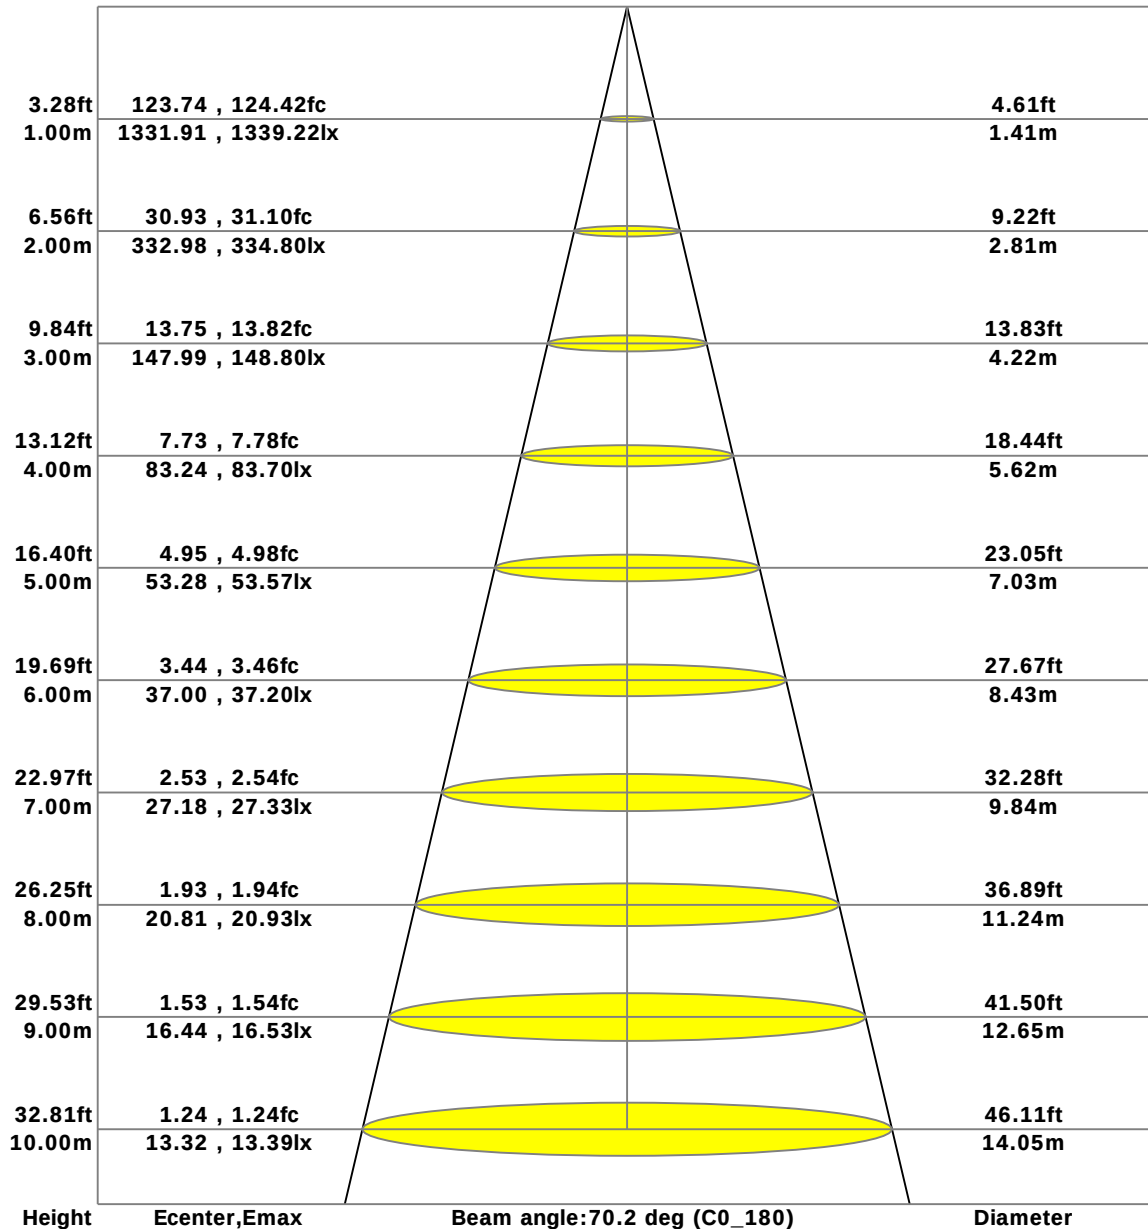

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

BUG Class

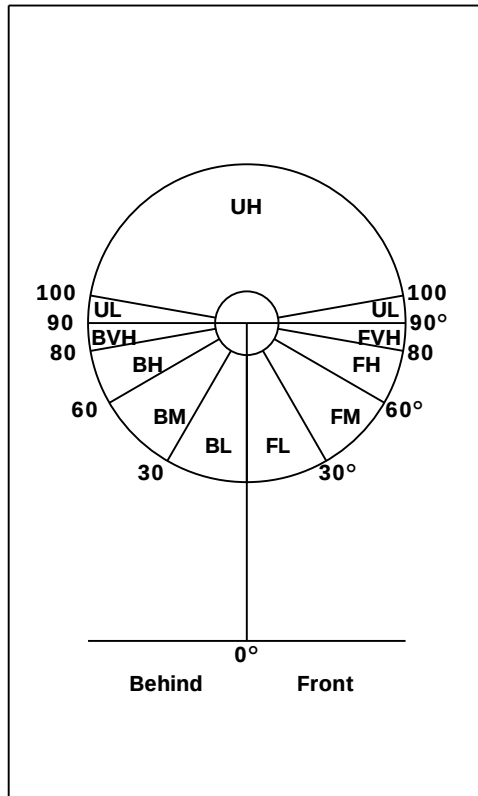

Zonal	Light Flux(lm)	Light Flux(%)
Front	971.4	46.7
FL (0°-30°)	435.4	20.9
FM (30°-60°)	418.5	20.1
FH (60°-80°)	107.2	5.1
FVH (80°-90°)	10.3	0.5

Behind	1110.7	53.3
BL (0°-30°)	464.2	22.3
BM (30°-60°)	493.8	23.7
BH (60°-80°)	130.7	6.3
BVH (80°-90°)	22.1	1.1

Above	0.0	0.0
UL (90°-100°)	0.0	0.0
UH (100°-180°)	0.0	0.0

Limit Light	NA	NA
-------------	----	----

BUG Class(TM-15-07)	
Asymmetric Lighting Fixtures (Type I , II , III , IV)	B1 U0 G1
Symmetrical Lighting Fixtures (Type V , Area Light)	B1 U0 G1


C Range: 0 - 360 Deg
 C Interval: 45.0 Deg
 Test Speed: High
 Temperature:
 Operators:
 Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg
 G Interval: 1.0 Deg
 Test System: Huipu CPM-2000B Goniophotometer
 Humidity:
 Test Distance: 6.25 m
 Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

LCS 图

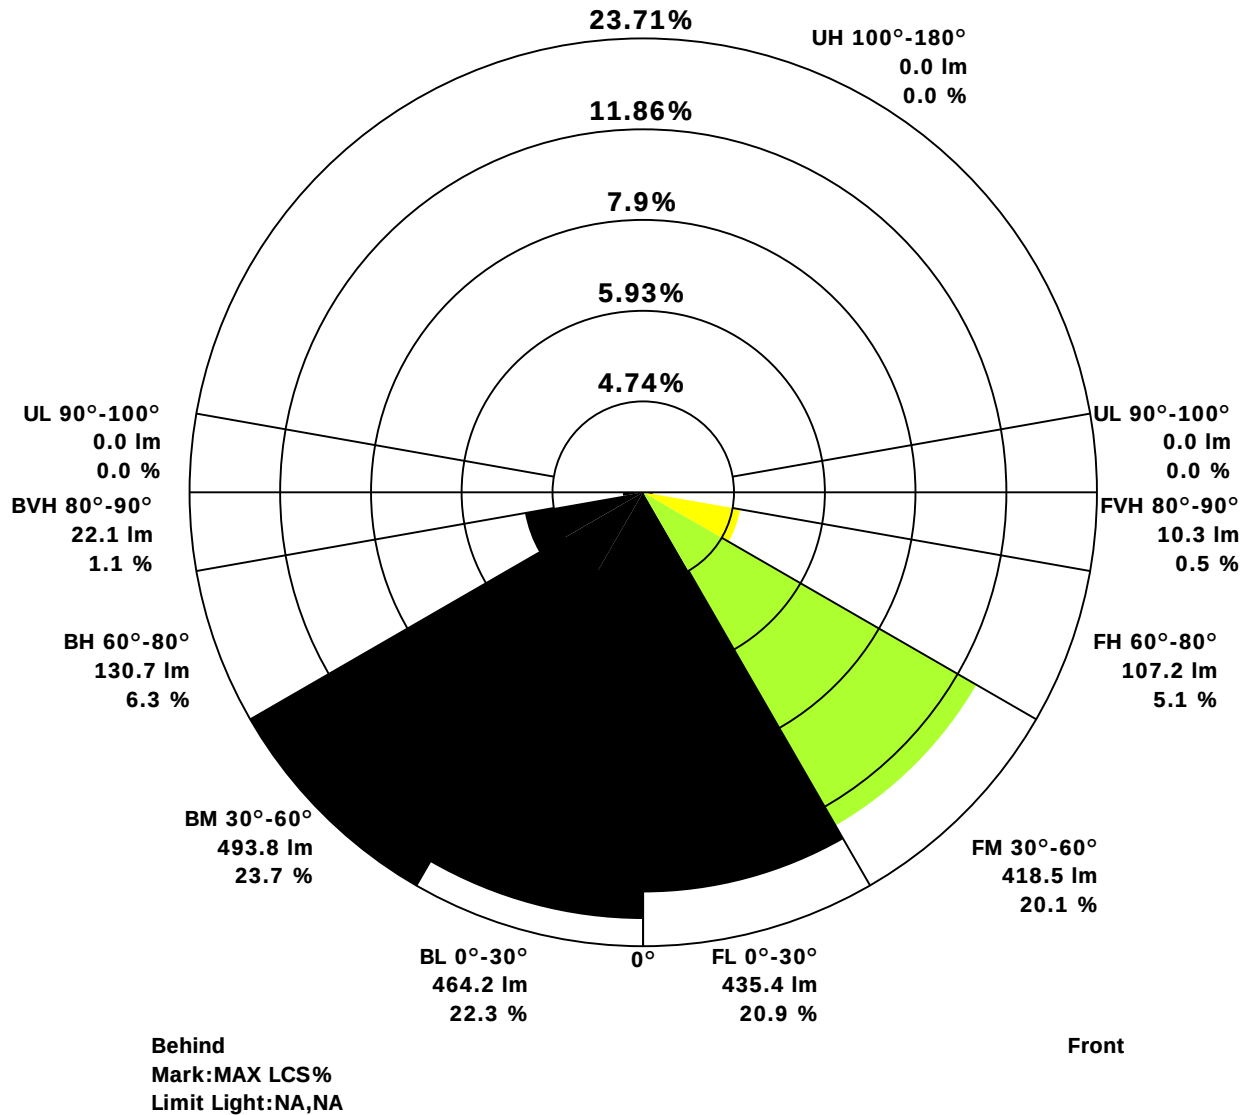

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

UGR(Unified Glare Rating) TABLE

RHOCC	70	70	50	50	30	70	70	50	50	30
RHOW	50	30	50	30	30	50	30	50	30	30
RHOF	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewed Endwise					Viewed Crosswise				
2H 2H	17.14	17.67	17.10	17.88	18.16	17.26	17.79	17.22	18.00	18.28
3H	16.93	17.42	16.95	17.66	17.98	17.03	17.53	17.05	17.77	18.08
4H	16.79	17.26	16.84	17.52	17.86	16.88	17.36	16.93	17.61	17.95
6H	16.62	17.07	16.70	17.34	17.70	16.71	17.15	16.79	17.43	17.79
8H	16.52	16.95	16.62	17.23	17.61	16.61	17.04	16.71	17.32	17.70
12H	16.42	16.84	16.54	17.13	17.52	16.51	16.93	16.62	17.22	17.61
4H 2H	19.13	19.60	19.17	19.86	20.19	19.53	20.01	19.58	20.26	20.60
3H	18.98	19.40	19.10	19.69	20.08	19.37	19.79	19.48	20.08	20.47
4H	18.85	19.24	19.01	19.55	19.97	19.22	19.61	19.38	19.92	20.34
6H	18.68	19.03	18.89	19.36	19.82	19.05	19.40	19.25	19.73	20.18
8H	18.59	18.91	18.81	19.26	19.73	18.94	19.27	19.17	19.61	20.09
12H	18.48	18.78	18.73	19.14	19.63	18.84	19.14	19.09	19.49	19.99
8H 4H	19.71	20.15	19.81	20.43	20.80	20.31	20.75	20.41	21.03	21.41
6H	19.37	19.65	19.64	20.01	20.53	19.94	20.22	20.21	20.58	21.10
8H	19.27	19.52	19.57	19.89	20.43	19.84	20.09	20.14	20.46	21.00
12H	19.16	19.38	19.49	19.77	20.33	19.73	19.95	20.06	20.34	20.89
12H 4H	19.50	19.81	19.75	20.16	20.65	20.12	20.43	20.37	20.78	21.27
6H	19.34	19.59	19.64	19.96	20.50	19.95	20.20	20.25	20.58	21.11

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

ZONAL LUMINOUS FLUX TABLE-1

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

ZONAL LUMINOUS FLUX TABLE-2

Y	C0	C45	C90	C135	C180	C225	C270	C315	Y	φ zonal	φ total	%lum	%lamp
10	1241.0	1207.3	1247.0	1271.2	1313.2	1312.9	1281.0	1267.0	10	123.7	123.7	5.9	5.9
20	1034.1	986.0	1060.0	1086.2	1174.5	1197.7	1116.7	1100.2	20	334.7	458.3	22.0	22.0
30	740.8	692.4	775.5	793.4	905.0	956.2	848.7	829.6	30	441.2	899.6	43.2	43.2
40	455.6	410.4	472.7	524.6	608.5	659.3	557.9	546.1	40	419.1	1318.7	63.3	63.3
50	255.6	215.1	255.6	252.5	353.0	349.1	297.5	264.0	50	300.4	1619.1	77.8	77.8
60	157.3	122.9	165.9	149.3	188.6	199.6	190.0	166.4	60	192.8	1811.9	87.0	87.0
70	109.8	74.7	128.0	103.7	137.2	128.3	142.7	114.3	70	137.7	1949.6	93.6	93.6
80	57.9	23.4	68.8	41.8	97.8	73.6	109.6	57.0	80	100.1	2049.7	98.4	98.4
90	1.3	0.0	0.0	0.0	1.4	17.7	5.4	5.7	90	32.4	2082.1	100.0	100.0

Conical surface Flux(90deg) : 1487.0 lm

%lum = 71.4%

%lamp = 71.4%

Conical surface Flux(120deg) : 1811.9 lm


%lum = 87.0%

%lamp = 87.0%

Report No.:

Test Time: 2024/11/8 10:59:22

SPACE ISOLX DIAGRAM

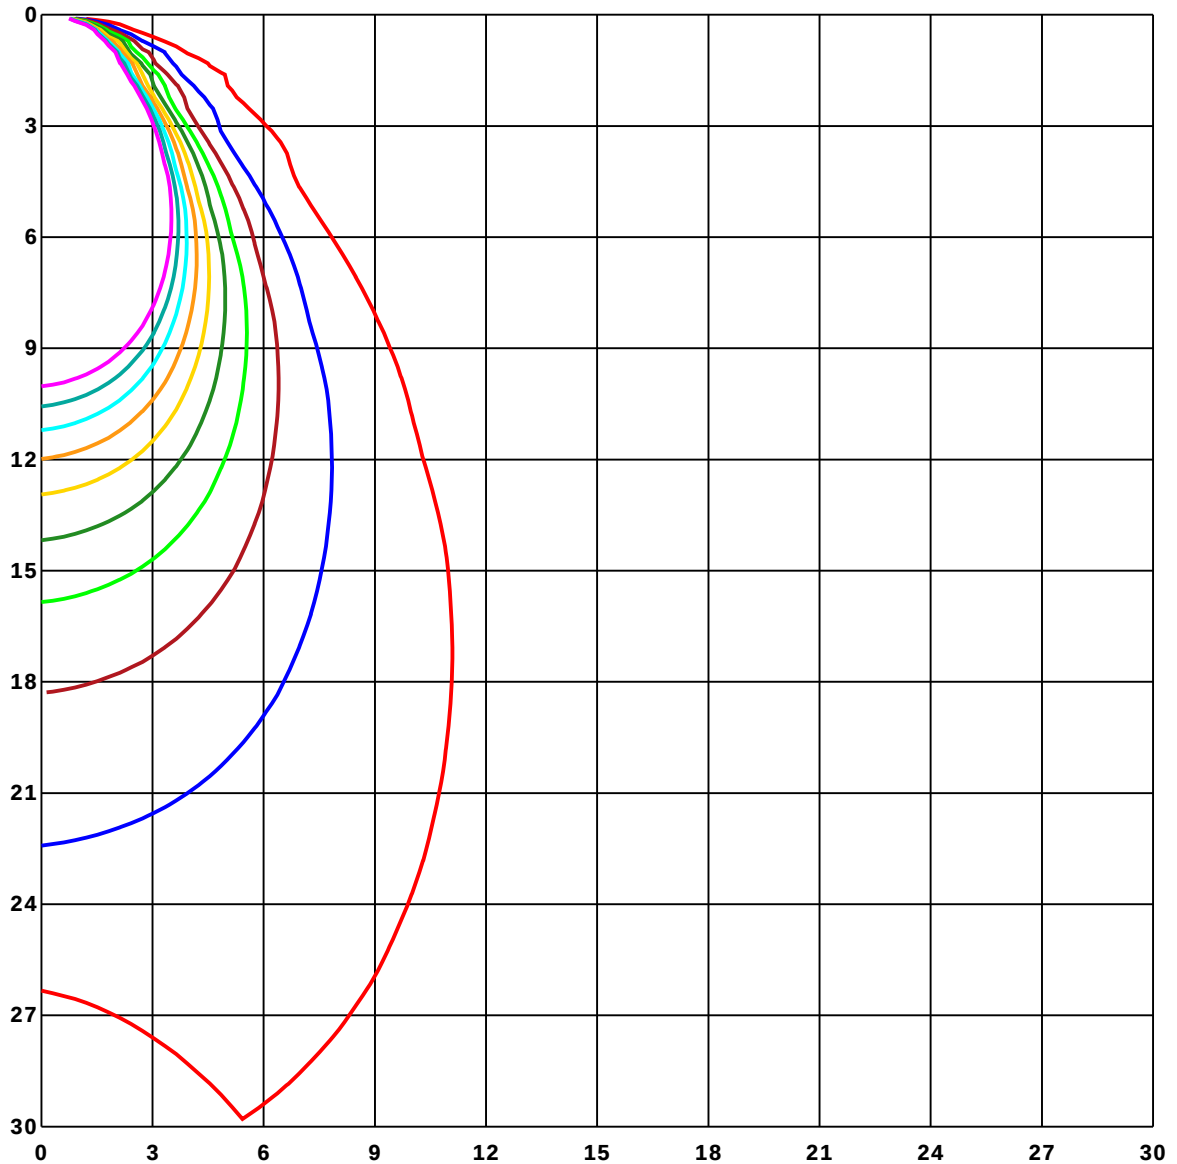

Unit of illumination:lx

13.256
11.931
10.605
9.279
7.954

6.628
5.303
3.977
2.651
1.326

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

LUMINOUS DISTRIBUTION INTENSITY DATA

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	1331.91	1315.59	1322.03	1325.74	1331.91	1315.59	1322.03	1325.74	1331.91	
G1	1326.41	1309.45	1319.53	1326.48	1335.27	1320.08	1322.7	1325.35	1326.41	
G2	1320.9	1302.19	1316.29	1325.16	1337.7	1322.54	1322.27	1323.13	1320.9	
G3	1313.91	1293.98	1312.31	1323.32	1339.22	1325.66	1320.82	1319.81	1313.91	
G4	1306.45	1285.43	1305.63	1320.08	1339.06	1326.25	1318.24	1316.09	1306.45	
G5	1297.58	1276.48	1298.56	1315.82	1337.54	1326.95	1315.66	1310.04	1297.58	
G6	1287.77	1265.27	1291.68	1307.81	1336.29	1326.13	1311.17	1303.95	1287.77	
G7	1278.2	1251.76	1282.34	1301.37	1332.46	1323.48	1306.56	1296.48	1278.2	
G8	1266.33	1237.81	1271.84	1291.72	1326.72	1322.5	1299.88	1287.54	1266.33	
G9	1255.08	1224.02	1259.61	1282.58	1321.37	1318.63	1290.43	1277.93	1255.08	
G10	1241.02	1207.31	1247.03	1271.21	1313.24	1312.89	1280.98	1267.03	1241.02	
G11	1226.17	1190.59	1232.54	1258.95	1304.45	1304.88	1272.07	1254.34	1226.17	
G12	1210.16	1172.54	1217.19	1244.06	1295.2	1296.76	1260.94	1240.98	1210.16	
G13	1192.54	1151.64	1199.18	1227.66	1284.38	1287.97	1247.5	1227.42	1192.54	
G14	1173.05	1130.31	1182.42	1210.55	1272.62	1278.63	1232.54	1210.98	1173.05	
G15	1152.97	1108.67	1164.02	1191.8	1258.95	1267.73	1216.41	1194.22	1152.97	
G16	1132.19	1085.94	1144.65	1173.36	1245.23	1255.47	1198.44	1175.66	1132.19	
G17	1109.49	1062.38	1124.3	1152.58	1229.41	1242.58	1179.57	1157.07	1109.49	
G18	1085.0	1039.61	1103.63	1130.98	1213.4	1229.1	1159.34	1138.28	1085.0	
G19	1062.31	1014.02	1082.19	1108.4	1194.34	1214.38	1137.27	1118.79	1062.31	
G20	1034.14	986.02	1059.96	1086.17	1174.49	1197.7	1116.68	1100.23	1034.14	
G21	1004.96	958.48	1033.71	1059.18	1152.77	1179.77	1094.02	1082.81	1004.96	
G22	976.91	929.96	1008.67	1033.01	1129.34	1160.31	1070.39	1059.41	976.91	
G23	949.06	901.64	980.47	1005.0	1103.59	1138.71	1046.02	1034.69	949.06	
G24	920.59	872.81	954.45	975.2	1080.08	1115.2	1020.35	1006.41	920.59	
G25	890.82	842.27	924.8	945.74	1053.01	1091.06	995.74	978.24	890.82	
G26	859.38	812.11	896.05	915.27	1024.61	1066.72	965.51	948.67	859.38	
G27	829.69	783.28	866.17	884.22	994.1	1042.23	936.29	918.87	829.69	
G28	800.94	752.5	837.7	854.77	964.02	1014.41	907.42	890.0	800.94	
G29	769.65	722.7	806.99	823.32	934.06	985.12	878.75	859.8	769.65	
G30	740.78	692.38	775.51	793.44	905.0	956.21	848.67	829.61	740.78	
G31	712.11	663.95	746.52	763.13	874.65	926.09	820.55	799.61	712.11	
G32	683.67	635.08	715.78	732.66	842.93	897.77	791.37	769.37	683.67	
G33	655.08	607.73	685.47	703.59	811.76	866.48	761.02	738.87	655.08	
G34	626.72	580.23	657.97	675.2	781.02	836.48	734.26	710.47	626.72	
G35	599.14	555.16	629.18	647.66	748.91	807.11	706.52	679.14	599.14	
G36	572.19	530.2	601.29	621.91	719.34	776.88	679.92	651.02	572.19	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	545.94	505.12	571.76	596.68	689.41	748.87	651.52	623.91	545.94	
G38	516.88	477.42	541.05	572.19	661.33	718.13	621.8	596.91	516.88	
G39	485.94	446.68	508.67	549.34	633.44	688.98	591.41	571.05	485.94	
G40	455.63	410.43	472.66	524.57	608.52	659.3	557.89	546.13	455.63	
G41	427.93	372.73	441.91	497.38	580.47	632.81	521.72	521.56	427.93	
G42	406.41	336.56	418.24	464.38	551.6	604.26	486.09	494.65	406.41	
G43	387.23	305.35	399.49	419.61	519.8	577.93	456.91	461.95	387.23	
G44	369.61	283.2	376.33	367.85	488.63	551.95	433.01	420.2	369.61	
G45	351.09	266.64	353.13	325.59	459.65	520.39	407.7	376.41	351.09	
G46	331.48	253.01	331.21	298.79	436.64	487.46	383.09	341.13	331.48	
G47	311.29	241.99	309.77	279.45	416.21	452.62	359.3	313.2	311.29	
G48	292.07	233.59	290.04	267.07	396.91	415.27	336.68	292.5	292.07	
G49	274.02	224.14	272.15	258.59	374.77	381.13	316.64	276.6	274.02	
G50	255.63	215.08	255.63	252.54	352.97	349.1	297.54	263.98	255.63	
G51	238.63	205.0	240.74	245.12	332.89	322.38	281.64	254.22	238.63	
G52	221.05	194.3	227.89	236.76	313.13	300.86	266.41	247.5	221.05	
G53	205.0	183.91	215.63	227.42	295.31	283.32	251.6	241.91	205.0	
G54	190.82	173.24	203.4	217.15	277.93	267.85	235.98	235.08	190.82	
G55	178.48	163.95	190.51	205.82	260.04	253.98	221.33	226.21	178.48	
G56	168.67	154.14	179.14	192.85	242.85	240.59	209.8	215.27	168.67	
G57	162.3	145.04	171.72	179.96	226.37	229.02	202.3	203.55	162.3	
G58	158.75	136.33	168.16	167.93	211.21	217.58	196.41	190.9	158.75	
G59	157.89	129.02	166.72	157.5	198.59	208.24	192.85	178.67	157.89	
G60	157.3	122.93	165.94	149.34	188.63	199.57	189.96	166.41	157.3	
G61	155.27	117.85	164.02	142.38	181.48	191.09	187.11	155.51	155.27	
G62	150.98	113.44	159.18	137.54	176.52	182.62	182.77	145.82	150.98	
G63	144.06	108.98	152.46	134.1	173.01	173.05	176.29	137.73	144.06	
G64	135.94	104.77	144.34	132.5	169.69	163.52	169.3	131.95	135.94	
G65	127.27	100.66	135.12	128.4	165.16	154.34	163.16	128.83	127.27	
G66	118.63	96.72	126.88	121.56	159.45	146.6	156.72	127.7	118.63	
G67	111.21	92.7	121.25	115.47	152.93	140.94	149.73	126.05	111.21	
G68	106.56	87.93	118.75	111.52	147.19	136.25	143.95	122.66	106.56	
G69	106.21	81.8	121.25	107.66	142.11	132.62	141.09	118.44	106.21	
G70	109.8	74.69	128.01	103.71	137.23	128.28	142.66	114.34	109.8	
G71	115.27	68.09	134.45	99.22	132.54	123.67	147.58	110.0	115.27	
G72	117.42	62.34	134.41	93.36	128.32	118.71	152.7	105.27	117.42	
G73	111.64	56.95	126.17	83.67	127.07	113.05	153.59	97.97	111.64	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:59:22

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:59:22

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks: