

Report No.:

Test Time: 2024/11/8 10:46:12

LUMINAIRE PHOTOMETRIC TEST REPORT

Luminaire Property

Manufacturer: 0
Luminaire Type: 筒灯6寸
Lamp Type:
Luminous Width: 0 mm
Luminous Length: 0 mm
Luminous Height: 0 mm


Voltage(V): 219.50 V
Current(A): 0.1650 A
Power(W): 21.76 W
Power Factor: 0.5990
Lamp Luminous Flux: 2800.99

Photometric Results


CIE Class: Direct
Luminaire Luminous Flux: 2800.994 lm
Downward Ratio: 100.00%
Luminaire Efficacy Rating(LER): 128.72 lm/W
Beam Angle(50%) C0-180,C90-270: 72.4,71.6
Field Angle(10%) C0-180,C90-270: 136.5,135.3
S/MH C0-180,C90-270: 1.019,0.975

Max. Intensity: 1719.38 cd
Max.Intensity Angle: C=180 Gamma=4
Upward Ratio: 0.00%
Efficacy: 100.00%
Center Intensity: 1707.89 cd
Effective Luminous Flux: 2567.96 lm
ERP(ϕ use)(120deg): 2407.05 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

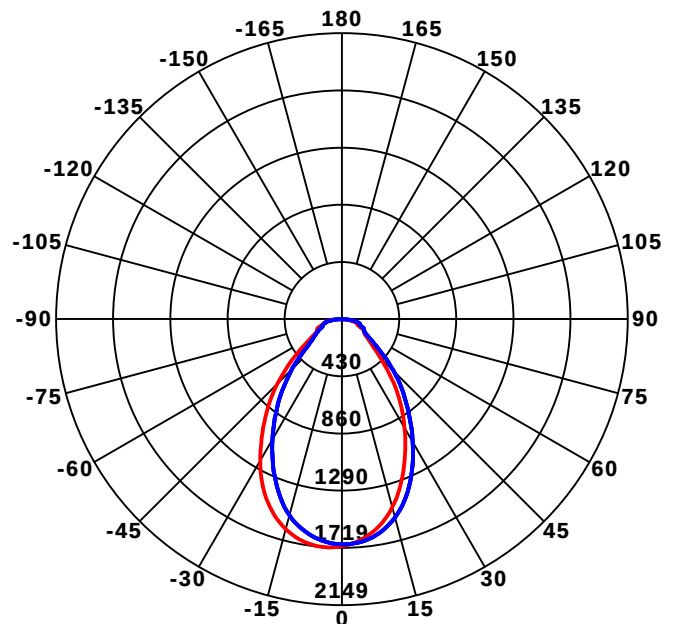

Beam Angle(50%) C0-180,C90-270: 72.4 deg,71.6 deg

C0-180 — C90-270 —



C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

Luminous Intensity Distribution Curve

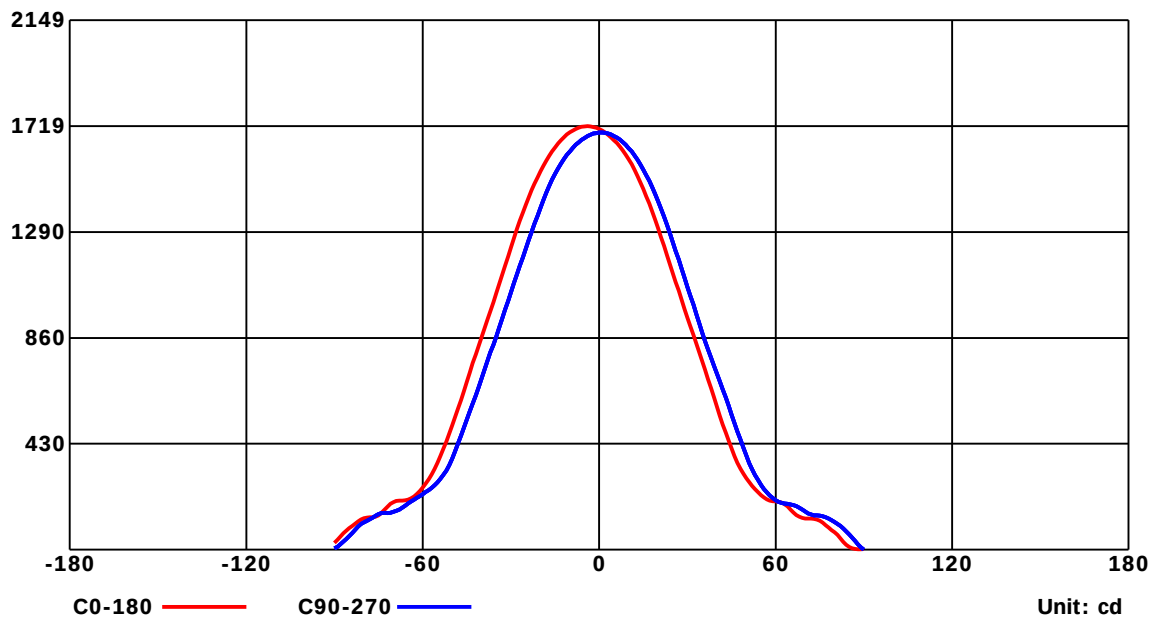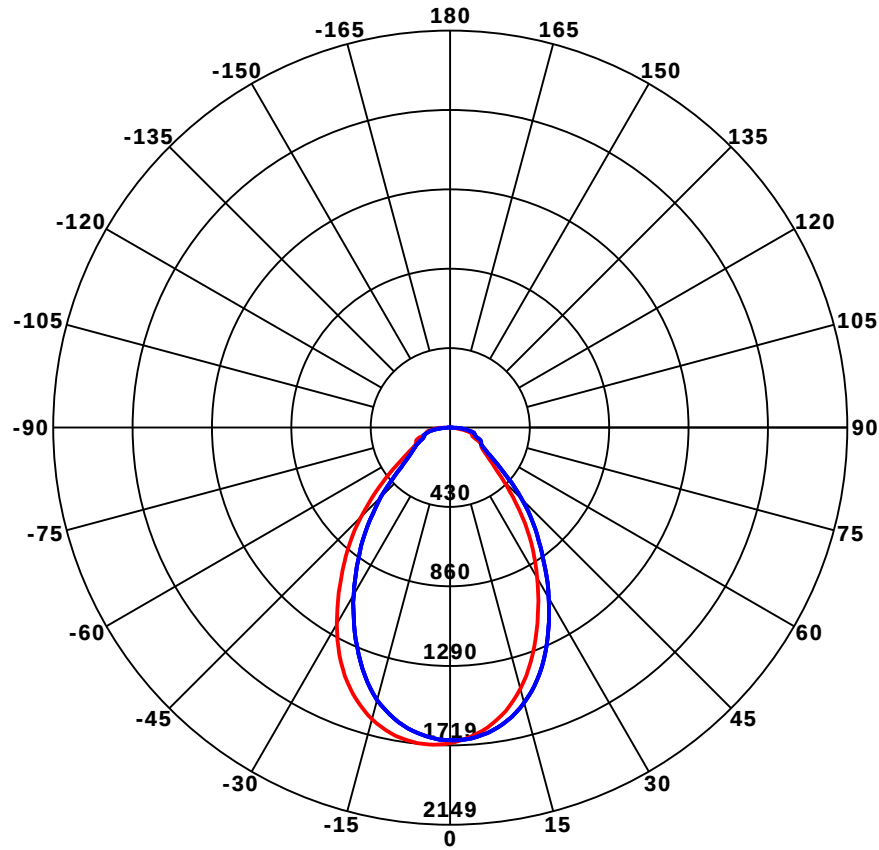

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

Luminous Intensity Distribution Curve

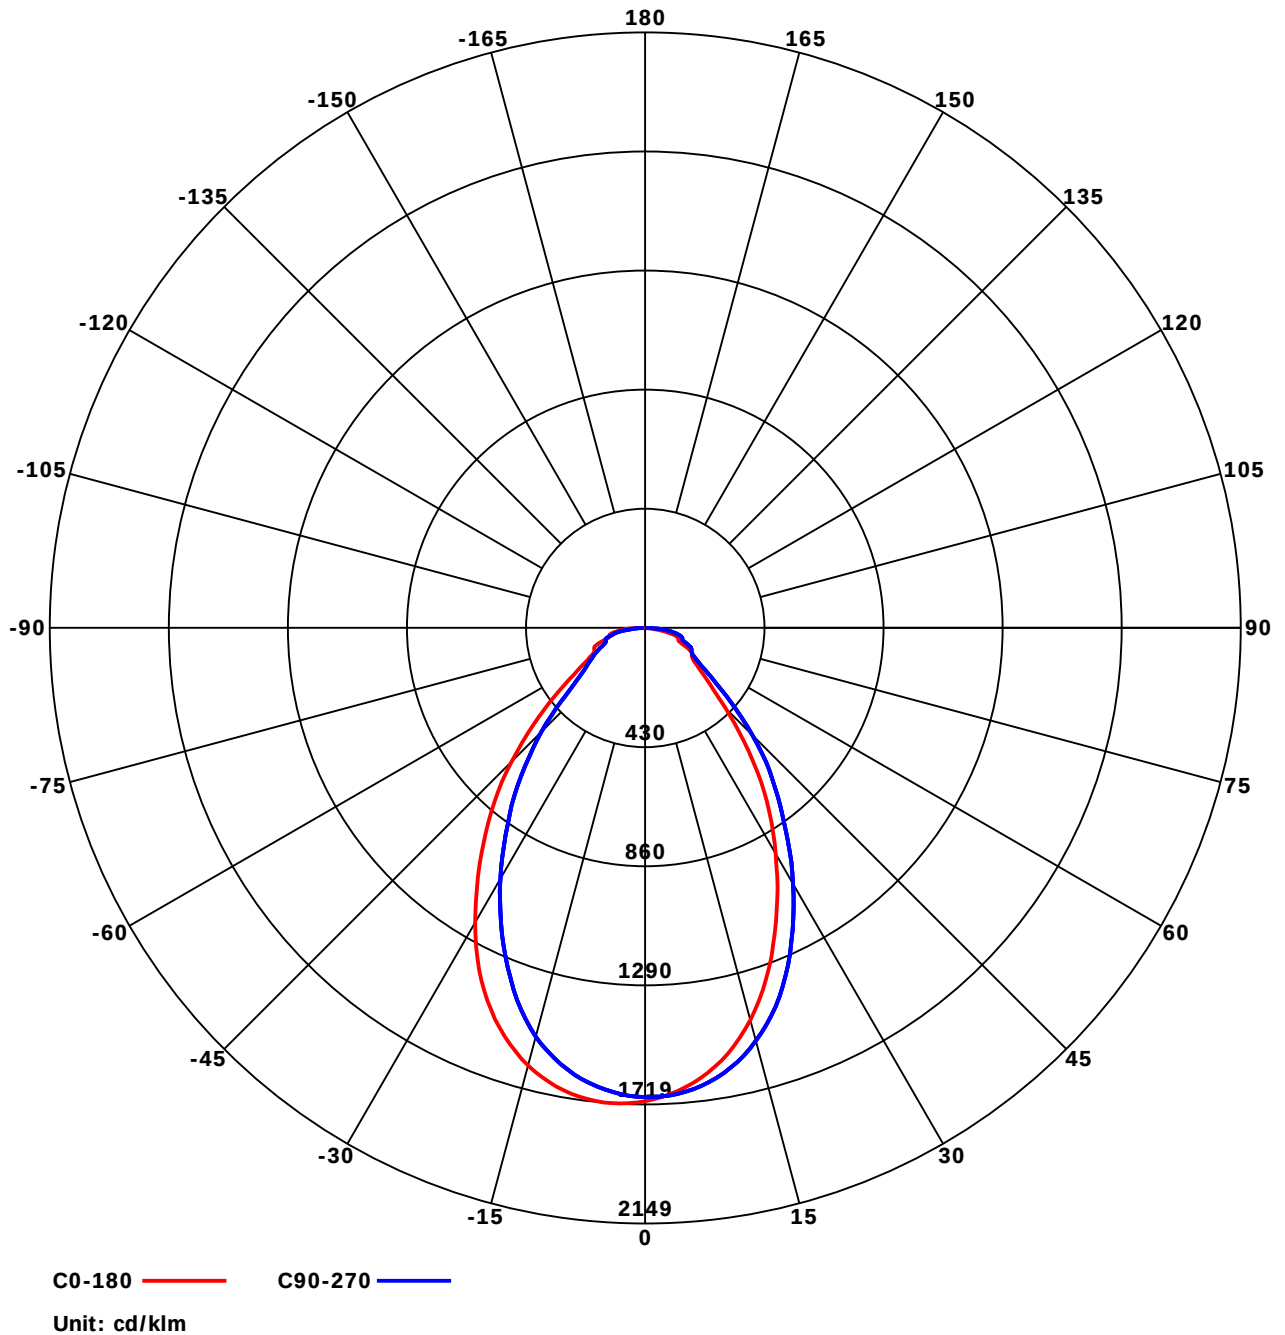

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:


Report No.:

Test Time: 2024/11/8 10:46:12

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.16	1.16	1.16	1.14	1.14	1.14	1.09	1.09	1.09	1.04	1.04	1.04	1.00	1.00	1.00	0.98
1	1.06	1.05	1.04	1.05	1.03	1.02	1.01	0.99	0.98	0.96	0.94	0.93	0.90	0.88	0.86	0.81
2	0.94	0.92	0.90	0.93	0.90	0.88	0.90	0.87	0.85	0.86	0.83	0.80	0.81	0.78	0.75	0.70
3	0.83	0.81	0.79	0.83	0.80	0.78	0.81	0.77	0.74	0.78	0.74	0.71	0.74	0.70	0.66	0.62
4	0.74	0.72	0.70	0.74	0.71	0.69	0.73	0.69	0.66	0.71	0.66	0.63	0.68	0.63	0.59	0.55
5	0.67	0.64	0.63	0.67	0.64	0.62	0.66	0.62	0.59	0.65	0.60	0.56	0.63	0.57	0.53	0.49
6	0.60	0.58	0.57	0.61	0.58	0.56	0.60	0.56	0.53	0.59	0.54	0.51	0.58	0.52	0.48	0.44
7	0.55	0.53	0.51	0.55	0.52	0.50	0.55	0.51	0.48	0.55	0.50	0.46	0.54	0.48	0.44	0.40
8	0.51	0.48	0.47	0.51	0.48	0.46	0.51	0.47	0.44	0.51	0.46	0.42	0.50	0.44	0.40	0.37
9	0.47	0.44	0.43	0.47	0.44	0.42	0.47	0.43	0.41	0.47	0.42	0.39	0.47	0.41	0.37	0.34
10	0.43	0.41	0.40	0.44	0.41	0.39	0.44	0.40	0.37	0.44	0.39	0.36	0.44	0.38	0.34	0.31

LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

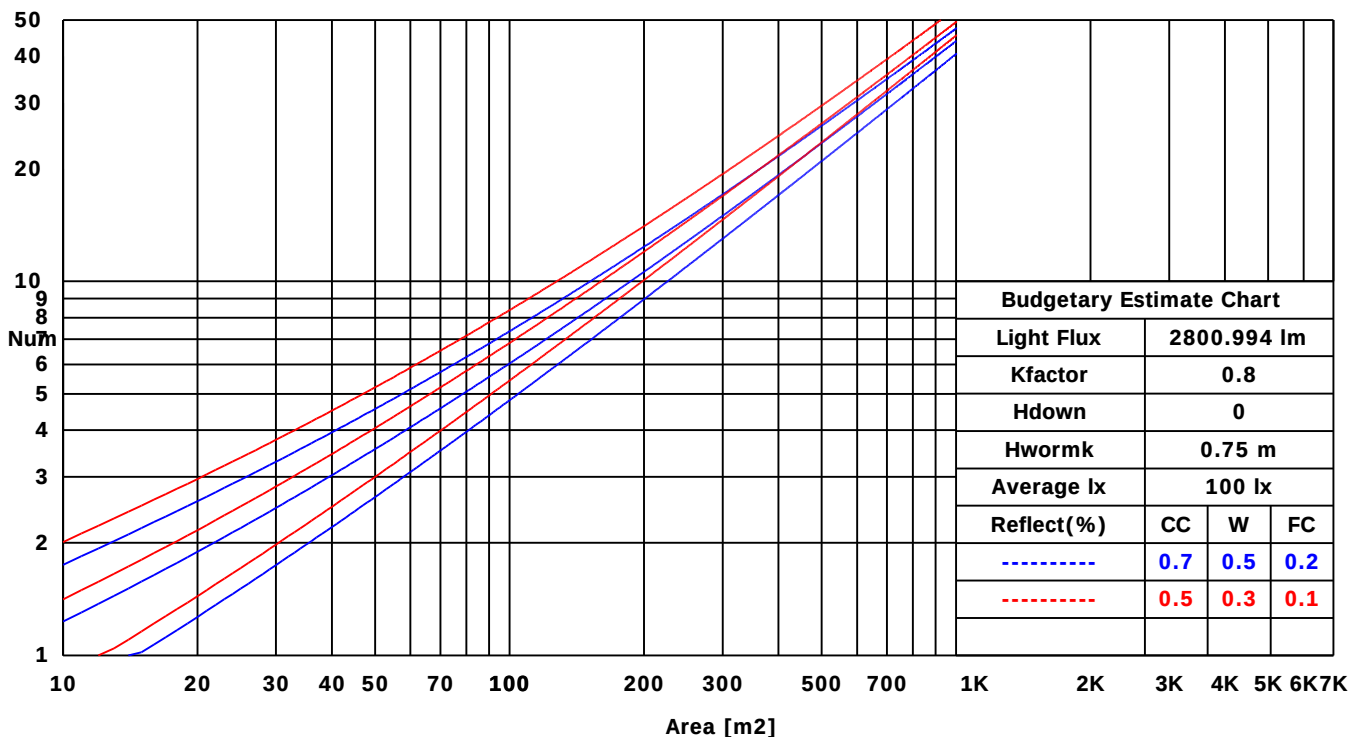

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

ISOCANDELA DIAGRAM (RECTANGULAR)

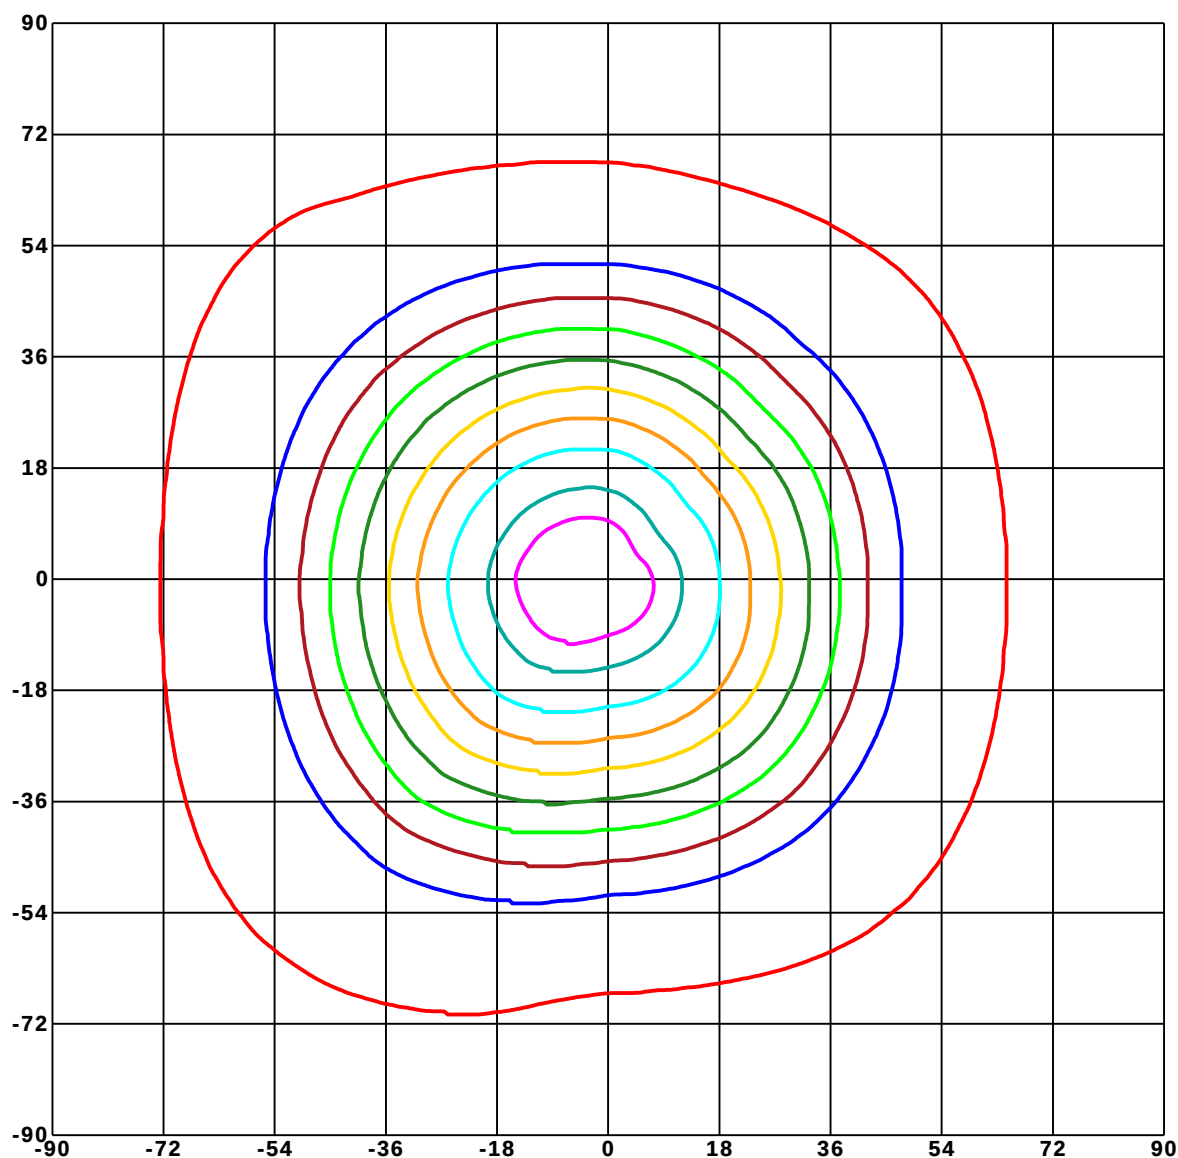

Unit of intensity:cd I_{max}(100%): 1719.375 cd

1633.406(95%I _{max})	859.688(50%I _{max})
1547.438(90%I _{max})	687.75(40%I _{max})
1375.5(80%I _{max})	515.813(30%I _{max})
1203.563(70%I _{max})	343.875(20%I _{max})
1031.625(60%I _{max})	171.938(10%I _{max})

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

ISOCANDELA DIAGRAM (SPHERE)

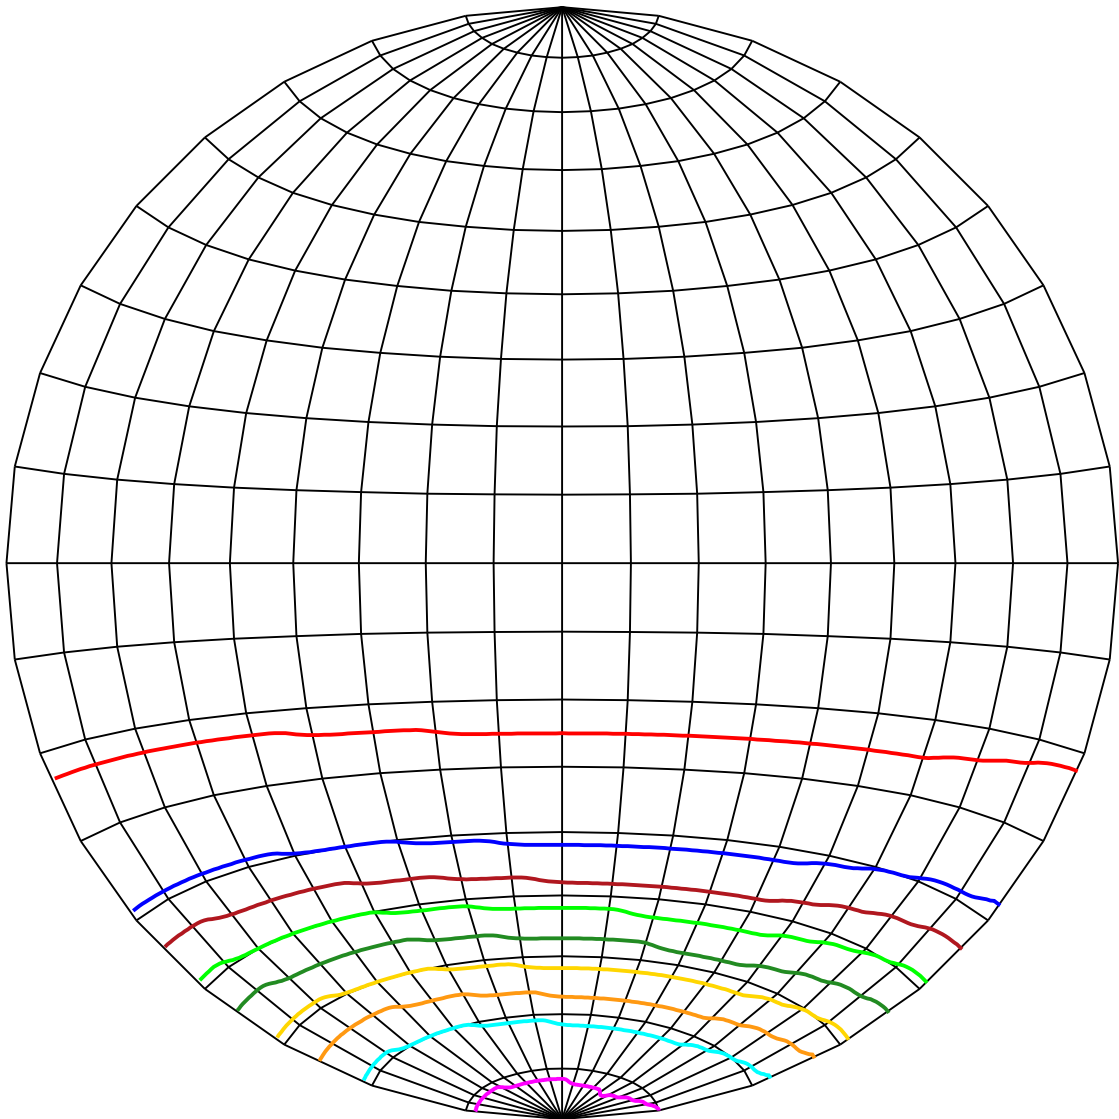

Unit of intensity:cd Imax(100%): 1719.375 cd

1633.406(95%Imax)	859.688(50%Imax)
1547.438(90%Imax)	687.75(40%Imax)
1375.5(80%Imax)	515.813(30%Imax)
1203.563(70%Imax)	343.875(20%Imax)
1031.625(60%Imax)	171.938(10%Imax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

ISOLX DIAGRAM

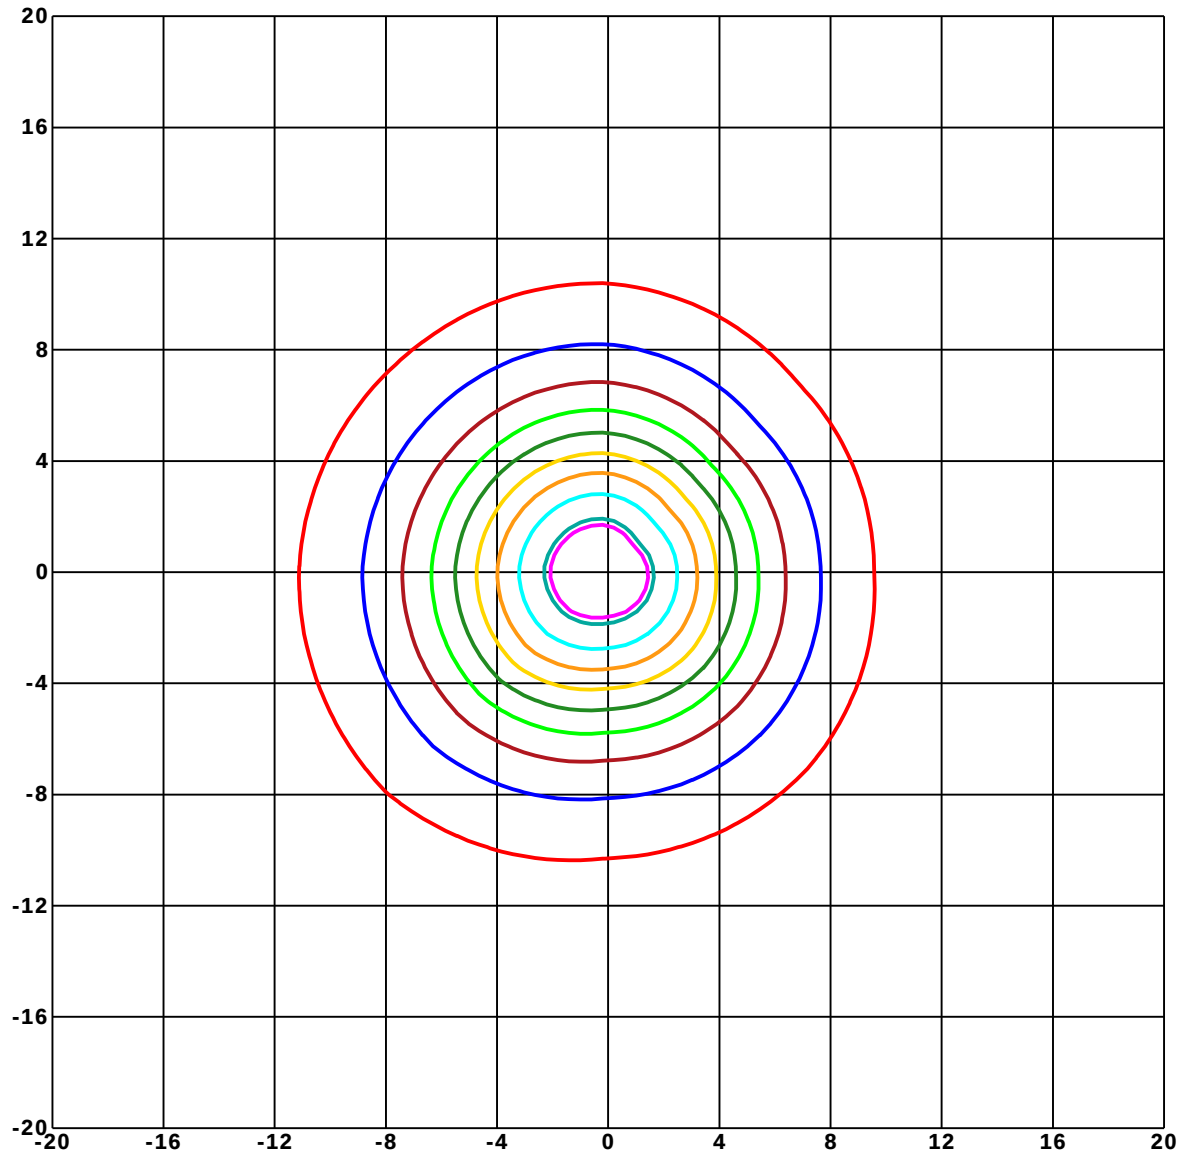

Unit of illumination:lx Height of plane:10.0(m)/32.81(ft)

15.76(92%E _{max})	8.565(50%E _{max})
15.417(90%E _{max})	6.852(40%E _{max})
13.704(80%E _{max})	5.139(30%E _{max})
11.991(70%E _{max})	3.426(20%E _{max})
10.278(60%E _{max})	1.713(10%E _{max})

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

UTILIZATION FACTOR DIAGRAM (ROAD)

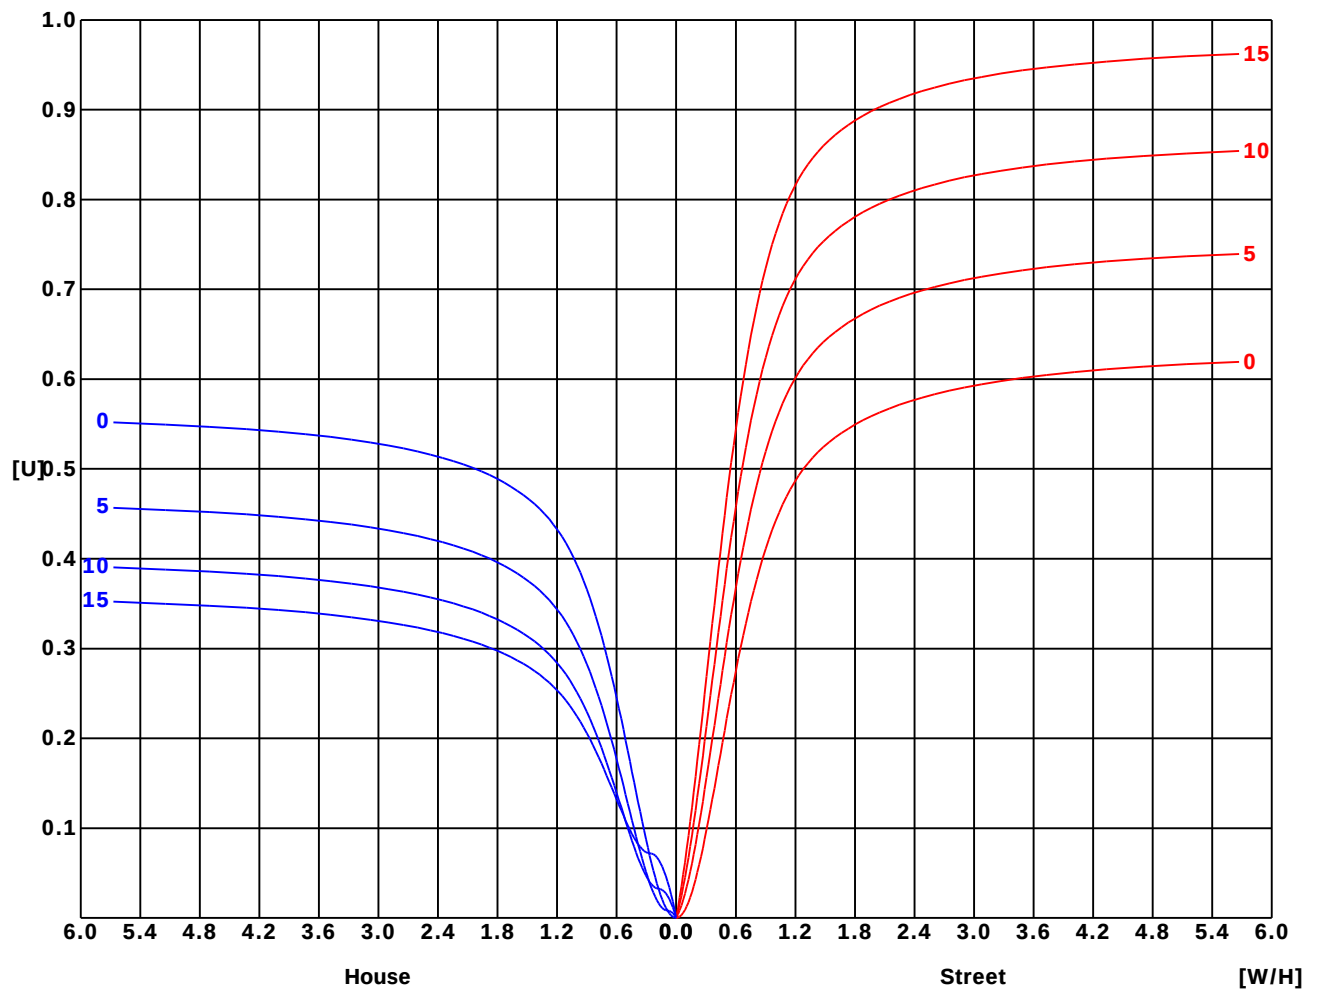

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:46:12


G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	6007	4606	4075	4047	3873	3882	4321	3743	296
C90	8446	6854	5374	4879	4750	4974	6339	7495	9358
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

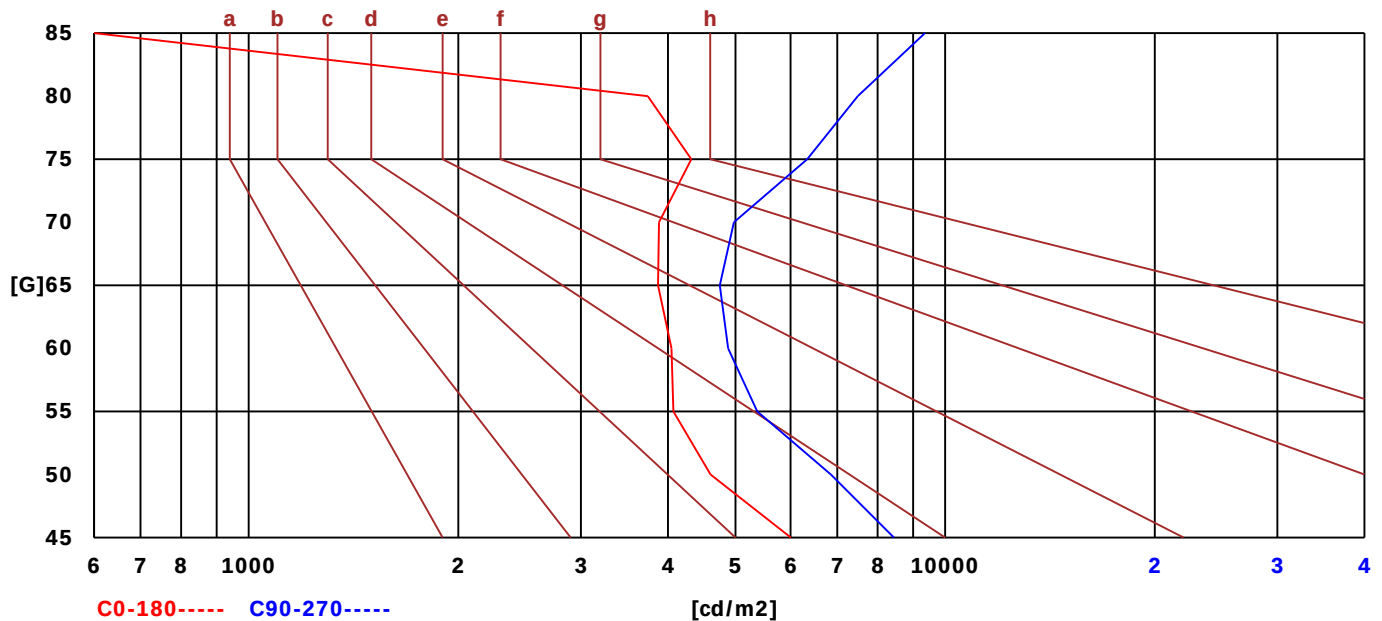

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

LX-DISTANCE DIAGRAM

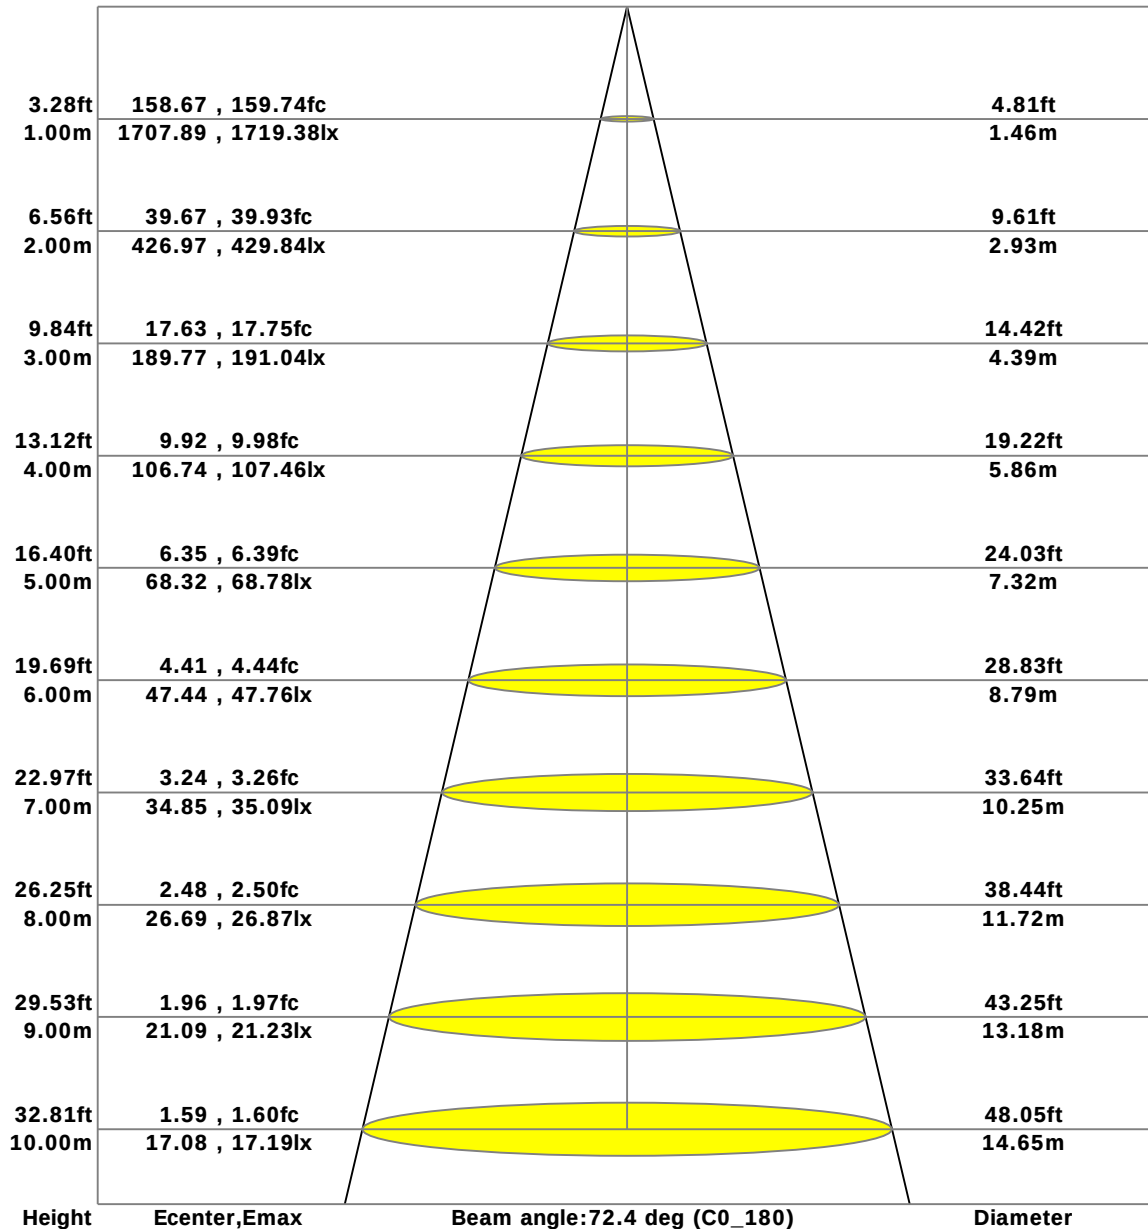

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

BUG Class

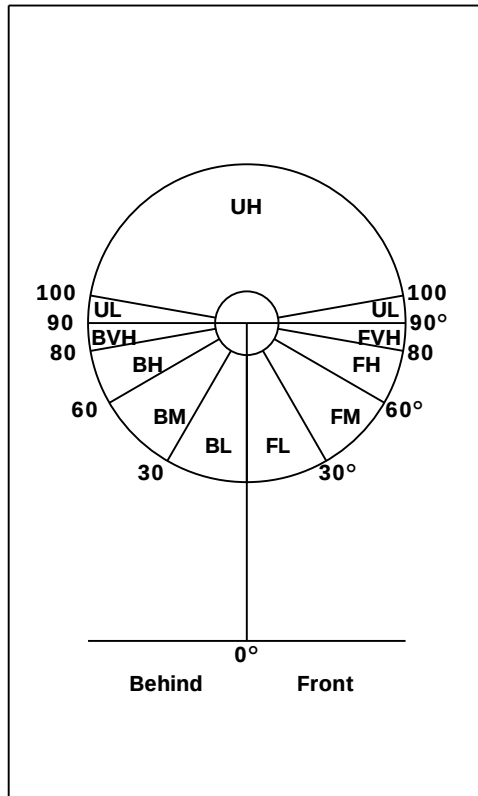

Zonal	Light Flux(lm)	Light Flux(%)
Front	1369.2	48.9
FL (0°-30°)	577.1	20.6
FM (30°-60°)	602.4	21.5
FH (60°-80°)	161.2	5.8
FVH (80°-90°)	28.5	1.0

Behind	1431.8	51.1
BL (0°-30°)	586.7	20.9
BM (30°-60°)	640.9	22.9
BH (60°-80°)	170.5	6.1
BVH (80°-90°)	33.7	1.2

Above	0.0	0.0
UL (90°-100°)	0.0	0.0
UH (100°-180°)	0.0	0.0

Limit Light	NA	NA
-------------	----	----

BUG Class(TM-15-07)	
Asymmetric Lighting Fixtures (Type I , II , III , IV)	B2 U0 G1
Symmetrical Lighting Fixtures (Type V , Area Light)	B2 U0 G1

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

LCS 图

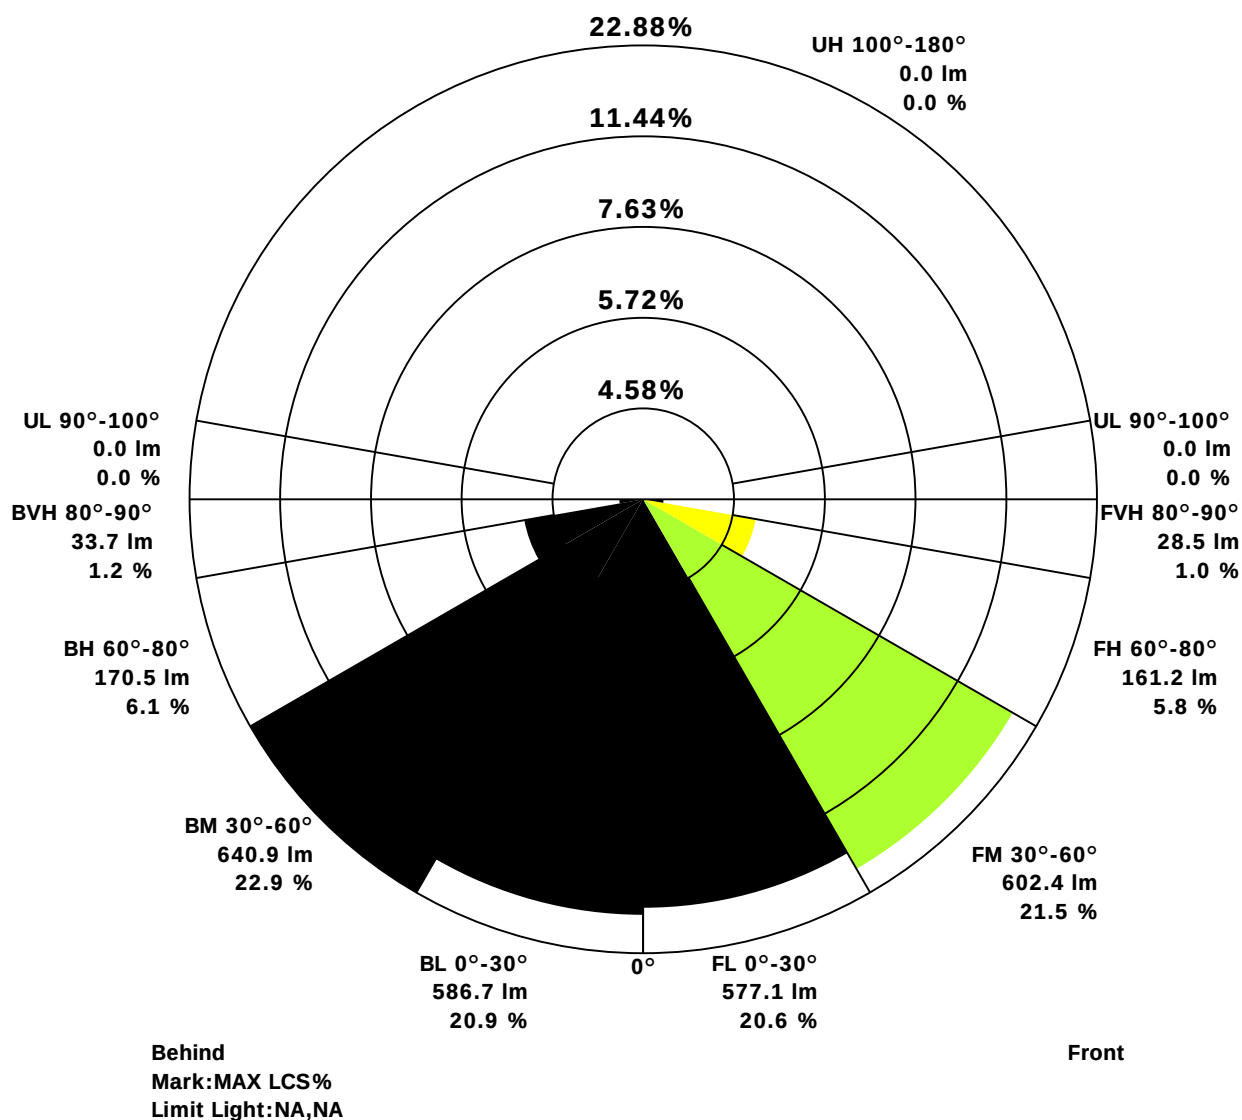

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

UGR(Unified Glare Rating) TABLE

RHOCC	70	70	50	50	30	70	70	50	50	30
RHOW	50	30	50	30	30	50	30	50	30	30
RHOF	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewed Endwise					Viewed Crosswise				
2H 2H	16.64	17.18	16.59	17.39	17.65	17.02	17.57	16.98	17.77	18.04
3H	16.46	16.97	16.47	17.20	17.51	16.81	17.32	16.82	17.55	17.86
4H	16.33	16.82	16.37	17.07	17.40	16.67	17.16	16.71	17.40	17.73
6H	16.17	16.63	16.24	16.89	17.25	16.49	16.95	16.57	17.22	17.58
8H	16.07	16.51	16.16	16.79	17.16	16.39	16.84	16.48	17.11	17.48
12H	15.97	16.40	16.08	16.68	17.07	16.29	16.72	16.40	17.01	17.39
4H 2H	18.67	19.15	18.70	19.40	19.73	19.22	19.70	19.26	19.95	20.28
3H	18.68	19.12	18.79	19.40	19.78	19.19	19.62	19.30	19.91	20.29
4H	18.62	19.02	18.77	19.32	19.74	19.10	19.50	19.25	19.80	20.22
6H	18.50	18.86	18.69	19.18	19.63	18.95	19.30	19.14	19.63	20.08
8H	18.41	18.74	18.63	19.08	19.55	18.84	19.18	19.06	19.52	19.99
12H	18.30	18.62	18.55	18.96	19.46	18.73	19.05	18.98	19.40	19.89
8H 4H	19.26	19.70	19.35	19.97	20.35	20.40	20.84	20.49	21.12	21.49
6H	19.26	19.54	19.52	19.90	20.41	20.35	20.64	20.62	21.00	21.51
8H	19.17	19.43	19.47	19.80	20.33	20.25	20.51	20.55	20.88	21.41
12H	19.07	19.30	19.40	19.68	20.24	20.14	20.36	20.46	20.75	21.31
12H 4H	19.30	19.61	19.54	19.96	20.45	20.77	21.09	21.02	21.44	21.93
6H	19.20	19.45	19.49	19.83	20.36	20.67	20.92	20.96	21.30	21.83

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

ZONAL LUMINOUS FLUX TABLE-1

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

ZONAL LUMINOUS FLUX TABLE-2

Y	C0	C45	C90	C135	C180	C225	C270	C315	Y	φ zonal	φ total	%lum	%lamp
10	1585.1	1565.1	1630.4	1664.7	1694.6	1669.3	1617.3	1601.0	10	158.8	158.8	5.7	5.7
20	1305.7	1294.2	1415.2	1478.2	1536.0	1520.6	1388.1	1365.8	20	431.1	589.8	21.1	21.1
30	941.0	921.2	1066.4	1145.7	1228.1	1226.7	1045.9	1022.4	30	573.9	1163.8	41.5	41.5
40	581.4	578.6	715.2	784.4	863.2	875.3	696.1	667.0	40	558.3	1722.1	61.5	61.5
50	290.2	296.1	381.9	440.5	504.7	524.2	369.2	340.0	50	422.9	2145.0	76.6	76.6
60	196.3	202.3	200.2	243.9	252.7	270.4	225.0	218.2	60	262.1	2407.1	85.9	85.9
70	126.8	132.8	154.5	170.1	193.1	209.3	153.1	152.0	70	187.9	2595.0	92.6	92.6
80	70.0	65.0	112.6	130.2	128.1	128.2	111.1	102.6	80	143.8	2738.7	97.8	97.8
90	2.6	0.0	0.0	27.7	27.2	47.6	5.7	3.6	90	62.3	2801.0	100.0	100.0

Conical surface Flux(90deg) : 1956.2 lm

%lum = 69.8%

%lamp = 69.8%

Conical surface Flux(120deg) : 2407.1 lm

%lum = 85.9%

%lamp = 85.9%


C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

SPACE ISOLX DIAGRAM

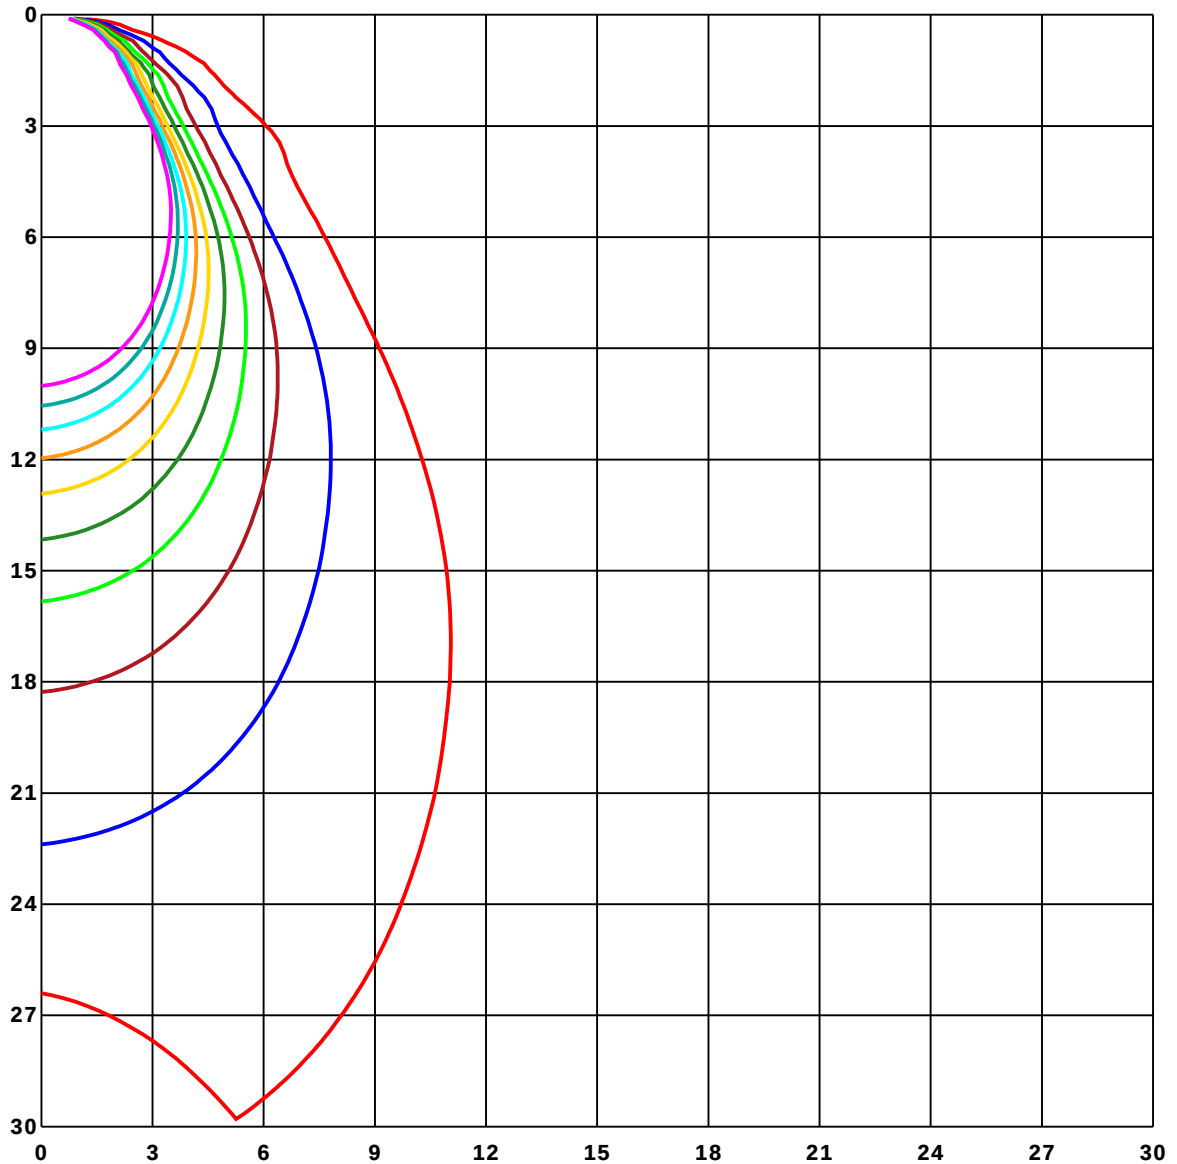

Unit of illumination:lx

17.045	8.523
15.341	6.818
13.636	5.114
11.932	3.409
10.227	1.705

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

LUMINOUS DISTRIBUTION INTENSITY DATA

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	1707.89	1685.78	1693.01	1703.36	1707.89	1685.78	1693.01	1703.36	1707.89	
G1	1701.6	1680.16	1693.2	1705.63	1713.13	1690.66	1691.48	1698.63	1701.6	
G2	1693.83	1672.54	1691.56	1707.19	1716.13	1693.87	1688.95	1692.93	1693.83	
G3	1684.41	1664.3	1689.06	1706.95	1718.24	1695.0	1685.0	1686.25	1684.41	
G4	1674.38	1655.27	1685.39	1706.06	1719.38	1695.7	1678.87	1678.87	1674.38	
G5	1662.89	1643.4	1679.69	1702.85	1718.63	1693.71	1671.68	1669.22	1662.89	
G6	1650.59	1630.78	1672.54	1698.71	1716.52	1692.34	1663.95	1657.97	1650.59	
G7	1636.29	1617.15	1664.53	1692.5	1712.77	1688.67	1653.79	1646.37	1636.29	
G8	1620.35	1600.66	1655.08	1684.49	1707.77	1683.13	1643.48	1633.01	1620.35	
G9	1603.28	1583.32	1643.83	1674.81	1701.72	1677.11	1631.72	1617.54	1603.28	
G10	1585.08	1565.12	1630.43	1664.69	1694.65	1669.26	1617.34	1600.98	1585.08	
G11	1564.22	1544.57	1616.41	1653.05	1685.08	1660.12	1602.85	1582.85	1564.22	
G12	1541.45	1522.5	1600.39	1639.92	1674.38	1648.87	1585.16	1563.05	1541.45	
G13	1517.15	1499.18	1582.77	1624.77	1662.07	1636.48	1566.91	1541.6	1517.15	
G14	1491.21	1473.52	1563.48	1608.32	1649.26	1623.16	1547.85	1518.75	1491.21	
G15	1464.41	1446.17	1542.54	1590.08	1633.87	1608.44	1526.84	1494.53	1464.41	
G16	1434.88	1419.22	1520.47	1570.08	1617.46	1592.58	1502.7	1469.73	1434.88	
G17	1404.88	1389.73	1497.07	1549.81	1599.06	1575.7	1476.91	1443.59	1404.88	
G18	1373.05	1359.69	1471.25	1527.73	1579.18	1557.85	1449.1	1417.34	1373.05	
G19	1340.08	1327.42	1444.18	1503.79	1558.28	1539.77	1419.73	1391.99	1340.08	
G20	1305.74	1294.22	1415.16	1478.16	1536.02	1520.59	1388.13	1365.78	1305.74	
G21	1270.0	1259.3	1384.96	1451.17	1511.99	1499.88	1355.86	1338.98	1270.0	
G22	1233.09	1223.44	1352.34	1422.03	1485.78	1476.91	1322.7	1308.16	1233.09	
G23	1195.86	1186.76	1319.61	1392.23	1459.84	1450.23	1289.1	1273.71	1195.86	
G24	1159.53	1149.53	1285.04	1360.98	1430.31	1422.42	1256.6	1238.48	1159.53	
G25	1123.2	1111.76	1248.95	1327.03	1400.43	1392.19	1221.64	1202.07	1123.2	
G26	1086.29	1074.53	1212.93	1293.13	1368.71	1361.56	1186.8	1167.03	1086.29	
G27	1052.07	1037.27	1176.99	1257.7	1334.3	1328.87	1151.33	1130.63	1052.07	
G28	1013.91	999.06	1140.35	1221.09	1300.9	1295.39	1116.02	1094.77	1013.91	
G29	976.68	959.38	1103.67	1183.44	1264.69	1261.56	1083.32	1058.98	976.68	
G30	940.98	921.17	1066.45	1145.7	1228.13	1226.68	1045.9	1022.38	940.98	
G31	906.99	886.33	1030.23	1107.62	1190.47	1192.97	1009.57	986.68	906.99	
G32	871.48	849.02	994.8	1069.57	1152.19	1157.89	973.01	951.84	871.48	
G33	836.45	813.44	954.77	1033.32	1114.84	1122.62	937.19	917.77	836.45	
G34	800.86	778.59	919.22	994.84	1078.63	1086.33	902.27	884.69	800.86	
G35	765.98	745.23	881.52	960.35	1041.95	1054.53	865.59	850.31	765.98	
G36	730.2	711.05	846.76	923.87	1004.96	1014.38	831.91	815.12	730.2	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	692.93	677.66	813.4	888.95	967.73	979.06	800.47	779.61	692.93	
G38	655.9	644.3	778.91	855.08	933.4	943.71	765.98	741.8	655.9	
G39	618.52	610.31	746.72	820.43	898.09	907.03	730.82	704.49	618.52	
G40	581.37	578.63	715.16	784.38	863.24	875.31	696.05	667.03	581.37	
G41	543.13	545.27	683.28	745.66	828.32	837.42	660.9	629.73	543.13	
G42	508.44	515.31	651.21	708.79	793.52	804.73	626.13	593.36	508.44	
G43	474.65	484.84	618.01	670.94	758.09	772.54	592.89	558.87	474.65	
G44	442.03	455.27	583.24	632.73	719.26	739.3	562.27	525.31	442.03	
G45	410.31	424.77	547.15	597.19	682.62	707.15	529.49	493.83	410.31	
G46	379.61	393.28	513.75	561.95	645.23	670.35	497.19	460.78	379.61	
G47	352.03	363.32	479.45	530.78	608.44	633.2	464.22	428.4	352.03	
G48	328.09	337.19	445.66	501.29	572.42	595.08	430.66	395.78	328.09	
G49	307.93	314.69	413.01	471.52	538.09	557.38	398.71	365.9	307.93	
G50	290.16	296.09	381.88	440.55	504.73	524.22	369.22	340.04	290.16	
G51	274.22	280.35	351.76	411.68	471.91	490.23	342.93	318.75	274.22	
G52	259.41	266.09	326.56	382.66	439.8	458.36	321.33	300.12	259.41	
G53	245.9	254.1	302.81	354.02	408.44	428.95	302.66	283.13	245.9	
G54	232.7	243.09	281.99	328.01	379.14	400.31	286.99	267.77	232.7	
G55	221.09	233.71	263.2	308.24	352.34	375.04	273.01	254.26	221.09	
G56	211.76	225.31	246.56	290.16	327.7	351.21	261.45	243.01	211.76	
G57	204.69	218.24	232.3	275.74	305.63	329.26	251.09	234.38	204.69	
G58	199.73	212.42	219.53	263.59	286.72	307.93	242.42	227.34	199.73	
G59	196.68	206.95	208.95	252.97	268.67	288.87	233.63	222.38	196.68	
G60	196.25	202.34	200.2	243.95	252.66	270.35	225.04	218.2	196.25	
G61	194.53	196.02	194.02	235.16	238.67	253.63	217.34	213.63	194.53	
G62	191.17	189.22	190.08	226.48	226.41	239.1	210.47	207.66	191.17	
G63	184.73	181.29	187.23	218.01	216.02	226.95	203.01	201.29	184.73	
G64	175.47	172.66	186.13	209.88	208.63	218.09	195.16	193.32	175.47	
G65	163.28	163.67	184.18	200.74	203.4	213.36	187.07	183.95	163.28	
G66	151.17	155.27	181.37	192.15	200.63	211.25	178.36	173.67	151.17	
G67	141.21	148.87	177.03	184.57	199.8	212.38	170.27	165.12	141.21	
G68	134.1	142.89	170.51	178.32	199.02	213.75	163.01	158.16	134.1	
G69	129.34	137.54	162.58	173.79	197.77	213.4	157.03	154.02	129.34	
G70	126.84	132.77	154.49	170.12	193.13	209.26	153.13	152.03	126.84	
G71	126.29	129.1	147.73	167.93	185.63	201.37	150.12	151.21	126.29	
G72	126.13	126.45	142.66	166.72	174.84	188.55	148.75	151.21	126.13	
G73	125.51	122.66	139.65	166.45	162.46	172.73	149.53	150.0	125.51	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:46:12

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:46:12

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks: