

Report No.:

Test Time: 2024/11/8 10:33:33

LUMINAIRE PHOTOMETRIC TEST REPORT

Luminaire Property

Manufacturer: 0
Luminaire Type: 筒灯8寸
Lamp Type:
Luminous Width: 0 mm
Luminous Length: 0 mm
Luminous Height: 0 mm


Voltage(V): 219.30 V
Current(A): 0.1260 A
Power(W): 26.78 W
Power Factor: 0.9650
Lamp Luminous Flux: 3617.24

Photometric Results


CIE Class: Direct
Luminaire Luminous Flux: 3617.24 lm
Downward Ratio: 100.00%
Luminaire Efficacy Rating(LER): 135.07 lm/W
Beam Angle(50%) C0-180,C90-270: 82.9,82.5
Field Angle(10%) C0-180,C90-270: 130.1,134.6
S/MH C0-180,C90-270: 1.109,1.109

Max. Intensity: 1941.72 cd
Max.Intensity Angle: C=180 Gamma=3
Upward Ratio: 0.00%
Efficacy: 100.00%
Center Intensity: 1938.36 cd
Effective Luminous Flux: 3397.47 lm
ERP(ϕ use)(120deg): 3236.00 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

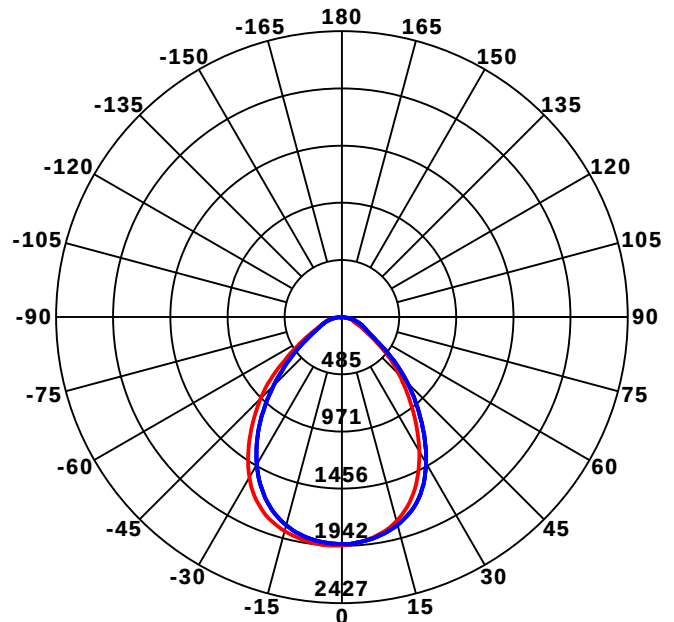

Beam Angle(50%) C0-180,C90-270: 82.9 deg,82.5 deg

C0-180 — C90-270 —



C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

Luminous Intensity Distribution Curve

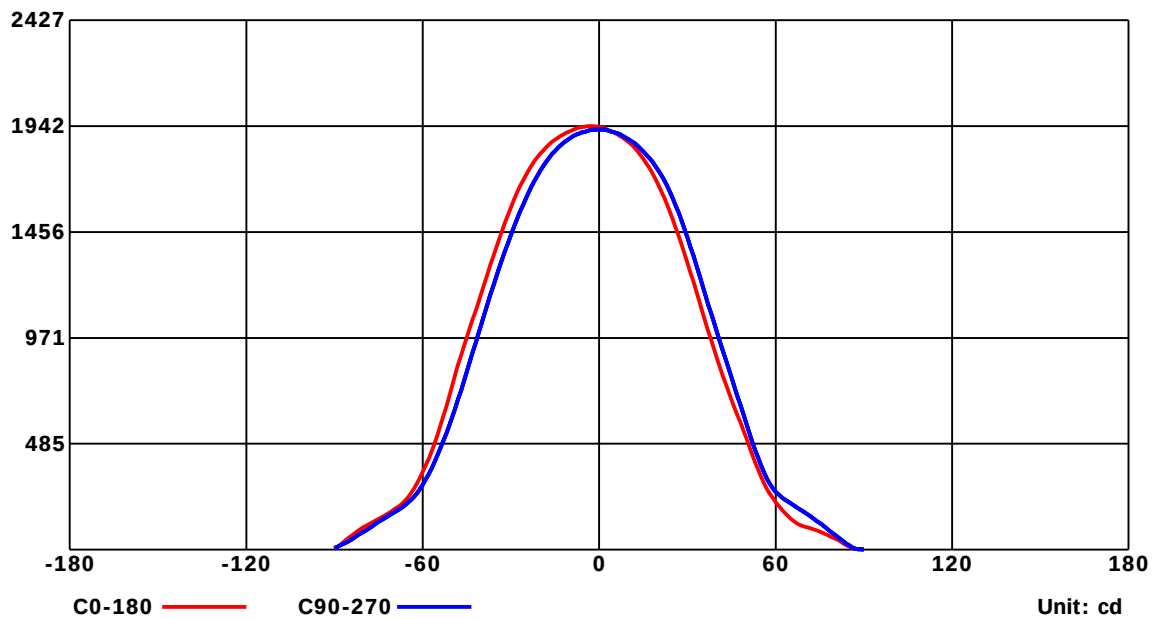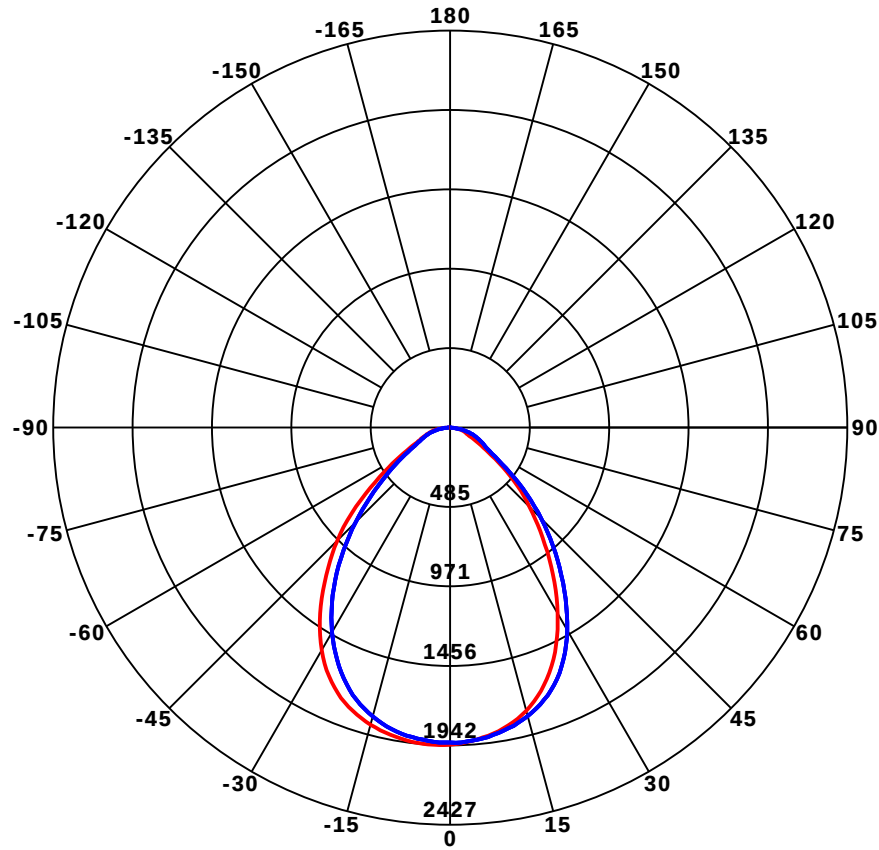

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

Luminous Intensity Distribution Curve

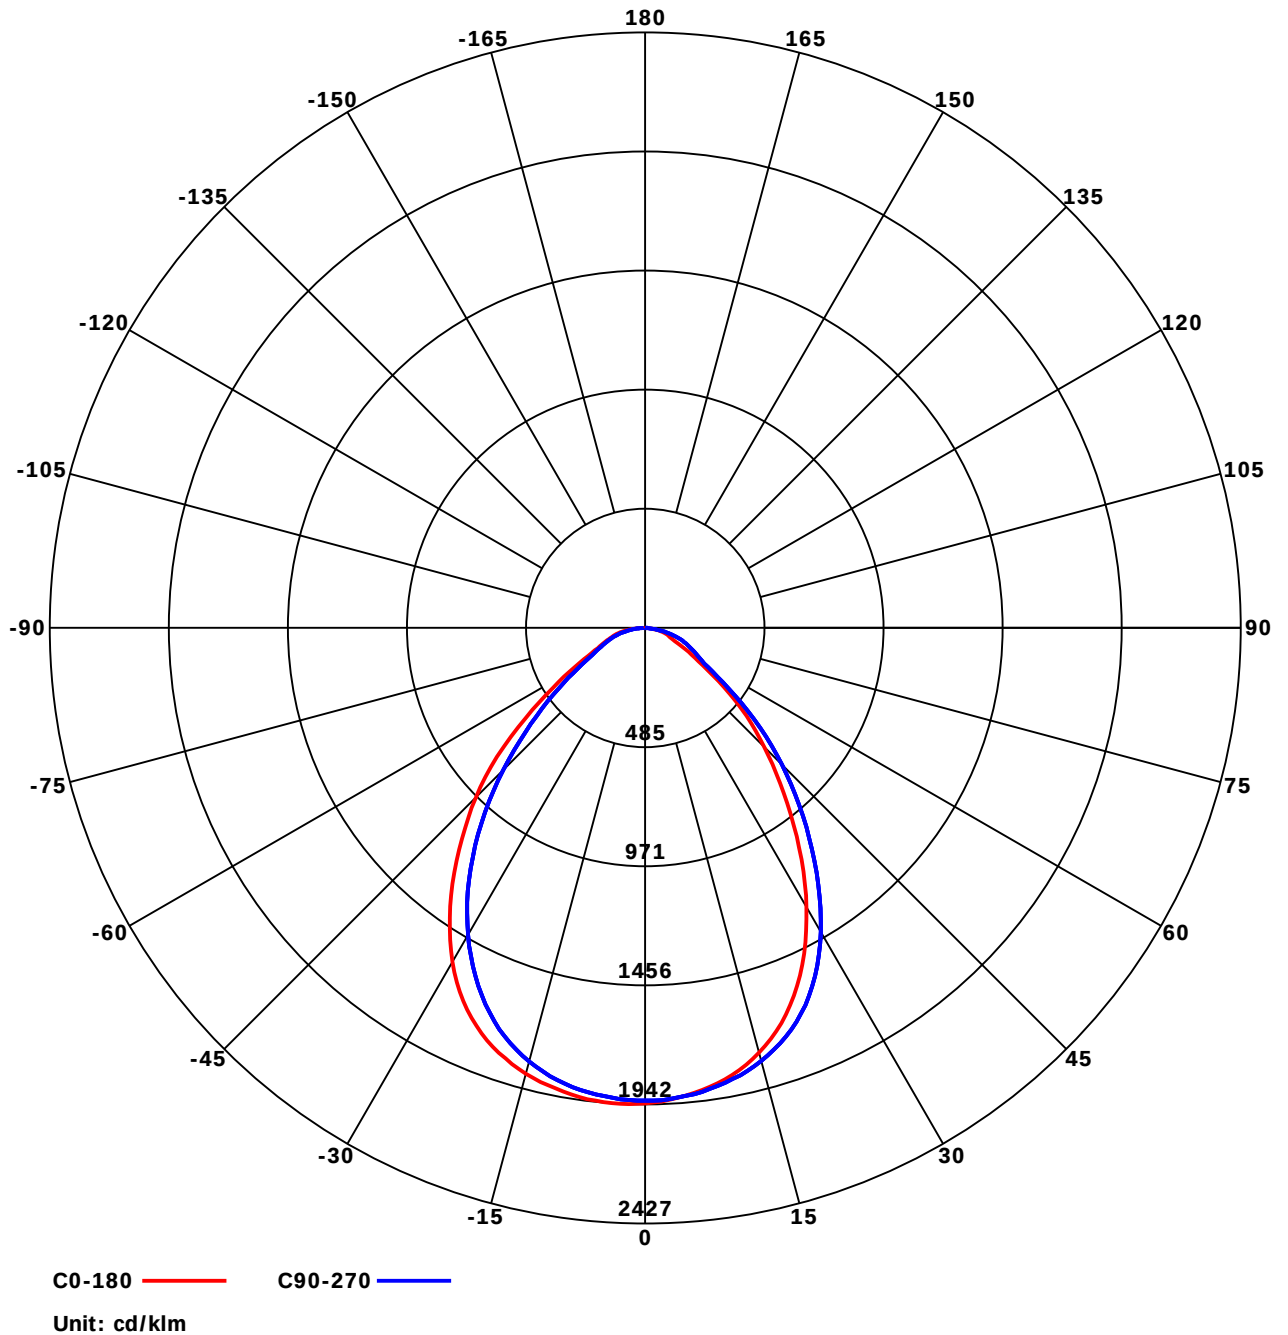

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:


Report No.:

Test Time: 2024/11/8 10:33:33

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	0.99
1	1.08	1.07	1.06	1.07	1.05	1.04	1.03	1.01	0.99	0.98	0.96	0.94	0.91	0.89	0.87	0.82
2	0.95	0.93	0.92	0.94	0.92	0.90	0.92	0.89	0.86	0.88	0.85	0.82	0.83	0.79	0.76	0.72
3	0.84	0.82	0.81	0.84	0.81	0.79	0.82	0.78	0.76	0.79	0.75	0.72	0.75	0.71	0.67	0.63
4	0.75	0.73	0.71	0.75	0.72	0.70	0.74	0.70	0.67	0.72	0.67	0.63	0.69	0.64	0.60	0.56
5	0.67	0.65	0.63	0.67	0.64	0.62	0.67	0.63	0.59	0.65	0.60	0.57	0.63	0.58	0.53	0.50
6	0.61	0.58	0.57	0.61	0.58	0.56	0.61	0.56	0.53	0.60	0.55	0.51	0.58	0.53	0.48	0.44
7	0.55	0.53	0.51	0.55	0.52	0.50	0.56	0.51	0.48	0.55	0.50	0.46	0.54	0.48	0.43	0.40
8	0.50	0.48	0.47	0.51	0.48	0.46	0.51	0.47	0.44	0.51	0.46	0.42	0.50	0.44	0.40	0.36
9	0.46	0.44	0.43	0.46	0.44	0.42	0.47	0.43	0.40	0.47	0.42	0.38	0.47	0.41	0.36	0.33
10	0.42	0.40	0.39	0.43	0.40	0.38	0.44	0.39	0.37	0.44	0.39	0.35	0.44	0.38	0.33	0.31

LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

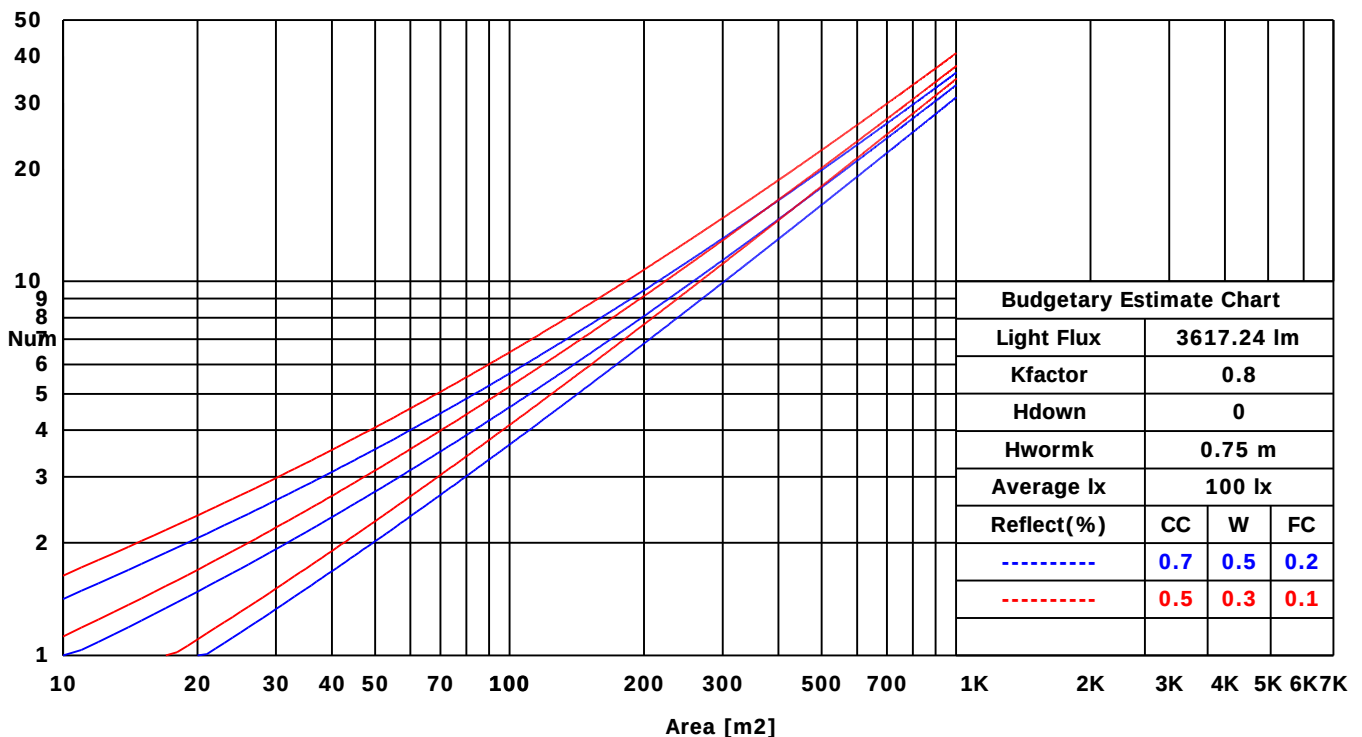

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

ISOCANDELA DIAGRAM (RECTANGULAR)

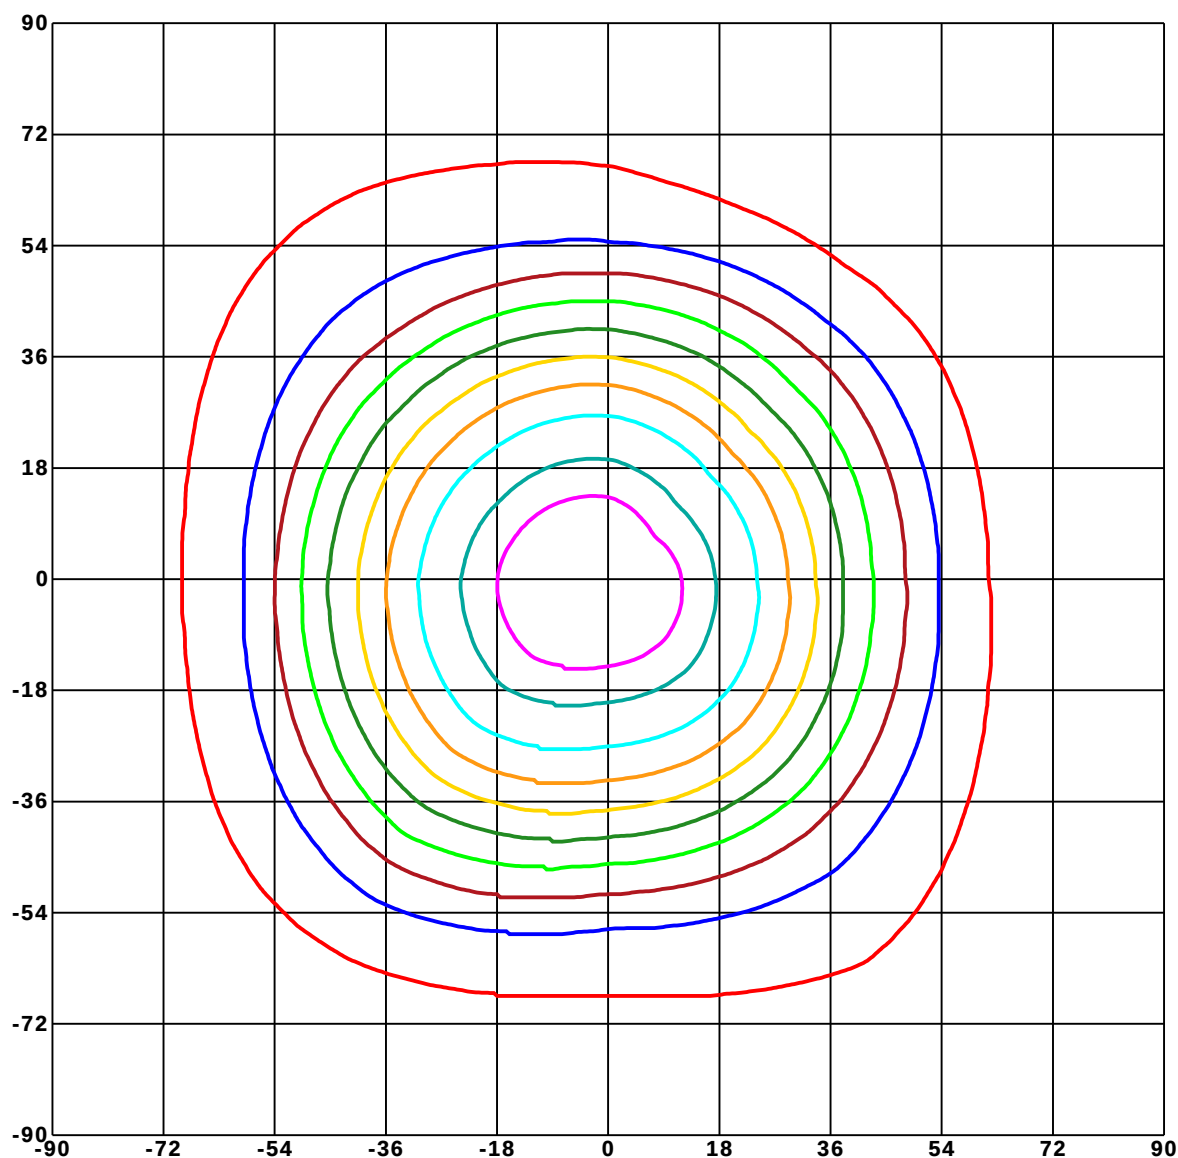

Unit of intensity:cd I_{max}(100%): 1941.719 cd

1844.633(95%I _{max})	970.859(50%I _{max})
1747.547(90%I _{max})	776.688(40%I _{max})
1553.375(80%I _{max})	582.516(30%I _{max})
1359.203(70%I _{max})	388.344(20%I _{max})
1165.031(60%I _{max})	194.172(10%I _{max})

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

ISOCANDELA DIAGRAM (SPHERE)

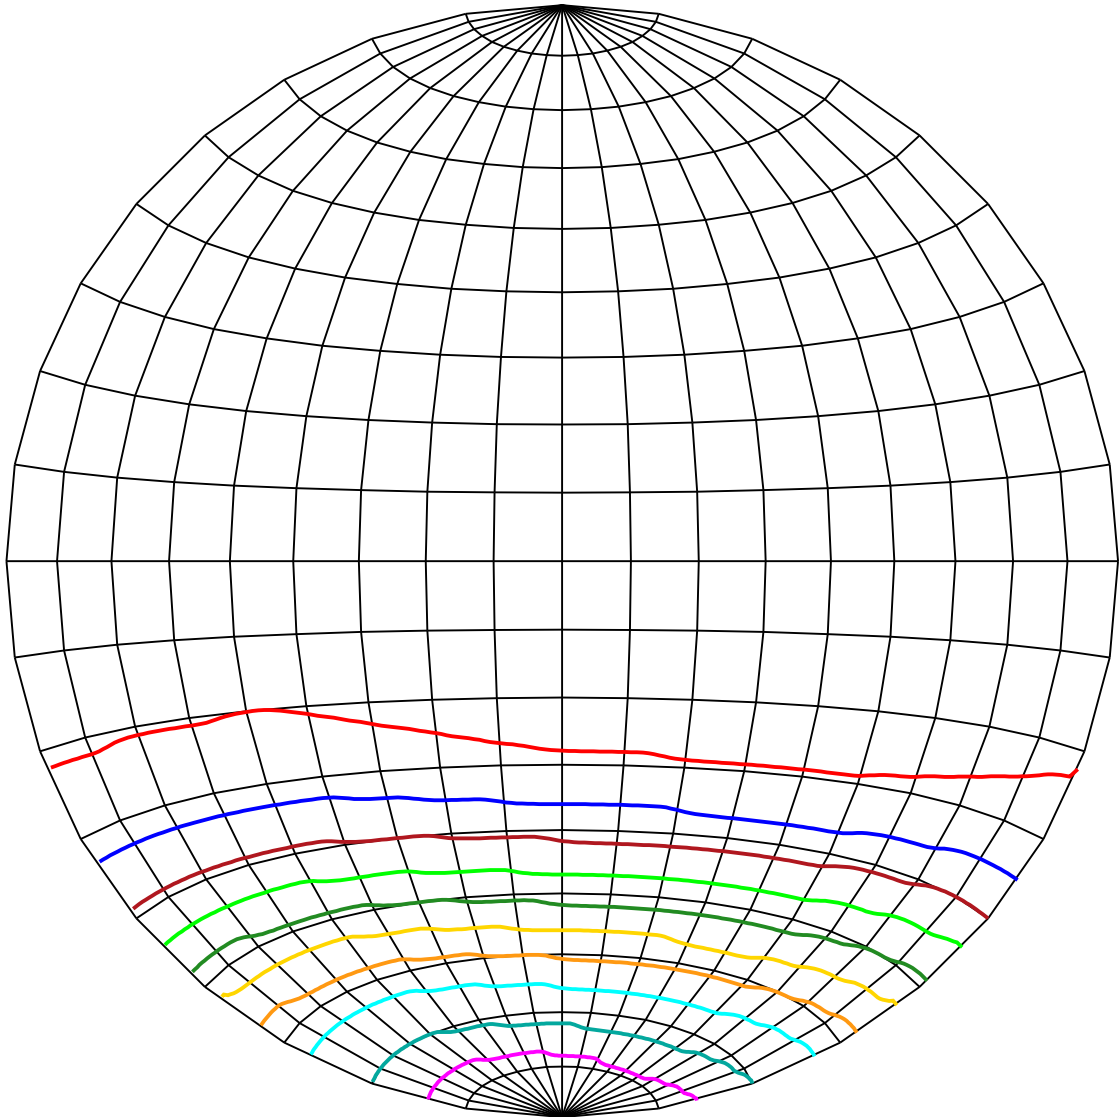

Unit of intensity:cd Imax(100%): 1941.719 cd

1844.633(95%Imax)	970.859(50%Imax)
1747.547(90%Imax)	776.688(40%Imax)
1553.375(80%Imax)	582.516(30%Imax)
1359.203(70%Imax)	388.344(20%Imax)
1165.031(60%Imax)	194.172(10%Imax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

ISOLX DIAGRAM

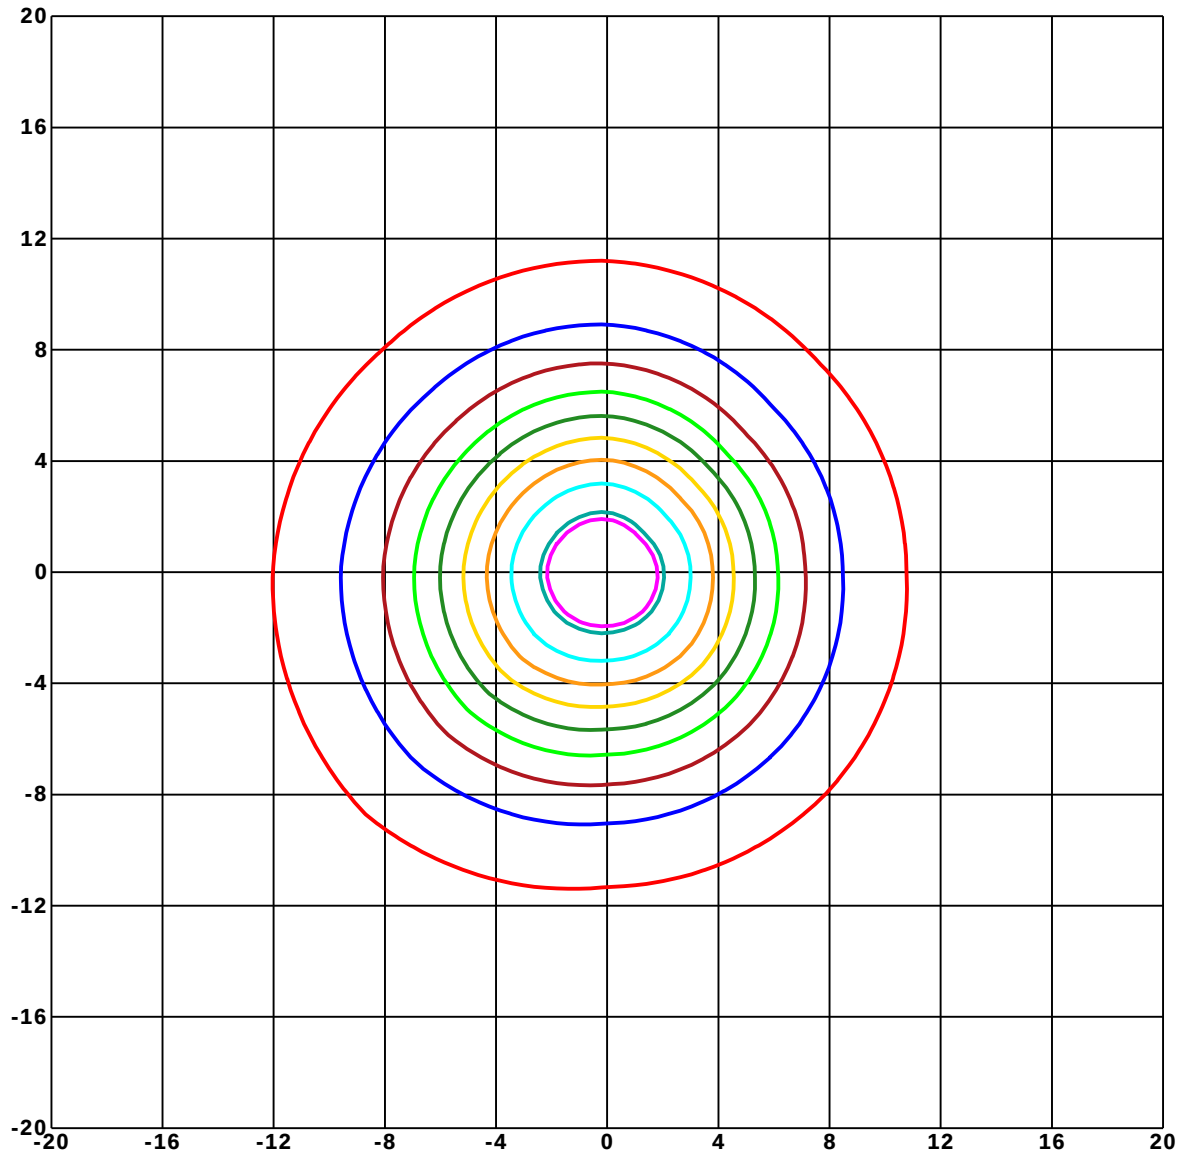

Unit of illumination:lx Height of plane:10.0(m)/32.81(ft)

17.839(92%Emax)	9.695(50%Emax)
17.452(90%Emax)	7.756(40%Emax)
15.513(80%Emax)	5.817(30%Emax)
13.574(70%Emax)	3.878(20%Emax)
11.634(60%Emax)	1.939(10%Emax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

UTILIZATION FACTOR DIAGRAM (ROAD)

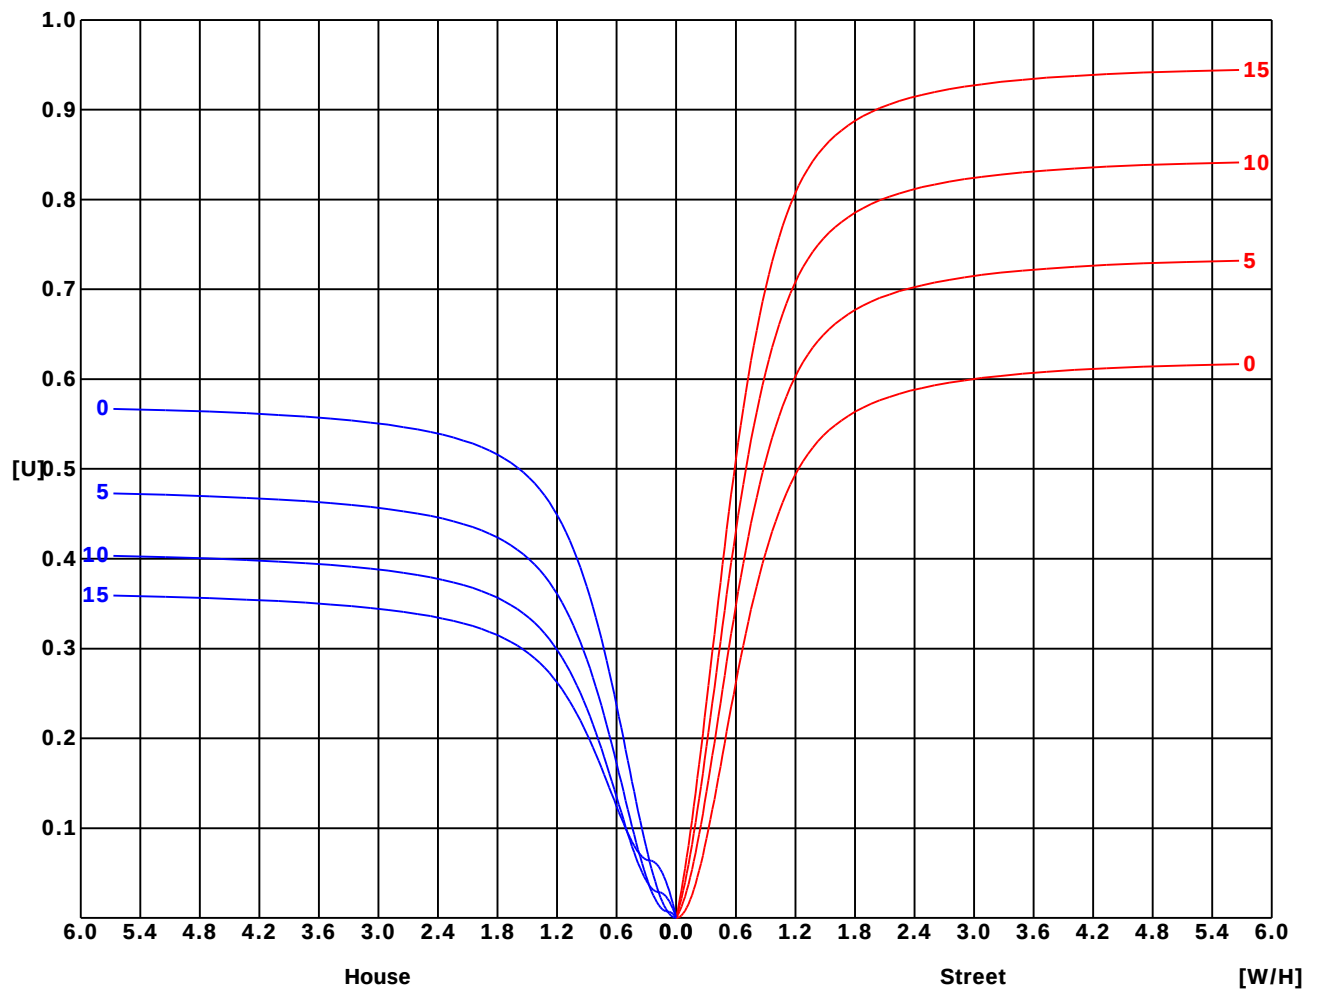

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature:
Operators:
Test Date: 2024/11/8 10:33:33


G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity:
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	9647	7543	5394	3991	3016	2847	3031	2142	0
C90	11840	9532	7856	6805	6284	5561	4517	4087	2393
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

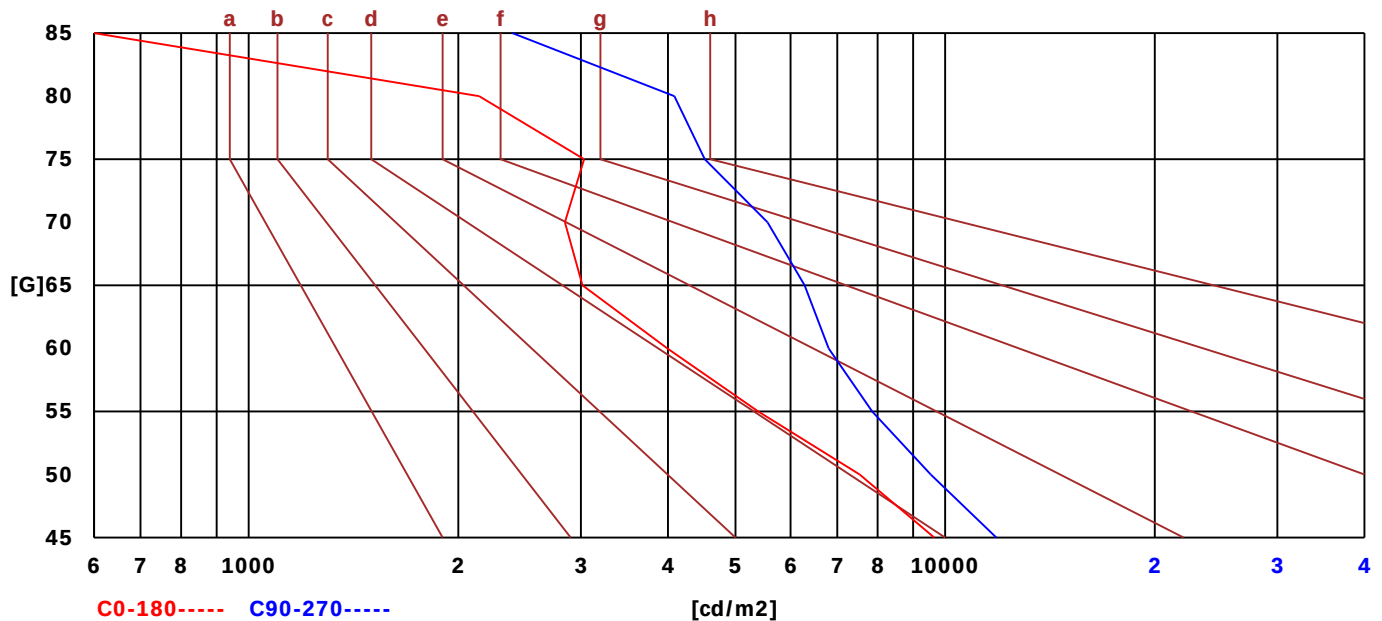

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

LX-DISTANCE DIAGRAM

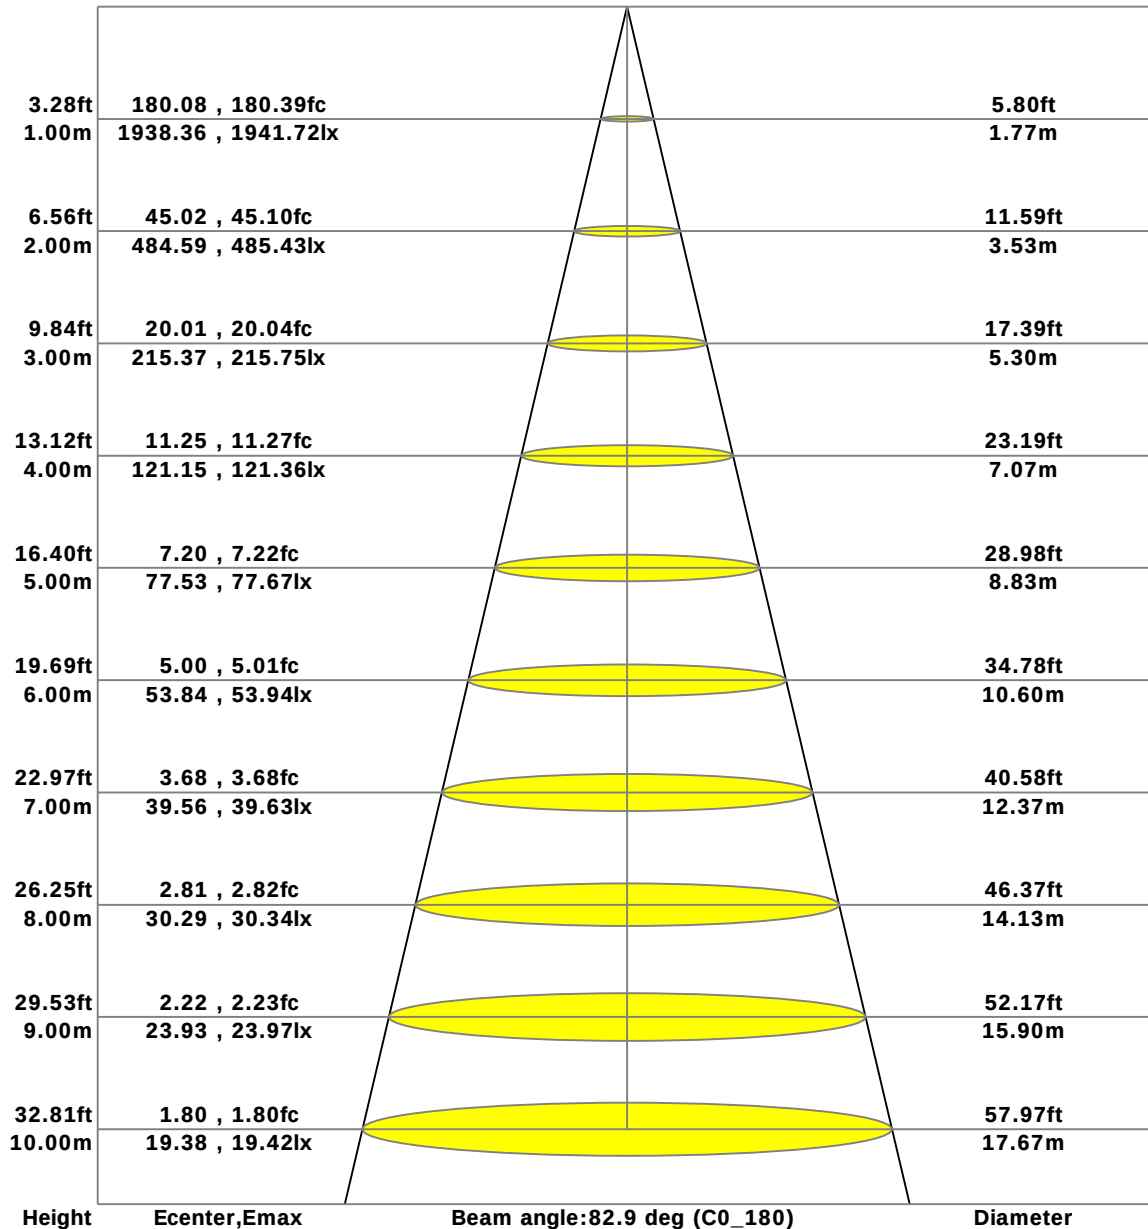

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

BUG Class

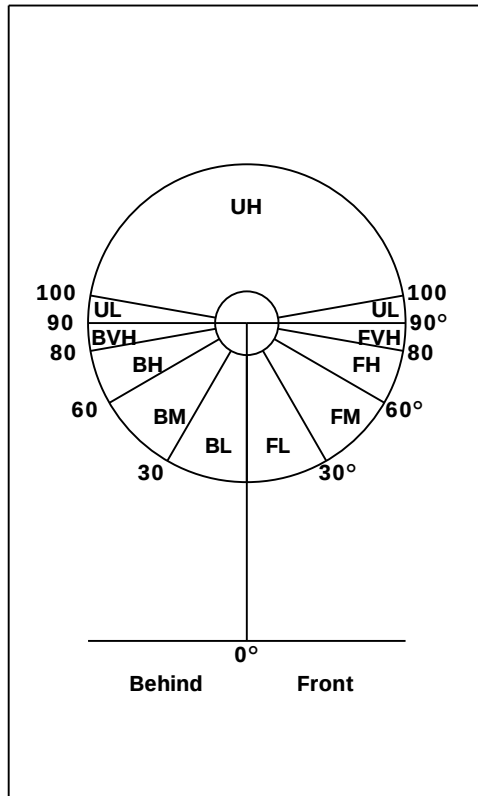

Zonal	Light Flux(lm)	Light Flux(%)
Front	1736.7	48.0
FL (0°-30°)	711.4	19.7
FM (30°-60°)	855.1	23.6
FH (60°-80°)	157.2	4.3
FVH (80°-90°)	13.1	0.4

Behind	1880.5	52.0
BL (0°-30°)	725.2	20.0
BM (30°-60°)	944.3	26.1
BH (60°-80°)	185.3	5.1
BVH (80°-90°)	25.7	0.7

Above	0.0	0.0
UL (90°-100°)	0.0	0.0
UH (100°-180°)	0.0	0.0

Limit Light	NA	NA
-------------	----	----

BUG Class(TM-15-07)	
Asymmetric Lighting Fixtures (Type I , II , III , IV)	B2 U0 G1
Symmetrical Lighting Fixtures (Type V , Area Light)	B2 U0 G1

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

LCS 图

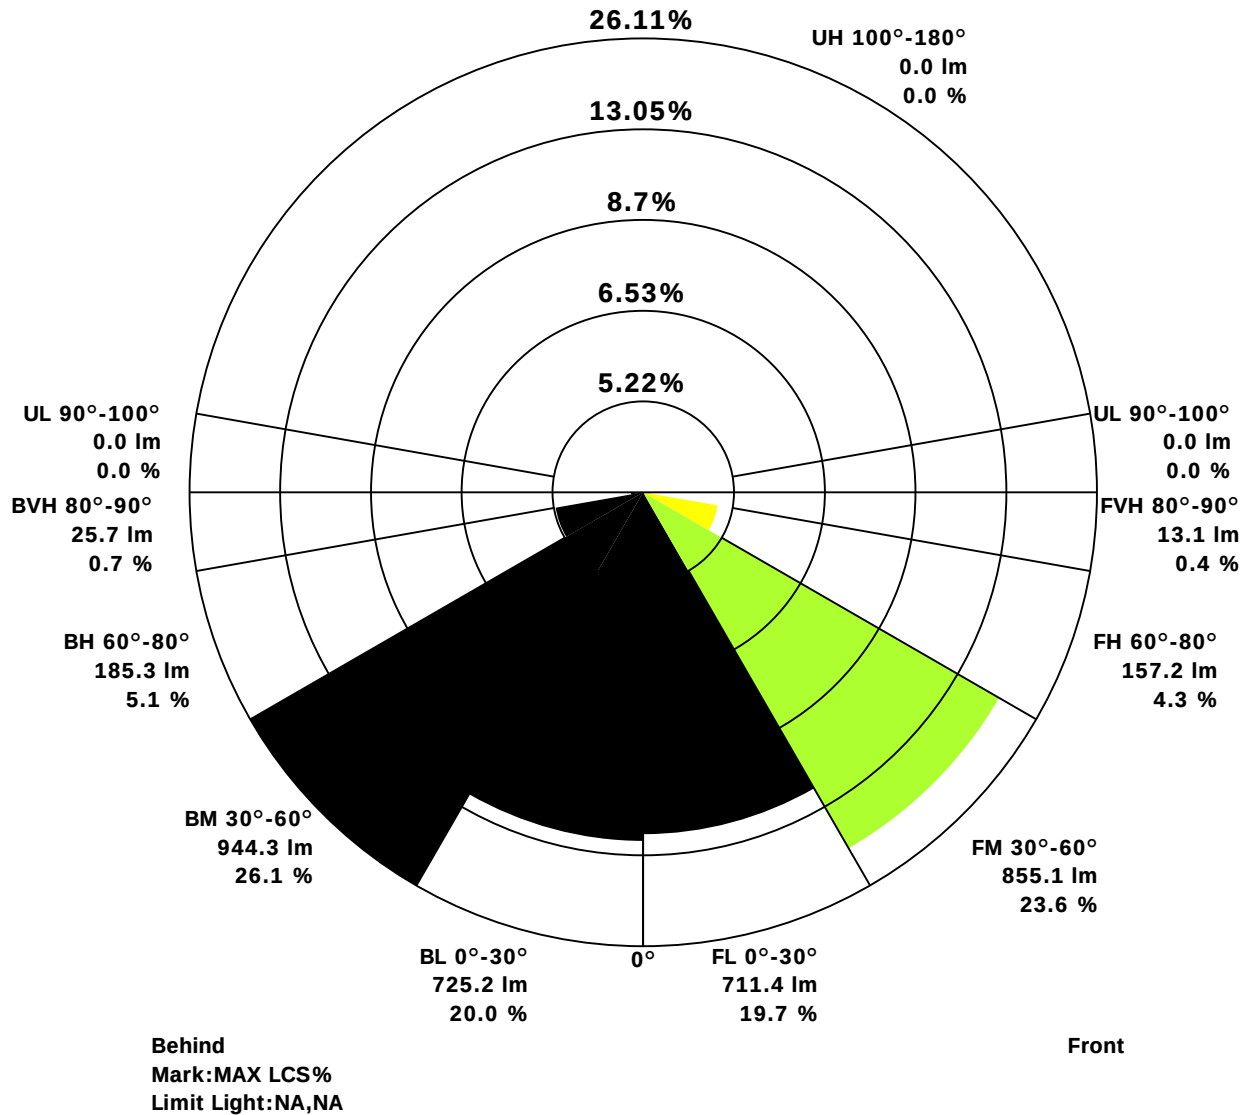

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

UGR(Unified Glare Rating) TABLE

RHOCC	70	70	50	50	30	70	70	50	50	30
RHOW	50	30	50	30	30	50	30	50	30	30
RHOF	20	20	20	20	20	20	20	20	20	20
Room Size X Y	Viewed Endwise					Viewed Crosswise				
2H 2H	17.73	18.30	17.67	18.49	18.74	18.15	18.71	18.09	18.91	19.16
3H	17.44	17.95	17.43	18.18	18.48	17.83	18.34	17.82	18.57	18.87
4H	17.26	17.75	17.29	18.00	18.32	17.64	18.14	17.68	18.38	18.70
6H	17.07	17.53	17.14	17.79	18.15	17.45	17.91	17.51	18.17	18.53
8H	16.97	17.41	17.05	17.69	18.06	17.34	17.79	17.43	18.06	18.43
12H	16.86	17.29	16.97	17.58	17.96	17.24	17.67	17.35	17.95	18.34
4H 2H	18.24	18.73	18.27	18.97	19.30	19.18	19.67	19.21	19.91	20.24
3H	18.03	18.47	18.14	18.75	19.13	18.93	19.36	19.04	19.64	20.03
4H	17.89	18.28	18.04	18.59	19.01	18.76	19.15	18.91	19.46	19.88
6H	17.70	18.06	17.90	18.38	18.84	18.56	18.91	18.76	19.24	19.70
8H	17.60	17.93	17.82	18.27	18.74	18.45	18.78	18.67	19.12	19.60
12H	17.49	17.79	17.73	18.14	18.64	18.34	18.65	18.59	19.00	19.49
8H 4H	18.35	18.80	18.44	19.08	19.44	19.40	19.85	19.49	20.12	20.49
6H	17.91	18.19	18.18	18.55	19.07	18.88	19.16	19.16	19.53	20.04
8H	17.80	18.05	18.10	18.43	18.97	18.78	19.03	19.08	19.40	19.94
12H	17.70	17.91	18.02	18.30	18.86	18.67	18.88	18.99	19.27	19.83
12H 4H	18.02	18.33	18.27	18.68	19.18	19.03	19.34	19.28	19.69	20.19
6H	17.85	18.10	18.15	18.48	19.01	18.85	19.10	19.15	19.47	20.01

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

ZONAL LUMINOUS FLUX TABLE-1

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

ZONAL LUMINOUS FLUX TABLE-2

Y	C0	C45	C90	C135	C180	C225	C270	C315	Y	φ zonal	φ total	%lum	%lamp
10	1868.0	1845.9	1881.2	1899.0	1918.9	1906.5	1886.1	1880.7	10	182.1	182.1	5.0	5.0
20	1676.1	1657.9	1741.3	1770.5	1817.0	1815.1	1739.5	1729.3	20	515.0	697.0	19.3	19.3
30	1314.7	1284.5	1430.5	1480.2	1570.5	1594.6	1444.6	1418.3	30	739.6	1436.6	39.7	39.7
40	877.9	862.8	998.6	1055.9	1180.0	1223.1	1037.3	988.5	40	772.9	2209.5	61.1	61.1
50	512.1	484.8	578.2	612.7	752.3	808.4	608.0	591.3	50	632.0	2841.5	78.6	78.6
60	218.1	199.5	265.2	340.2	356.5	410.9	298.8	318.5	60	394.5	3236.0	89.5	89.5
70	104.3	97.4	169.1	190.2	181.7	182.0	168.8	186.7	70	218.0	3454.0	95.5	95.5
80	51.6	37.2	69.3	71.0	103.9	110.9	83.1	81.1	80	124.4	3578.5	98.9	98.9
90	2.3	0.0	0.0	0.0	2.4	30.4	7.2	5.6	90	38.8	3617.2	100.0	100.0

Conical surface Flux(90deg) : 2551.2 lm

%lum = 70.5%

%lamp = 70.5%

Conical surface Flux(120deg) : 3236.0 lm

%lum = 89.5%

%lamp = 89.5%

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

SPACE ISOLX DIAGRAM

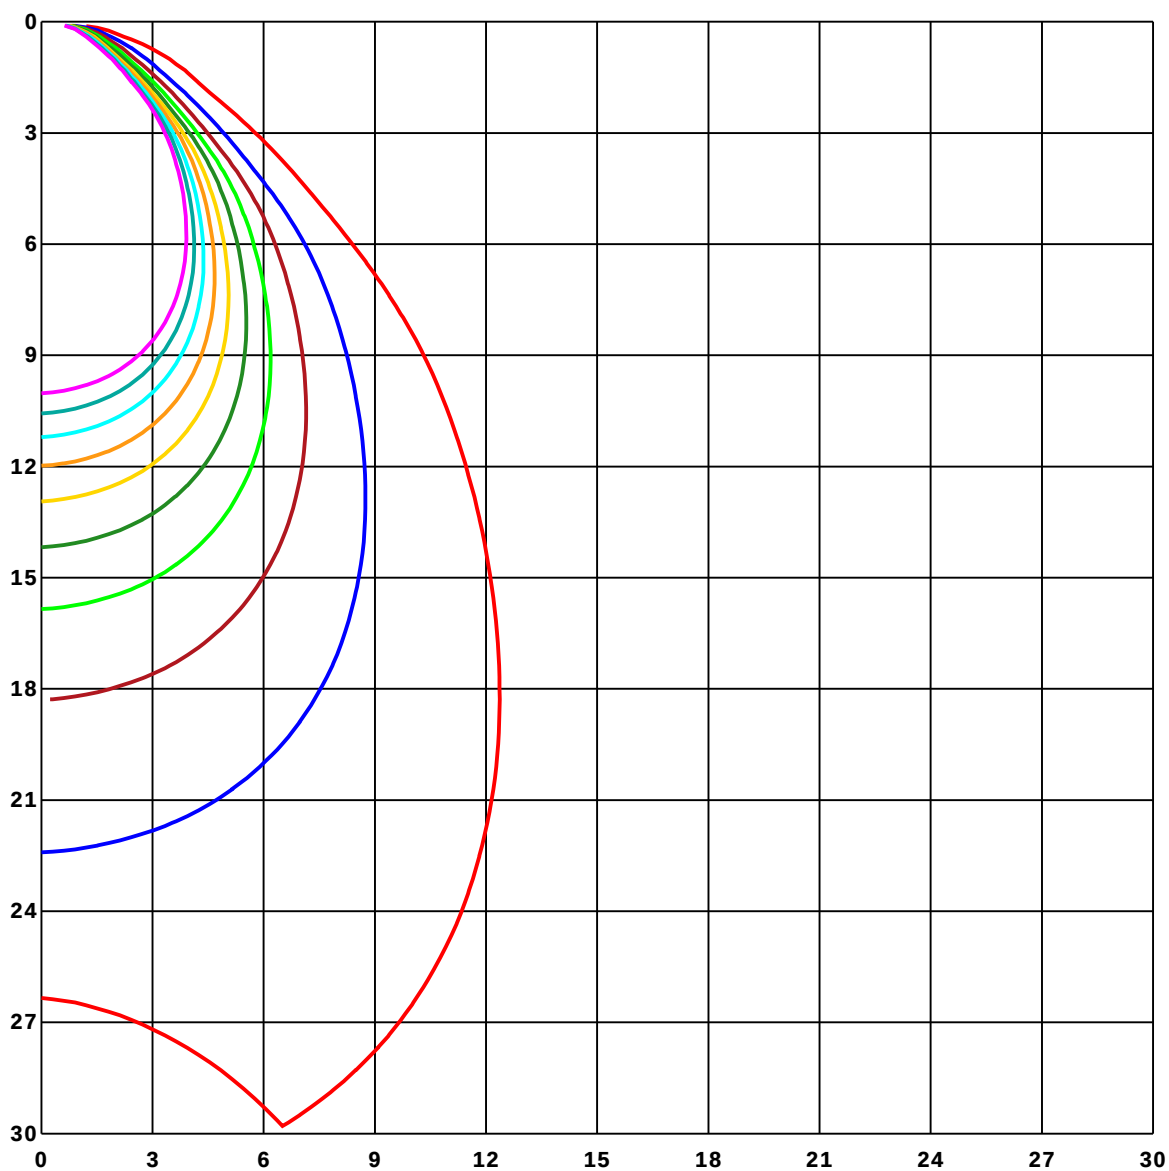

Unit of illumination:lx

19.299	9.649
17.369	7.719
15.439	5.79
13.509	3.86
11.579	1.93

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

LUMINOUS DISTRIBUTION INTENSITY DATA

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	1938.36	1919.88	1925.51	1933.87	1938.36	1919.88	1925.51	1933.87	1938.36	
G1	1934.73	1916.64	1926.33	1933.2	1939.96	1921.99	1925.63	1930.82	1934.73	
G2	1930.94	1910.63	1925.59	1931.68	1941.29	1924.02	1925.08	1928.71	1930.94	
G3	1924.69	1905.98	1921.45	1931.02	1941.72	1923.98	1923.59	1926.41	1924.69	
G4	1919.34	1900.7	1917.23	1928.67	1941.33	1924.06	1919.1	1921.95	1919.34	
G5	1912.66	1894.65	1913.63	1924.61	1939.61	1924.06	1915.12	1916.33	1912.66	
G6	1904.69	1887.15	1909.88	1920.59	1937.07	1921.95	1911.91	1911.37	1904.69	
G7	1896.95	1878.09	1904.77	1917.27	1934.77	1919.61	1906.41	1904.41	1896.95	
G8	1888.59	1867.89	1896.45	1912.54	1930.35	1915.23	1901.48	1896.91	1888.59	
G9	1879.22	1857.27	1889.3	1906.25	1924.81	1910.7	1894.69	1889.69	1879.22	
G10	1868.01	1845.9	1881.17	1898.98	1918.87	1906.52	1886.09	1880.66	1868.01	
G11	1856.02	1833.56	1872.03	1890.94	1912.07	1900.82	1876.48	1871.37	1856.02	
G12	1842.27	1819.34	1863.67	1882.07	1905.43	1894.02	1867.38	1859.69	1842.27	
G13	1827.34	1805.0	1851.68	1871.91	1898.52	1886.29	1855.23	1846.45	1827.34	
G14	1809.88	1788.63	1839.18	1861.17	1889.65	1878.32	1842.81	1832.42	1809.88	
G15	1791.95	1771.25	1826.52	1849.26	1880.7	1869.73	1829.02	1816.95	1791.95	
G16	1772.23	1751.76	1811.8	1836.21	1869.26	1859.18	1813.52	1801.88	1772.23	
G17	1750.63	1731.02	1795.74	1821.72	1858.05	1849.61	1796.84	1785.39	1750.63	
G18	1728.05	1709.38	1779.73	1806.17	1844.45	1838.36	1779.41	1767.27	1728.05	
G19	1703.2	1685.27	1760.43	1789.02	1830.94	1827.19	1760.2	1749.3	1703.2	
G20	1676.13	1657.93	1741.33	1770.47	1817.03	1815.12	1739.53	1729.26	1676.13	
G21	1646.84	1629.3	1719.69	1750.23	1800.51	1801.56	1716.09	1708.09	1646.84	
G22	1616.21	1598.56	1695.04	1727.97	1781.99	1786.33	1691.52	1683.83	1616.21	
G23	1583.48	1565.86	1669.96	1703.59	1761.41	1767.73	1665.98	1656.29	1583.48	
G24	1550.63	1531.48	1641.48	1677.62	1739.49	1748.16	1638.59	1626.37	1550.63	
G25	1515.0	1494.73	1611.09	1649.18	1716.56	1727.07	1609.14	1595.2	1515.0	
G26	1477.34	1455.16	1578.59	1618.63	1691.17	1703.98	1578.44	1563.09	1477.34	
G27	1437.27	1414.77	1543.71	1586.45	1664.38	1679.18	1546.64	1528.67	1437.27	
G28	1396.76	1372.7	1507.93	1551.95	1635.51	1653.24	1513.87	1493.2	1396.76	
G29	1355.98	1329.41	1469.73	1517.38	1604.06	1624.41	1480.27	1456.37	1355.98	
G30	1314.73	1284.49	1430.51	1480.23	1570.51	1594.57	1444.65	1418.28	1314.73	
G31	1271.8	1241.41	1389.22	1442.46	1536.64	1564.81	1407.42	1378.52	1271.8	
G32	1228.28	1196.52	1347.34	1402.62	1499.96	1532.5	1370.04	1338.16	1228.28	
G33	1183.75	1152.73	1303.95	1362.66	1462.5	1497.81	1332.03	1296.25	1183.75	
G34	1138.52	1108.28	1261.33	1321.02	1424.96	1461.84	1293.24	1253.48	1138.52	
G35	1093.28	1065.43	1216.95	1277.73	1385.08	1424.38	1252.15	1210.66	1093.28	
G36	1050.23	1023.01	1172.58	1234.02	1345.78	1386.91	1210.98	1166.6	1050.23	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	1005.35	979.77	1127.46	1188.13	1305.04	1347.34	1168.05	1122.54	1005.35	
G38	963.48	938.05	1083.87	1143.98	1263.09	1307.54	1125.08	1080.63	963.48	
G39	919.77	899.22	1042.93	1098.91	1221.17	1265.74	1082.54	1033.56	919.77	
G40	877.89	862.81	998.63	1055.9	1180.04	1223.13	1037.31	988.48	877.89	
G41	838.71	824.96	955.0	1011.84	1138.36	1181.37	995.08	944.88	838.71	
G42	798.75	788.91	914.14	968.55	1096.68	1138.75	949.41	898.98	798.75	
G43	759.41	754.1	870.63	924.3	1057.31	1095.66	905.43	856.84	759.41	
G44	722.62	717.93	829.88	881.68	1017.73	1053.91	862.07	815.39	722.62	
G45	686.05	682.15	788.59	837.23	974.88	1011.68	818.09	774.92	686.05	
G46	650.74	645.35	745.82	790.86	934.38	968.83	773.01	735.31	650.74	
G47	616.37	606.6	703.63	745.08	890.86	928.59	730.39	697.3	616.37	
G48	582.42	566.88	662.27	701.37	846.64	889.06	687.93	661.29	582.42	
G49	546.33	525.82	621.21	655.35	800.63	848.91	645.86	624.77	546.33	
G50	512.11	484.84	578.16	612.73	752.3	808.4	608.01	591.33	512.11	
G51	474.26	445.47	537.19	572.34	703.79	767.07	570.12	558.24	474.26	
G52	438.36	408.4	496.99	535.98	655.74	724.18	533.67	526.45	438.36	
G53	402.85	372.3	458.2	503.4	610.23	681.45	498.55	495.47	402.85	
G54	367.77	339.61	421.8	474.14	567.66	638.59	465.55	466.25	367.77	
G55	334.8	309.41	386.56	450.59	525.66	595.0	432.73	437.23	334.8	
G56	305.74	282.27	355.59	424.8	486.91	553.98	402.58	409.02	305.74	
G57	279.06	258.52	326.8	402.03	450.78	514.77	373.52	383.4	279.06	
G58	256.76	237.42	302.15	380.59	417.81	477.38	347.15	359.73	256.76	
G59	236.52	217.42	281.41	360.35	386.56	442.15	322.19	338.05	236.52	
G60	218.13	199.53	265.2	340.23	356.52	410.94	298.83	318.52	218.13	
G61	201.41	182.42	252.27	323.13	328.98	378.28	277.89	301.84	201.41	
G62	185.16	166.99	240.98	307.85	303.44	348.98	259.02	286.64	185.16	
G63	170.16	152.66	231.37	293.59	280.0	321.84	242.54	273.01	170.16	
G64	156.37	139.3	222.42	279.73	259.34	295.55	228.32	260.47	156.37	
G65	143.24	127.46	212.89	265.59	239.96	272.03	216.05	248.32	143.24	
G66	131.8	116.88	204.1	251.05	224.49	249.8	204.88	235.47	131.8	
G67	121.99	108.59	195.51	235.51	211.05	230.08	194.73	223.36	121.99	
G68	114.22	102.7	186.91	220.86	200.16	211.25	185.74	211.21	114.22	
G69	108.48	99.22	177.7	205.39	191.02	195.12	176.91	198.83	108.48	
G70	104.26	97.38	169.1	190.2	181.72	182.03	168.75	186.72	104.26	
G71	101.45	95.82	160.23	174.69	172.62	170.0	160.74	174.92	101.45	
G72	97.73	92.62	151.45	159.18	164.26	160.9	152.66	163.79	97.73	
G73	92.89	89.06	141.56	143.79	156.29	153.75	144.06	153.83	92.89	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2024/11/8 10:33:33

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature:

Operators:

Test Date: 2024/11/8 10:33:33

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity:

Test Distance: 6.25 m

Remarks: