



1		2		3		4		5		6		7		8		9		10		11		12		13		14	
↓						↓								↓				↓						↓		↓	
系列		代码		产品直径		代码		产品高度		代码		额定电压(V)		代码		静电容量(μF)		代码		容量范围		代码		附属码(国内)			
L3M		L3M		3.5		F		3.95		039		6.3		0J		0.1		R10		±20%		M		O 引线30F/35F			
LMM		LMM		3.55		W		4.5		045		10		1A		0.22		R22		±10%		K		H 引线33F/38F			
LK7		LK7		4		A		5		050		16		1C		0.33		R33		0%~+10%		R		F 引线22F/27F			
LK		OLK		4.5		G		5.4		054		20		1D		0.47		R47		0%~-10%		T		A 切直脚A图			
KCX		KCX		5		B		5.7		057		25		1E		0.56		R56		-10%~+20%		V		B 切脚成型B图			
KCG		KCG		5.5		H		5.8		058		27		1N		0.68		R68		-20%~+5%		L		C 切脚成型C图			
KCM		KCM		6.3		C		6.5		065		35		1V		0.82		R82		-10%~+5%		G		D 切脚成型D图			
LKF		LKF		7		T		7		070		40		1G		1.0		1R0		-10%~+15%		H		E 切脚成型E图			
LKM		LKM		8		D		7.7		077		50		1H		2.2		2R2		0%~+40%		I		Q 切脚折弯90° F图A型(右)			
LKG		LKG		10		E		8		080		63		1J		3.3		3R3		±15%		J		P 切脚折弯90° F图B型(左)			
LKZ		LKZ		12.5		L		8.5		085		70		1L		3.9		3R9		-20%~+50%		A		X 切脚成型G图			
LLK		LLK		13		S		9		090		80		1K		4.7		4R7		-5%~-20%		B		g 切脚双折弯90° H图A型(右)			
LKX		LKX		14.5		U		9.5		095		90		1F		5.6		5R6		-5%~+20%		E		f 切脚双折弯90° H图B型(左)			
LKL		LKL		16		I		10		100		100		2A		6.8		6R8		-15%~+5%		C		K 编带A图			
LKL(R)		LKL(R)		18		J		10.5		105		110		2R		8.2		8R2		-15%~-5%		D		J 编带B图			
LKJ		LKJ		20		N		11		110		120		2K		10		100		0%~+20%		F		V SMD			
LKD		LKD		22		K		11.5		115		125		2B		12		120		0%~+15%		N		TM 涂膜			
LED		LED		25		M		12		120		130		1Q		15		150		-5%~+15%		W		CG 车规			
LKE		LKE						12.5		125		140		2Q		22		220		-20%~+0%		S		TJ 透明			
V4M		V4M						13		130		160		2C		33		330		-20%~+10%		P		SLYP 塑料圆盘			
V3MC		V3MC						13.5		135		180		2M		47		470		0%~+5%		Q		附属码(IND)			
V3M		V3M						14		140		200		2D		56		560		-15%~+20%		u		2 引线30F/35F			
VMM		VMM						14.5		145		250		2E		68		680						3 引线33F/38F			
VK7		VK7						15		150		270		2N		82		820						4 切直脚A图			
VKO		VKO						16		160		300		2S		100		101						5 切脚成型B图			
VKM		VKM						16.5		165		315		2F		120		121						6 切脚成型C图			
VKG		VKG						17		170		320		1U		150		151						7 切脚成型D图			
VKL		VKL						18		180		330		2U		180		181						8 切脚成型E图			
VKL(R)		VKL(R)						19		190		350		2V		220		221						9 引线22F/27F			
								20		200		375		2P		330		331						M 编带A图			
								21		210		400		2G		470		471						N 编带B图			
								22		220		420		2T		560		561									
								23		230		450		2W		680		681									
								25		250		480		2L		820		821									
								28		280		500		2H		1000		102									
								30		300		550		2I		1500		152									
								31.5		315		600		2J		2200		222									
								32		320		630		2Y		3300		332									
								35.5		355		650		2X		4700		472									
								36		360						6800		682									
								40		400						10000		103									
								41.5		415						22000		223									
								45		450						33000		333									
								50		500																	



LKM


- ◆小体积 耐高频大纹波电流 高频低阻抗 电源专用产品
- ◆105℃环境下7000~10000小时
- ◆符合AEC-Q200 RoHS指令对应




主要技术参数

项目	特性									
使用温度范围	≤120V -55~+105℃；160~500V -40~+105℃									
标称电压范围	10~500V									
容量允许偏差	±20% (25±2℃ 120Hz)									
漏电流(μA)	10~120WV I≤0.01CV or 3μA 取大者 C:标称容量(μF) V:额定电压(V) 2分钟读数									
	160~500WV I≤0.02CV+10(μA) C:标称容量(μF) V:额定电压(V) 2分钟读数									
损耗角正切值 (25±2℃ 120Hz)	额定电压(V)	10	16	25	35	50	63	80	100	
	tg δ	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.09	
	额定电压(V)	120	160	200	250	350	400	450	500	
	tg δ	0.09	0.09	0.08	0.08	0.10	0.10	0.12	0.20	
	标称容量超过1000μF者, 则每增加1000μF, 损耗角正切值增加0.02									
温度特性 (120Hz)	额定电压(V)		10	16	25	35	50	63	80	100
	阻抗比Z(-40℃)/Z(20℃)		6	4	3	3	3	3	3	3
	额定电压(V)		120	160	200	250	350	400	450	500
	阻抗比Z(-40℃)/Z(20℃)		5	5	5	5	7	7	7	8
耐久性	在105℃烘箱中, 施加含额定纹波电流的额定电压, 持续规定时间后, 置于常温16小时后测试, 测试温度: 25±2℃, 电容器的性能应满足如下要求									
	容量变化率			在初始值的±20%以内						
	损耗角正切值			在规定值的200%以下						
	漏电流			在规定值以下						
	负荷寿命			Φ5				7000小时		
				Φ6.3				9000小时		
				≥Φ8				10000小时		
高温储存	在105℃下, 储存1000小时, 置于常温16小时后测试, 测试温度25±2℃, 电容器的性能应满足如下要求									
	容量变化率			在初始值的±20%以内						
	损耗角正切值			在规定值的200%以下						
	漏电流			在规定值的200%以下						

产品尺寸图 (单位: mm)

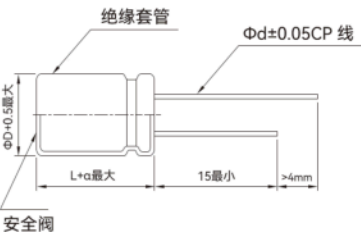

备注: ≥Φ6.3 产品有安全阀



L=9	α=1.0
L≤16	α=1.5
L>16	α=2.0

D	5	6.3	8	10	12.5~13	12.5~13(高度≥30)	14.5	16	18
d	0.5	0.5	0.6	0.6	0.7	0.6	0.8	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	5.0	7.5	7.5	7.5

纹波电流补偿系数

①频率修正因子

频率(Hz)	50	120	1K	10K~50K	100K
修正因子	0.40	0.50	0.80	0.90	1.00

②温度修正系数

环境温度(℃)	50℃	70℃	85℃	105℃
修正因子	2.1	1.8	1.4	1.0



LKM

■ 标准品一览表

电压(V)	50			63			80			100		
项目 容量 (μF)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)	尺寸 ΦD×L(mm)	阻抗 (Ωmax/100kHz 25±2°C)	纹波电流 (mA r.m.s/ 105°C 100kHz)
22	5×9	1.10	238	5×9	0.86	228	5×11	0.73	250	6.3×9	0.63	290
22							6.3×9	0.63	267			
27	5×9	0.86	286	5×9	0.58	250	6.3×9	0.63	267	6.3×11	0.63	420
27										8×9	0.63	450
33	5×9	0.58	314	5×11	0.39	300	6.3×9	0.63	267	8×9	0.40	450
33				6.3×9	0.39	344						
39	5×11	0.36	344	6.3×9	0.39	344	6.3×11	0.63	400	8×9	0.28	565
39	6.3×9	0.36	344				8×9	0.63	420			
47	5×11	0.36	344	6.3×9	0.39	385	6.3×11	0.63	420	8×11.5	0.28	585
47	6.3×9	0.34	385				8×9	0.63	470	10×9	0.28	624
56	6.3×9	0.34	385	6.3×11	0.24	492	8×9	0.63	470	8×14	0.25	624
56				8×9	0.24	525				10×9	0.25	624
68	6.3×9	0.34	390	6.3×11	0.24	724	8×9	0.49	520	8×16	0.21	735
68				8×9	0.24	724				10×12.5	0.21	750
82	6.3×11	0.24	487	8×9	0.24	724	8×11.5	0.38	624	8×16	0.19	780
82	8×9	0.24	724				10×9	0.25	668	10×14	0.19	900
100	6.3×11	0.18	687	8×9	0.24	902	8×14	0.21	735	10×14	0.14	1040
100	8×9	0.18	724				10×9	0.19	744			
120	8×9	0.18	800	8×11.5	0.19	902	8×16	0.19	744	10×16	0.12	1170
120				10×9	0.19	979	10×12.5	0.19	892	12.5×14	0.12	1240
150	8×11.5	0.14	950	8×14	0.19	950	10×14	0.15	980	12.5×14	0.0930	1368
150	10×9	0.14	975	10×12.5	0.19	1130						
180	8×14	0.11	1190	8×16	0.19	1190	10×14	0.15	980	12.5×16	0.0660	1530
180	10×12.5	0.11	1230	10×14	0.19	1190						
220	8×14	0.0950	1190	10×14	0.14	1200	10×16	0.13	1040	12.5×20	0.0660	1620
220	10×12.5	0.0950	1230				12.5×14	0.13	1040			
270	8×16	0.0740	1420	10×16	0.0860	1300	10×20	0.0940	1240	12.5×20	0.0560	1750
270	10×14	0.0740	1420	12.5×14	0.0902	1500	12.5×16	0.0940	1240	16×16	0.0640	1750
330	10×14	0.0740	1450	10×16	0.0860	1580	12.5×16	0.0940	1368	12.5×25	0.0470	2140
330				12.5×14	0.0902	1650				16×20	0.0480	2210
390	10×16	0.0580	1580	10×20	0.0660	1870	12.5×20	0.0640	1640	12.5×30	0.0400	2210
390	12.5×14	0.0580	1650	12.5×16	0.0660	1870	16×16	0.0640	1750	16×20	0.0480	2210
470	12.5×14	0.0580	2050	12.5×16	0.0500	2100	12.5×20	0.0640	1750			
470							14.5×16	0.076	1460	16×25	0.0480	2400
470							16×16	0.0480	1750	18×20	0.0420	2270
560	12.5×16	0.0500	2050	12.5×20	0.0473	2410	12.5×25	0.0480	2110	16×25	0.0320	2600
560				16×16	0.0473	2500	16×20	0.0480	2110			
680	12.5×16	0.0500	2250	12.5×25	0.0473	2410	12.5×30	0.0420	2270			
680				14.5×16	0.0560	1620	14.5×20	0.0630	1720			
680							14.5×23	0.0570	1860	16×31.5	0.0300	2860
680				16×16	0.0385	2730	16×20	0.0420	2270	18×25	0.0300	2860
820	12.5×20	0.0390	2410	12.5×30	0.0360	2620				14.5×25	0.0520	1990
820	14.5×16	0.0580	2480				16×25	0.0320	2600	18×31.5	0.0290	3510