2D Topology | Figure 6: designed input vs measured neural geometry

A Designed input currents (prior)

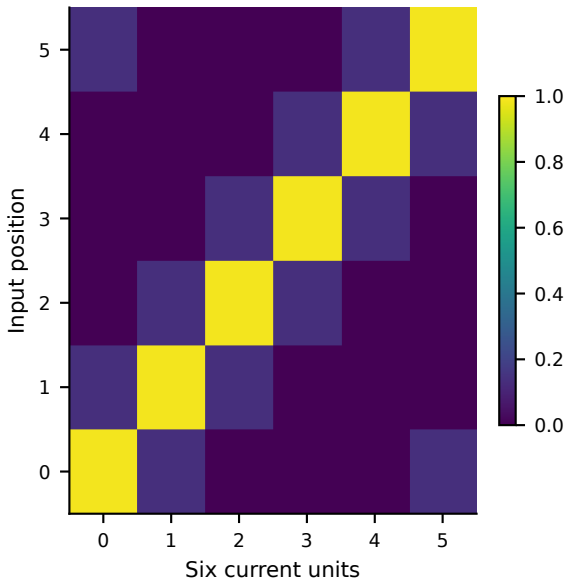

B Ideal ring geodesic distance

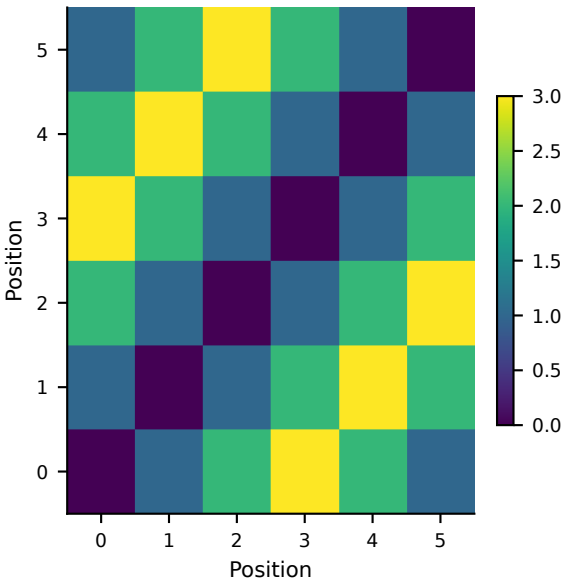

C Six input positions; ring adjacency prior

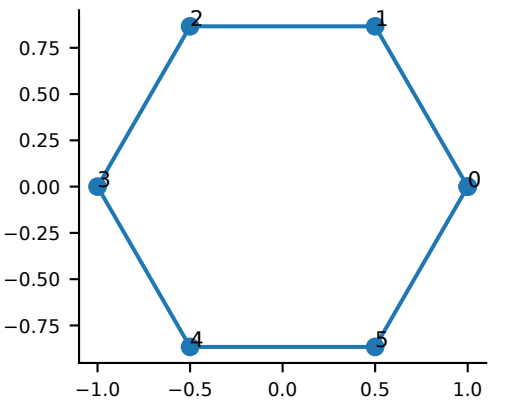

D

132 neural units in every encoding
External dimensions: 6 / 1 / 2
No neural normalization
Fixed branch b0; all six positions
NA = constant off-diagonal distances
MDS stress measures distance distortion
Six discrete points do not prove a manifold

E R1 whole-network RDM
rho=NA; relative delta=0

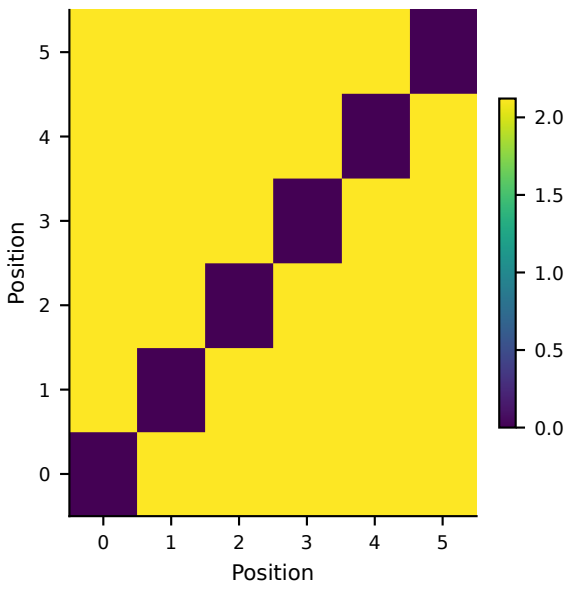

F R2 whole-network RDM
rho=0.91; relative delta=0.00016

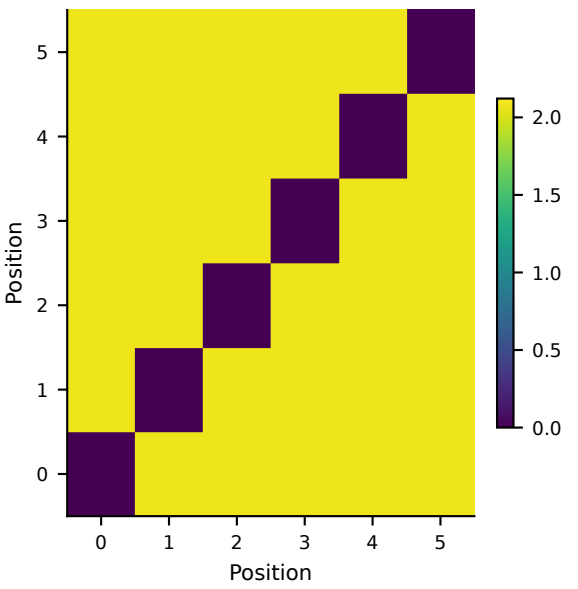

G R3 whole-network RDM
rho=1.00; relative delta=0.00014

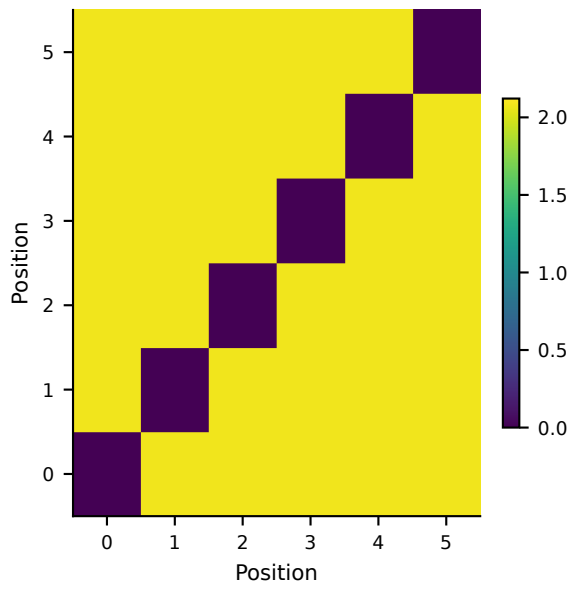

H R4 whole-network RDM
rho=1.00; relative delta=0.00024

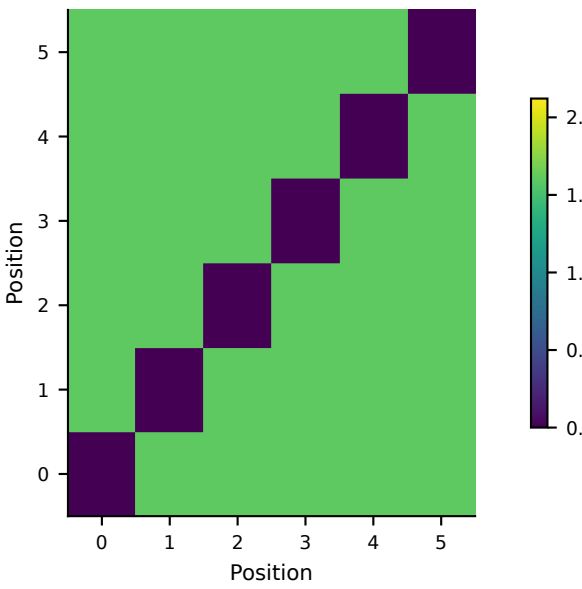

I R1 classical MDS; stress=0.460

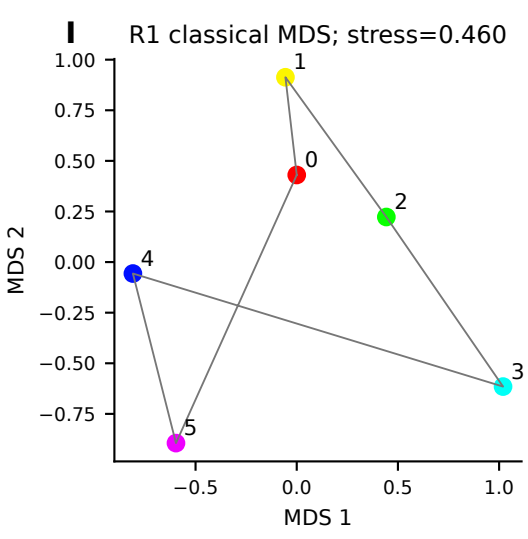

J R2 classical MDS; stress=0.425

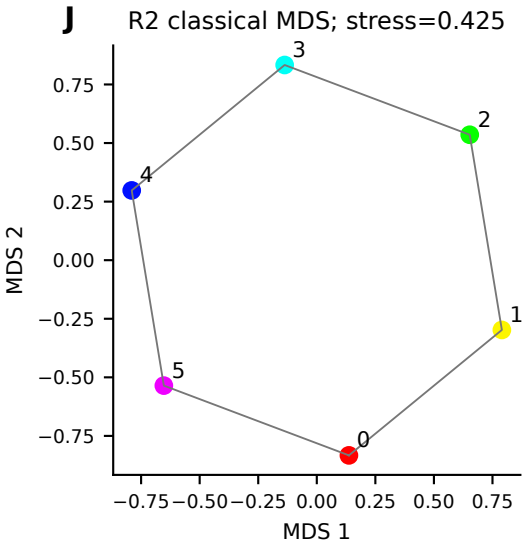

K R3 classical MDS; stress=0.425

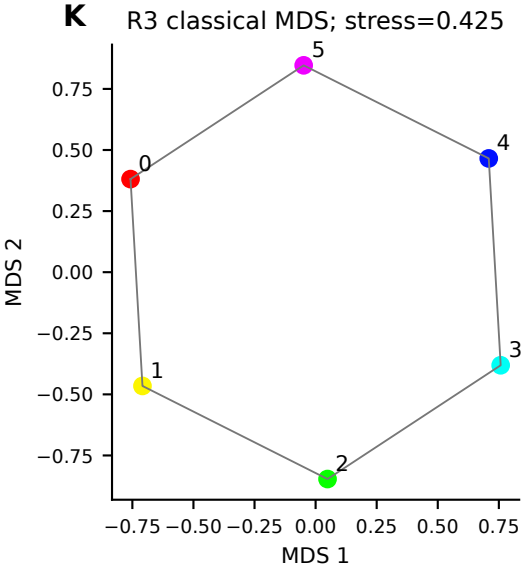
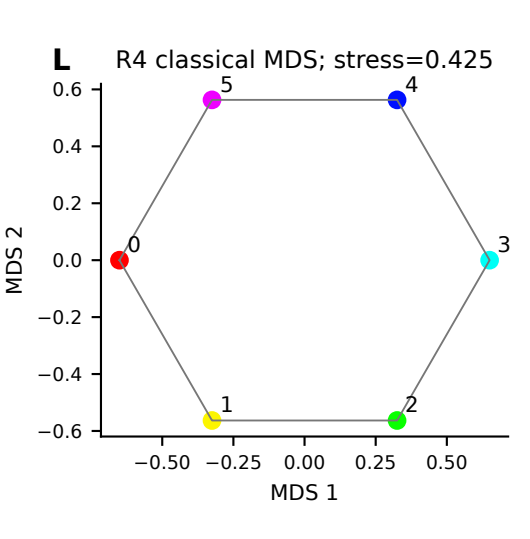
L R4 classical MDS; stress=0.425