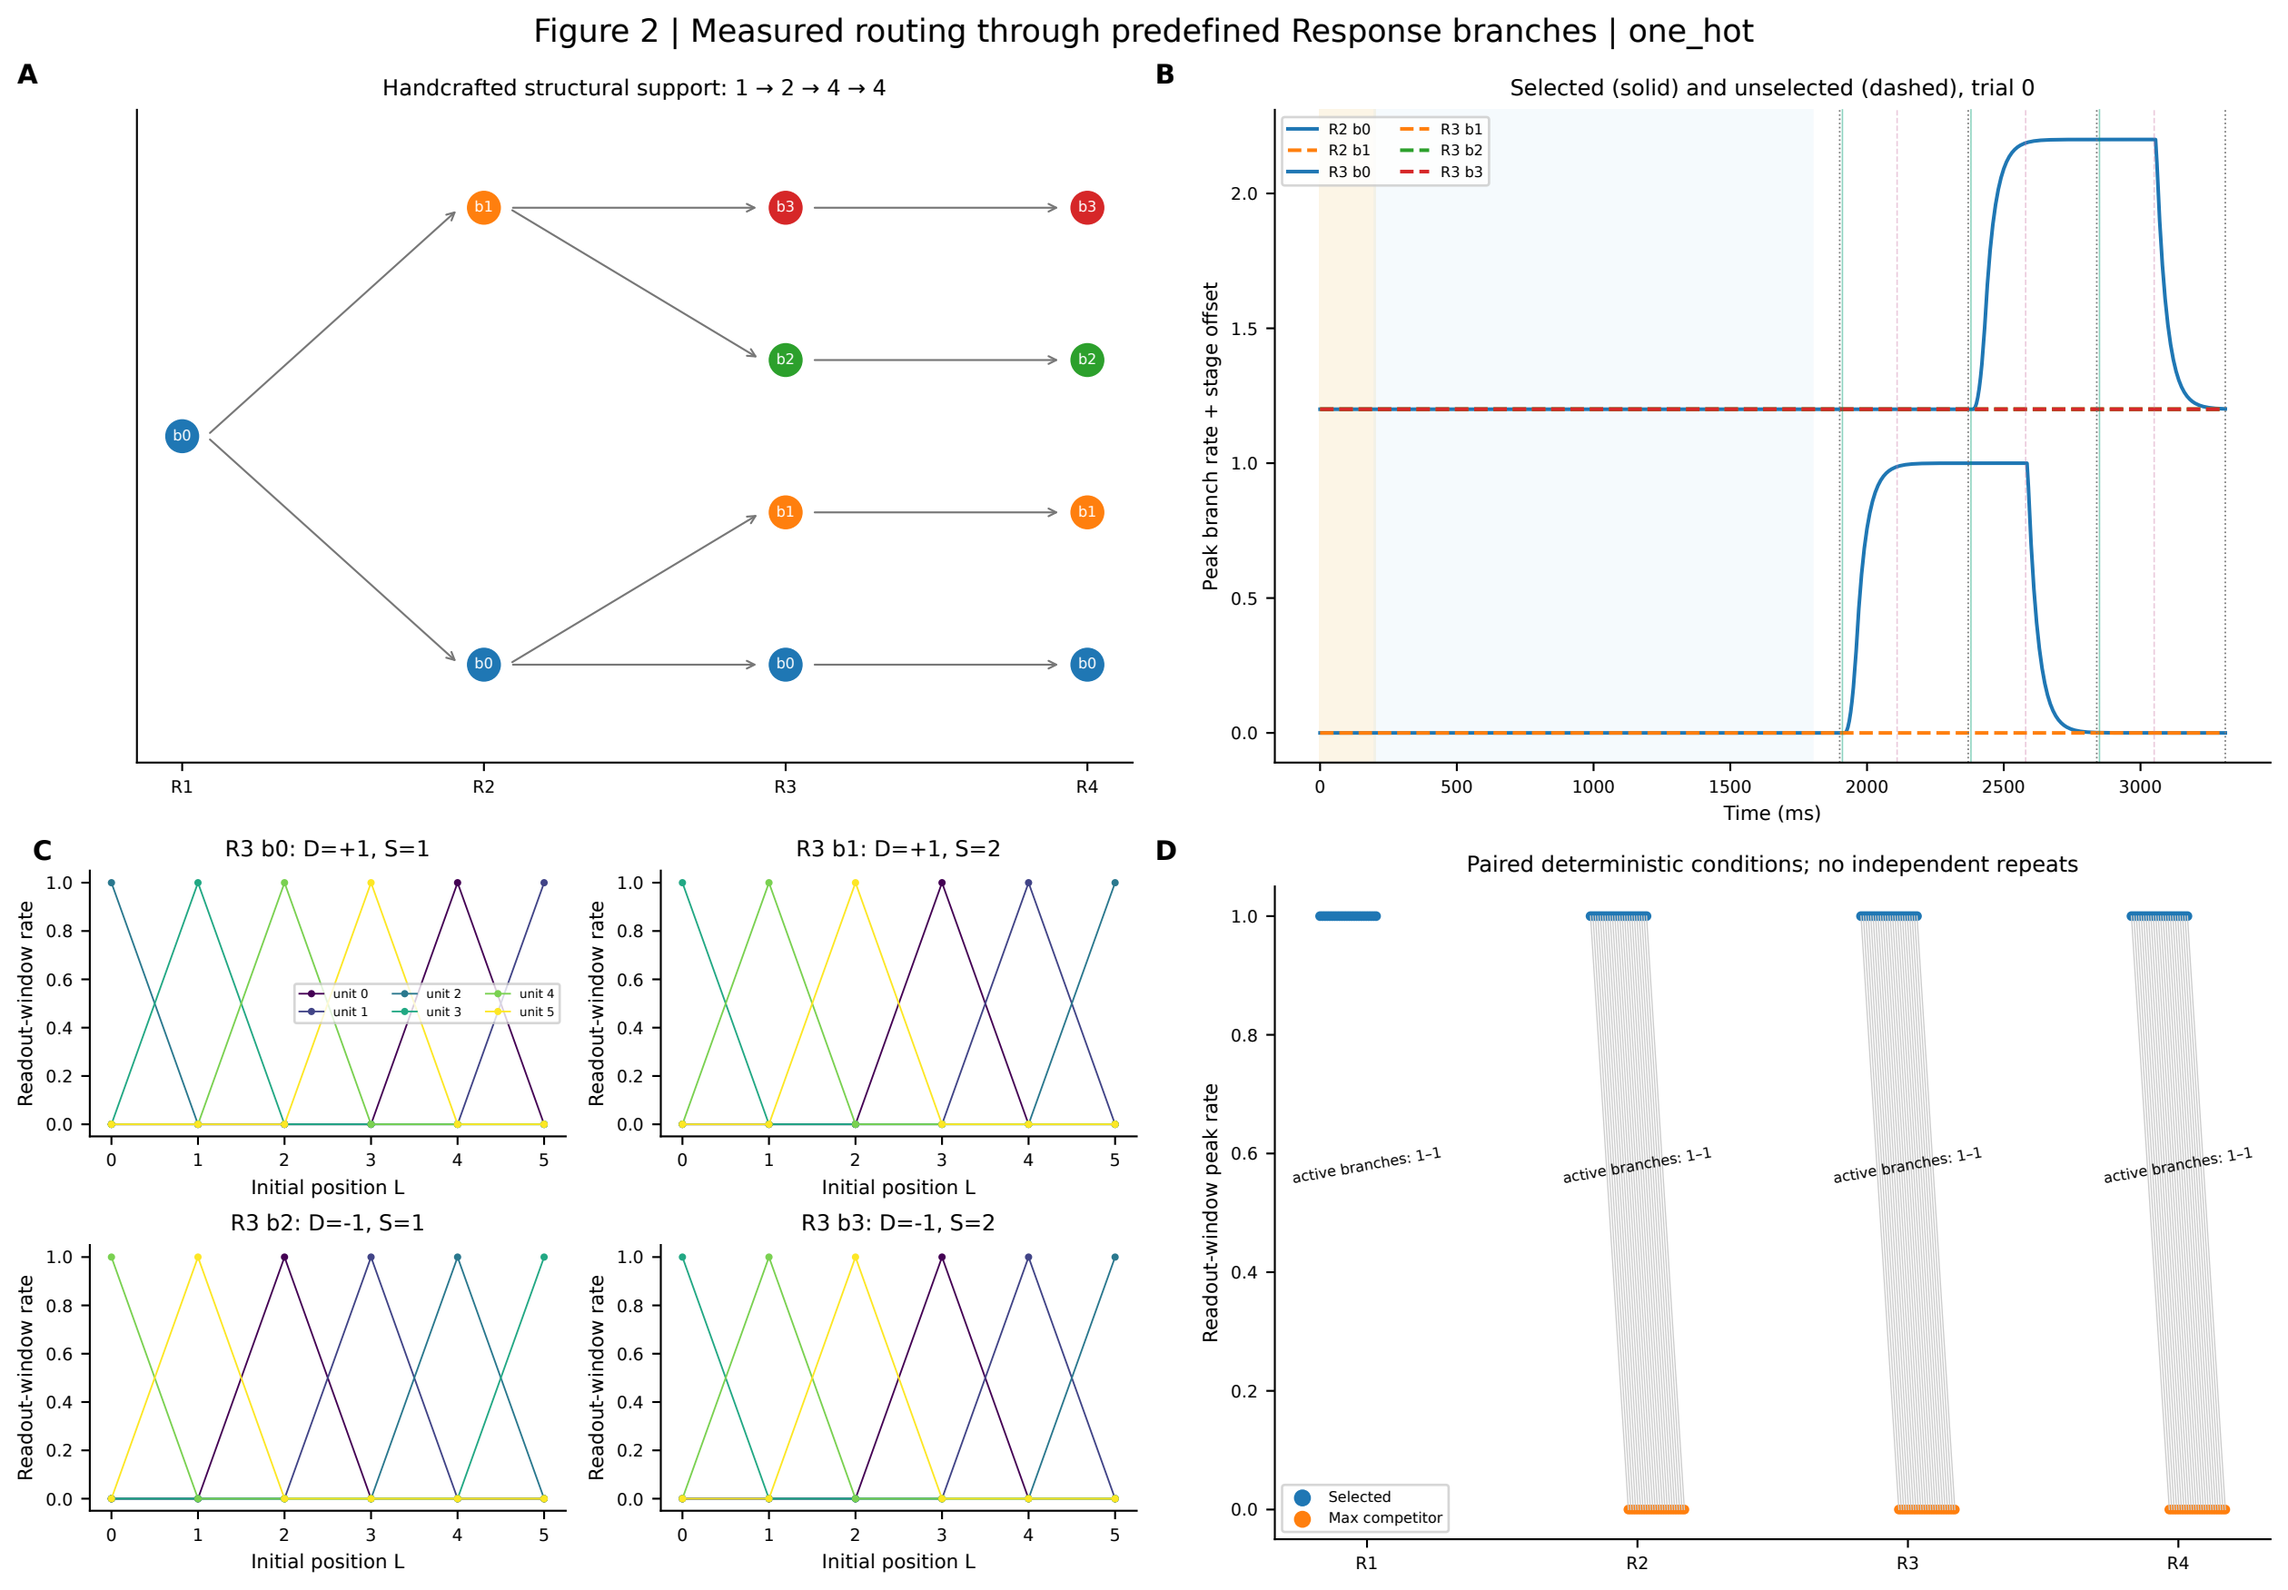

Figure 2 | Measured routing through predefined Response branches | one_hot
A
Handcrafted structural support: 1 → 2 → 4 → 4
b0
b1
b0
b3
b2
b1
b0
b3
b2
b1
b0
R1
R2
R3
R4
B
Selected (solid) and unselected (dashed), trial 0
R2 b0
R2 b1
R3 b0
R3 b1
R3 b2
R3 b3
Peak branch rate + stage offset
Time (ms)
C
R3 b0: D=+1, S=1
R3 b1: D=+1, S=2
R3 b2: D=-1, S=1
R3 b3: D=-1, S=2
unit 0
unit 1
unit 2
unit 3
unit 4
unit 5
Readout-window rate
Initial position L
D
Paired deterministic conditions; no independent repeats
Readout-window peak rate
active branches: 1–1
Selected
Max competitor
R1
R2
R3
R4