

# MS Technical Paper: Placement Algorithms for Heterogeneous FPGAs

Brian B Cheng

Rutgers University Department of Electrical and Computer Engineering

## 1 Keywords

- FPGA, EDA, Placement, Simulated Annealing, Optimization, RapidWright

## 2 Abstract

fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.  
fdsafdsafdsa.

## 3 Introduction

Field-Programmable Gate Arrays (FPGAs) have witnessed rapid growth in capacity and versatility, driving significant advances in computer-aided design (CAD) and electronic design automation (EDA) methodologies. Since the early-to-mid 2000s, the stagnation of single-processor performance relative to the rapid increase in integrated circuit sizes has led to a design productivity gap, where the computational effort for designing complex chips continues to rise. FPGA CAD flows mainly encompass synthesis, placement, and routing; all of which are NP-hard problems, of which placement is one of the most time-consuming processes. Inefficient placement strategy not only extends design times from hours to days, thereby elevating cost and reducing engineering productivity, but also limits the broader adoption of FPGAs by software engineers who expect compile times akin to those of software compilers like gcc.

For these reasons, FPGA placement remains a critical research effort even today. In this paper, we study and implement established placement methods. To do this, we use the RapidWright API, which is a semi-open-source research effort from AMD/Xilinx that enables custom solutions to FPGA design implementations and design tools that are not offered by their industry-standard FPGA environment, Vivado. We implement multiple variations of simulated annealing placers for

Xilinx’s 7-series FPGAs, with an emphasis on minimizing total wirelength while mitigating runtime. Our implementation is organized into three consecutive sub-stages. The **prepacking** stage involves traversing a raw EDIF netlist to identify recurring cell patterns—such as CARRY chains, DSP cascades, and LUT-FF pairs—that are critical for efficient mapping and legalization. In the subsequent **packing** stage, these identified patterns, along with any remaining loose cells, are consolidated into SiteInst objects that encapsulate the FPGA’s discrete resource constraints and architectural nuances. Finally, the **placement** stage employs a simulated annealing (SA) algorithm to optimally assign SiteInst objects to physical sites, aiming to minimize total wirelength while adhering to the constraints of the 7-series architecture.

Simulated annealing iteratively swaps placement objects guided by a cost function that decides which swaps should be accepted or rejected. Hill climbing is permitted by occasionally accepting moves that increase cost, in hope that such swaps may later lead to a better final solution. SA remains a popular approach in FPGA placement research due to its simplicity and robustness in handling the discrete architectural constraints of FPGA devices. While SA yields surprisingly good results given relatively simple rules, it is ultimately a heuristic approach that explores the vast placement space by making random moves. Most of these moves will be rejected, meaning that SA must run many iterations, usually hundreds to thousands, to arrive at a desirable solution.

In the ASIC domain, where placers must handle designs with millions of cells, the SA approach has largely been abandoned in favor of analytical techniques, owing to SA’s runtime and poor scalability. Modern FPGA placers have also followed suit, as new legalization strategies allow FPGA placers to leverage traditionally ASIC placement algorithms and adapt them to the discrete constraints of FPGA architectures. While this paper does not present a working analytical placer, it will explore ways to build upon our existing infrastructure (prepacker and packer) to replace SA with AP.

The paper first begins by elaborating on general FPGA architecture and then specifically the Xilinx 7-Series architecture. Then, the paper will elaborate on the FPGA design flow, then the role that the RapidWright API plays in the design flow. We explain in detail each of these concepts for a broader audience as they provide much needed context for FPGA placement algorithms as a concept. However, readers who are already familiar with these concepts can skip directly to the RapidWright API section 7 or to the Simulated Annealing section .

## 4 FPGA Architecture History

Before any work can begin on an FPGA placer, it is necessary to understand both the objects being placed and the medium in which they are placed. Configurable logic devices have undergone significant evolution over the past four decades. We will briefly review the evolution of configurable logic architecture starting in the 1970s and quickly work our way up to modern day FPGA architecture.

**PLA:** The journey began with the Programmable Logic Array (PLA) in the early 1970s. The PLA implemented output logic using a programmable-OR and programmable-AND plane that formed a sum-of-products equation for each output through programmable fuses. Around the same time, the Programmable Array Logic (PAL) was introduced. The PAL simplified the PLA by fixing the OR gates, resulting in a fixed-OR, programmable-AND design, which sacrificed some logic flexibility to simplify its manufacture. Figure 1 shows one such PAL architecture.

**CPLD:** Later in the same decade came the Complex Programmable Logic Device (CPLD), which took the form of an array of Configurable Logic Blocks (CLBs). These CLBs were typically modified PAL blocks that included the PAL itself along with macrocells such as flip-flops, multiplexers, and tri-state buffers. The CPLD functioned as an array of PALs connected by a central programmable switch matrix and could be programmed using a hardware description language (HDL) like VHDL. Figure 2 shows one such CPLD architecture.



Figure 1: PAL architecture with 5 inputs, 8 programmable AND gates and 4 fixed OR gates

**Homogeneous FPGA:** The mid-1980s saw the introduction of homogeneous FPGAs, which were built as a grid of CLBs. Rather than using a central programmable switch matrix as in CPLDs, FPGAs adopted an island style architecture in which each CLB is surrounded on all sides by programmable routing resources, as shown in Figure 4. The first commercially viable FPGA, produced by Xilinx in 1984, featured 16 CLBs arranged in a 4x4 grid. As FPGA technology advanced, CLBs were redesigned to use lookup tables (LUTs) instead of PAL arrays for greater logic density. The capacity of an FPGA was often measured by how many logical elements or CLBs it offered, which grew from hundreds to thousands and now to hundreds of thousands of CLBs.



Figure 2: CPLD architecture with 4 CLBs (PAL-like blocks)



Figure 3: A homogeneous island-style FPGA architecture with 16 CLBs in a grid.



## 5.1 CLB SLICES

In the 7-Series architecture, the term *CLB* (Configurable Logic Block) refers to a *CLB Tile* that contains two *SLICE* Sites. Xilinx offers two variants of *SLICE* Sites: **SLICEL** and **SLICEM**.

- Each **SLICEL** has a set of BELs including eight LUTs, eight FFs, and one CARRY4 adder. The LUT BELs in a **SLICEL** can only host LUT Cells.
- The **SLICEM** includes all the features of a **SLICEL** but its LUT BELs can host both LUT Cells, which are asynchronous ROM elements, or RAM32M Cells, which are synchronous 32-deep RAM elements. These cells are also referred to as *Distributed RAM* in the Xilinx documentation. These cells can offer an alternative to the larger, more dedicated 18K-36K RAMB18E1 cells when RAM resources are highly utilized or when the design inherently demands homogeneously distributed local memory.

In a typical 7-Series device, approximately 75% of the *SLICE* Sites are **SLICEL**s and 25% are **SLICEM**s. A single *CLB* Tile can therefore host either two **SLICEL**s or one **SLICEL** and one **SLICEM**. To simplify the problem space, however, we will only consider **SLICEL**s for general logic and use the dedicated RAMB18E1 cells to implement RAM elements.

The BELs in these *SLICES* facilitate the bulk of the general programmability of the FPGA fabric. We will explain in detail the function and motivation behind these BELs.

**LUTs** Combinational logic is universal to all HDL designs. As the their name suggests, a Look-Up Table (LUT) map an input value to an output value. LUTs facilitate combinational logic by acting as tiny asynchronously-accessed ROMs whose contents are fixed when the FPGA is programmed. For any boolean function, the synthesizer precalculates the boolean output to every possible input combination and stores the resulting truth table into a LUT's static memory. The inputs are then essentially treated as an address space that maps to a data value space in an asynchronous ROM. No explicit logic gates like NAND or XNOR are synthesized, contrary to what newcomers might expect from a "Field Programmable Gate Array".

In the 7-Series devices, one LUT can facilitate any 6-input boolean function, or two 5-input functions, as long as they share the same input signals. The LUT can also host two independent boolean functions of up to 3 inputs each, even when the inputs are not shared. Functions requiring more than six unique inputs are decomposed across multiple cascaded LUTs. Figure 6 shows an example of where a LUT is typically synthesized in a design entry.

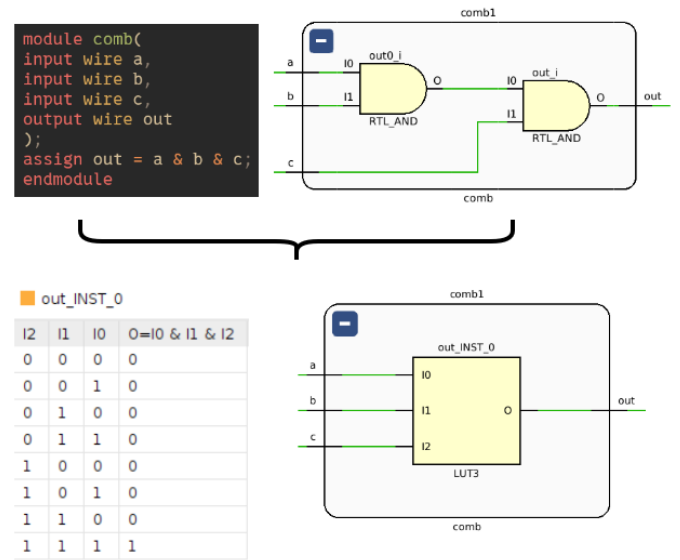


Figure 6: LUT synthesis from user design

**FFs** FFs are synthesized to facilitate synchronous event-driven signal assignment. For most Verilog users, this generally means signal assignments wrapped in always @(posedge clk) statements. Figure 7 shows an example of where a FF is typically synthesized. The cell primitive **FDRE** is a type of FF and belongs to a family of D Flip Flops (DFFs) with Clock Enable (CE).

- **FDCE** - DFF with CE and Asynchronous Clear
- **FDPE** - DFF with CE and Asynchronous Preset
- **FDSE** - DFF with CE and Synchronous Set
- **FDRE** - DFF with CE and Synchronous Reset

In a typical HDL design, the vast majority of FFs will be synthesized as **FDRE**s with the occasional **FDSE**, as it is generally good practice to keep FPGA designs synchronous. A FF BEL may also host a **LATCH** Cell, however, since they are generally bad practice in FPGA design, we will not consider latches in this paper.

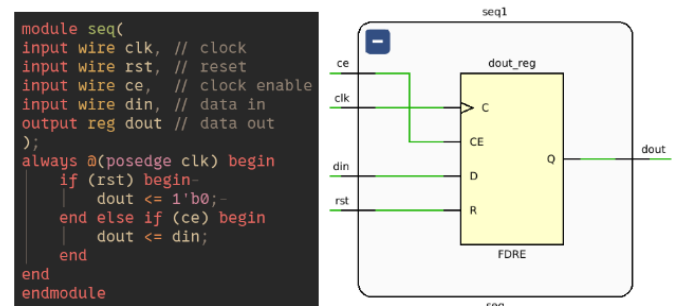


Figure 7: FF synthesis from user design

Up to eight (8) FFs can be placed within the same *SLICE*, but only if they all share a common Clock-Enable (CE) net and a common Set-Reset (SR) net. This is because the *SLICE* has only one CE pin and one SR pin to interface with general routing. The CE and SR signals from these pins are broadcast intra-Site to all FFs within.

**LUT-FF Pairs** FPGA designs are very often modelled as a collection of Finite State Machines (FSM) like shown in Figure 8. Many times a design will also use pipelining, either to model signal buffers or shift registers, or to split up large combinational logic blocks into time slices to meet timing constraints. These common design structures result in many consecutive sections of combinational logic feeding into a vector of registers. The synthesizer naturally synthesizes these structures as consecutive pairs of LUTs feeding into FFs as shown in Figure 9. Figure 10 shows an example of a synthesized LUT-FF Pair.

Shown in Figure 11 are two possible placements for a LUT-FF Pair on the physical device. On the right, the cells are placed across different Sites, thus the only way to route the net between the cells is through general inter-site routing. On the bottom left, the cells are placed within the same Site in the same lane, taking advantage of the intra-site routing without burdening the general router with additional inter-site routing. This is an important consideration to make while minimizing wirelength during placement.

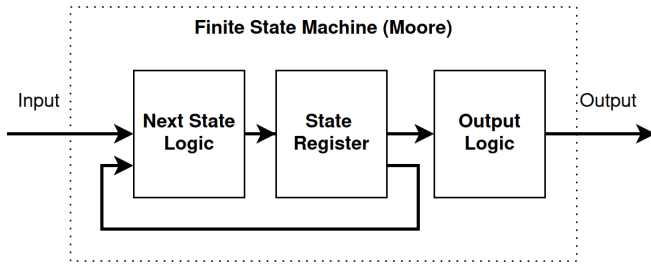


Figure 8: Finite state machine (Moore)

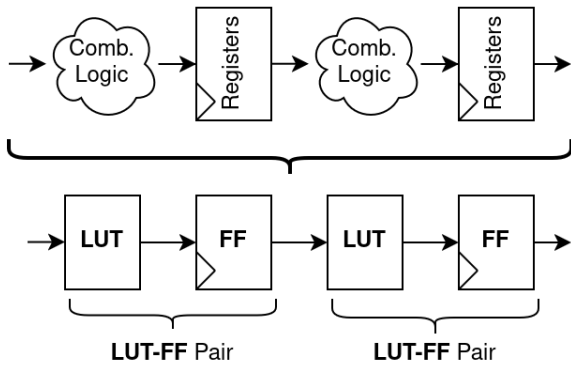


Figure 9: Pipelining synthesized as consecutive LUT-FF pairs

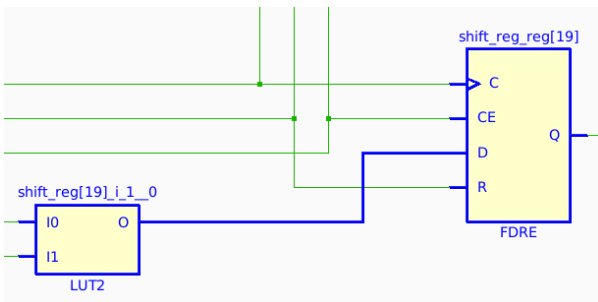


Figure 10: A synthesized LUT-FF Pair

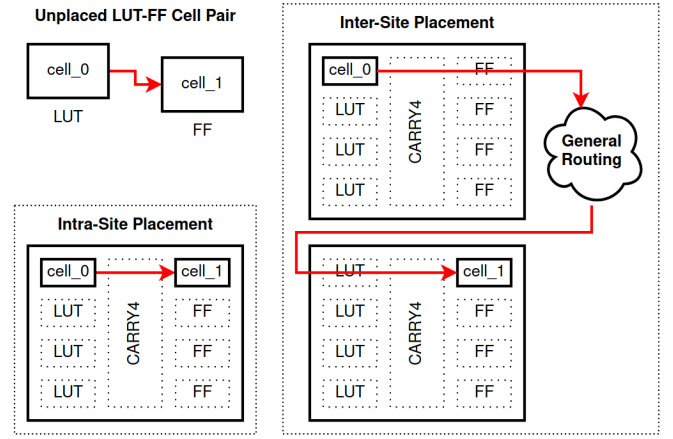


Figure 11: Intrasite vs Intersite LUT-FF Placement

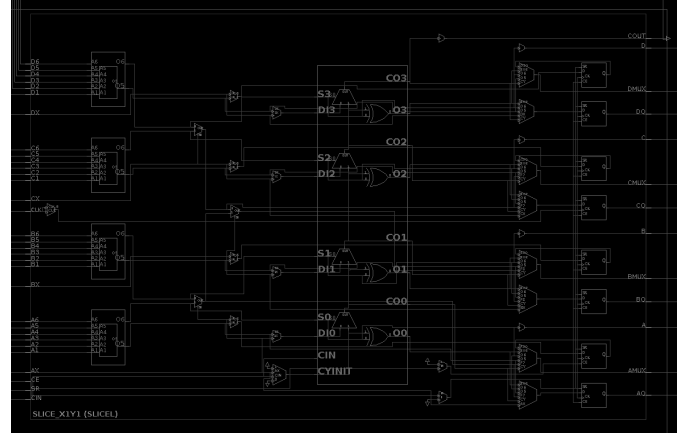


Figure 12: A SLICEL Site




Figure 13: A LUT6 Cell is hosted using two LUT5 BELs.

A group of LUT-FF pairs may be placed in the same SLICE, with the constraint that the FFs must share the same Clock-Enable (CE) and Set-Reset (SR) nets. Clustering LUT-FF pairs like this can reduce the redundancy of having to route the same CE and SR nets to many SLICES by routing the nets to fewer SLICES and connecting them to the individual FFs within via intra-Site routing, and at the same time, packing greater logic density over a smaller area of the device. Recall that up to eight FFs may be placed in the same SLICE, thus theoretically, up to eight LUT-FF pairs can be placed in the same SLICE.

Utilizing all 8 LUT-FF lanes in a SLICE can help reduce device area utilization and minimize wirelength, but *too much* logic density in an area can contribute to general routing congestion. Furthermore, attempting to fill all 8 lanes in a SLICE requires meticulous adherence to conditional LUT constraints. Recall that a LUT can accommodate one 6-input boolean function or two 5-input boolean functions sharing the same inputs or any two 3-input or less boolean functions regardless of shared in-



puts. A LUT6 Cell (a LUT with 6-inputs) will actually occupy two LUT-FF lanes in a SLICE, rendering one of the FF BELs in either lane ineligible for another LUT-FF pair. Figure 12 hints at this by depicting pairs of LUTs stacked ontop of one another. The LUTs individually can host up to a LUT5, but combined together can host one LUT6, like shown in Figure 13. To simplify the problem space, we will only fill up to four LUT-FF lanes in any given SLICE.

**CARRY** An FPGA design will also typically implement many adders, counters, subtractors, or comparators, all of which are based on binary addition. They are so ubiquitous that every that in the 7-Series architecture, every SLICE features a CARRY4 BEL – a 4-bit carry-lookahead (CLA) adder, a much better alternative to synthesizing adders via LUTs.

**CARRY Chains** These CARRY4 blocks can be chained across SLICES to implement wide adders efficiently. The CARRY4 BELs *must* be chained vertically consecutively across SLICES as the Carry-In (CI) and Carry-Out (CO) pins can only be routed this way. A CARRY4 cell may also directly connect to LUTs and FFs, and should be placed in the same Site whenever possible to minimize wirelength. Shown in figure 15 shows how a CARRY4 chain and associated LUTs and FFs can be placed across SLICES.

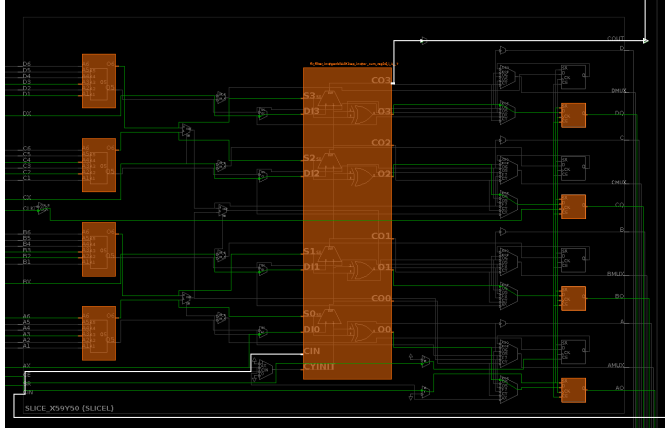


Figure 14: A SLICEL populated by a CARRY4 cell, 4 LUT cells, and 4 FF cells

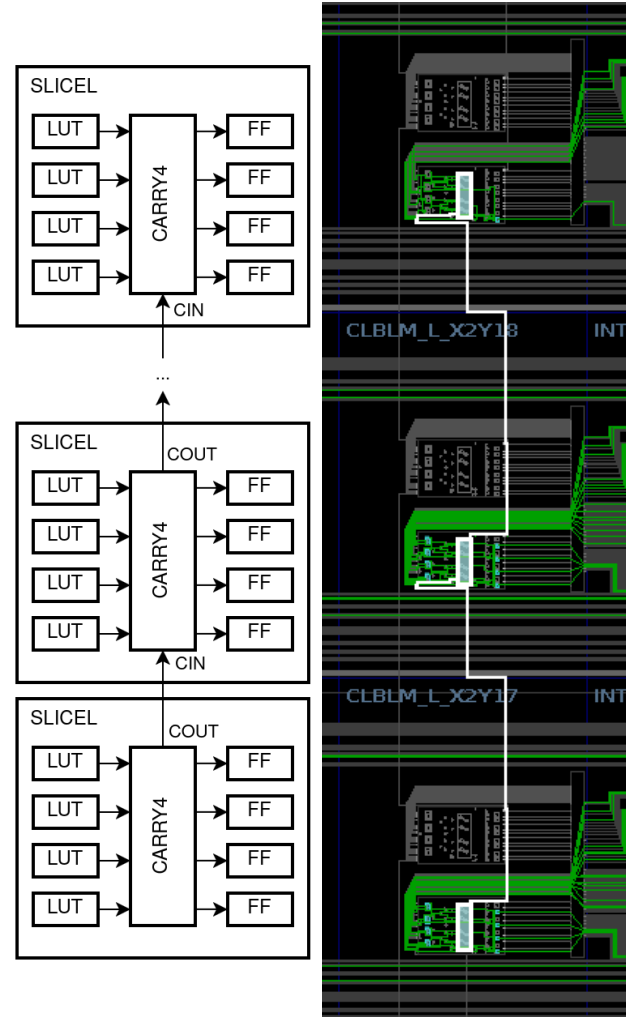


Figure 15: A CARRY4 chain of size 3 placed across 3 SLICES. **Left:** Simplified view, **Right:** As shown in the Vivado device viewer.

```

module adder(
    input clk,
    input rst,
    input wire ce,
    input wire[7:0] dina,
    input wire[7:0] dinb,
    output wire[7:0] dout,
    output wire cout
);
    reg[8:0] sum;
    always @(posedge clk) begin
        if (rst) begin
            sum <= 9'b0;
        end else if (ce) begin
            sum <= dina + dinb;
        end
    end
    assign cout = sum[8];
    assign dout = sum[7:0];
endmodule

```

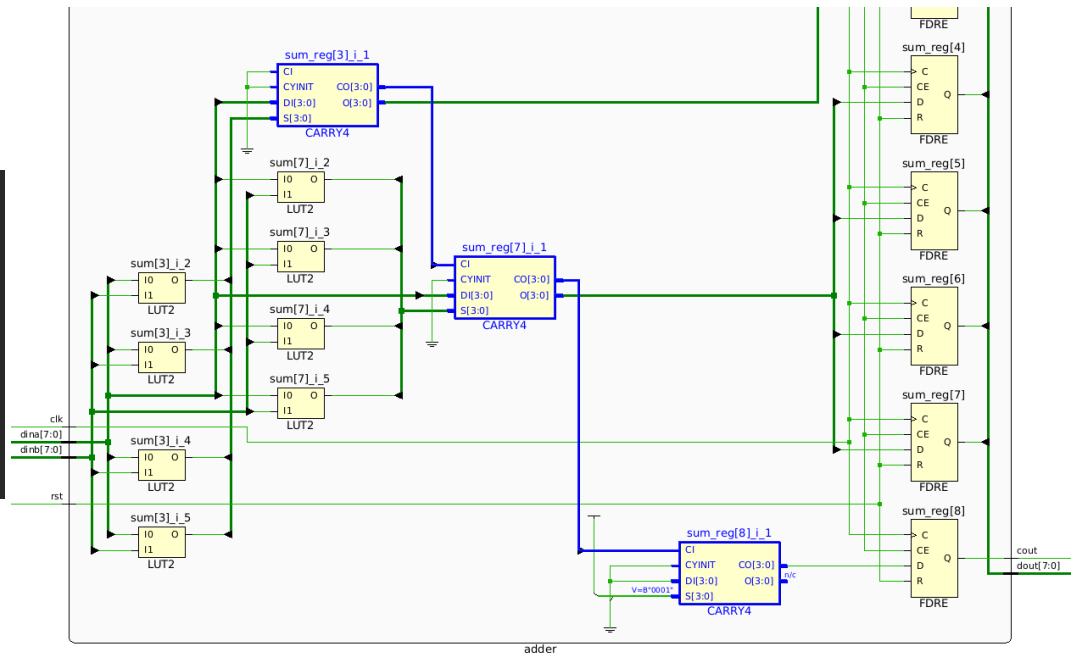


Figure 16: A CARRY4 chain of size 3 as shown in the Vivado netlist viewer

## 5.2 DSP Slices

**DSPs** FPGAs are often used as low latency Digital Signal Processing (DSP) accelerators. Common DSP subsystems like Finite Impulse Response (FIR) filters, Fast Fourier Transform (FFTs), and convolutional neural nets (CNNs) demand fast large scale multiply-accumulate (MAC) capabilities. The 7-Series architecture integrates DSP BELs into the logic fabric called DSP48E1 that can facilitate MAC efficiently. The architecture hierarchy for DSPs is simple compared to CLBs and SLICES. A DSP48E1 Tile contains two DSP48E1 Sites, each containing one DSP48E1 BEL, which can host a DSP48E1 Cell.

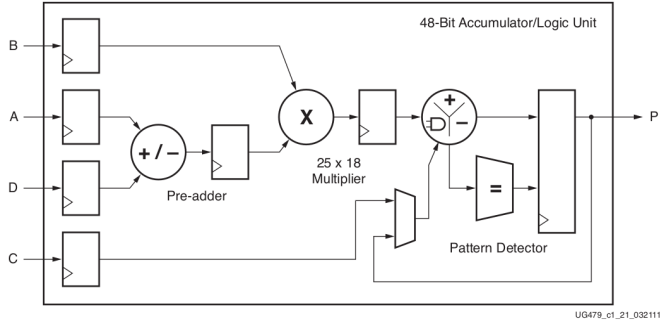


Figure 17: Basic DSP48E1 Slice Functionality

**DSP Cascades** Wider DSP functions are supported by cascading DSP48E1 slices in a DSP48E1 column. Much like CARRY4 chains, DSP48E1 cascades must necessarily be placed vertically consecutively across DSP48E1 Sites. They are connected by three busses: ACOUT to ACIN, BCOUT to BCIN, PCOUT to PCIN. These signal busses run directly between the vertical DSP48E1 slices without burdening the general routing resources. The ability to cascade this way provides a high-performance and low-power imple-

mentation of digital signal processing systems.

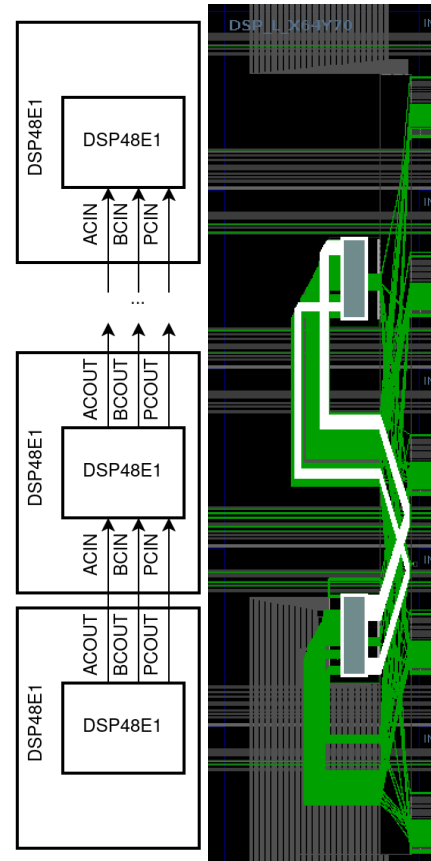


Figure 18: A DSP48E1 cascade of size 2 placed across 2 DSP48E1 Sites. **Left:** Simplified view, **Right:** As shown in the Vivado device viewer.

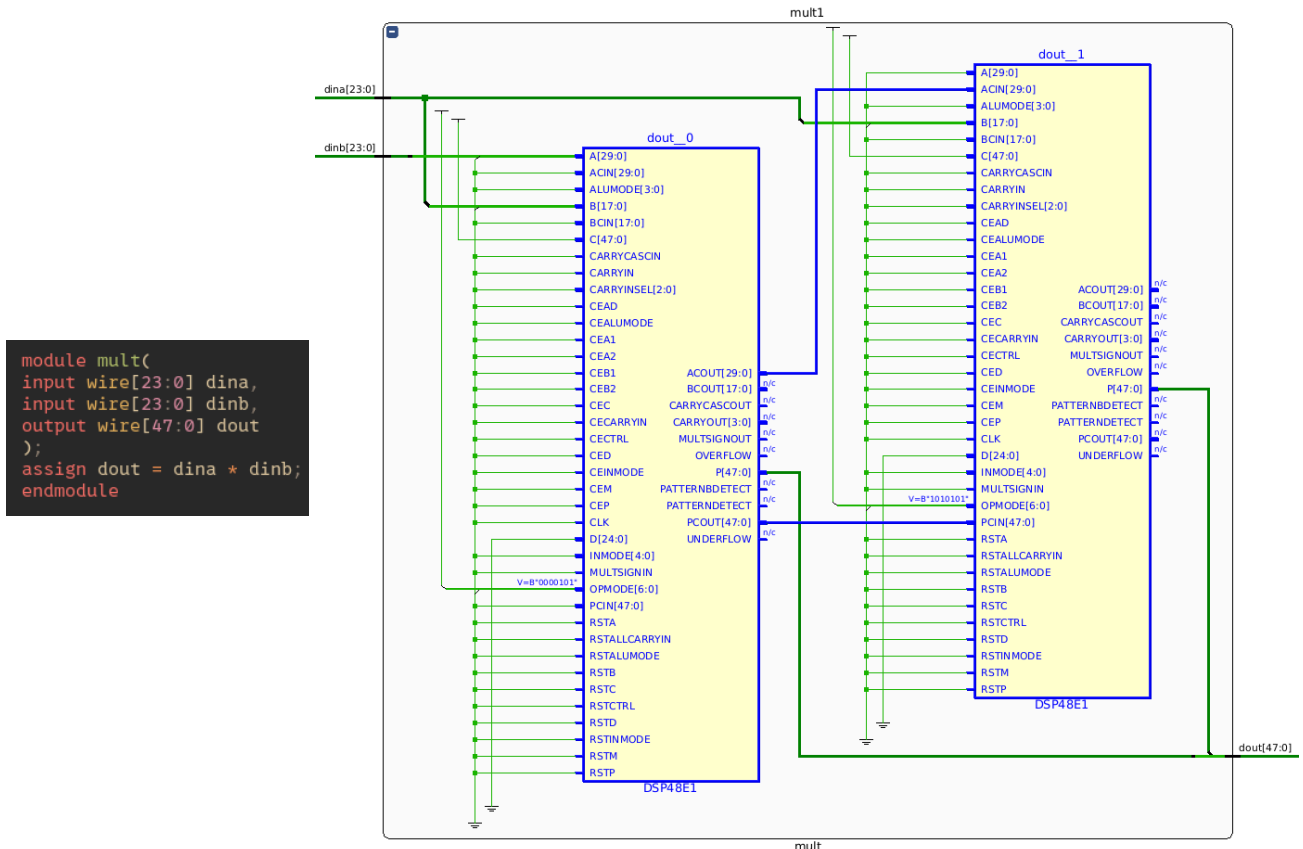


Figure 19: Simple multiplier synthesis from user design.

### 5.3 Block RAM

In addition to SLICES and DSPs, the 7-Series also offers dedicated Block Random Access Memory (BRAM) BELs. These BRAMs come in two variants: **RAMB18E1** and **RAMB36E1**.

- **RAMB18E1** - Has a capacity of 18 Kilobits. It can be configured as single port RAM with dimensions ranging between (1-bit wide by 16K deep) to (18-bit wide by 1024 deep). It can also be configured as a (36-bit wide by 512 deep) true simple dual port RAM.
- **RAMB36E1** - Has a capacity of 36 Kilobits. It can be configured as single port RAM with dimensions ranging between (1-bit wide by 32K deep) to (36-bit wide by 1024 deep). It can also be configured as a (72-bit wide by 512 deep) simple dual port RAM.

One BRAM Tile contains one **RAMB36E1** Site and two **RAMB18E1** Sites. The **RAMB36E1** Site contains one **RAMB36E1** BEL, which can host one **RAMB36E1** Cell. Likewise, the **RAMB18E1** Site contains one **RAMB18E1** BEL, which can host one **RAMB18E1** Cell.

Like DSP cascades, BRAMs may also be cascaded together in a column to implement large memories efficiently, with some intermediate signals between them routed intra-Tile without burdening the general routing. However, unlike DSPs, large memories decomposed amongst multiple BRAMs can also be routed together through general routing. Furthermore, in most design scenarios, large memories will not utilize the intra-Tile signals.

To simplify the problem space, we will not constrain large BRAMs to be cascaded together in consecutive vertical Tiles. We can essentially treat **RAMB18E1** and **RAMB36E1** Cells as loose, minimally constrained single cells, in contrast to the highly constrained **DSP48E1** cascades and **CARRY4** chains.

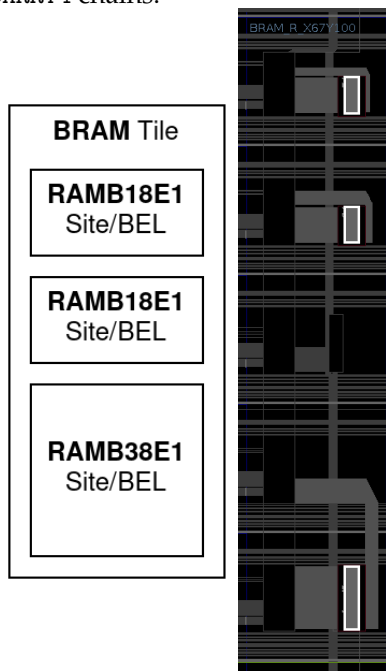


Figure 20: A BRAM Tile containing two **RAMB18E1** Sites and one **RAMB36E1** Site. **Left:** simplified view. **Right:** as seen in the device viewer, BELs highlighted in white.

```

module ram(
    input wire clk,
    input wire en,
    input wire we,
    input wire rst,
    input wire [9:0] addr,
    input wire [23:0] din,
    output wire [23:0] dout
);
reg [23:0] ram [1023:0];
reg [23:0] dout;
always @(posedge clk)
begin
    if (en) begin
        if (we)
            ram[addr] <= din;
        if (rst)
            dout <= 0;
        else
            dout <= ram[addr];
    end
end
endmodule

```

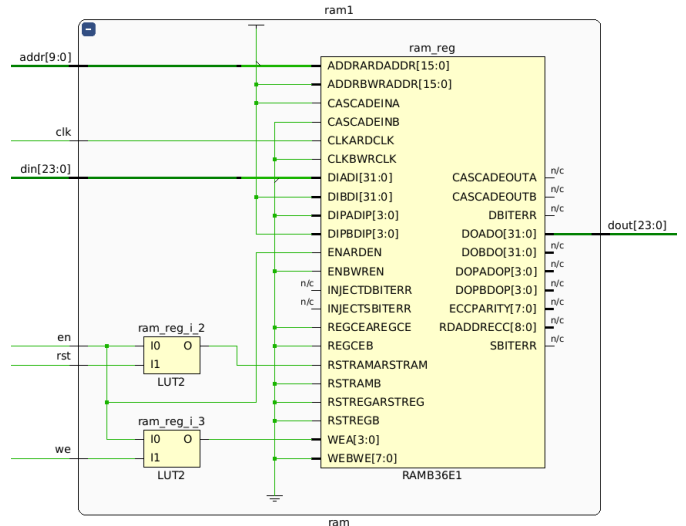


Figure 21: An example of BRAM synthesis (via inference)

### 5.4 Further Documentation

For more in-depth details about 7-Series FPGAs, refer to the official Xilinx user guides such as:

- *7 Series FPGAs Overview* (UG476)
- *7 Series FPGA Configurable Logic Block* (UG474)
- *7 Series Memory Resources* (UG473)
- *7 Series DSP48E1 Slice* (UG479)

This architectural context provides the necessary background for understanding how a placement algorithm should account for resource and placement constraints and optimize wirelength in modern FPGA architectures.



## 6 FPGA Design Flow and Toolchain

Modern FPGA designs require a sophisticated toolchain to bridge the gap between high-level hardware descriptions and the final bitstream used to configure the FPGA. Figure 22 illustrates a representative process that converts an abstract Hardware Description Language (HDL) design into a verified configuration file for a target device.



Figure 22: A typical FPGA design and verification workflow.

1. **Design Entry:** An engineer describes the intended functionality of the digital system using a hardware description language (HDL) such as Verilog or VHDL. During this phase, the coding style can vary (behavioral, structural, dataflow, etc.), but it generally aims to capture high-level behavior rather than device-specific details.
2. **Synthesis:** The synthesis tool parses the HDL source, performs logical optimizations, and maps the design onto primitive cells that suit the target FPGA technology. The output is typically a structural netlist (e.g., EDIF or structural Verilog) which details how the design's logic is broken down into LUTs, FFs, and other vendor-specific cells.
3. **Placement and Routing (Implementation):** In *placement*, each logical cell from the synthesized netlist is assigned to a physical location on the FPGA fabric. For instance, LUTs and FFs go into specific *BELs* within the device's CLB sites, and specialized cells such as DSPs and Block RAMs must be placed in their corresponding tile types. Next, *routing* determines how signals are physically wired through the FPGA's configurable interconnect network. Modern tools often interleave these steps (e.g., fluid-placement routing or

routing-aware placement) to better meet timing and area objectives.

4. **Bitstream Generation:** After a design is fully placed, routed, and timing-closed, the toolchain produces a final *bitstream* that sets the configuration of every programmable element in the FPGA. This bitstream can then be loaded onto the device, either through vendor software or via a custom programming interface.
5. **Verification:** In parallel to the design flow, simulations and testbenches validate correctness of the user's design at multiple abstraction levels. Engineers may begin with behavioral simulations, then progress to post-synthesis simulations, and finally to post-implementation simulations that incorporate estimated routing delays. With each higher level of fidelity, computational requirements grow significantly due to increasing complexity and the need to analyze more variables over time. Ensuring correct functionality and meeting timing closure at the post-implementation stage is crucial before deploying the design to hardware. Given the importance of thorough verification, many established companies dedicate one verification engineer for every design engineer.

## 7 RapidWright API

**RapidWright** is an open-source Java framework from AMD/Xilinx that provides direct access to the netlist and device databases used by vendor tools. This framework positions itself as an additional workflow column, allowing users to intercept or replace stages of the standard design flow with custom optimization stages (see Figure 23).

- **Design Checkpoints:** RapidWright leverages .dcp files (design checkpoints) generated at various stages of a Vivado flow. By importing a checkpoint, engineers can manipulate the netlist, placement, or routing externally, then re-export a modified checkpoint for further processing in the Vivado workflow column.
- **Key Packages:** RapidWright revolves around three primary data model packages:
  1. **edif** – Represents the logical netlist in an abstracted EDIF-like structure.
  2. **design** – Contains data structures for the physical implementation (Cells, Nets, Sites, BELs, etc.).
  3. **device** – Provides a database of the target FPGA architecture (e.g., Site coordinates, Tile definitions, routing resources).
- **Interfacing with the Netlist and Device:** An engineer can query the netlist to find specific resources (LUTs, FFs, DSPs, etc.) and then map or move them onto device sites. This level of control over backend resources is necessary for research in custom placement, advanced packing techniques, or experimental routing algorithms.

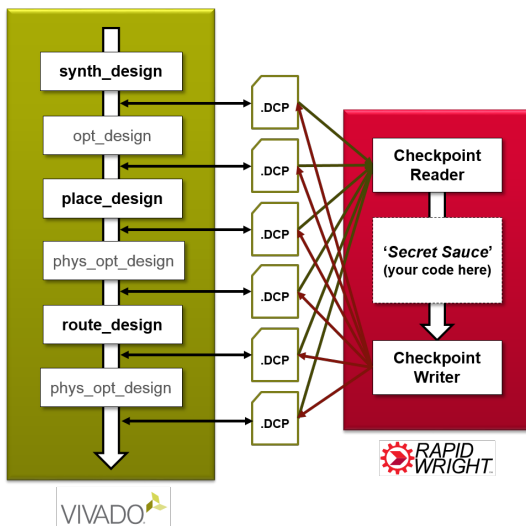


Figure 23: RapidWright workflow integrating into the default Vivado design flow.

By exposing these low-level internals, RapidWright allows fine-grained design transformations that go beyond the standard Vivado IDE's capabilities. Researchers can prototype new EDA strategies without needing to re-implement an entire FPGA backend from scratch, thus accelerating innovation in placement and routing methodologies.

### 7.1 What is a Netlist?

In its most general form, a netlist is a list of every component in an electronic design paired with a list of nets they connect to. Depending on the abstraction level at hand, these components can be transistors, logic gates, macrocells, or increasingly higher-level modules. Generally, a net denotes any group of two or more interconnected components. In an electronics context, a net can be thought of as a wire connecting multiple pins between multiple components, with each wire having one voltage source and one or more voltage sinks. Thus, one could express the netlist as a hypergraph, nodes representing components, hyperedges representing wires connecting two or more component. More precisely, these hyperedges connect the ports on the components, not the components themselves, with each component exposing multiple ports.

In FPGA context, the components are logical cells (LUTs, CARRY4s, etc.) or hierarchical cells (Verilog module instances) with pins connected together by wires. In Vivado, a Netlist can be synthesized as a Hierarchical or a Flattened netlist. Figure 24 shows an example a Verilog design with modules instantiated in a hierarchy. Figure 25 shows the design synthesized into a **hierarchical netlist** with **hierarchical cells** and **leaf cells**. The synthesizer attempts to construct the module hierarchy as close to the module instantiation hierarchy defined by the user design entry. Figure 26 shows the same design but synthesized into a **flattened netlist** containing **only leaf cells**.

In either synthesized netlist, the **leaf cells**, (deepest level cells), must necessarily consist only of **primitive cells** from the architecture's primitive cell library (LUT6, FDRE, CARRY4, DSP48E1, etc.). The netlist can be compiled and exported as a purely structural low-level Verilog file, or an Electronic Design Interchange Format (EDIF) file, both describing the netlist explicitly as a list of cell instances connected by a list of wires.

```

module top_level(
  input wire clk, // clock
  input wire rst, // reset
  input wire ce, // clock enable
  input wire dina, // data in a
  input wire dinb, // data in b
  input wire dinc, // data in c
  output wire[2:0] dout // data out
);
module_0 m0(
  clk, rst, ce,
  dina, dinb, dinc, dout[0]
);
module_1 m1(
  clk, rst, ce,
  dina, dinb, dinc, dout[2:1]
);
endmodule

module module_0(
  input wire clk, // clock
  input wire rst, // reset
  input wire ce, // clock enable
  input wire dina, // data in a
  input wire dinb, // data in b
  input wire dinc, // data in c
  output reg dout // data out
);
wire q_0;
reg q_1;
assign q_0 = (dina && dinb) || dinc;
always @(posedge clk) begin
  if (rst) begin
    dout <= 1'b0;
  end else if (ce) begin
    q_1 <= q_0;
    dout <= q_1;
  end
end
endmodule

module module_1(
  input wire clk, // clock
  input wire rst, // reset
  input wire ce, // clock enable
  input wire dina, // data in a
  input wire dinb, // data in b
  input wire dinc, // data in c
  output wire[1:0] dout // data out
);
module_2 m2(
  clk, rst, ce,
  dina, dinb, dinc, dout[0]
);
module_3 m3(
  clk, rst, ce,
  dina, dinb, dinc, dout[1]
);
endmodule

module module_2(
  input wire clk, // clock
  input wire rst, // reset
  input wire ce, // clock enable
  input wire dina, // data in a
  input wire dinb, // data in b
  input wire dinc, // data in c
  output reg dout // data out
);
wire q;
assign q = (1dina && dinb) || dinc;
always @(posedge clk) begin
  if (rst) begin
    dout <= 1'b0;
  end else if (ce) begin
    dout <= q;
  end
end
endmodule

module module_3(
  input wire clk, // clock
  input wire rst, // reset
  input wire ce, // clock enable
  input wire dina, // data in a
  input wire dinb, // data in b
  input wire dinc, // data in c
  output reg dout // data out
);
wire q;
assign q = (dina && dinb) || !dinc;
always @(posedge clk) begin
  if (rst) begin
    dout <= 1'b0;
  end else if (ce) begin
    dout <= q;
  end
end
endmodule

```

Figure 24: A simple HDL design with module hierarchy.

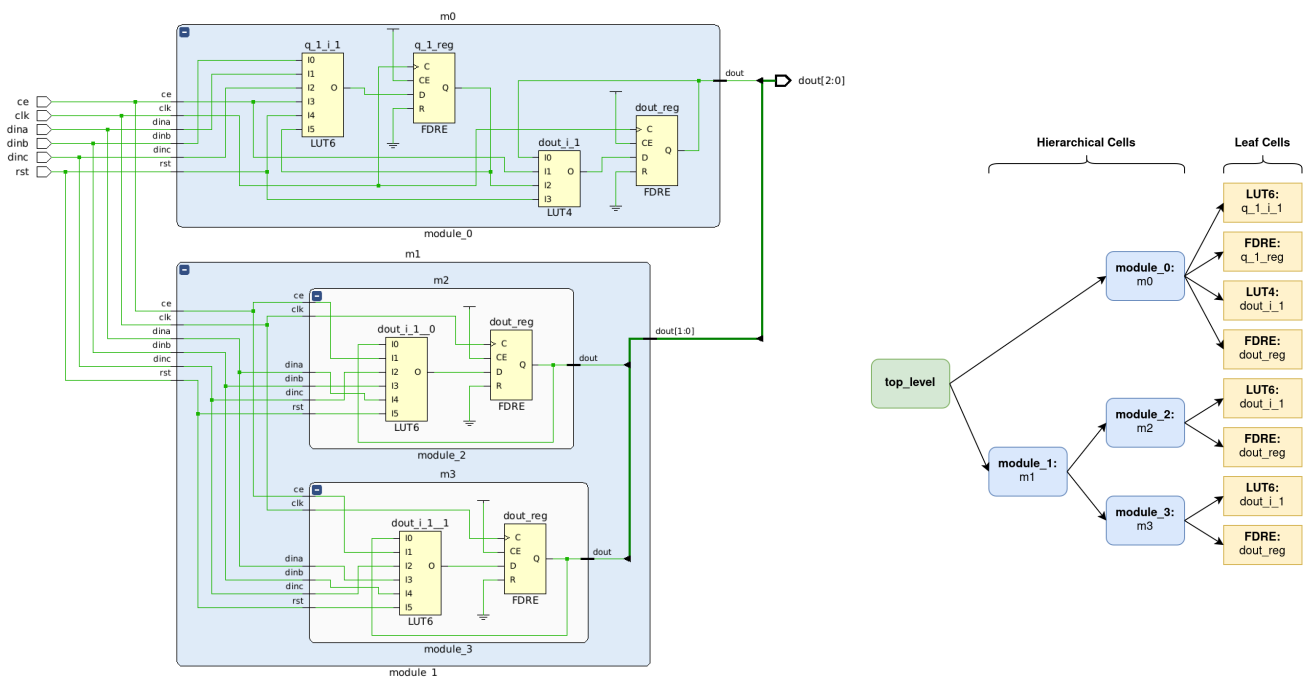


Figure 25: **Left:** A hierarchical netlist consisting of LUTs and FFs. **Right:** The cell hierarchy tree.

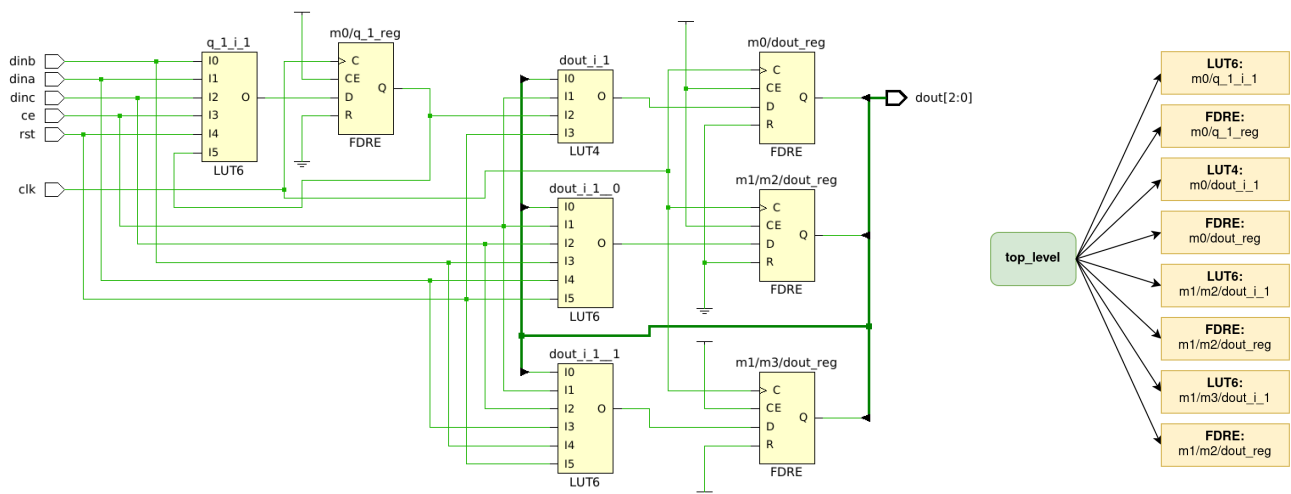


Figure 26: **Left:** A flattened netlist consisting of LUTs and FFs. **Right:** The flattened cell hierarchy tree.

## 7.2 Netlist Traversal and Manipulation via RapidWright

RapidWright represents the logical netlist objects via the edif classes:

- EDIFNetlist: The full logical netlist of a Design.
- EDIFNet: A logical net within an EDIFNetlist.
- EDIFHierNet: Combines an EDIFNet with a full hierarchical instance name to uniquely identify a net in a netlist.
- EDIFCell: A logical cell in an EDIFNetlist.
- EDIFCellInst: An instance of an EDIFCell.
- EDIFHierCellInst: An EDIFCellInst with its hierarchy, described by all the EDIFCellInsts that sit above it within the netlist.
- EDIFPort: A port on an EDIFCell.
- EDIFPortInst: An instance of a port on an EDIFCellInst.
- EDIFHierPortInst: Combines an EDIFPortInst with a full hierarchical instance name to uniquely identify a port instance in a netlist.

Using these classes and their associated methods, we can traverse the logical netlist (EDIFNetlist) and analyze or manipulate it as we see fit. A netlist can be easily extracted from a .dcp design checkpoint file and traversed like shown in Listing 1. This is performed on the same design shown in figure 26.

Listing 1: Basic netlist extraction and traversal

```
1 Design design = Design.readCheckpoint("synth.dcp");
2 EDIFNetlist netlist = design.getNetlist();
3
4 // Example task:
5 // Extract the set of all unique nets from the design.
6
7 // Initialize a new Set:
8 Set<EDIFNet> netSet = new HashSet<>();
9
10 // Access all leaf cells
11 List<EDIFCellInst> ecis = netlist.getAllLeafCellInstances();
12
13 // Traverse the cell list
14 for (EDIFCellInst eci : ecis) {
15     // Access the ports on this cell
16     Collection<EDIFPortInst> epis = eci.getPortInsts();
17     for (EDIFPortInst epi : epis) {
18         // Access the net on this port
19         EDIFNet net = epi.getNet();
20         netSet.add(net);
21     }
22 }
23
24 // Downstream task:
25 // For each unique net, print out the incident cells.
26
27 // Traverse the set of nets
28 for (EDIFNet net : netSet) {
29     System.out.println("Net: " + net.getName());
30     // Access the ports connected to this net
31     Collection<EDIFPortInst> epis = net.getPortInsts();
32     for (EDIFPortInst epi : epis) {
33         // Access the cell that this port belongs to
34         EDIFCellInst eci = epi.getCellInst();
35         if (eci == null) {
36             // (top_level ports have no associated cell)
37             continue;
38         } else {
39             System.out.println(
40                 "\tCell: " + eci.getName() +
41                 ",\tCellType: " + eci.getCellName()
42             );
43         }
44     }
45 }
```

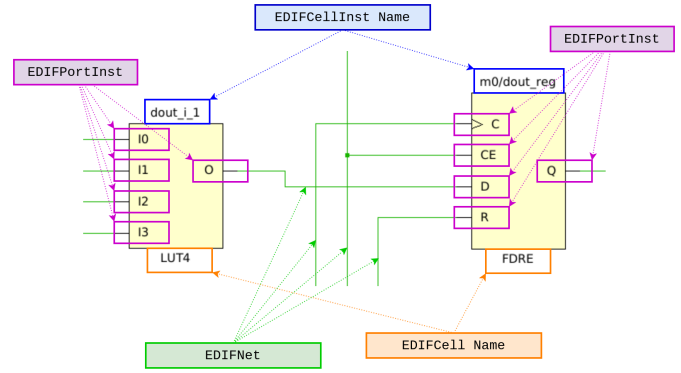


Figure 27: Netlist traversal via the EDIFCellInst, EDIFPortInst, and EDIFNet classes

In this method, we get the list of all EDIFCellInst from the EDIFNetlist and traverse the list of cells and access their connected nets. Alternatively, we could have also extracted the list of all EDIFNets directly from the design and traversed the nets to access their connected cells.

Listing 2: Code Printout

```
1 Net: dout[0]
2   Port: I0, Cell: dout_i_1, CellType: LUT4
3   Port: Q, Cell: m0/dout_reg, CellType: FDRE
4 Net: q_1
5   Port: I2, Cell: dout_i_1, CellType: LUT4
6   Port: Q, Cell: m0/q_1_reg, CellType: FDRE
7   Port: I5, Cell: q_1_i_1, CellType: LUT6
8 Net: ce
9   Port: I1, Cell: dout_i_1, CellType: LUT4
10  Port: I1, Cell: dout_i_1_0, CellType: LUT6
11  Port: I1, Cell: dout_i_1_1, CellType: LUT6
12  Port: I3, Cell: q_1_i_1, CellType: LUT6
13 Net: dout[1]
14  Port: I0, Cell: dout_i_1_0, CellType: LUT6
15  Port: Q, Cell: m1/m2/dout_reg, CellType: FDRE
16 Net: dout_i_1_1_n_0
17  Port: O, Cell: dout_i_1_1, CellType: LUT6
18  Port: D, Cell: m1/m3/dout_reg, CellType: FDRE
19 Net: clk
20  Port: C, Cell: m0/dout_reg, CellType: FDRE
21  Port: C, Cell: m0/q_1_reg, CellType: FDRE
22  Port: C, Cell: m1/m2/dout_reg, CellType: FDRE
23  Port: C, Cell: m1/m3/dout_reg, CellType: FDRE
24 Net: dout[2]
25  Port: I0, Cell: dout_i_1_1, CellType: LUT6
26  Port: Q, Cell: m1/m3/dout_reg, CellType: FDRE
27 Net: <const0>
28  Port: G, Cell: GND, CellType: GND
29  Port: R, Cell: m0/dout_reg, CellType: FDRE
30  Port: R, Cell: m0/q_1_reg, CellType: FDRE
31  Port: R, Cell: m1/m2/dout_reg, CellType: FDRE
32  Port: R, Cell: m1/m3/dout_reg, CellType: FDRE
33 Net: <const1>
34  Port: P, Cell: VCC, CellType: VCC
35  Port: CE, Cell: m0/dout_reg, CellType: FDRE
36  Port: CE, Cell: m0/q_1_reg, CellType: FDRE
37  Port: CE, Cell: m1/m2/dout_reg, CellType: FDRE
38  Port: CE, Cell: m1/m3/dout_reg, CellType: FDRE
39 Net: dout_i_1_0_n_0
40  Port: O, Cell: dout_i_1_0, CellType: LUT6
41  Port: D, Cell: m1/m2/dout_reg, CellType: FDRE
42 Net: rst
43  Port: I3, Cell: dout_i_1, CellType: LUT4
44  Port: I5, Cell: dout_i_1_0, CellType: LUT6
45  Port: I5, Cell: dout_i_1_1, CellType: LUT6
46  Port: I4, Cell: q_1_i_1, CellType: LUT6
47 Net: dinc
48  Port: I2, Cell: dout_i_1_0, CellType: LUT6
49  Port: I2, Cell: dout_i_1_1, CellType: LUT6
50  Port: I2, Cell: q_1_i_1, CellType: LUT6
51 Net: dinb
52  Port: I3, Cell: dout_i_1_0, CellType: LUT6
53  Port: I4, Cell: dout_i_1_1, CellType: LUT6
54  Port: I0, Cell: q_1_i_1, CellType: LUT6
55 Net: dina
56  Port: I4, Cell: dout_i_1_0, CellType: LUT6
57  Port: I3, Cell: dout_i_1_1, CellType: LUT6
58  Port: I1, Cell: q_1_i_1, CellType: LUT6
59 Net: q_1_i_1_n_0
60  Port: D, Cell: m0/q_1_reg, CellType: FDRE
61  Port: O, Cell: q_1_i_1, CellType: LUT6
62 Net: dout_i_1_n_0
63  Port: O, Cell: dout_i_1, CellType: LUT4
64  Port: D, Cell: m0/dout_reg, CellType: FDRE
```

## 7.3 Placement Flow via RapidWright

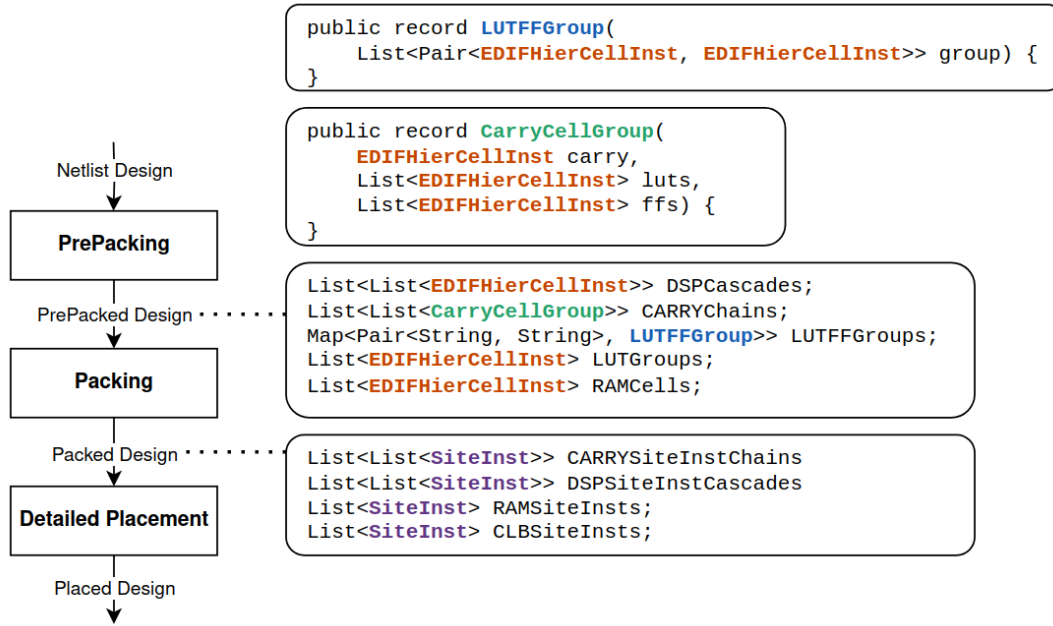


Figure 28: The data classes populated at each substage: PrepackedDesign, PackedDesign, and PlacedDesign.

With a basic understanding of FPGA architecture, design placement, and RapidWright, we have all the necessary pieces to implement our SA placer. Here we outline in detail each substage of our implementation: PrePacking, Packing, and Placement. Shown in Figure 29 is an overview of the placement workflow. Figure 28 shows the data structures of RapidWright objects that are populated at each stage: PrepackedDesign, which is a group of data structures around EDIFHierCellInsts, PackedDesign, which is a group of data structures around SiteInsts, and finally, PlacedDesign, which is simply captured by the final RapidWright Design object.

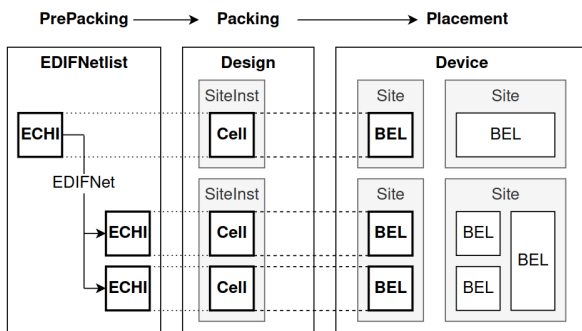


Figure 29: Our placement workflow

## 8 Prepacking

The first step in our placement flow is **prepacking**. Recall from the 7-Series architecture that there are certain multi-cell structures that must adhere to certain placement constraints to ensure legality, and by design, to minimize wirelength. The job of the prepacker is to traverse the raw EDIF netlist, detect these multi-cell structures, and consolidate these cells into clusters or groups of clusters that naturally reflect these placement constraints.

Recall that CARRY4 chains must necessarily be placed vertically and consecutively across a column of SLICES in ascending order. Likewise, DSP48E1 cascades must necessarily be placed vertically and consecutively across a column of DSP48E1 Sites in ascending order. A LUT-FF pair may be placed freely, but should be placed in the same lane within the same SLICE to minimize wirelength.

The raw EDIF netlist only tells us the list of nets and the cell ports that they connect to. It does not report the presence of any multi-cell structures (CARRY4 chains, etc.). Thus, we must traverse the netlist to detect these multi-cell structures and store that structure information in a class we will call PrepackedDesign.

The code snippet in 7 shows how one can detect and collect these CARRY4 chains using RapidWright. We first collect the cells in the design that are of type CARRY4, then iteratively traverse their Carry-Out (CO) to Carry-In (CI) nets to find incident CARRY4 cells. Each CARRY4 chain has an anchor cell and a tail cell where the chain terminates. The anchor is found when the CI net connects to Ground (GND), while the tail is found when the CO port is null. We can further detect if there are LUTs or FFs connected to the CARRY4 cell and store that information in a data structure we will call CarryCellGroup as defined in figure 28. This will help us in knowing which cells can be packed together into the same Site in the subsequent stages.

Similarly, DSP48E1 cascades can be found and collected by traversing the PCOUT ACOUT and BCOUT nets. LUT-FF pairs can be found by inspecting the LUT output (O) net and checking for FF input (DI) ports. We can bucket these LUT-FF pairs by finding the set of unique CE SR net pairs to know which group of LUT-FF pairs can be placed within the same Site.

The overall goal of prepacking is to detect the presence of these multi-cellular structures and consolidate that information into our PrepackedDesign object in preparation for the following Packing stage.



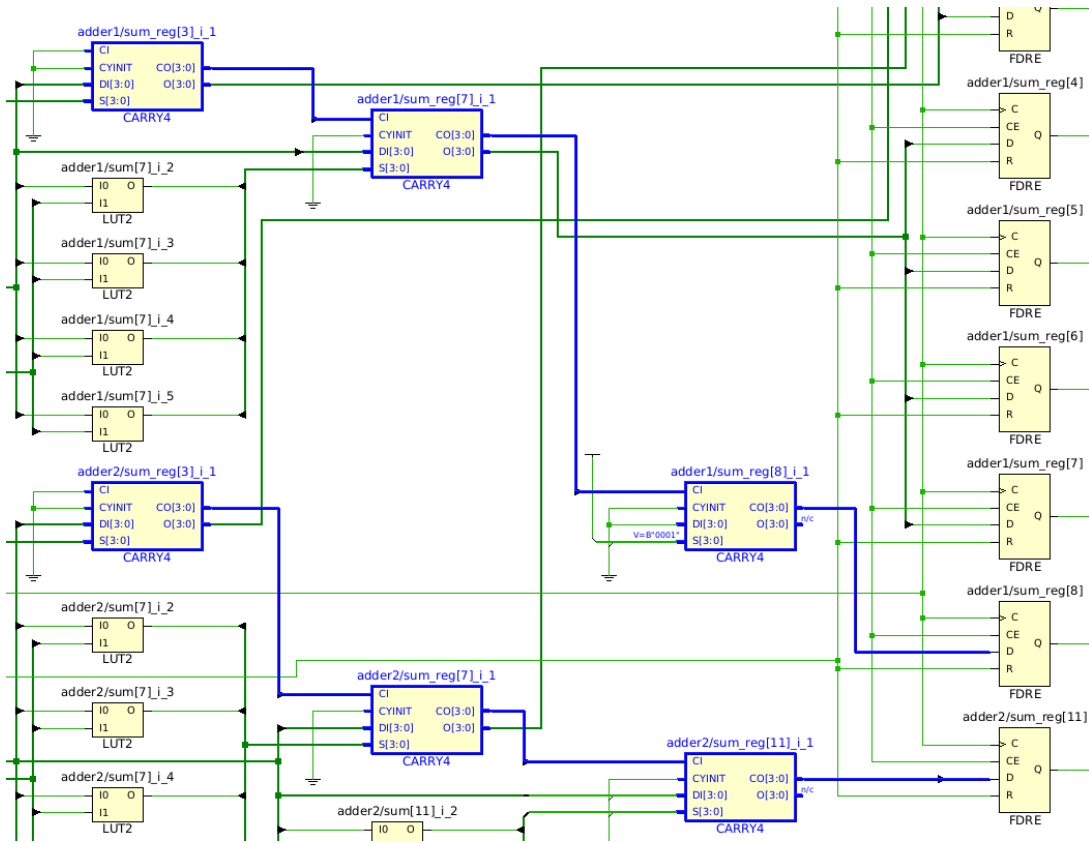


Figure 30: A netlist with two CARRY4 chains, each of size 3

Listing 3: Finding and storing carry chains.

```

1 Design design = Design.readCheckpoint("synth.dcp");
2 EDIFNetlist netlist = design.getNetlist();
3 List<EDIFCellInst> ecis = netlist.getAllLeafCellInstances();
4
5 // Select only the carry cells.
6 List<EDIFCellInst> carryCells = new ArrayList<>();
7 for (EDIFCellInst eci : ecis) {
8     if (eci.getCellName().equals("CARRY4"))
9         carryCells.add(eci);
10 }
11
12 // Find and remove carry chains until the list is empty
13 List<List<EDIFCellInst>> carryChains = new ArrayList<>();
14 while (!carryCells.isEmpty()) {
15     // Set "currentCell" pointer to an arbitrary cell in list
16     EDIFCellInst currentCell = carryCells.get(0);
17
18     // Find this carry chain anchor.
19     // Traverse the Carry-In (CI) to Carry-Out (CO) nets.
20     // Anchor is found when net on the CI Port is Ground.
21     while (true) {
22         System.out.println(currentCell);
23         // Access the CI port on this cell.
24         EDIFPortInst sinkPort = currentCell.getPortInst("CI");
25         // Access the net on this CI port.
26         EDIFNet net = sinkPort.getNet();
27         if (net.isGND()) {
28             break; // Found this chain anchor!
29         }
30         // Get all ports on this net.
31         List<EDIFPortInst> netPorts = net.getPortInsts();
32         for (EDIFPortInst netPort : netPorts) {
33             // Access the port belonging to another carry cell.
34             EDIFCellInst sourceCell = netPort.getCellInst();
35             if (sourceCell.getCellName().equals("CARRY4")) {
36                 // Move the "currentCell" pointer
37                 currentCell = sourceCell;
38                 break;
39             }
40         }
41     }
42     // Now currentCell points to this chain's anchor.
43
44     // Now traverse in the opposite direction to find the
45     // chain tail.
46     // Tail is found when the CO Port is null.
47     // Collect the chain cells into an ordered list.
48     List<EDIFCellInst> currentChain = new ArrayList<>();
49     currentChain.add(currentCell);
50     while (true) {
51         EDIFPortInst sourcePort =
52             currentCell.getPortInst("CO[3]");
53         if (sourcePort == null) {
54             break; // Found this chain's tail!
55         }
56         EDIFNet net = sourcePort.getNet();
57         List<EDIFPortInst> netPorts = net.getPortInsts();
58         for (EDIFPortInst netPort : netPorts) {
59             EDIFCellInst sinkCell = netPort.getCellInst();
60             if (netPort.getName().equals("CI") &&
61                 sinkCell.getCellName().equals("CARRY4")) {
62                 currentCell = sinkCell;
63                 // Add the cell to the chain list.
64                 currentChain.add(currentCell);
65                 break;
66             }
67         }
68     }
69     // Add currentChain to the list of chains
70     carryChains.add(currentChain);
71     // Remove currentChain from the list of cells
72     carryCells.removeAll(currentChain);
73 } // end while()
74
75 // Print out the carry chains.
76 for (List<EDIFCellInst> chain : carryChains) {
77     for (int i = 0; i < chain.size(); i++) {
78         EDIFCellInst carry = chain.get(i);
79         if (i == 0) {
80             writer.write("\nAnchor Cell: " + carry.getName() +
81                 ", CellType: " + carry.getCellName());
82         } else {
83             writer.write("\n\tCell: " + carry.getName() +
84                 ", CellType: " + carry.getCellName());
85         }
86     }
87 }

```

Listing 4: Code Printout

```

1 Anchor Cell: adder2/sum_reg[3]_i_1, CellType: CARRY4
2 Cell: adder2/sum_reg[7]_i_1, CellType: CARRY4
3 Cell: adder2/sum_reg[11]_i_1, CellType: CARRY4
4 Anchor Cell: adder1/sum_reg[3]_i_1, CellType: CARRY4
5 Cell: adder1/sum_reg[7]_i_1, CellType: CARRY4
6 Cell: adder1/sum_reg[8]_i_1, CellType: CARRY4

```

## 9 Packing

Now that we have our `PrepackedDesign` object keeping track of multi-cell structures on the edif level, we can start packing them into `SiteInst` objects on the design level. Below are some of the most relevant classes from the design package for this task.

- **Cell:** A cell corresponds to the leaf cell within the logical netlist `EDIFCellInst` and provides a mapping to a physical location `BEL` on the device. A cell can be created directly out of an `EDIFCellInst` to inherit all of its edif properties on the design level.
- **Net:** Represents the physical net to be routed (both inter-site and intra-site). When an `Cell` is created out of an `EDIFCellInst`, the `Nets` are automatically created out of its corresponding `EDIFNets`.
- **SiteInst:** An instance of a `Site` on the `Device`. Carries the mapping information between the `BELs` in a `Site` and the `Cells` assigned to them. Also keeps track of the intra-`Site` routing information within (`Nets`, `SitePinInsts`, `SitePIPs`, etc.).
- **SitePIP:** A Programmable Interconnect Point (PIP) in a `Site`. Represents the fuses in intra-`Site` routing `BELs`.
- **SitePinInst:** An instance of a `SitePin` on a `Site`. These objects serve as the interface between intra-`Site` routing and general inter-`Site` routing.

A `SiteInst` object can be created and its `BELs` populated with existing `EDIFHierCellInst` objects from the `EDIFNetlist`. A `SiteInst` is placed on a specific device

`Site` upon its creation using the constructor in Listing 5. The packer therefore assigns an initial placement to every `SiteInst` before the simulated-annealing stage randomizes their positions. During this packing phase, we simply map design `SiteInsts` onto device `Sites` in coordinate order as they are generated (e.g., the first `SiteInst` onto `SLICEL_X0Y0`, the second onto `SLICEL_X0Y1`, and so on).

Listing 5 shows how to use the `SiteInst` object and how it ties `Sites`, `Cells`, `BELs`, and intra-`Site` `Nets` together. The super-specifics of the packing process via `RapidWright` is too involved for the scope of this paper, but just to give an impression of how the design classes are used, Listing 6, 7, 8, and 9 together show how `CarryCellGroups` are packed into `SLICEL` `Sites` in our working code.

Packing the other `Cell` structures into `Sites` follow a similar process. For each cell cluster, we create a `SiteInst` and populate its `BELs` with the corresponding `Cells` in the cluster and assign it a physical `Site` on the device. We further consolidate these `SiteInsts` into clusters or lists of `SiteInsts` for multi-`Site` structures like `CarryCellGroup` chains and `DSP` cascades. For each `SiteInst`, we assign it a physical `Site` on the device and route its internal intra-`Site` nets. The end result is a `PackedDesign` object which is a group of data structures solely around `SiteInsts` like shown in figure 28. At this point we no longer need to worry about individual `BELs`, `Cells`, or intra-`Site` `Nets` as they have now been packaged and taped-off into their respective `SiteInsts`. These `SiteInst` become the new atomic level components in the following `Placement` stage. This process is analogous to the containerization of loose goods in ocean freight forwarding.

Listing 5: `SiteInst` constructor and methods.

```
1 SiteInst Constructor:
2   SiteInst(String name, Design design, SiteTypeEnum type, Site site)
3 Most relevant SiteInst Methods:
4   createCell(EDIFHierCellInst inst, BEL bel) // Populating the SiteInst BELs with Cells
5   unplace() // Unplacing the SiteInst from its current Site
6   place(Site site) // Placing an unplaced SiteInst onto a Site
7   routeSite() // Attempt to automatically route all intra-Site nets (manual intervention likely required)
8   routeIntraSiteNet(Net net, BELPin src, BELPin snk) // Manually route an intra-Site net
9
10 Example:
11 SiteInst si = new SiteInst("mySiteInst", design, SiteTypeEnum.SLICEL, device.getSite("SLICEL_X0Y1"));
12 si.createCell(someFDRECell, si.getBEL("AFF"));
13 si.routeSite();
14 si.unplace();
15 si.place(device.getSite("SLICEL_X15Y33"));
16 // In Simulated Annealing, SiteInst objects will be unplaced() and placed() many times to converge to an optimal solution.
17 // All Cell-BEL mapping and intra-Site routing is preserved when a SiteInst is moved.
```

Listing 6: Packing one `CarryCellGroup` into one `SLICEL` `SiteInst`.

```
1 // Names of the BELs in the 4 LUT-FF lanes:
2 protected String[] FF_BELS = new String[] { "AFF", "BFF", "CFF", "DFF" };
3 protected String[] LUT6_BELS = new String[] { "A6LUT", "B6LUT", "C6LUT", "D6LUT" };
4 // Pack one CarryCellGroup
5 private void packCarrySite(CarryCellGroup carryCellGroup, SiteInst si) {
6   // Iterate through 4 LUT-FF Lanes
7   for (int i = 0; i < 4; i++) {
8     EDIFHierCellInst ff = carryCellGroup.ffs().get(i);
9     if (ff != null)
10      si.createCell(ff, si.getBEL(FF_BELS[i]));
11     EDIFHierCellInst lut = carryCellGroup.luts().get(i);
12     if (lut != null)
13      si.createCell(lut, si.getBEL(LUT6_BELS[i]));
14     // carry site LUTs MUST be placed on LUT6 BELs.
15     // only LUT6/D6 can connect to CARRY4/S0
16   }
17   si.createCell(carryCellGroup.carry(), si.getBEL("CARRY4"));
18   // default intrasite routing
19   si.routeSite();
20   // sometimes the default routeSite() is insufficient, so some manual intervention is required
21   rerouteCarryNets(si);
22   rerouteFFClkSrCeNets(si);
23 } // end placeCarrySite()
```

Listing 7: Packing CarryCellGroups into SLICEL SiteInsts.

```

1 // Pack all CarryCellGroup chains
2 private List<List<SiteInst>> packCarryChains(List<List<CarryCellGroup>> EDIFCarryChains)
3     throws IOException {
4     List<List<SiteInst>> siteInstChains = new ArrayList<>();
5     writer.write("\n\nPacking carry chains... (" + EDIFCarryChains.size() + ")");
6     for (List<CarryCellGroup> edifChain : EDIFCarryChains) {
7         List<SiteInst> siteInstChain = new ArrayList<>();
8         writer.write("\n\t\tChain Size: (" + edifChain.size() + "), Chain Anchor: "
9             + edifChain.get(0).carry().getFullHierarchicalInstName());
10        Site anchorSite = selectCarryAnchorSite(edifChain.size());
11        SiteTypeEnum selectedSiteType = anchorSite.getSiteTypeEnum();
12        for (int i = 0; i < edifChain.size(); i++) {
13            Site site = (i == 0) ? anchorSite
14                : device.getSite("SLICE_X" + anchorSite.getInstanceX() + "Y" + (anchorSite.getInstanceY() + i));
15            SiteInst si = new SiteInst(edifChain.get(i).carry().getFullHierarchicalInstName(), design,
16                selectedSiteType,
17                site);
18            packCarrySite(edifChain.get(i), si);
19            if (i == 0) { // additional routing logic for anchor site
20                Net CINNet = si.getNetFromSiteWire("CIN");
21                CINNet.removePin(si.getSitePinInst("CIN"));
22                si.addSitePIP(si.getSitePIP("PRECYNIT", "0"));
23            }
24            occupiedSites.get(selectedSiteType).add(site);
25            availableSites.get(selectedSiteType).remove(site);
26            siteInstChain.add(si);
27        }
28        siteInstChains.add(siteInstChain);
29    } // end for (List<EDIFCellInst> chain : EDIFCarryChains)
30    return siteInstChains;
31 } // end packCarryChains()

```

Listing 8: Manually rerouting intra-Site nets in a SLICEL containing a CARRY4 Cell

```

1 protected String[] FF_BELS = new String[] { "AFF", "BFF", "CFF", "DFF" };
2 private void rerouteCarryNets(SiteInst si) {
3     // activate PIPs for CARRY4/COUT
4     si.addSitePIP(si.getSitePIP("COUTUSED", "0"));
5     // undo default CARRY4/DI nets
6     SitePinInst AX = si.getSitePinInst("AX");
7     if (AX != null)
8         si.unrouteIntraSiteNet(AX.getBELPin(), si.getBELPin("ACY0", "AX"));
9     SitePinInst DX = si.getSitePinInst("DX");
10    if (DX != null)
11        si.unrouteIntraSiteNet(DX.getBELPin(), si.getBELPin("DCY0", "DX"));
12    // activate PIPs for CARRY4/DI pins
13    si.addSitePIP(si.getSitePIP("DCY0", "DX"));
14    si.addSitePIP(si.getSitePIP("CCY0", "CX"));
15    si.addSitePIP(si.getSitePIP("BCY0", "BX"));
16    si.addSitePIP(si.getSitePIP("ACY0", "AX"));
17    // remove stray CARRY4/CO nets
18    if (si.getNetFromSiteWire("CARRY4_CO2") != null)
19        design.removeNet(si.getNetFromSiteWire("CARRY4_CO2"));
20    if (si.getNetFromSiteWire("CARRY4_CO1") != null)
21        design.removeNet(si.getNetFromSiteWire("CARRY4_CO1"));
22    if (si.getNetFromSiteWire("CARRY4_CO0") != null)
23        design.removeNet(si.getNetFromSiteWire("CARRY4_CO0"));
24    // add default XOR PIPs for unused FFs
25    for (String FF : FF_BELS)
26        if (si.getCell(FF) == null)
27            si.addSitePIP(si.getSitePIP(FF.charAt(0) + "OUTMUX", "XOR"));
28 } // end rerouteCarryNets()

```

Listing 9: Manually reroute intra-Site nets in a SLICEL containing FF Cells

```

1 private void rerouteFFClkSrCeNets(SiteInst si) {
2     si.addSitePIP("CLKINV", "CLK");
3     // activate PIPs for SR and CE pins
4     Net SRNet = si.getNetFromSiteWire("SRUSEDMUX_OUT");
5     Net CENet = si.getNetFromSiteWire("CEUSEDMUX_OUT");
6     // if routeSite() default PIPs are incorrect, deactivate them then activate correct PIP
7     if (SRNet != null) {
8         if (SRNet.isGNDNet()) {
9             if (si.getSitePIPStatus(si.getSitePIP("SRUSEDMUX", "IN")) == SitePIPStatus.ON)
10                for (String FF : FF_BELS)
11                    si.unrouteIntraSiteNet(si.getSitePinInst("SR").getBELPin(), si.getBELPin(FF, "SR"));
12            si.addSitePIP(si.getSitePIP("SRUSEDMUX", "0"));
13        } else {
14            if (si.getSitePIPStatus(si.getSitePIP("SRUSEDMUX", "0")) == SitePIPStatus.ON)
15                for (String FF : FF_BELS)
16                    si.unrouteIntraSiteNet(si.getBELPin("SRUSEDGND", "0"), si.getBELPin(FF, "SR"));
17            si.addSitePIP(si.getSitePIP("SRUSEDMUX", "IN"));
18        }
19    }
20    if (CENet != null) {
21        if (CENet.isVCCNet()) {
22            if (si.getSitePIPStatus(si.getSitePIP("CEUSEDMUX", "IN")) == SitePIPStatus.ON)
23                for (String FF : FF_BELS)
24                    si.unrouteIntraSiteNet(si.getSitePinInst("CE").getBELPin(), si.getBELPin(FF, "CE"));
25            si.addSitePIP(si.getSitePIP("CEUSEDMUX", "1"));
26        } else {
27            if (si.getSitePIPStatus(si.getSitePIP("CEUSEDMUX", "1")) == SitePIPStatus.ON)
28                for (String FF : FF_BELS)
29                    si.unrouteIntraSiteNet(si.getBELPin("CEUSEDGND", "1"), si.getBELPin(FF, "CE"));
30            si.addSitePIP(si.getSitePIP("CEUSEDMUX", "IN"));
31        }
32    }
33 } // end rerouteFFSrCeNets()

```

## 10 Placement

So far we have only dealt with the technology where we consider the problem space and address the constraints of the hardware architecture. For every constraint, we devise a solution to fully address it or a simplification that sacrifices some optimization but reduces the complexity of the problem space.

Now that we have dealt with the bulk of these constraints and squared them away into self-contained SiteInsts, we can now apply some general optimization algorithms to finally address our optimization objective, which is to place these SiteInst objects onto the device while minimizing wirelength.

### 10.1 Simulated Annealing

In this paper we implement and present a basic Simulating Annealing (SA) placer. As mentioned in the Introduction, SA is a metaheuristic that approximates a global optimum in a large optimization search space. Its name is borrowed from metallurgy and is inspired by the physical process of heating a metal and then slowly lowering the temperature to decrease structural atomic defects, thus minimizing the system energy. SA does not guarantee a globally optimal solution, but provides solutions that are often "good enough", especially when an approximate global optimum is more important than finding a precise local optimum in a fixed amount of time. SA is typically employed in discrete combinatorial optimization problems like the travelling salesman problem or job-shop scheduling.

The state  $s$  of the system and the function  $E(s)$  to be minimized is analogous to the internal energy of the system. The goal of SA is to bring the system from some initial state to a state with the minimum possible energy until an energy budget met or until a computational budget is exceeded. At each step or iteration, the algorithm considers some neighboring state  $s^*$ . If  $s^*$  has a lower energy than  $s$ , then the state transition from  $s$  to  $s^*$  is accepted outright. If  $s^*$  has a higher energy, then it can be probabilistically accepted depending on the current global temperature. The global temperature starts at some positive amount then gradually decreases to zero according to a cooling schedule. The higher the temperature, the higher the likelihood of accepting an energy-increasing move. This cooling schedule can be linear, geometric, logarithmic, or some piecewise combination. The parameters of the cooling schedule are fine tuned through empirical experimentation.

In the context of our placer, we use SA to minimize wirelength between SiteInsts as we place them over the discrete Sites of the FPGA device. The state  $s$  represents the current placement of all SiteInsts on the device, while the system energy  $E(s)$  represents the total HPWL of all nets of the placement.

Shown in Listing 10 is a simplified pseudocode for the outer-most loop of the SA algorithm. First, we unplace all of the SiteInsts and then randomly place them across the device. Then, we enter the outer-most loop which terminates when the number of passes exceeds a computational budget, in this case, 300 passes. In each pass, we move() the design, then update the global temperature.

In each move(), we iterate through four

groups of placement objects: DSPSiteInstCascades, CARRYSiteInstChains, RAMSiteInsts, and CLBSiteInsts (single SLICES that do not belong to CARRY chains). For each placement object, we propose a move to a new placement on the device. If the design has for example, 1000 single SiteInsts and 500 multi-SiteInst chains (all mutually exclusive groups), and we set a budget of 300 passes, then the algorithm will consider up to  $300 * (1000 + 500) = 450000$  state transitions. The proposed Site or Site chain is conventionally selected randomly, but can also be selected by finding the midpoint or centroid of SiteInsts that share a net with the current object, or even a hybrid of both.

If the proposed Site is already occupied by a resident or existing SiteInst, we evaluate a swap in their placements. Each move or swap is evaluated by calculating the HPWL cost of the placement before and after the movement. If the move reduces the HPWL cost, then the movement is accepted outright. If the move increases cost, then it can be accepted by chance depending on if the global temperature is high enough to permit the hill-climb.

The temperature decreases with each pass until reaching zero, at which point, the algorithm makes exclusively energy-reducing moves, effectively becoming a greedy algorithm. The hope is that by this point, the placement will crystallize into a global optimum of minimum total HPWL.

Listing 10: SA pseudocode: outer loop

```
1 public void placeDesign(PackedDesign packedDesign) {
2     // unplace the pseudorandom packed placement
3     unplaceAllSiteInsts(packedDesign);
4     // place randomly
5     randomInitialPlacement(packedDesign);
6     int passes = 0;
7     while (passes < 300) {
8         updateTemperature(passes);
9         move(packedDesign);
10        passes++;
11    }
12 }
13
14 private void moveAll(PackedDesign packedDesign) {
15     moveSiteChains(packedDesign.DSPSiteInstCascades);
16     moveSiteChains(packedDesign.CARRYSiteInstChains);
17     moveSingleSite(packedDesign.RAMSiteInsts);
18     moveSingleSite(packedDesign.CLBSiteInsts);
19 }
```



Listing 11: Single Site Movement

```

1 protected void moveSingleSite(List<SiteInst> sites) {
2   for (SiteInst si : sites) {
3     SiteTypeEnum ste = si.getSiteTypeEnum();
4     List<Site> homeConns = findConnectedSites(si, null);
5     Site homeSite = si.getSite();
6     Site awaySite = proposeSite(si, homeConns, true);
7     SiteInst awaySi = occupiedSites.get(ste).get(awaySite);
8     double oldCost = 0;
9     double newCost = 0;
10    if (awaySi != null) {
11      List<Site> awayConns = findConnectedSites(awaySi,
12        null);
13      oldCost += evaluateSite(homeConns, homeSite);
14      oldCost += evaluateSite(awayConns, awaySite);
15      newCost += evaluateSite(homeConns, awaySite);
16      newCost += evaluateSite(awayConns, homeSite);
17    } else {
18      oldCost += evaluateSite(homeConns, homeSite);
19      newCost += evaluateSite(homeConns, awaySite);
20    }
21    if (evaluateMoveAcceptance(oldCost, newCost)) {
22      if (awaySi != null) {
23        unplaceSiteInst(si);
24        unplaceSiteInst(awaySi);
25        placeSiteInst(si, awaySite);
26        placeSiteInst(awaySi, homeSite);
27      } else {
28        unplaceSiteInst(si);
29        placeSiteInst(si, awaySite);
30      }
31    }
32  } // end randomMoveSingleSite()


```

Listing 12: Move Acceptance with Temperature

```

1 protected boolean evaluateMoveAcceptance(double oldCost,
2   double newCost) {
3   // if the new cost is lower, accept it outright
4   if (newCost < oldCost)
5     return true;
6   // otherwise, evaluate probability to accept higher cost
7   double delta = newCost - oldCost;
8   double acceptanceProbability =
9     Math.exp(-delta / this.currentTemp);
10  return Math.random() < acceptanceProbability;

```

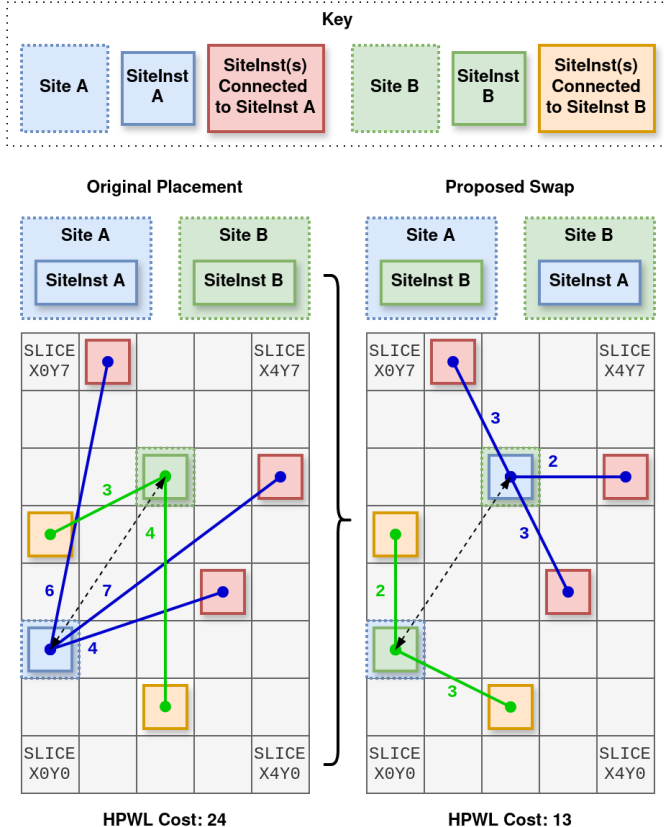

Listing 13: Chain Swapping Pseudocode

```

1 protected void moveSiteChains(List<List<SiteInst>> chains) {
2   for (List<SiteInst> currentChain : chains) {
3     int chainSize = currentChain.size();
4
5     // Step 1: Identify home window for this chain
6     Site homeAnchor = currentChain.get(0).getSite();
7     List<Site> homeWindow = getSitesInWindow(homeAnchor,
8       chainSize);
9
10    // Step 2: Select a candidate away anchor
11    Site awayAnchor = proposeAnchorSite(currentChain,
12      homeWindow, true);
13
14    // Step 3: Determine away window based on awayAnchor and
15    // chainSize
16    List<Site> awayWindow = getSitesInWindow(awayAnchor,
17      chainSize);
18
19    // Step 4: Find any resident SiteInst chains in the away
20    // window
21    List<List<SiteInst>> residentChainsInAway =
22      collectChainsInWindow(siteType, awayWindow);
23
24    // Step 5: If any resident chains overlap, extend the away
25    // window to include them
26    if (!residentChainsInAway.isEmpty()) {
27      awayWindow = extendWindowToIncludeChains(awayWindow,
28        residentChainsInAway);
29    }
30
31    // Step 6: Map the (possibly extended) away window back
32    // onto the original region
33    // so that the tail of that window coincides with
34    // the tail of the current chain
35    List<Site> candidateHomeWindow = mapAwayToHomeWindow(
36      homeAnchor, awayWindow, chainSize);
37
38    // Step 7: While the candidate home window still overlaps
39    // resident chains, shift upward
40    int shifts = 0;
41    while (windowHasOverlap(candidateHomeWindow)) {
42      candidateHomeWindow =
43        shiftWindowUp(candidateHomeWindow);
44      shifts++;
45      if (shifts > (homeWindow.size() - chainSize)) {
46        // Reject this swap attempt and move on to the
47        // next chain
48        continue;
49      }
50    }
51
52    // Step 8: Compute cost of the original placement in home
53    // window
54    double oldCost = evaluateWindowCost(homeWindow);
55
56    // Step 9: Compute cost of the proposed swap placement
57    double newCost = evaluateWindowCostForSwap(
58      homeWindow, awayWindow, currentChain);
59
60    // Step 10: Decide whether to accept the move based on
61    // oldCost, newCost, and temperature
62    if (evaluateMoveAcceptance(oldCost, newCost, currentTemp)) {
63      // Step 11: Perform an element-wise swap of SiteInsts
64      // between homeWindow and awayWindow
65      swapChainsBetweenWindows(homeWindow, awayWindow);
66    }
67  }
68 }

```

Figure 31: Single Site Swap Proposal



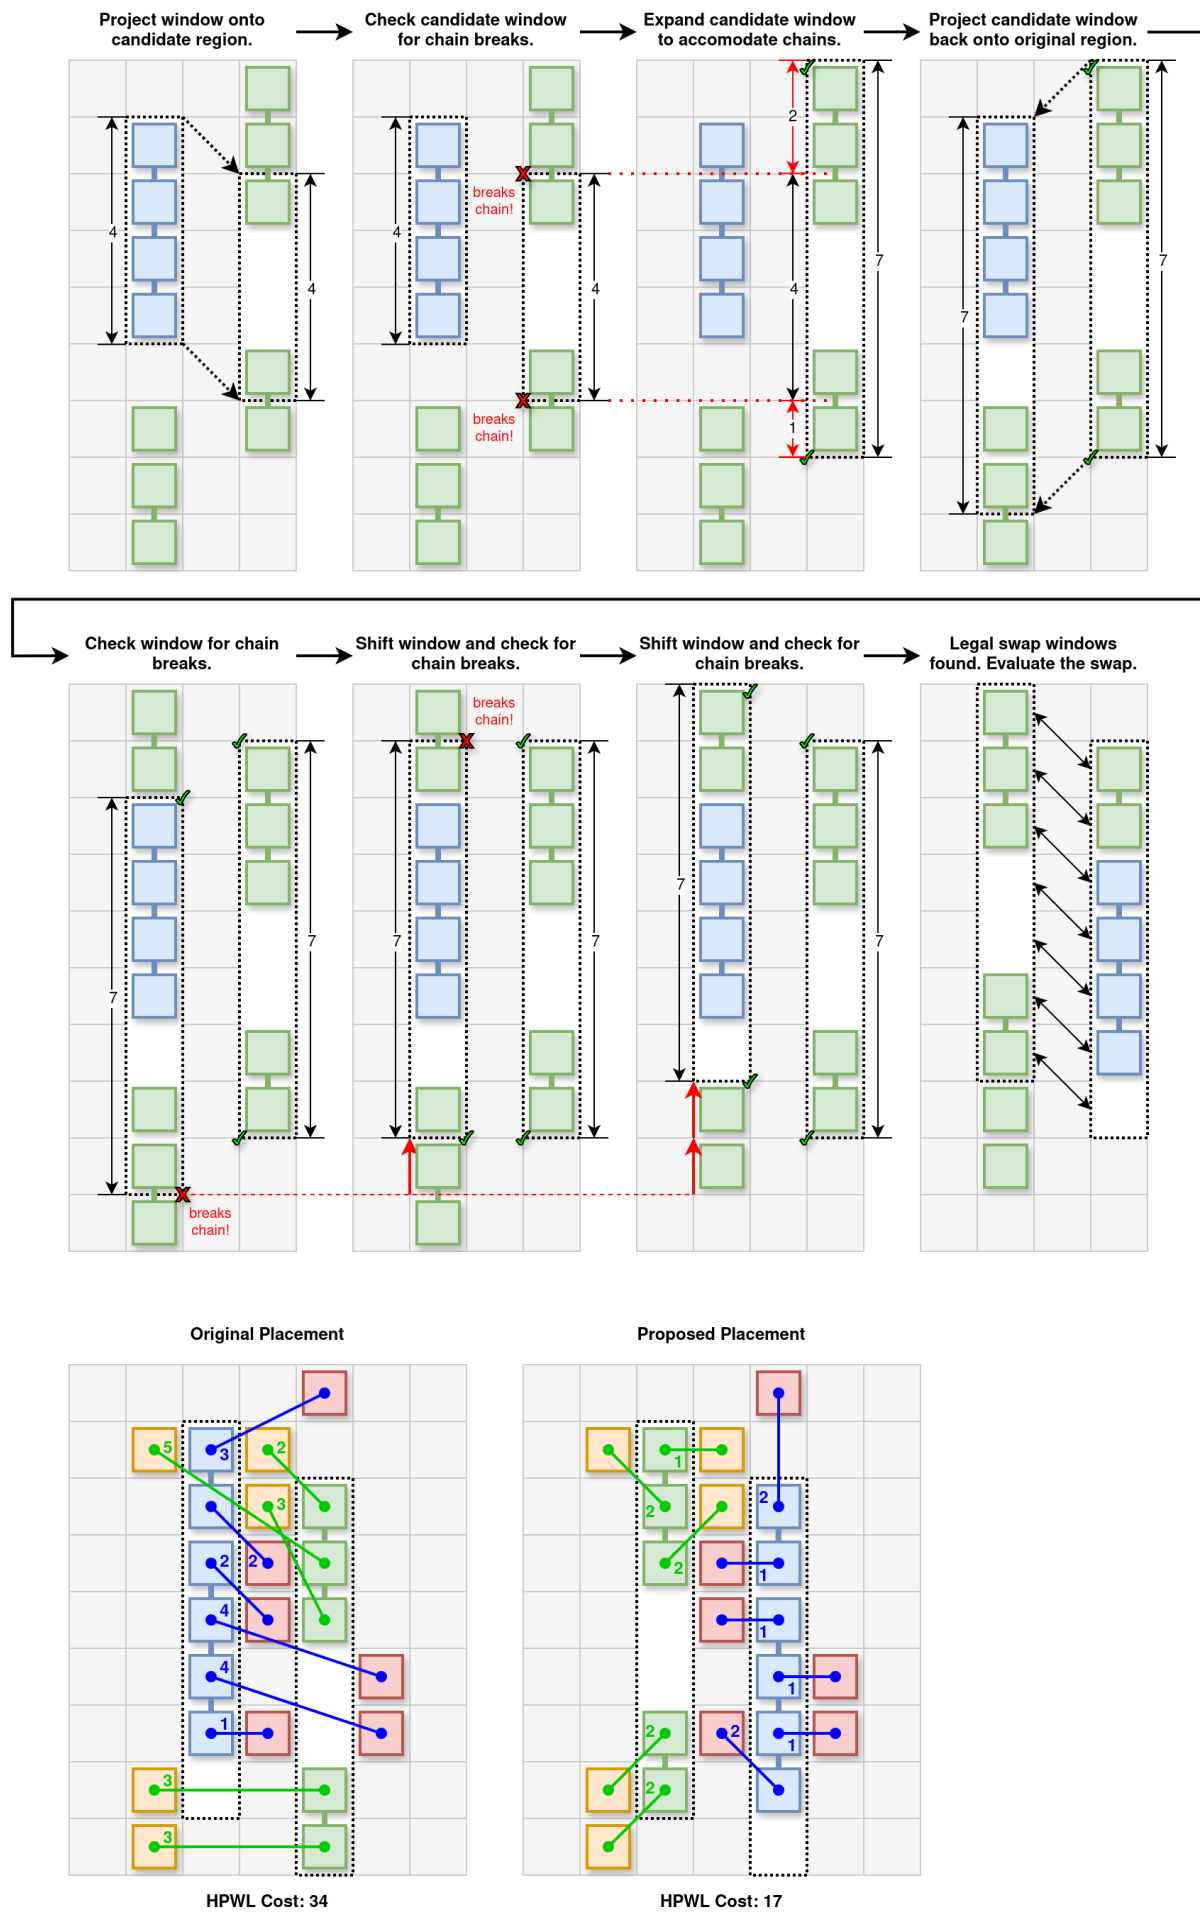


Figure 32: Site Chain Swap Proposal

Select a new anchor Site. Project a window onto the proposed Site. If the window anchor breaks a chain, extend the window in its direction until the anchor coincides with the chain anchor.. If the window tail breaks a chain, extend the window in its direction until the tail coincides with the chain tail.