GM TECH 2 KEYPAD Test

Main Menu

F0: Diagnostics
F1: Service Programming System
F2: View Captured Data
F3: GM Performance Parts Diagnostics
F4: Tool Options
F5: Getting Started

1.

Tool Options

F0: Set Clock
F1: Set Screen Contrast
F2: Set Units
F3: Self Test
F4: Programming TECH 2
F5: Set Communication By-Pass Mode
F6: Set Language
F7: CANdi Diagnostics

2.

3.
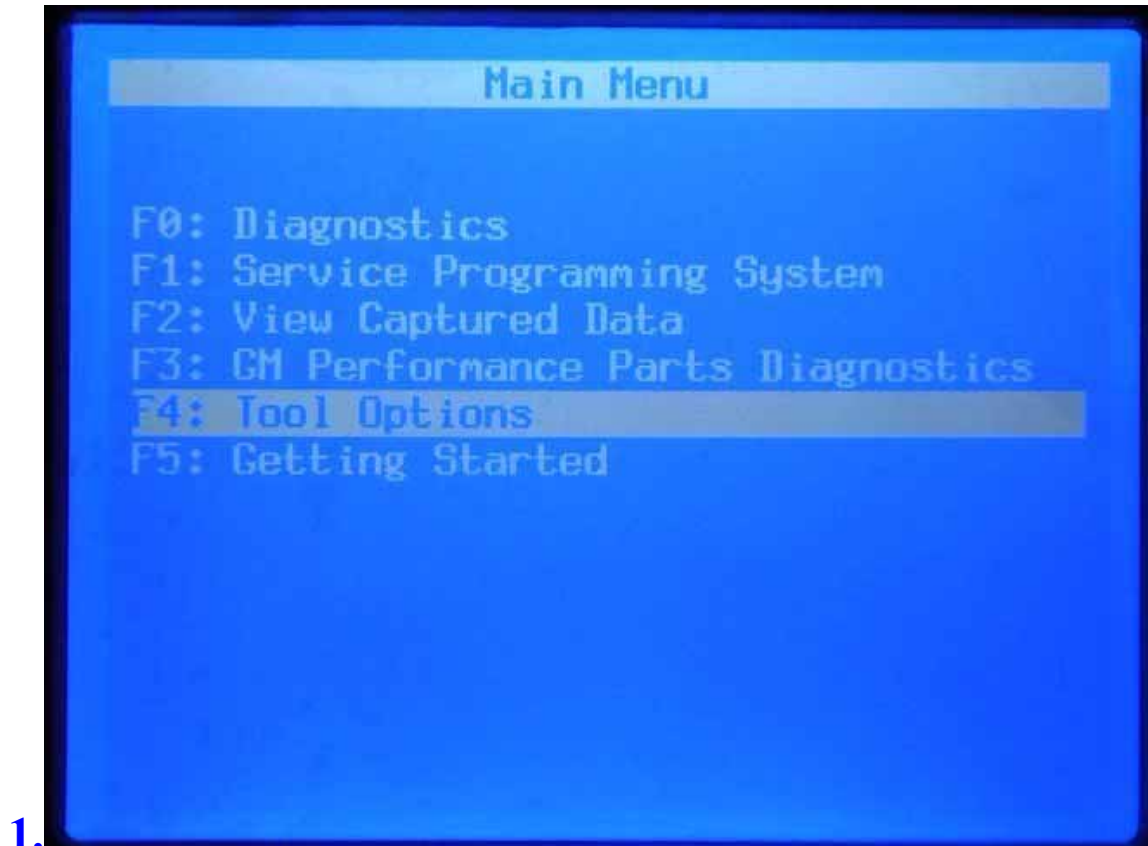
Before running the Tech 2 self test:

1. CANdi must not be connected.
2. ALDL loopback should be connected (GM3000109).
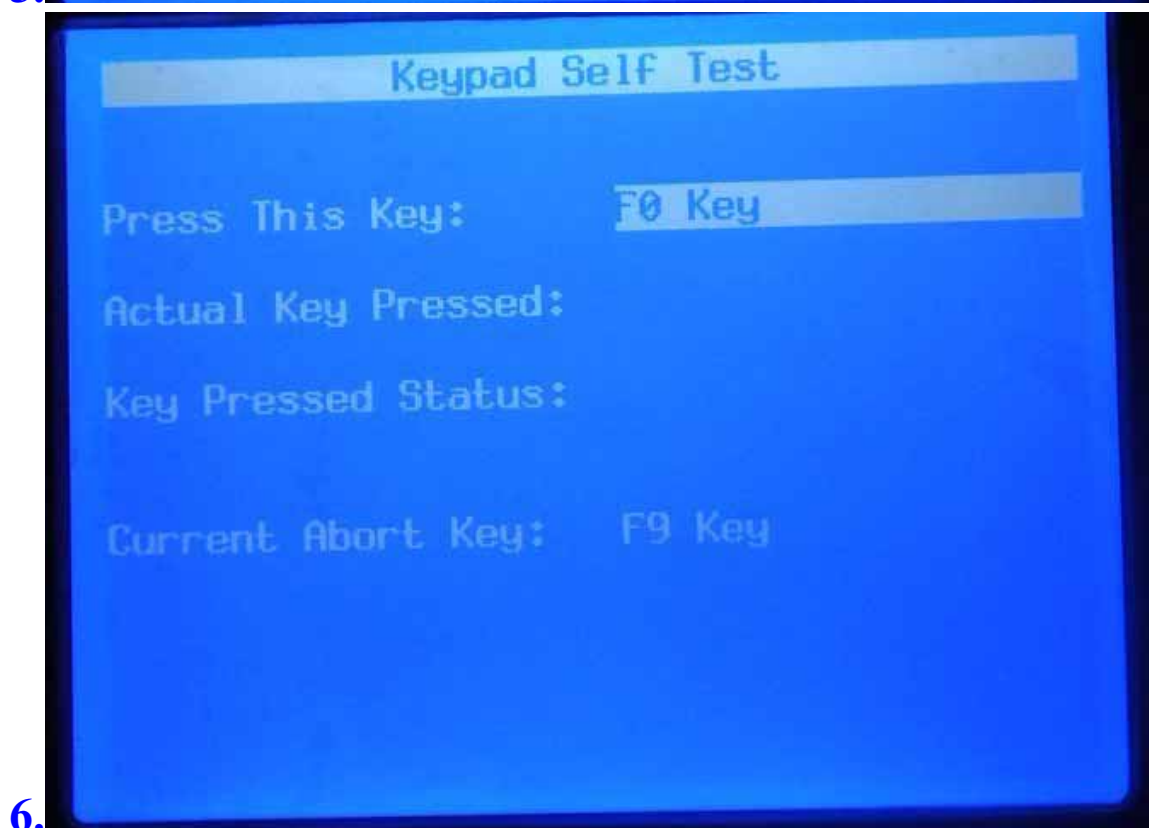3. Failure to follow these instructions may invalidate the self test.
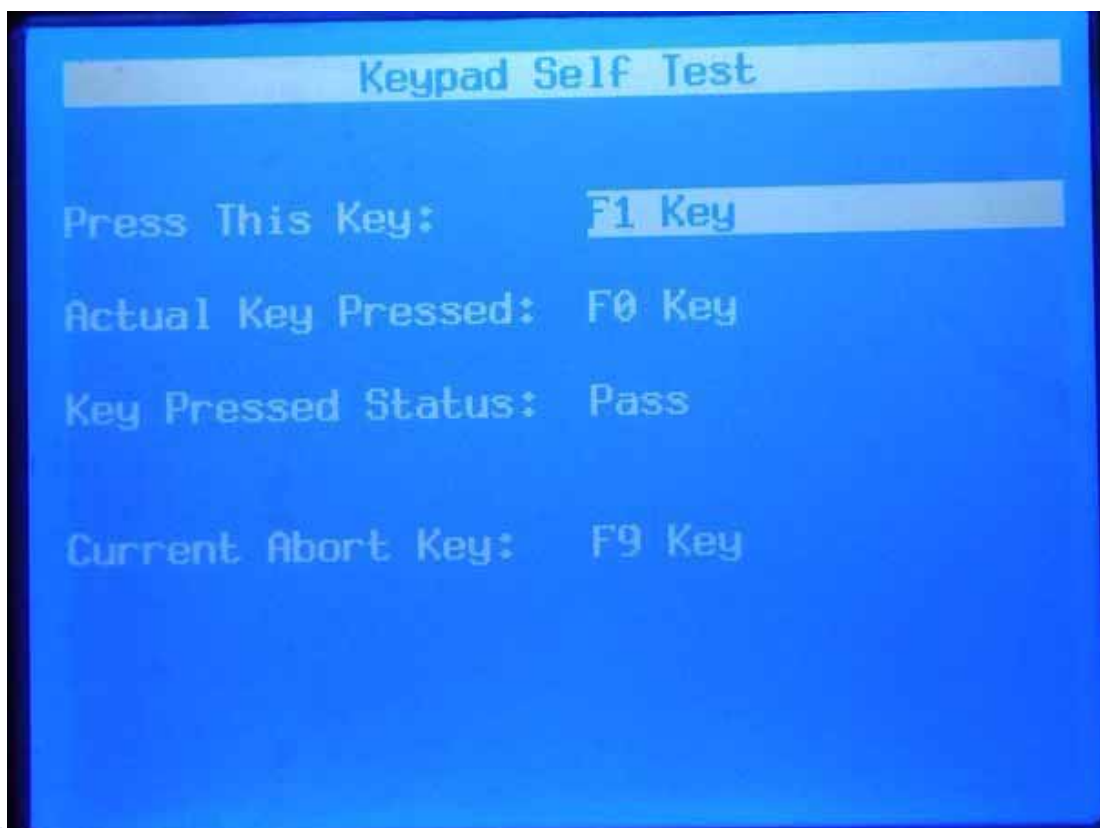
Press [EXIT] to continue

4.

Tech 2 Self Test
Version 6.40

F0: Automated Main PCB and VCI
F1: Automated Main PCB
F2: Automated VCI
F3: Selectable Main PCB
F4: Selectable VCI
F5: Power On Self Test Results
F6: Hardware ID

Main PCB Self Test

F0: RAM / ROM
F1: RS-485 LoopBack
F2: RS-232 LoopBack
F3: Keypad
F4: PCMCIA
F5: Display Controller
F6: Sound Transducer
F7: Real-Time Clock

5.

Keypad Self Test

Press This Key: F0 Key

Actual Key Pressed:

Key Pressed Status:

Current Abort Key: F9 Key

6.

7.

Picture NO.7 is to test F0 key, key Pressed status: pass means F0 key is working. You have to one-by-one test

F0-F1-F2-F3-F4-F5-F6-F7-F8-F9-EXIT-ENTER-?

Don't skip any of one key.