



FIA FORMULA 1 WORLD CHAMPIONSHIP



2026 BAHRAIN GRAND PRIX IN MALAYSIA

02 - 04 October 2026

From The FIA Formula 1 Race Director

Document 4

To All Teams, All Officials

Date 01 October 2026

Time 12:15

Title Power Unit Information

Description Power Unit Information

Enclosed R16_Bahrain_in_Malaysia_Power_Unit_Information.pdf

Rui Marques

The FIA Formula 1 Race Director




F1 POWER UNIT INFORMATION TO THE TEAMS AND PUMs



2026 BAHRAIN GRAND PRIX IN MALAYSIA

COMPETITION INFORMATION


ROUND No.	R16
VENUE	Sepang
CENTRELINE	5.543 km
FORMAT	Standard
DATE	02-04 October

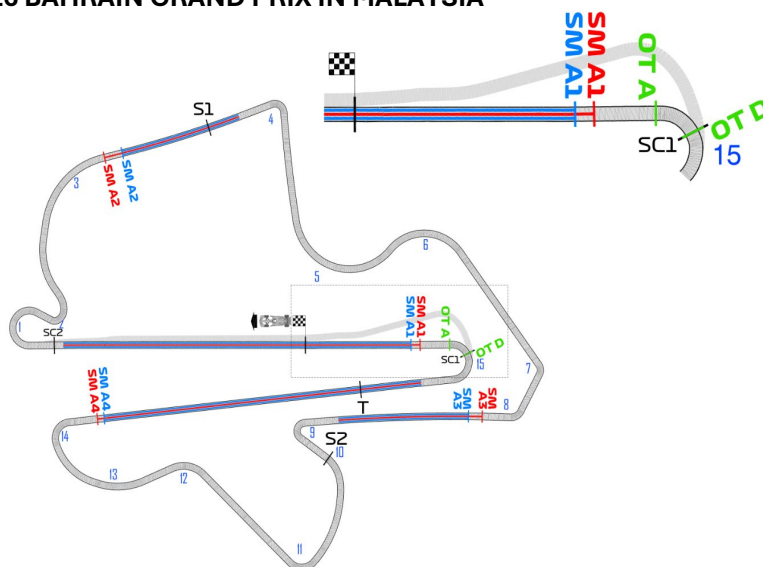

POWER AND ENERGY LIMITS

Article C5.2.10 Maximum Recharge per lap					Article C5.12.8 Maximum PU Power Reduction Rate	
Race		Qualifying	Free Practice sessions	Out laps other than in Race	Power Limited Distance	Rate Limit
Overtake <u>not</u> active	Overtake active					
8.5 MJ	9.0 MJ	7.5 MJ	9.0 MJ	9.0 MJ	3365 m	100 kW/s

Article C5.2.8 Maximum DC power of ERS-K function of car speed			
Sprint & Race			Any Practice Session incl. Qualifying Sessions
Main Overtaking Zones		Other parts of the Lap	
Overtake <u>not</u> active	Overtake active		
Base - Standard	Base - Overtake	Alt 1	Base - Overtake

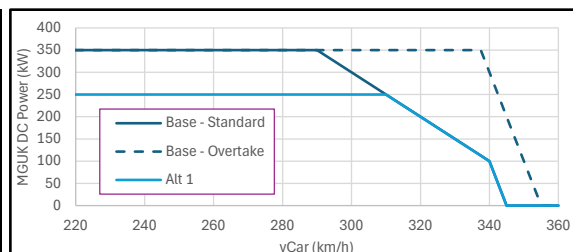

IDENTIFICATION OF SECTORS WHERE EXCEPTIONS APPLY

Article C5.2.8iii Sectors where the alternative power curve defined above applies in Sprint & Race		Article C5.12.4 Sectors where the PU power reduction at the start of a Power Limited Pending period can be greater than 150kW (sectors indicated by [] are for SQ and Q only)			Article C5.12.5 Sectors where a reset of MGUK power reduction is permitted (sectors indicated by [] are for SQ and Q only)	
Identification of Sectors	Lap distance window [m]	Identification of Sectors	Lap distance window [m]	Maximum PU power reduction permitted	Identification of Sectors	Lap distance window [m]
T4-T7 T9-T14	1550-2500 3100-4100	T1-T2 T5-T7 T9-T11 T12-T13 [Exit T15]	600-750 1900-2500 3100-3400 3750-4000 [5050-5300]	350kW 350kW 350kW 350kW [350kW]	Exit T5 Exit T6 [Exit T15]	1950-2100 2150-2350 [5200-5500]

Article C5.12.7 Sectors with a higher speed threshold		
Identification of Sectors	Lap distance window [m]	Speed threshold
T5-T6 T12-T13	1750-2200 3700-3900	270km/h 270km/h

OVERTAKE		
Article B7.2		
Detection Gap	Detection Line [sLap & Loop] (Art. B7.2.1b.viii)	Activation Line [sLap & Loop] (Art. B7.2.1b.ix)
1.0 s	5110 m (TBC) L18	5160 m (TBC) L19