




Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials



FRONT

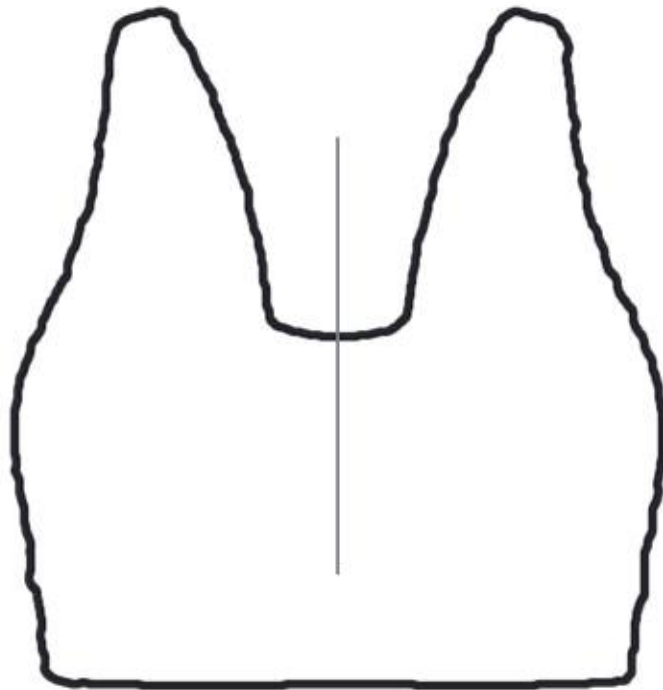

BACK




Product Reference Image



Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

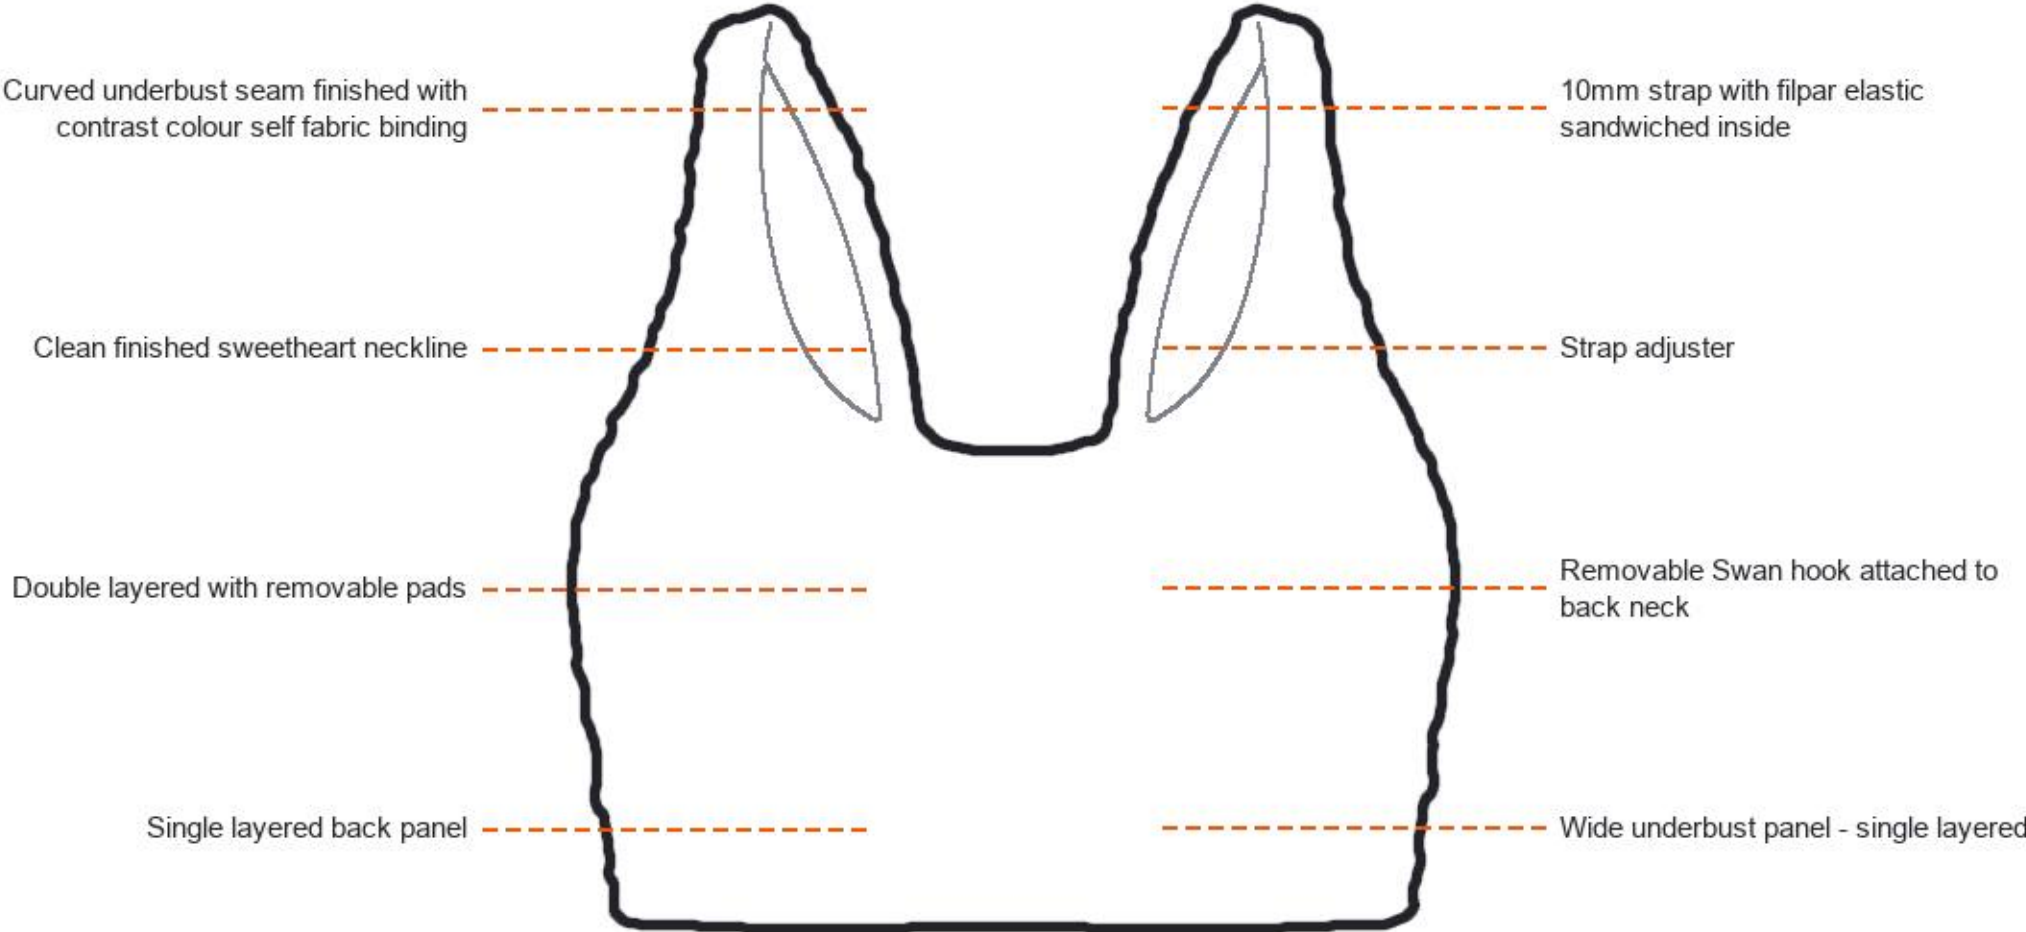




AERO ACTIVE

Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

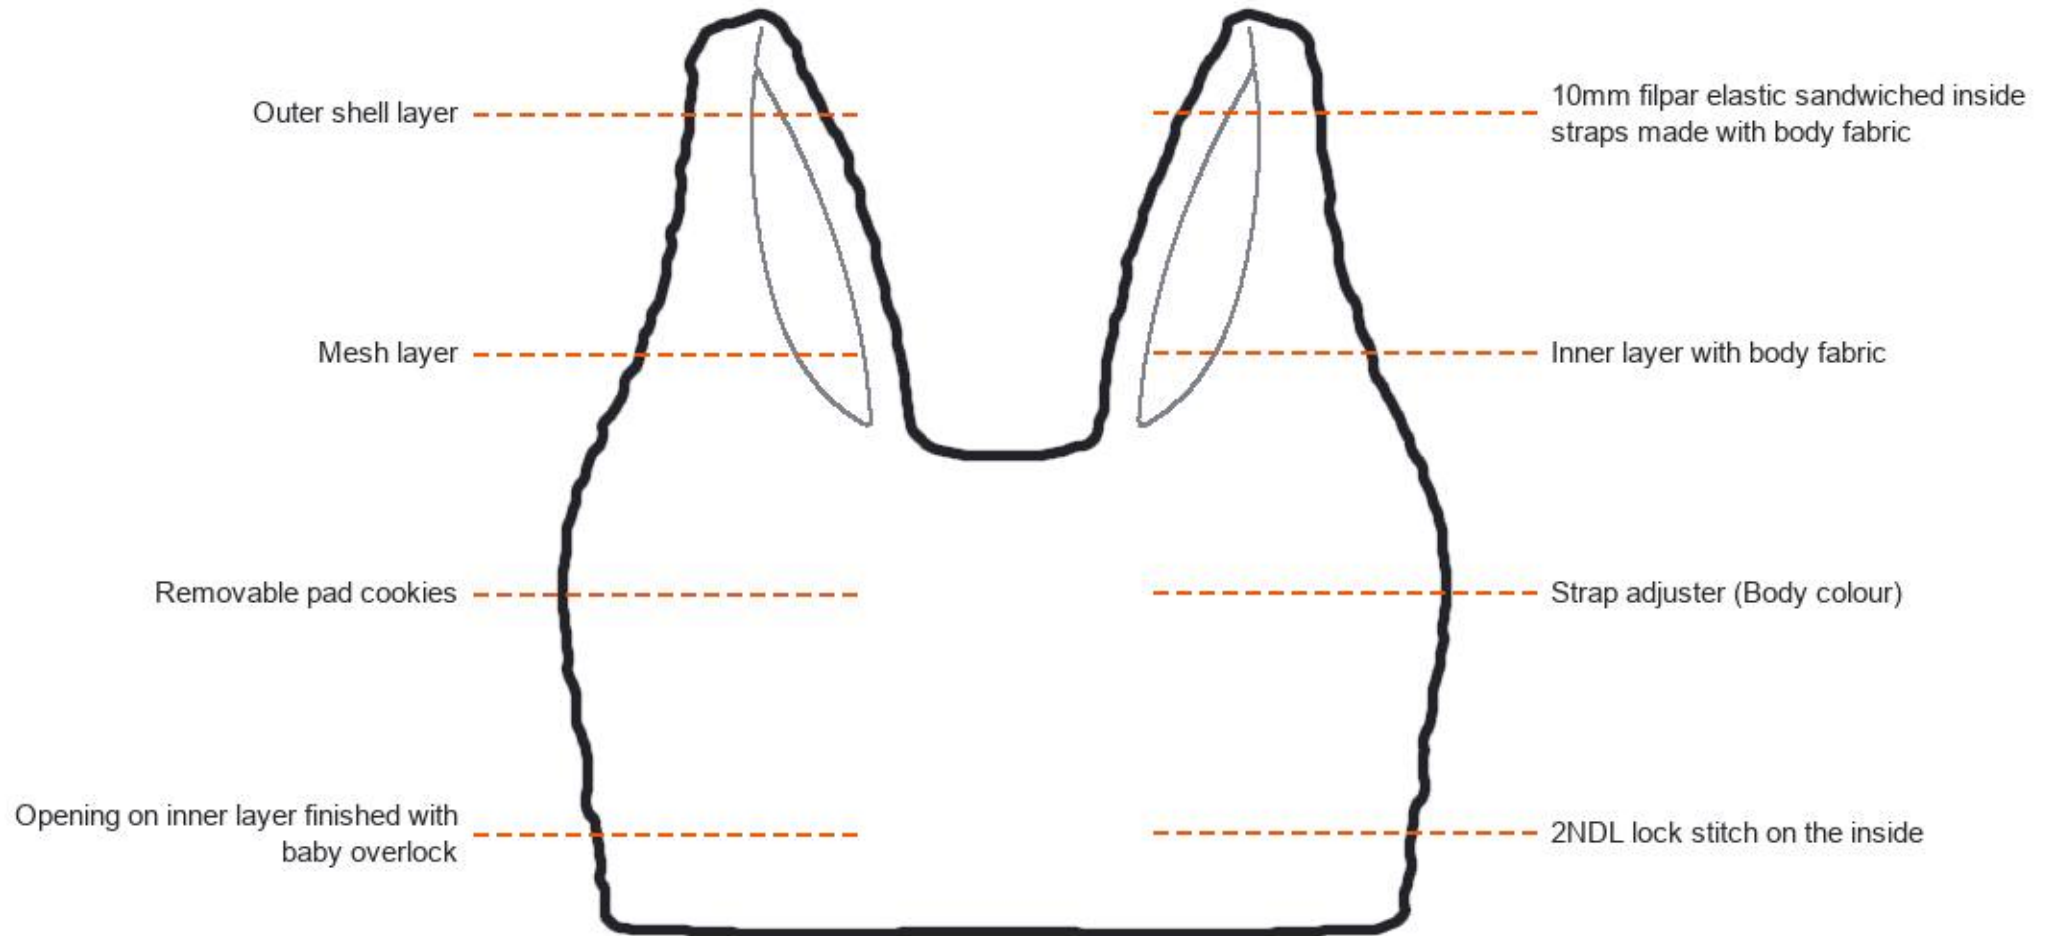



Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

LOGO placement (to scale)



Print Technique : Silver Reflective Heat Transfer
Temperature : 140°C - 150°C
Time : 8-10 secs

Placement

Aligned to center back
2cm above slit stitch line




Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

STITCH LEGEND :

- ① Three Thread Overlock
- ② Four Thread Overlock
- ③ Two Needle Flatlock Stitch
- ④ 3 Needle 5 Thread Flatseam
- ⑤ Two Needle Cover Stitch
- ⑥ One Needle Lock Stitch
- ⑦ Satin Stitch
- ⑧ Bartack Stitch
- ⑨ Zig Zag Stitch
- ⑩ Free Cut Hem
- ⑪ Laser Cut

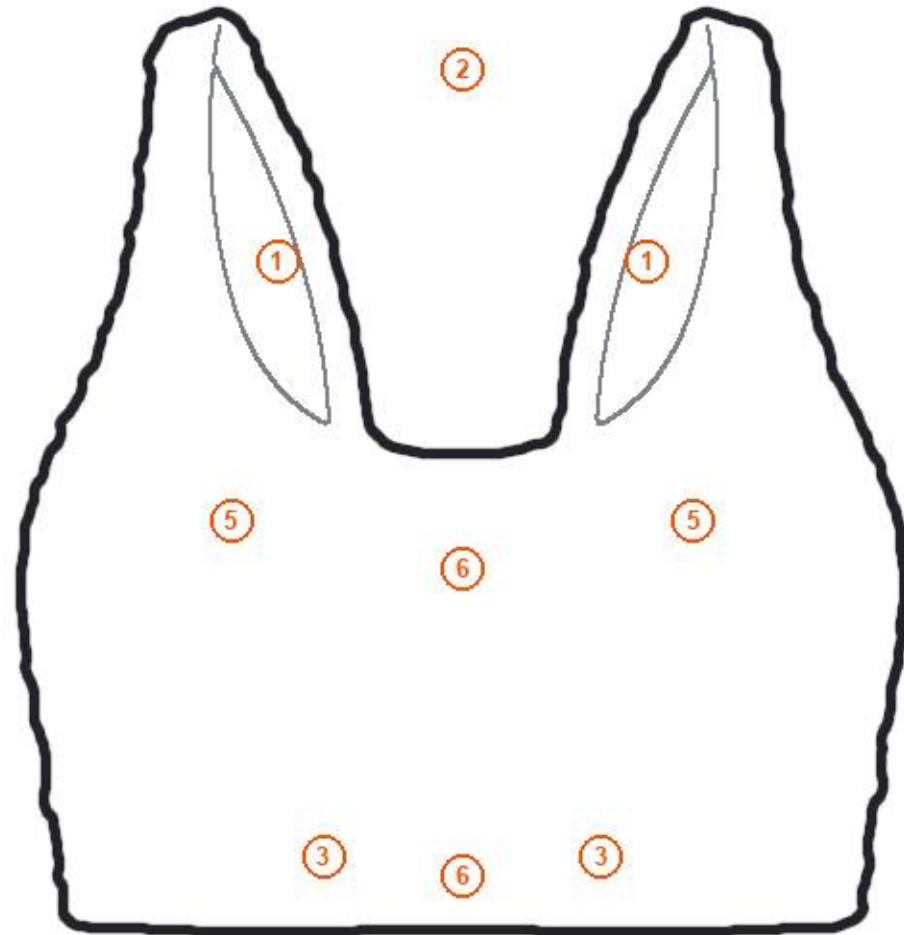



Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials


Code	Measurement point	Tol	S	M	L	XL	XXL
A	Bust ½ (at widest point across cup center)	±0.5	34.5	36.5	39	41	43
B	Underbust ½ (at contour seam)	±0.5	31.5	33.5	35.5	37.5	40
C	Hem ½ (bottom band width relaxed)	±0.5	31.5	33.5	35.5	37.5	40
D	Measurement point D	±0.5	22.5	23.5	24.5	25.5	26.5
E	Body length CB (full, back neck dip to hem)	±0.5	18.5	19.5	20.5	21.5	22.5
F	Side seam length (underarm to hem)	±0.5	19.5	20.5	21.5	22.5	23.5
G	Measurement point G	±0.5	14.5	15	15.5	16	16.5
H	Bust cup height (HPS to underbust seam)	±0.5	15.5	16.5	17.5	18.5	19.5
I	Front neck halter band strap width	±0.2	1	1	1	1	1
J	Outer shoulder strap width	±0.2	1	1	1	1	1
K	Measurement point K	±0.5	36.5	37.5	39	40	41
L	Strap adjustability range	±0.5	10	10	10	10	10
M	Measurement point M	±0.5	32.5	34	35.5	37	39
N	Underbust contour seam curvature drop	±0.2	2.5	2.5	2.5	2.5	2.5
O	Bottom hem stitch height (double needle)	±0.1	1.5	1.5	1.5	1.5	1.5

All measurements in cm, garment laid flat. Tolerances apply to finished garment.



Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

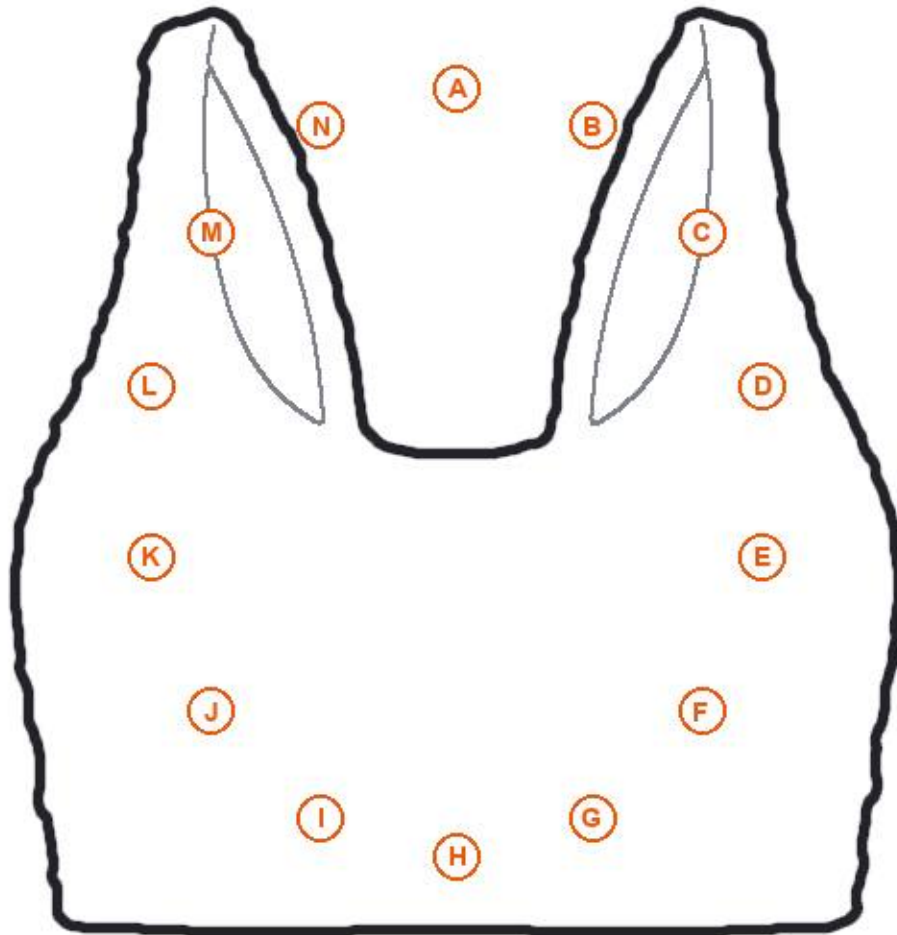


- A** Bust $\frac{1}{2}$ (at widest point across cup center)
- B** Underbust $\frac{1}{2}$ (at contour seam)
- C** Hem $\frac{1}{2}$ (bottom band width relaxed)
- D** Measurement point D
- E** Body length CB (full, back neck dip to hem)
- F** Side seam length (underarm to hem)
- G** Measurement point G
- H** Bust cup height (HPS to underbust seam)
- I** Front neck halter band strap width
- J** Outer shoulder strap width
- K** Measurement point K
- L** Strap adjustability range
- M** Measurement point M
- N** Underbust contour seam curvature drop



Brand Aero Active
Style No. AER-FSB-12
Description Flex Sports Bra
Category Sports Bras
Gender Womens

Designer Aero Design Team
Fabric Comp. 88% Polyester 12% Spandex
GSM 250
Size Range S-XXL
Collection SS27 Core Essentials

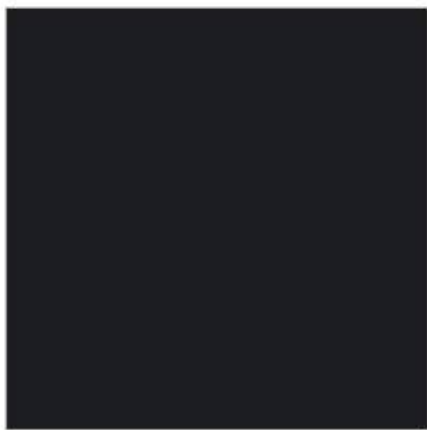

Black
Colourway 1 | Ref AER-C01

Colours to be matched to the approved lab dip. Bulk shade tolerance: Delta E 1.0 (CMC 2:1).