


MODEL NO.	LMD8S12BSS05-060	DWG NO.	A6023
-----------	------------------	---------	-------

CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	LJ	3.23.2026

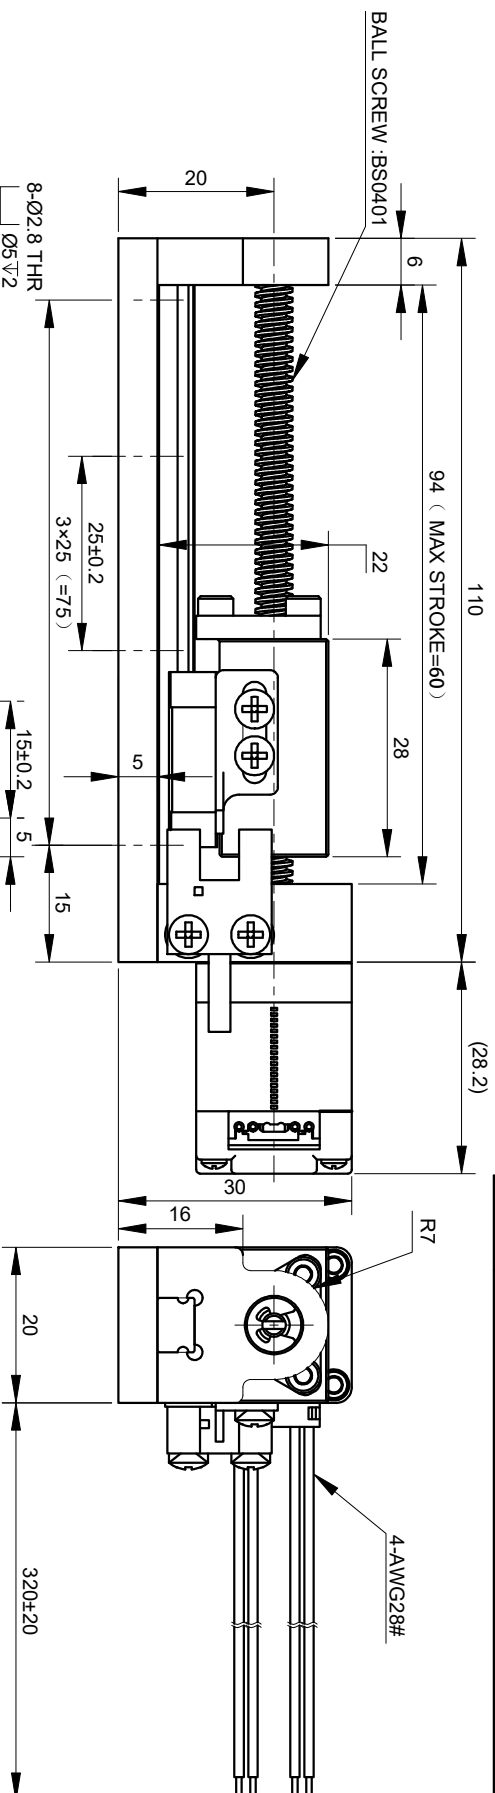

CONNECTION	
SPECIFICATION	BIPOLAR
AMPS/PHASE	0.50
RESISTANCE/PHASE(Ohms)@25°C	5.00±10%
INDUCTANCE/PHASE(mH)@1KHz	1.50±20%
HOLDING TORQUE(Nm)[lb-in]	0.01[0.09]
STEP ANGLE(°)	1.80
STEP ACCURACY(NON-ACCUM)	±5.00%
LEAD(mm)[in]	1[0.0393]
LINEAR TRAVEL/STEP(mm)[in]	0.005[0.00019685]
RATED LOAD CAPACITY(N)	17.5
MAX SPEED(mm/s)	20
POSITION ACCURACY(mm)	±0.02
AMBIENT TEMPERATURE	-20°C~50°C[-4°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX. 80°C

PHOTOELECTRIC SWITCH

PHOTOELECTRIC SWITCH SEQUENCE		
PIN NO	BIPOLAR	LEADS
1	+5-24V	BRN
2	GND	BLU
3	SIGNAL LINE	BLK
4	N/A	WHT

MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	RED	
2	A -	RED/WHT	
3	B+	GRN	
4	B -	GRN/WHT	

FULL STEP 2 PHASE EX., WHEN FACING MOUNTING END (X)					DIMENSIONS ARE IN MILLIMETERS TOLERANCES AS BELOW:	
STEP	A+	B+	A-	B-	CCW	CW
1	+	+	-	-		
2	-	+	+	-		
3	-	-	+	+		
4	+	-	-	+		
					THIRD ANGLE PROJECTION	

DIMENSIONS ARE IN MILLIMETERS TOLERANCES AS BELOW:	
DECIMALS	ANGLES
X ±0.5	±2°
X.X ±0.25	
X.XX ±0.13	
THIRD ANGLE PROJECTION	

SIGNATURE		DATE
DRN	LJ	3.23.2026
APVD	ZPJ	3.23.2026

STEPPERONLINE®				
LINEAR ACTUATORS				
LMD8S12BSS05-060				
REV.	1	SCALE	1:1	DWG NO.
				A6023

STEPPERONLINE®

LINEAR ACTUATORS

LMD8S12BSS05-060