

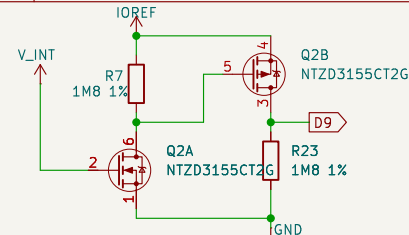


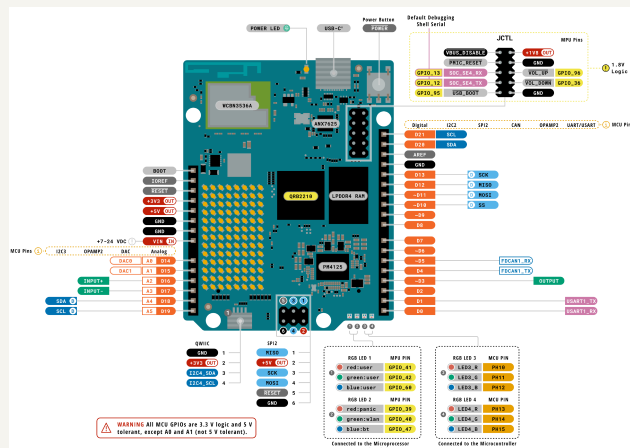



JANALOG OF ARDUINO

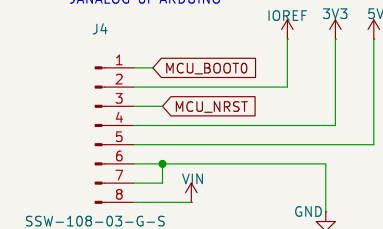



V_INT can be used by Arduino to sense the start of the module switch-on sequence. V_INT can be used by Arduino to detect the end of the module switch-off sequence. Do not remove VCC before VINT goes low. The double transistor shifts the 1.8V to the IOREF voltage level

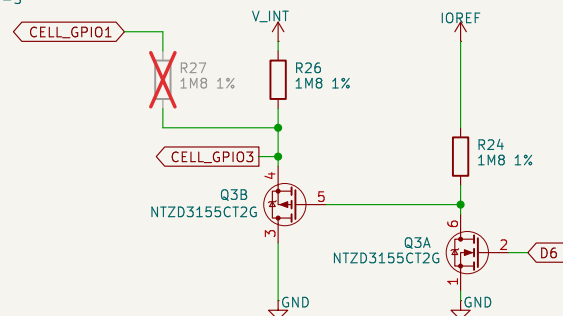

GPIO3 can be used for faster switch off modes enabled by AT+CFUN=10 or AT+CFUN=11. Use GPIO1 set as Output High, instead of V_INT, to bring the module to Active mode from Deep Sleep by means of GPIO3 and AT+UPSV=5. VINT is not active during Deep Sleep 10N 16V while GPIO3 and GPIO1 are powered by the Allways ON Domain of the LEXI-R10

STM32 of UNO-Q has USART1_CTS on GPIOs PA11 and PB4 corresponding to ARDUINO D5 (PA11) and ARDUINO D8 (PB4)

STM32 of UNO-Q has USART1_RTS on GPIOs PA12 and PB3 corresponding to ARDUINO D4(PA12) and ARDUINO D2(PB3)

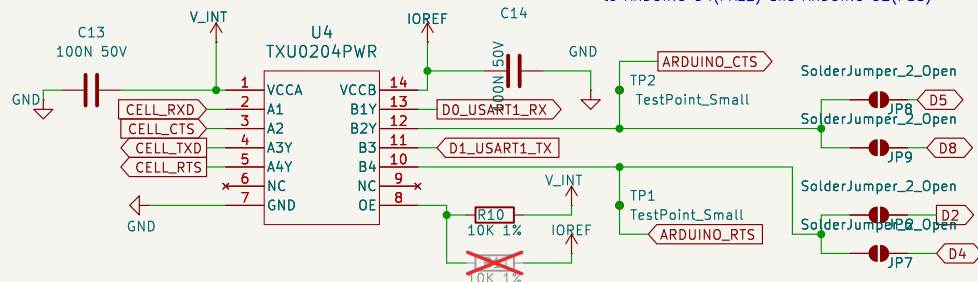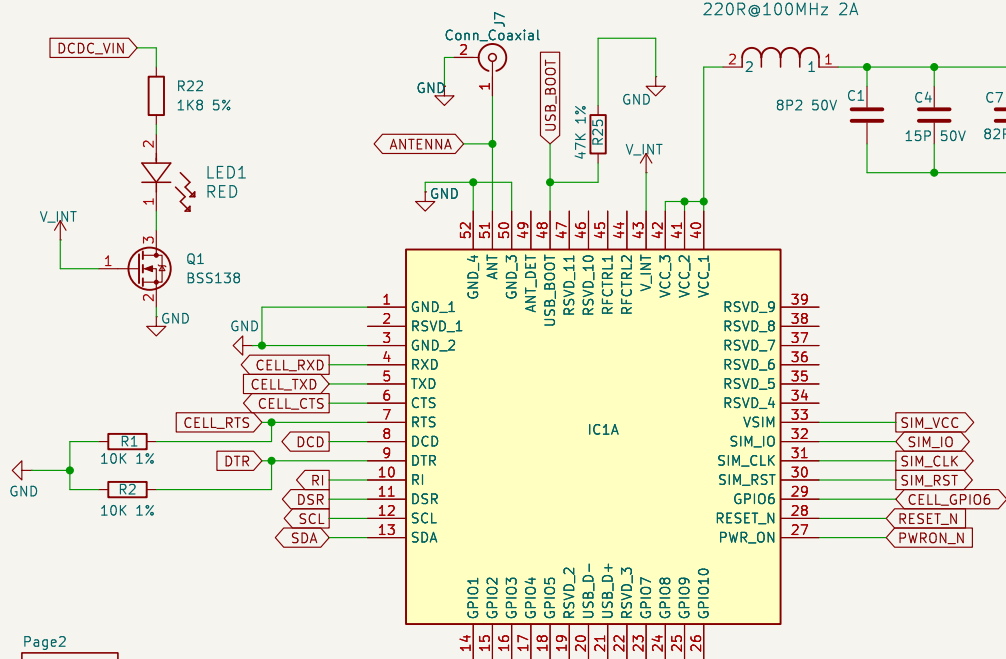

GPIO3 is an interrupt for the CELL module

Sheet: /
File: LEXI-ADAM UNO SHIELD ver.01.kicad_sch


Title:


Size: A4
KiCad E.D.A. 9.0.2-rc1

Date:

Rev:

Id: 1/3

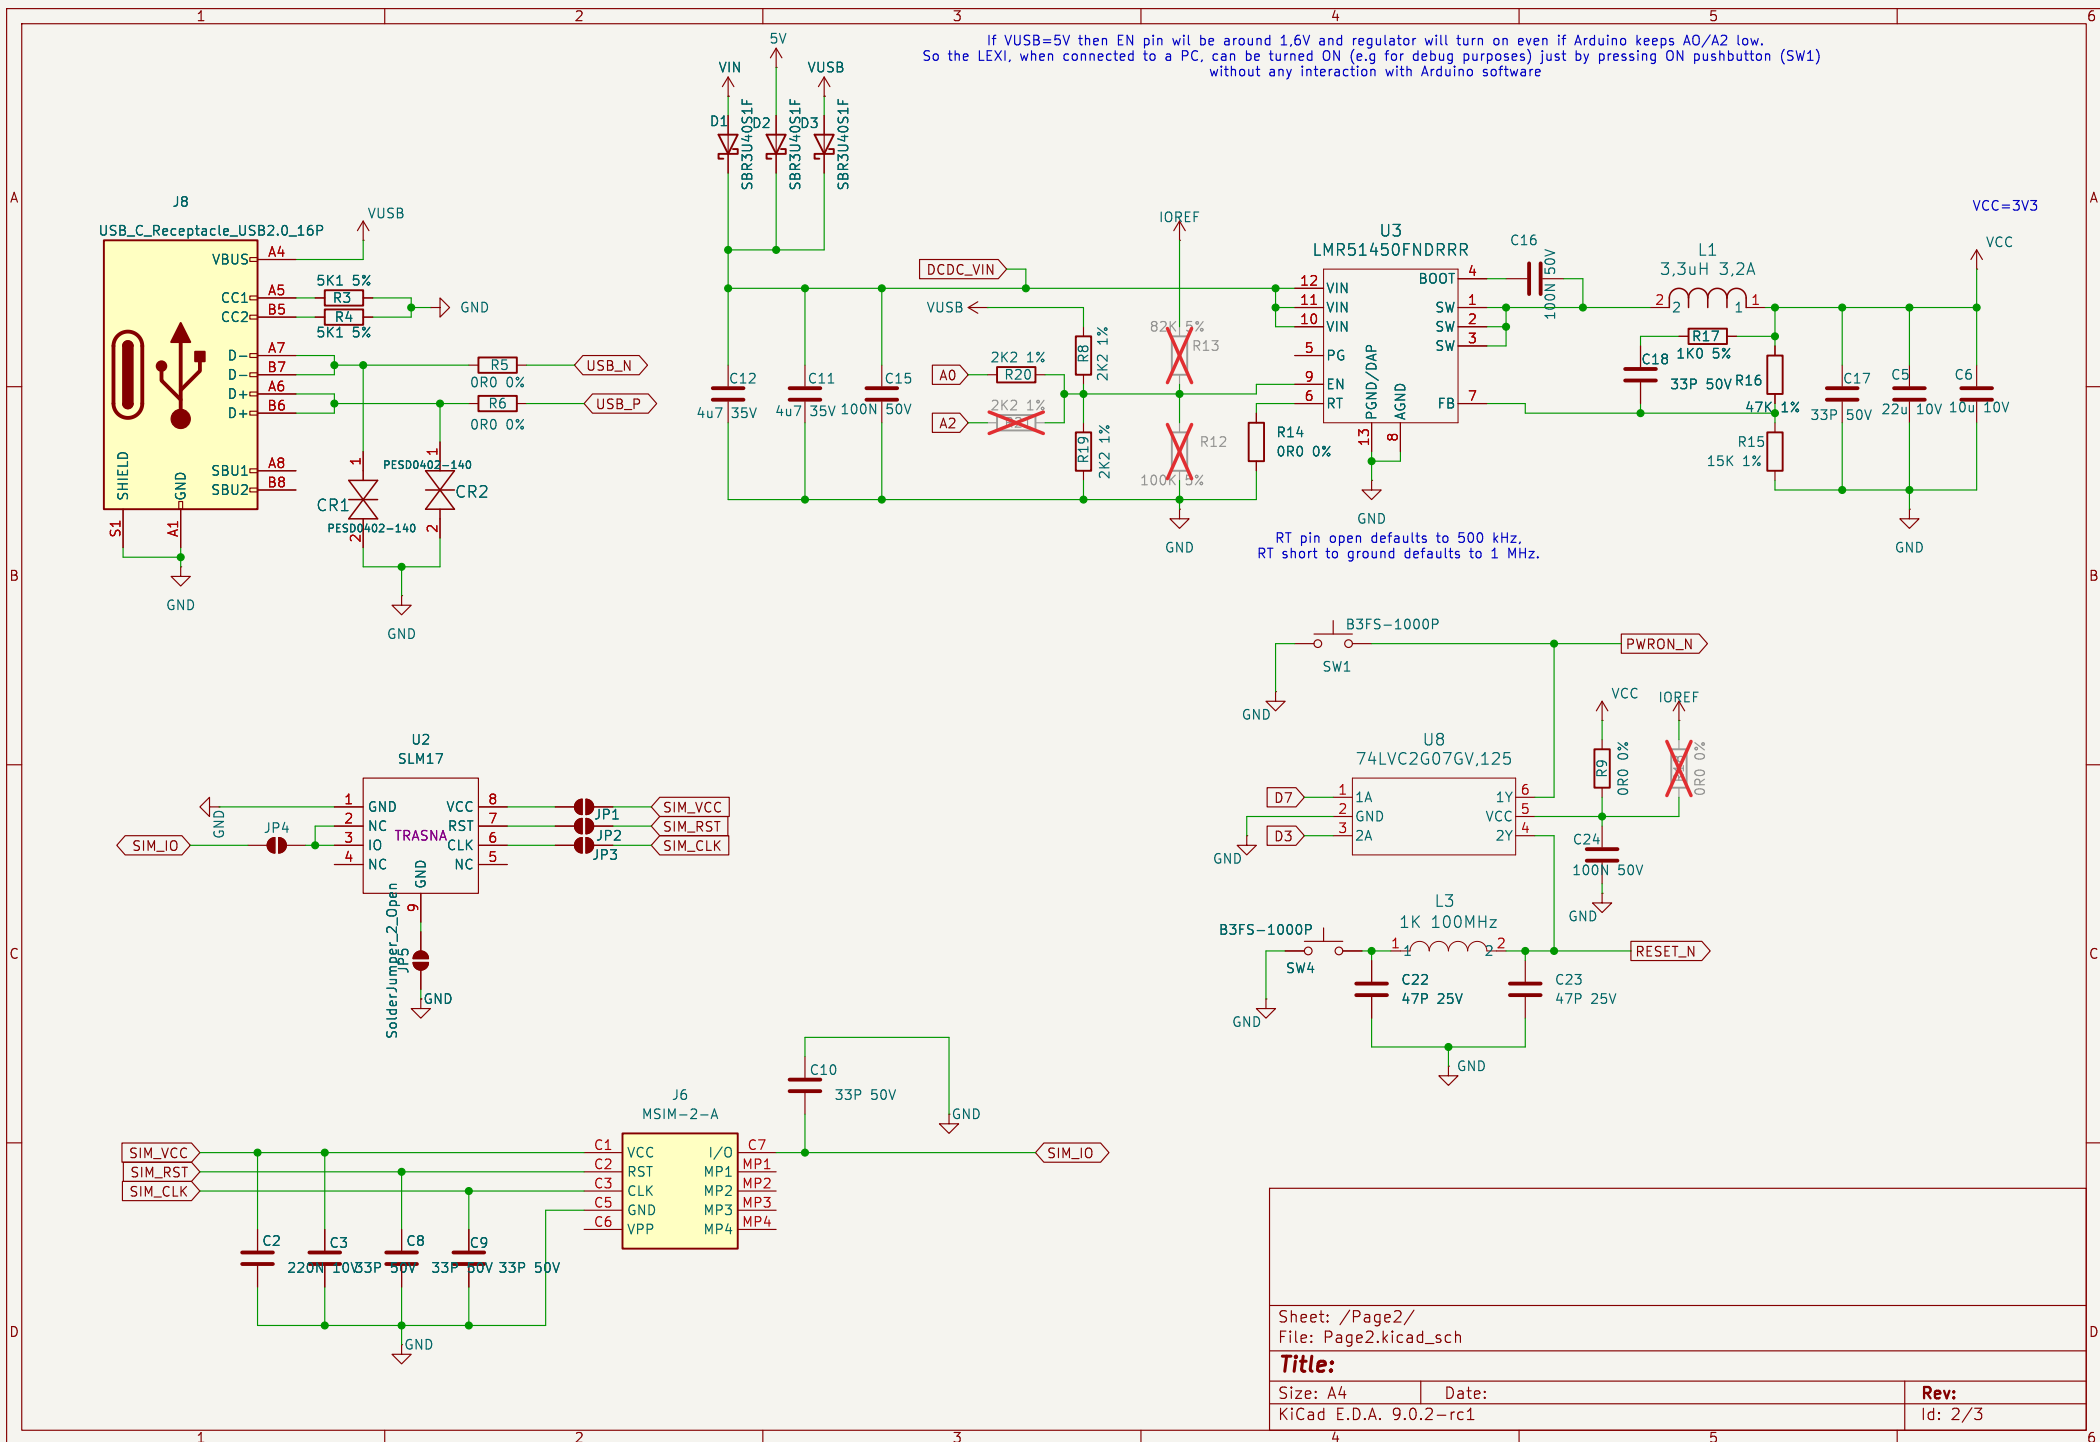

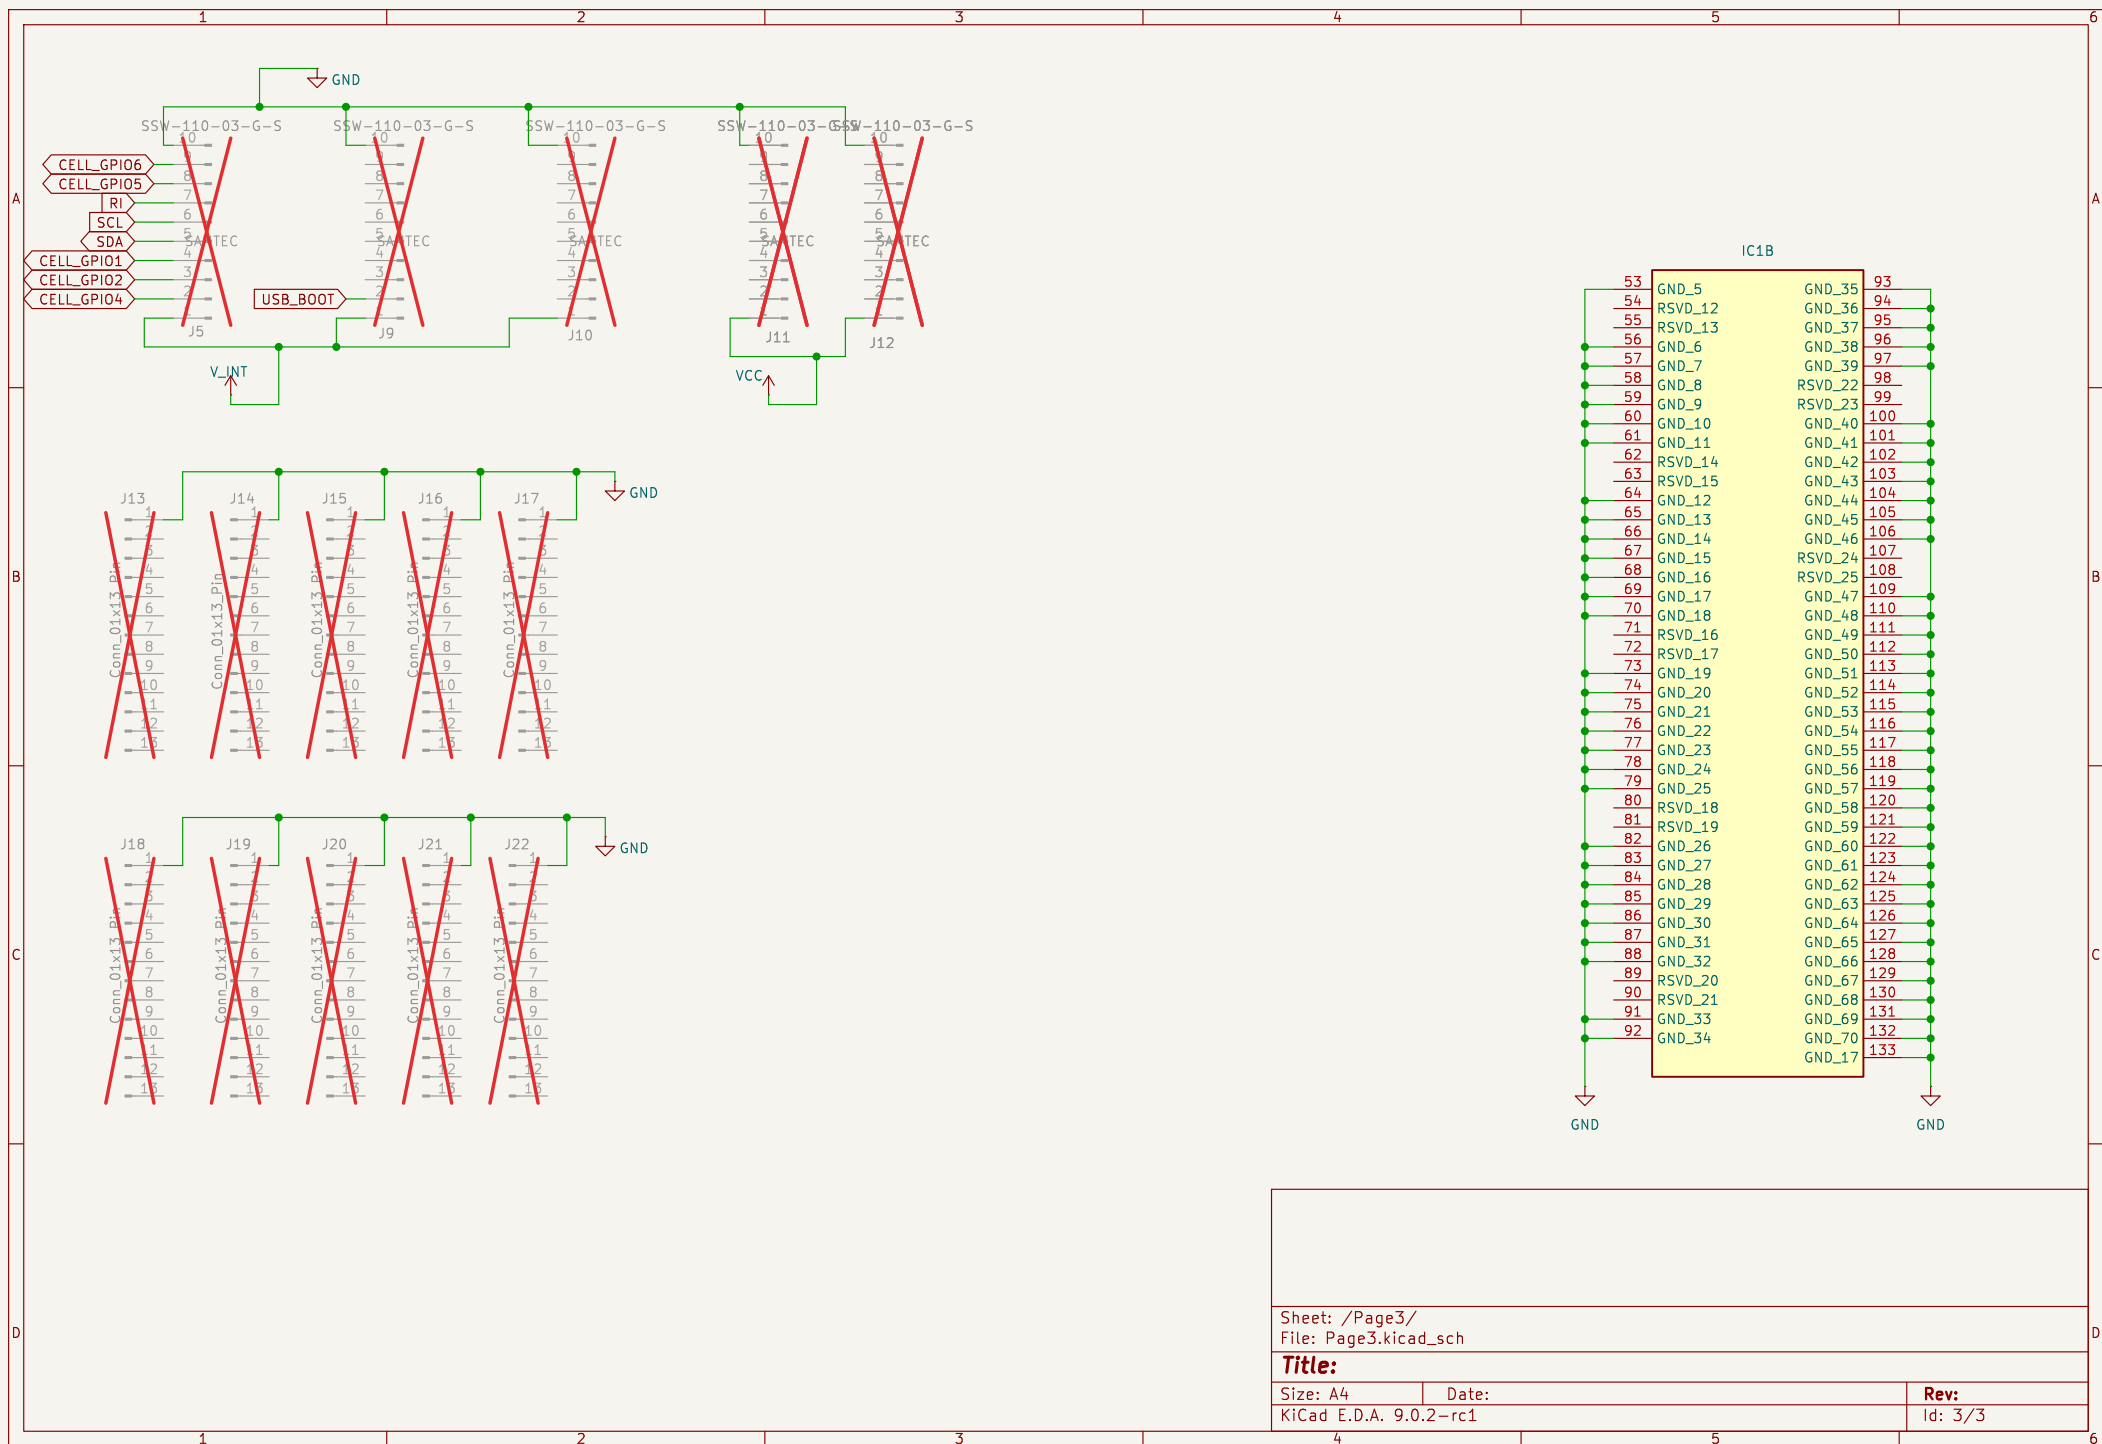


Sheet: /Page3/
File: Page3.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.2-rc1

Date:

Rev:
Id: 3/3

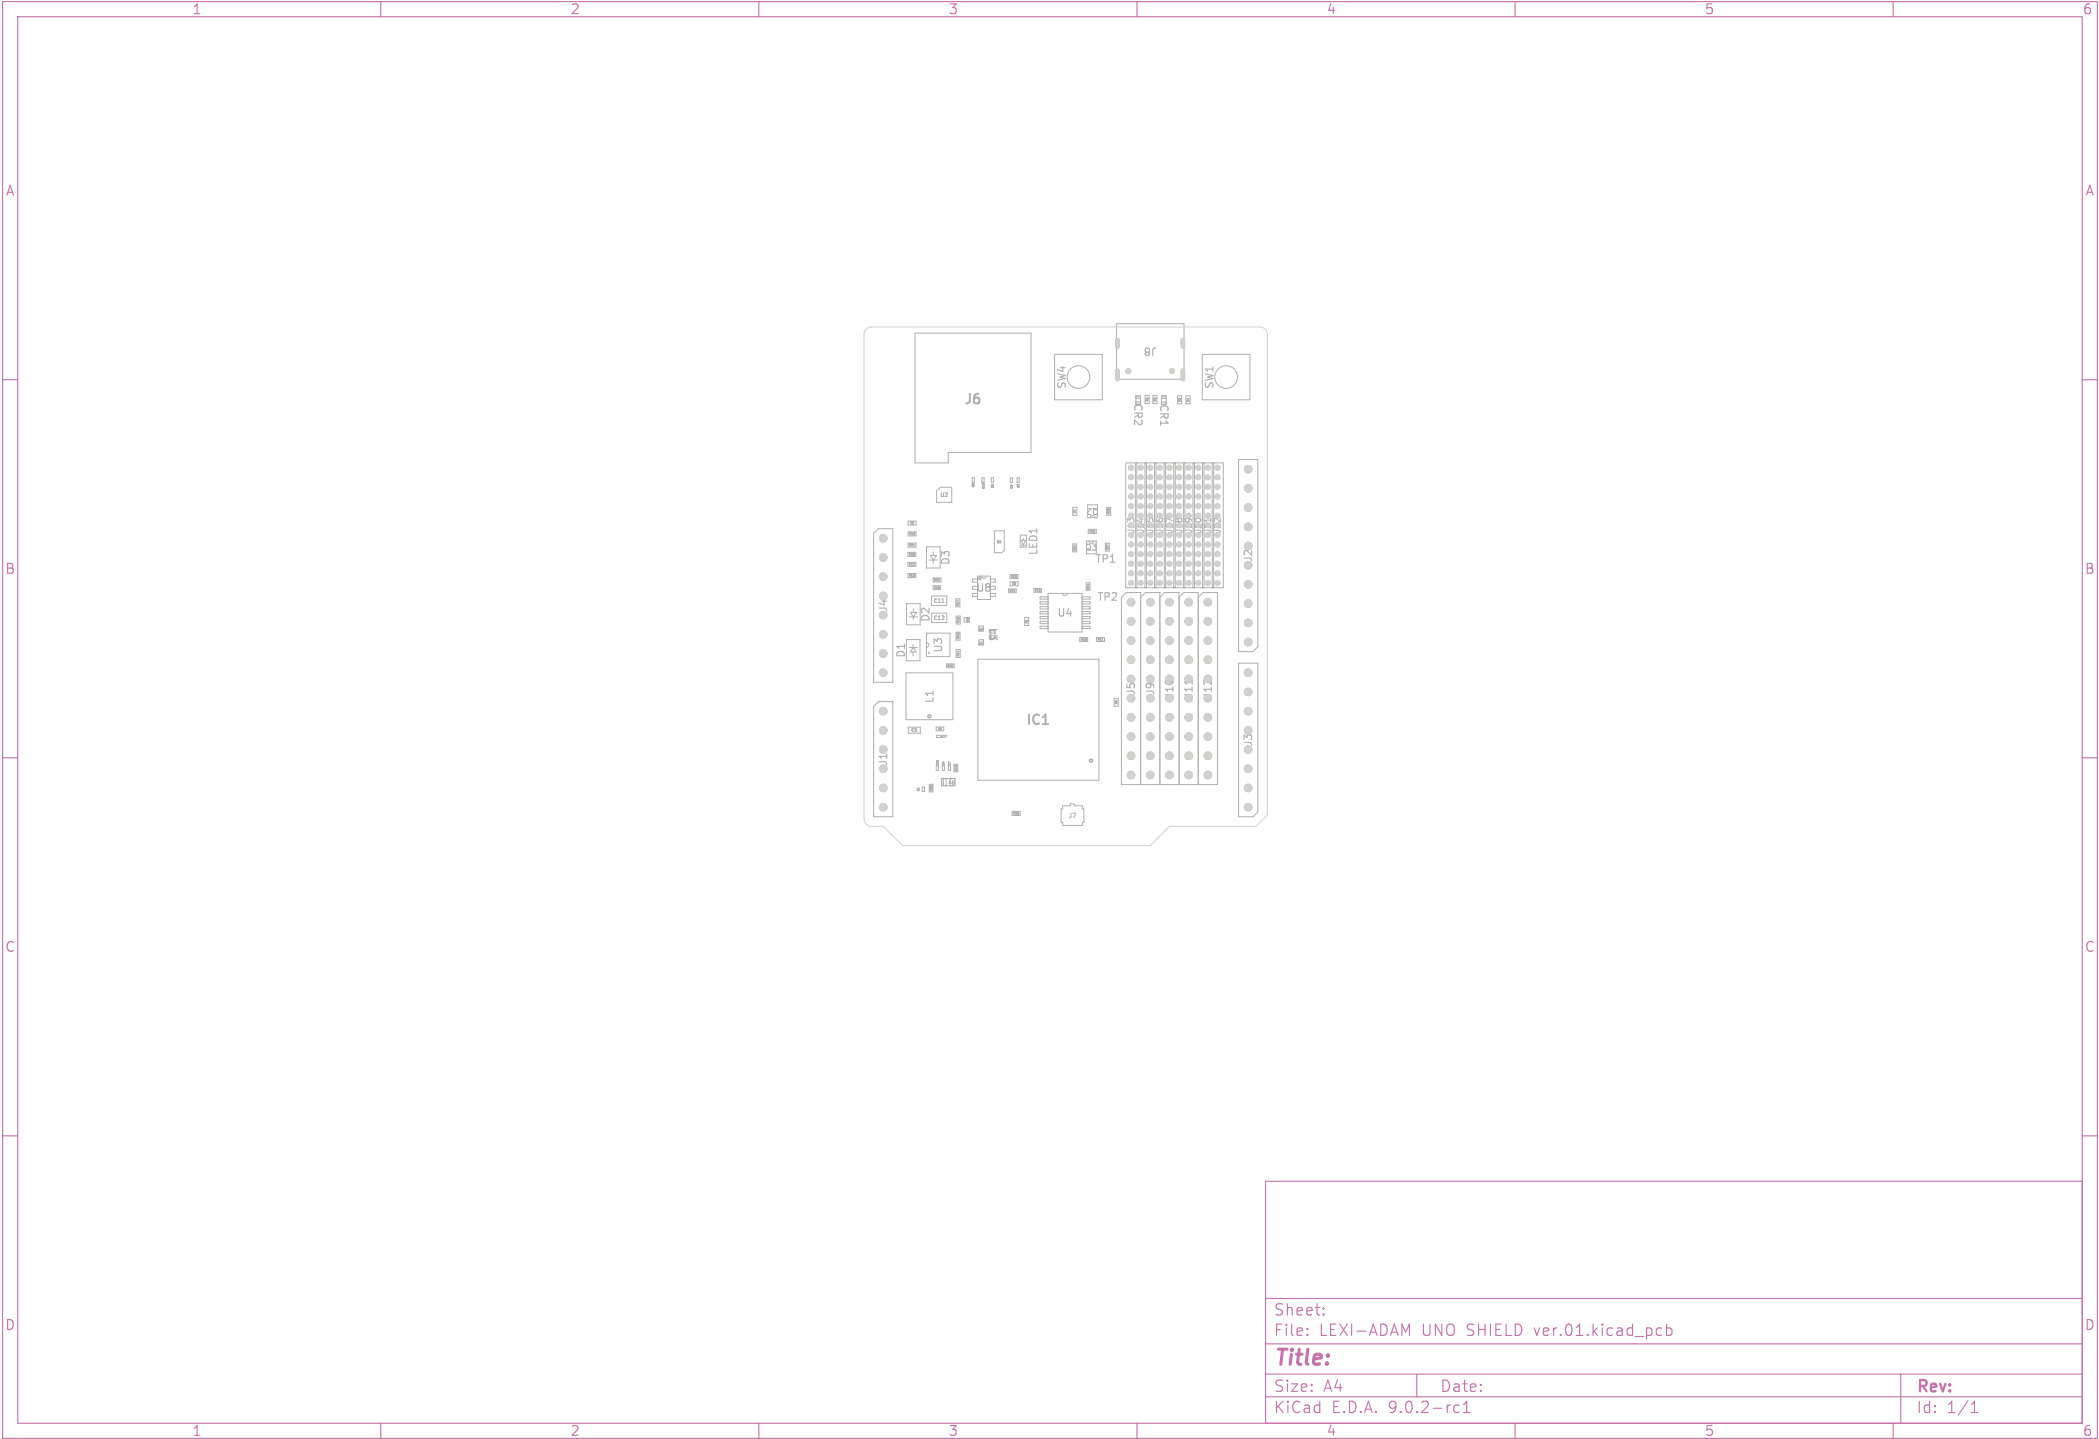

Sheet:		
File: LEXI-ADAM UNO SHIELD ver.01.kicad_pcb		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.2-rc1		Id: 1/1

