

CHAPMAN-HUFFMAN, INC.**HANDPIECE PRESSURE GAUGE****NEW!****20-140-00**

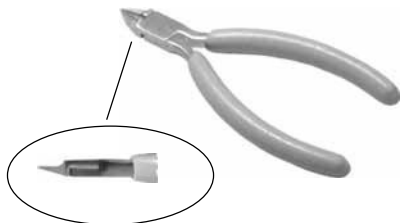
- Used to test dental unit drive air pressure at the handpiece with the handpiece running
- Fits 5 hole MIDWEST and 6 pin connectors
- Designed with through holes for air & water coolant
- 0-60 PSI gauge
- Nickel plated brass and stainless steel construction

AIR SERVICE TOOL**Air Service Tool****20-115-00****Replacement Barb Fitting****14-330-00**

- Adapts to 5 hole MIDWEST handpiece tubing to provide instant drive air source for testing of components and blowing out plugged tubing, while wearing proper eye and skin protection
- Nickel plated brass construction
- Includes 14-330-00 barb fitting 10-32 X 1/16" and 1/8" barb

TEST GAUGE**Test Gauge****019-02-00****Replacement Barb****14-330-00**

- 0-160 PSI gauge
- Replaceable barb for use w/ 1/16" or 1/8" I.D. tubing

UNIVERSAL NIPPERS**019-10-00**

- The perfect tool for Service Technicians. Used for removing sleeve clamps, tubing from barbs, toggle pins and many others.
- Small overall length 4"
- Flush cutting jaws
- Insulated handles

HEMOSTAT**NEW!****019-30-00**

- 6 1/4" overall length
- Easily capable of clamping off 1/8 or 1/4 supply tubing
- Serrated jaw for enhanced gripping of part being held
- Jaw locking capability
- Stainless steel construction

800-225-4621

CHAPMAN-HUFFMAN, INC.

1/4" NUT DRIVER

20-120-00



- Special Nut Driver for installing 10-32 x 1/16 barb fitting 95-116-00 or 95-616-00 and 10-32 x 1/8 barb fitting 95-117-00 or 95-617-00
- Also fits 10-32 hex plug 95-127-00 and barb fitting 10-32 x 1/16 x 1/8 14-330-00
- Counterbore for centering washer while installing

O-RING INSTALLATION TOOL KIT FOR HANDPIECE COUPLERS

20-095-00

**NEW!**

- Includes two separate O-ring tools to assist when installing O-rings on KAVO MULTIFLEX couplers
- Use with Chapman-Huffman O-ring Kit 95-226-00
- Stainless steel construction
- Fits Chapman-Huffman couplers: 20-075-00, 20-077-00 and 20-079-00

TEMPORARY LUBRICATING AGENT FOR TUBING

20-230-00

**NEW!**

- To aid in the connection of handpiece tubing to handpiece connectors, hook up tubing to barb fittings and vacuum tubing to vacuum handpieces
- **Drys clear**
- 2 fluid ounce, leak proof plastic container

TUBING STRIPPER

019-05-00



- Used for separating standard and asepsis tubing

TUBING CUTTER

**Tubing Cutter**

019-11-00

Replacement Blade

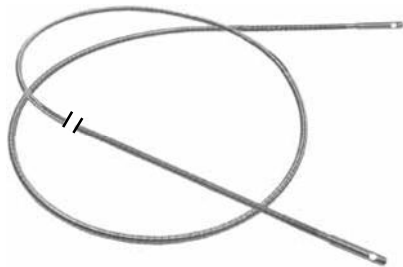
019-12-00

- Cuts tubing square and clean
- For tube OD sizes 1/8" to 1/2"
- Closes automatically for safe storage

800-225-4621

CHAPMAN-HUFFMAN, INC.**DIAL THERMOMETER 0°-220° F****019-45-00**

- 1" dia. bi-metal test thermometer 0° F to 220° F
- Easy-to-read face
- Stainless steel construction
- 5" stem length
- $\pm 1\%$ accuracy
- External recalibration adjustment
- Protective sheath with pocket clip

ROUTING CABLE ASSEMBLY**20-257-00**

- For pulling an extra 1/8 OD or 1/4 OD tubing, or a needed low voltage electrical wire through an existing umbilical assembly.
- 12 ft. length
- Stainless steel construction
- Easily coiled to fit in any tool case

SLEEVE INSTALLATION TOOL**1/8" Sleeve Tool****20-110-00****1/4" Sleeve Tool****20-111-00**

- Used for installation of tubing sleeve clamps 95-028-00, 95-030-00 and 95-041-00

COMBINATION SLEEVE INSTALLATION TOOL**20-112-00**

- Two-in-one tool
- 1/8" sleeve tool on one end and 1/4" sleeve tool on the other end
- Used for installation of tubing sleeve clamps 95-028-00, 95-030-00 and 95-041-00

PANEL WRENCH**019-35-00**

- Fits 9/16" hex nuts
- Designed for tightening inside nuts on valves when installed in panel or face plate
- Zinc plated steel

800-225-4621

CHAPMAN-HUFFMAN, INC.

FOREST STYLE SYRINGE SERVICE TOOL

40-010-00



- Fits FORSTAR-3 syringe for removal of cartridge, tip adapter and barbs
- Cross ref. # 1107-057
- Stainless steel construction

SYRINGE BUTTON REMOVAL TOOL

019-50-00



- Assists with the removal of syringe buttons that are stuck. The tapered design forces the button up and out as you push the tool under the button head
- Plastic construction

UTILITY BRUSH

**Brass Bristles**

019-22-00

Stainless Steel Bristles

019-23-00

- Toothbrush style utility brush
- Overall length 7 1/2"
- Brush length 1 3/8"
- Plastic handle

SOCKET RETRACTOR TOOL

16-775-00



- For removal and installation of bulb in PELTON & CRANE LFI and LF+ lights
- PELTON & CRANE cross ref. # 006800

BULB REPLACEMENT TOOL

16-780-00

**NEW!**

- For removal of MIDWEST bulb #650064
- Chapman-Huffman part number 16-058-00
- MIDWEST cross ref. # 753399

TEFLON TAPE

017-20-00



- For sealing pipe threads
- 1/2" wide x 520" long (approx. 43 ft. long)
- White Teflon
- Pop out covered spool

800-225-4621

CHAPMAN-HUFFMAN, INC.**ELECTRICAL TAPE****025-94-00**

- Light gray color
- Flame retardant
- Vinyl plastic tape
- Maximum operating temperature 105°C (220° F)
- Suitable for use at maximum 600 volts as primary insulation
- 3/4" wide X 60' long roll

PARKER O-RING LUBE**20-211-00**

- For low pressure (under 200 PSI)
- Use for vacuum seals
- Extends life of synthetic O-rings
- 4 oz. tube
- **Recommended for use w/ Nitrile/Buna N O-rings**

PARKER SUPER-O LUBE**20-212-00**

- Clear silicone base lubricant
- For plastic and rubber use
- Improve sealability in vacuum and high pressure systems
- Useful from -65° to 400° F
- Moisture resistant
- 2 oz. tube
- **Recommended for use with viton and ethylene propylene O-rings**

ALL PURPOSE LUBE**20-240-00**

- Magnalube brand
- Contains DUPONT TEFLON
- Operating range -40° F to 530° F
- Load range 7000 lbs PSI
- Water resistant
- Anti-rust properties
- TEFLON base lubricates after petroleum base is worn out
- For O-ring and cylinder seals
- .75 oz. tube size

LUBRIPLATE LUBRICANT**20-217-00**

- LUBRIPLATE brand
- 10.6 gram tube
- General purpose lubricant

800-225-4621

CHAPMAN-HUFFMAN, INC.**TEFLON LUBE****20-213-00**


- All purpose dry film lubricant
- Use on metal, wood, glass, paper and virtually any surface
- Withstands temperatures to 500° F
- Non-oily and chemically inert, will not attract dust, dirt, lint and atmospheric particles
- 10 oz. aerosol can - **Ground Shipment Only**

CONTACT CLEANER**20-214-00**

- Use on all electrical equipment
- Pretest on all plastics
- 3-way action; cleans, restores, protects
- Nonflammable
- Leaves no residue
- 20 oz. aerosol can - **Ground Shipment Only**

INSTANT ADHESIVE**019-07-00**

- Bonds handpiece tubing to connector
- Bonds metals, wood, ceramics, rubber and plastic parts
- Net wt. 20 grams (.70 oz.)

ADJUSTABLE TIE MOUNT**95-100-00**

- Adhesive mount also (2) pre-drilled holes for screw mount
- Either 95-031-00, 95-032-00 or 95-035-00 adjustable tie will fit this mount
- Plastic construction
- **Pkg. of 10**

ADJUSTABLE TIE**4" Pkg. of 10****95-031-00****8" Pkg. of 10****95-032-00****11 3/4" Pkg. of 10****95-035-00****800-225-4621**

CHAPMAN-HUFFMAN, INC.**TUBING CLAMP***For use with tubing OD's:*

| | |
|-----------------|------------------|
| 1/8 OD | 95-102-00 |
| 1/4 OD | 95-103-00 |
| 3/8 OD | 95-104-00 |
| 1/2 OD | 95-106-00 |
| 3/4 OD | 95-107-00 |
| 1 1/4 OD | 95-109-00 |

- Fits tubings with **OD's** listed above
- Plastic construction
- **Pkg of 10**

ZIP-IT™ WALL ANCHOR - NYLON

| | |
|------------------|------------------|
| Each | 008-70-00 |
| Bag of 50 | 95-161-00 |

- Self-drilling sheetrock hollow wall anchor
- Fast, easy installation with electric drill or screwdriver
- Use # 8 X 1 1/4" sheet metal screws
- Electrically non-conductive
- Made of engineered nylon

ZIP-IT™ WALL ANCHOR - METAL

| | |
|------------------|------------------|
| Each | 008-71-00 |
| Bag of 50 | 95-163-00 |

- Self-drilling sheetrock hollow wall anchor
- Fast, easy installation with electric drill or screwdriver
- Use # 8 X 1 1/4" sheet metal screws
- Made of Zamac alloy

GENERAL PURPOSE WALL ANCHOR SCREW

| | |
|-------------------|------------------|
| Pkg. of 25 | 95-188-00 |
| Pkg. of 50 | 95-189-00 |

- Use with Nylon or Metal wall anchors 008-70-00 and 008-71-00 (sold above)
- # 8 X 1 1/4" zinc plated screw

800-225-4621