


L-SERIES COMPRESSO-DRI INSTALLATION SPECIFICATIONS

ELECTRICAL

☐ Follow this layout
L-Series WITH Remote Switch

18/3
TO REMOTE
24 V. SWITCH
W/PILOT LIGHT


TO
POWER
SUPPLY
PANEL

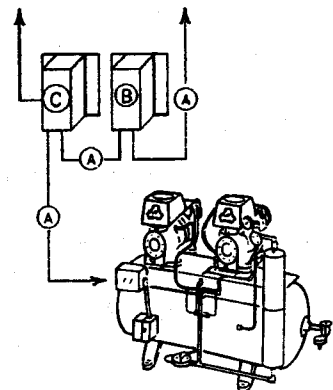

(A) DO NOT INSTALL A LINE VOLTAGE SWITCH IN THIS CIRCUIT.

☐ Follow this layout
L-Series WITHOUT Remote Switch


TO
POWER
SUPPLY
PANEL

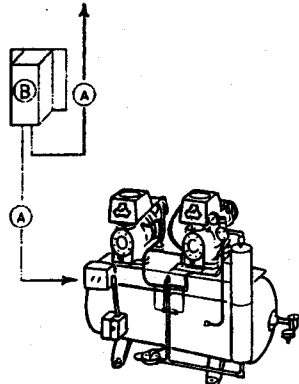

(A) DO NOT INSTALL A LINE VOLTAGE SWITCH IN THIS CIRCUIT.

PLUMBING

☐ Follow this layout
L-Series Plumbing

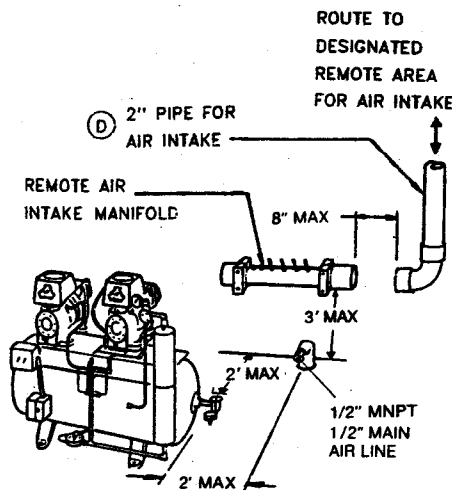

DOCTOR _____
ADDRESS _____
CITY/STATE _____
PHONE _____

DEALER _____
ADDRESS _____
CITY/STATE _____
PHONE _____

ALL INSTALLATIONS MUST CONFORM
TO LOCAL CODES

All models are supplied with a 4 ft. pressure hose
with a 1/2 NPT female swivel connector at outlet.

All models are supplied with a 4 ft. flexible
electrical conduit w/appropriate wires.

All main air lines type L or K hard drawn
copper pipe 1/2".

This Model L-Series Compresso-Dri
is being installed:

☐ L-60 ☐ L-61 ☐ L-62

☐ L-64 ☐ L-66 ☐ L-68

These options are being installed:

☐ (B) BOOST TRANSFORMER

☐ (C) CONTACTOR

☐ (D) REMOTE AIR INTAKE

SPECIFICATIONS	L-60	L-61	L-62	L-64	L-66	L-68
TOTAL HP RATING	0.75 HP	1.0 HP	1.0 HP	1.5 HP	2.0 HP	3.0 HP
VOLTAGE RATING	115 V.	115 V.	230 V.	230 V.	230 V.	230 V.
FULL LOAD AMPS	10.2 A.	13.8 A.	8.0 A.	12.0 A.	16.0 A.	25.5 A.
DEDICATED CIRCUIT	20 A.	20 A.	20 A.	20 A.	20 A.	30 A.
MIN. WIRE SIZE	#12 AWG	#12 AWG	#12 AWG	#12 AWG	#12 AWG	#10 AWG
MIN/MAX VOLTAGE	105/125 V.	105/115 V.	220/240 V.	220/240 V.	220/240 V.	220/240 V.
BOOST TRANSFORMER	#67500	#67500	#67000	#67000	#67000	#67000-1
CONTACTOR	#53080	#53080	#53081	#53081	#53081	#53082
W" x D" x H"	18.5 x 21 x 28	18.5 x 21 x 28	18.5 x 21 x 28	39 x 22 x 30.5	39 x 22 x 30.5	44 x 24 x 35



70 Contiague Rock Road, Hicksville, New York 11801

WESTERN DIVISION
23891 Via Fabricante, Suite 617, Mission Viejo, CA 92691