
Progeny®—the leader in intraoral x-ray systems in the U.S. and the preferred choice of dentists around the world.

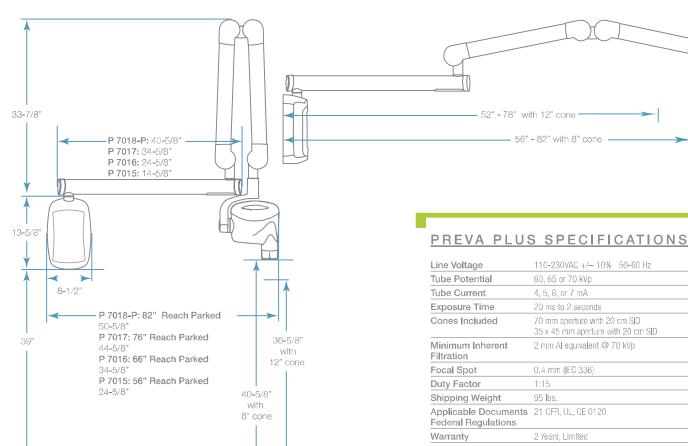

Minimum Ceiling Requirement: 86.5"

Cabinet Pass Through

66" Arm: 31" W x 47.5" H **76" Arm:** 41" W x 47.5" H

Cabinet Pass Through (Alternate) 66" Arm: 26.75" W x 47.5" H

76" Arm: 36.75" W x 47.5" H

Mobile

Base: 26.9" W x 36" L Height: 76.9' Arm reach: 44"

Lina Valtaga	110-230VAC +/- 10% 50-60 Hz
Line Voltage	
Tube Potential	60, 65 or 70 kVp
Tube Current	4, 5, 6, or 7 mA
Exposure Time	20 ms to 2 seconds
Cones Included	70 mm aperture with 20 cm SID 35 x 45 mm aperture with 20 cm SID
Minimum Inherent Filtration	2 mm Al equivalent @ 70 kVp
Focal Spot	0.4 mm (IEC 336)
Duty Factor	1:15
Shipping Weight	95 lbs.
Applicable Documents Federal Regulations	21 CFR, UL, CE 0120
Warranty	2 Years, Limited
Options	
Exposure hand switch 35 x 45 mm Long Cone	Remote Exposure Stations
Two stud mounting plate	Metal stud mounting plate
Choice of 56", 66", 76", or 82	2" (total reach) and Mobile

Sensor

Film Size equivalent	Size 1	Size 2
Dimensions	37 x 24 x 5.5 mm	43 x 32 x 5.5 mm
Active Area	30 x 20 mm	36 x 26 mm
Sensor Cable	90 cm	90 cm
Computer Interface	High Speed USB 2.0	High Speed USB 2.0

Computer Requirements

Please see www.progenydental.com for operating system and hardware requirements

Contact your Midmark representative for additional system requirement information.

midmark.com

675 Heathrow Drive Lincolnshire, II 60069 847-415-9800 Toll-free 888-924-3800

©Midmark 2013 All Rights Reserved Printed in the USA ML-00041 Rev. D

