



PCB3 Ventilation Lab Setup – emulates the Dimplex ZL 300/400 VF terminal board (PCB3)

24 V supply pass-through.
Pin 1 = +24V, pin 2 = GND
on both terminals.












AUS_0..4: emulated unit outputs. DIP switch ON pulls the line to GND through 2.2k (open-collector style).
Green LED = this output is active. Wire each ESP optocoupler input between +24V and its AUS line.

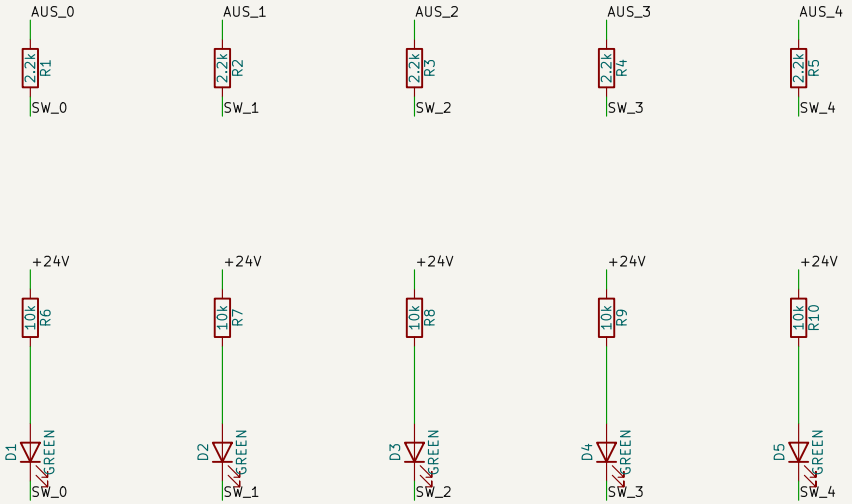


EIN_0/1: emulated unit inputs.
Red LED lights while the ESP relay
puts +24V on the line.





AUS_0 fault/filter, AUS_1 level 1, AUS_2 level 2, AUS_3 level 3, AUS_4 auto. EIN_0 up, EIN_1 down.



Sheet: /
File: ESP24V_Ventilation_LAB.kicad_sch

Title:

Size: A4 | Date: | **Rev:**
KiCad E.D.A. 10.0.7 | Id: 1/1