2024 Digital IC Design
Homework 4: Max-Priority Queue

NAME	
Student ID	P76124265

Simulation Result

Functional simulation	Score: 100	Gate-level simulation	Score: 100	Clock width	43 (ns)	Gate-level simulation time	(see below for details)

your pre-sim result of test patterns

P0

```
VSIM 3> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 2396500 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P1

```
VSIM 6> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 3385500 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P2

```
VSIM 9> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 4030500 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P3

your post-sim result of test patterns

P0

```
VSIM 53> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 2404907 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P1

```
VSIM 50> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 3393907 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P2

```
VSIM 44> run -all
#  ****************************
#  **                        **
#  **  Congratulations !!    **
#  **                        **
#  **  Simulation PASS !!    **
#  **                        **
#  **  Your score =100       **
#  **                        **
#  ****************************
# ** Note: $finish    : testfixture.v(157)
#    Time: 4038907 ps  Iteration: 0  Instance: /test
# 1
# Break in Module test at testfixture.v line 157
```

P3

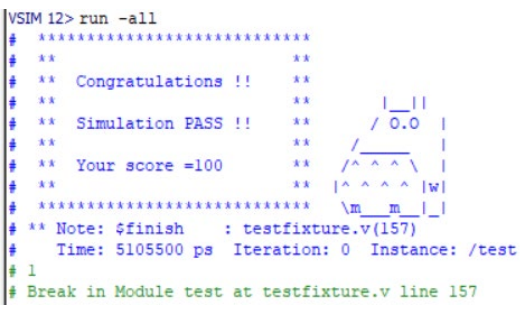

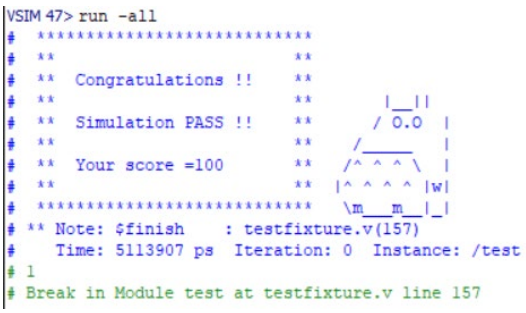

Synthesis Result

Total logic elements	17051 / 55836 (31 %)
Total memory bit	0 / 2396160 (0 %)
Embedded multiplier 9-bit element	0 / 308 (0%)

your flow summary

Flow Summary

<<Filter>>

Flow Status	Successful - Thu May 23 23:13:18 2024
Quartus Prime Version	20.1.1 Build 720 11/11/2020 SJ Lite Edition
Revision Name	MPQ
Top-level Entity Name	MPQ
Family	Cyclone IV E
Device	EP4CE55F23A7
Timing Models	Final
Total logic elements	17,051 / 55,856 (31 %)
Total registers	2103
Total pins	50 / 325 (15 %)
Total virtual pins	0
Total memory bits	0 / 2,396,160 (0 %)
Embedded Multiplier 9-bit elements	0 / 308 (0 %)
Total PLLs	0 / 4 (0 %)

Description of your design

MPQ.v架構如下:

- State register: 循序電路，存 next stage 模組產生的 state
- Next stage: 組合電路，根據 input 和目前的 state 決定下一個 state
- Output logic && Datapath: 循序電路，根據 state 決定 output，和根據 state 和 input 進行運算

FSM state 如下:

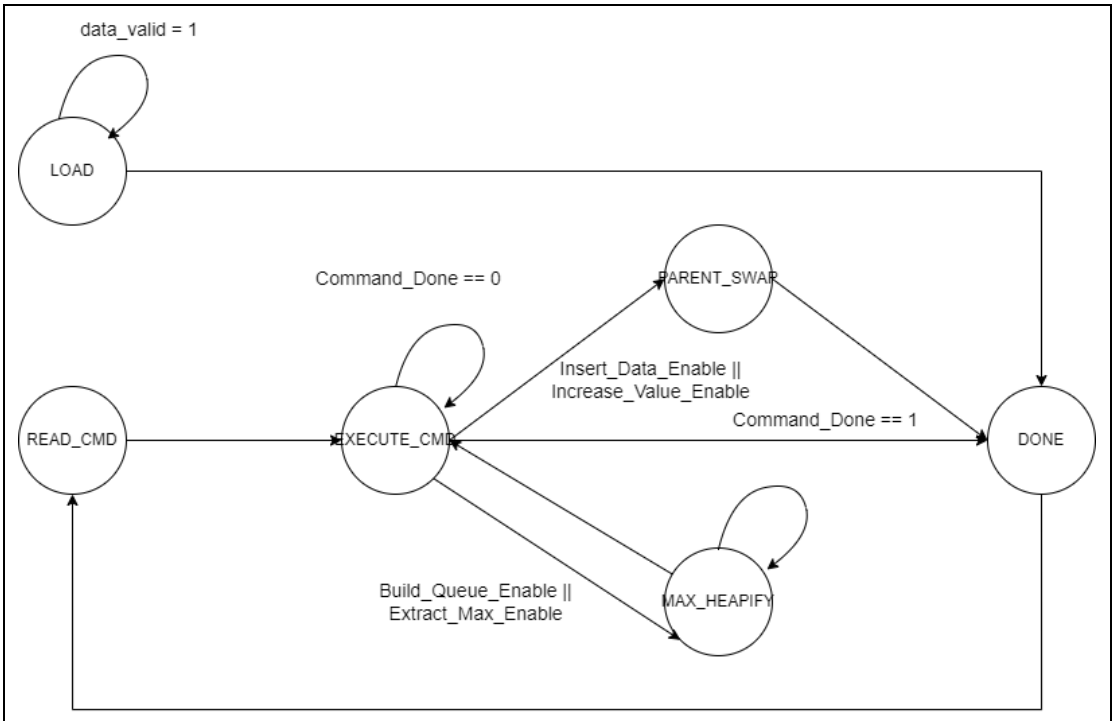

分成 6 個 state，根據 cmd 的值執行不同指令。

*Scoring = (Total logic elements + total memory bit + 9*embedded multiplier 9-bit element) × (Total cycle used*clock width)*