


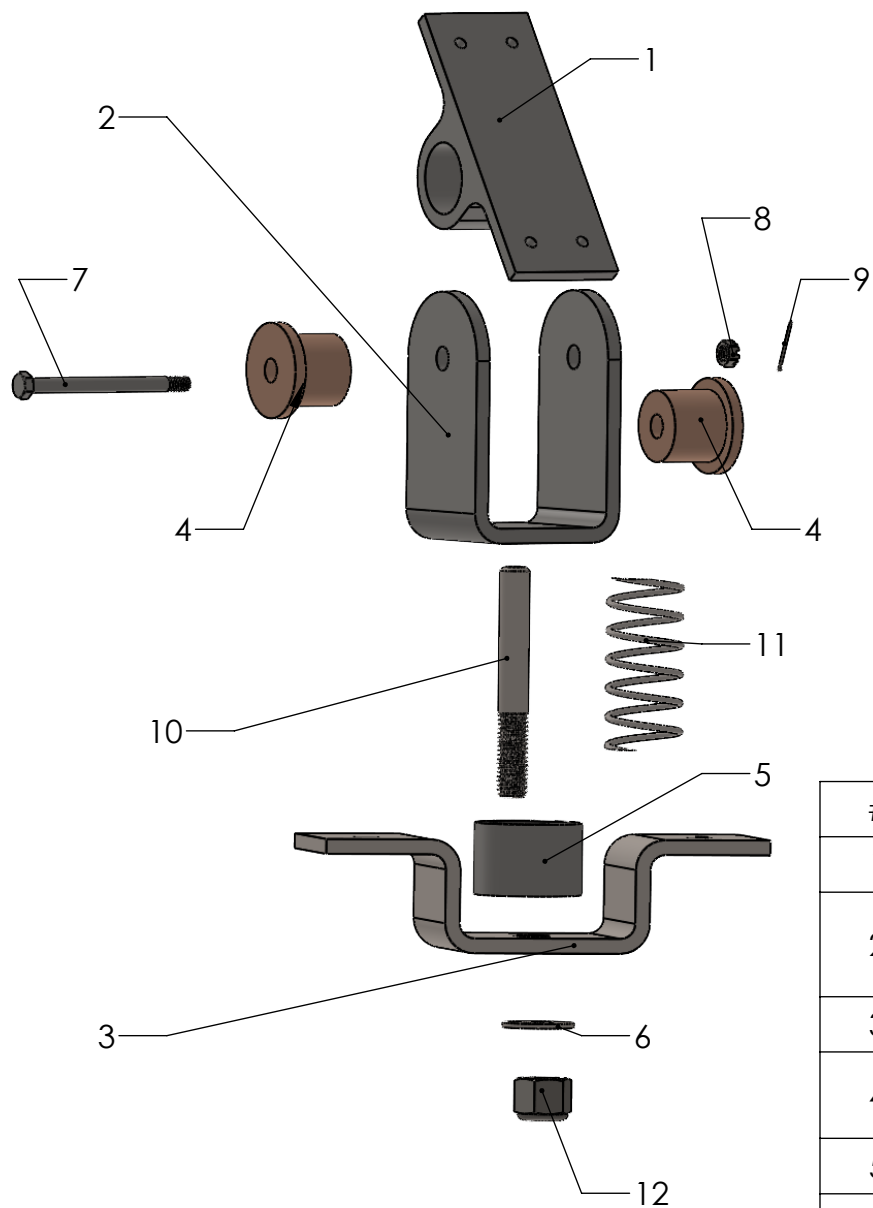
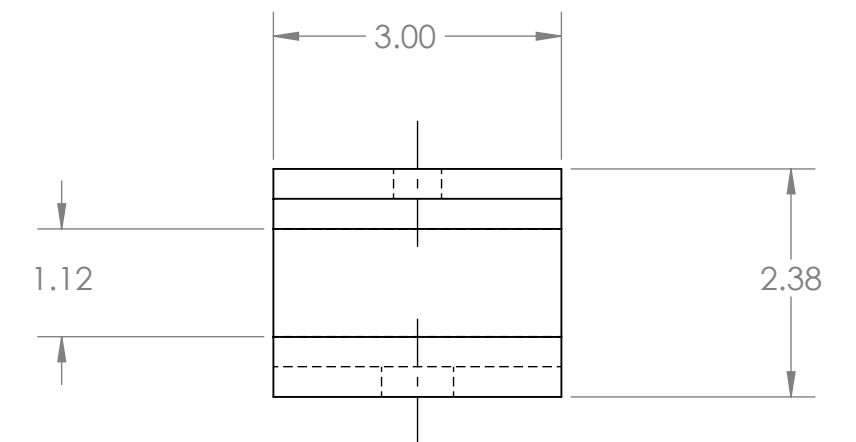
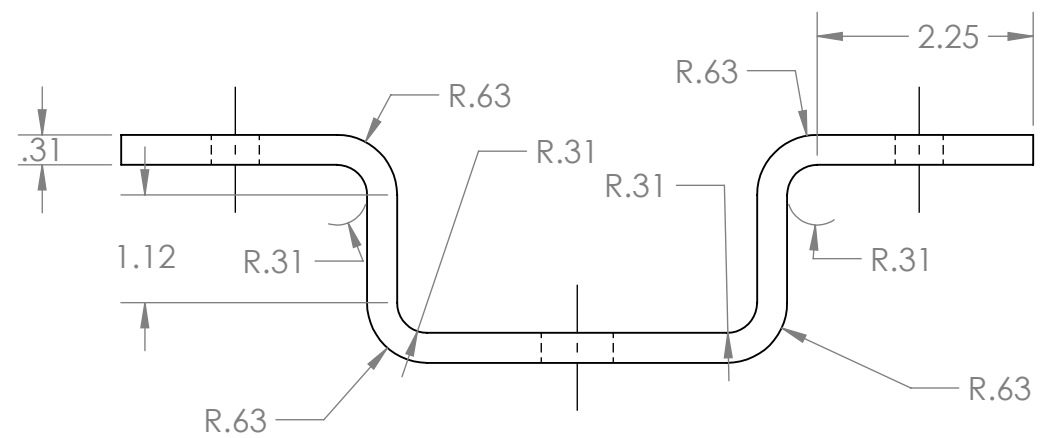
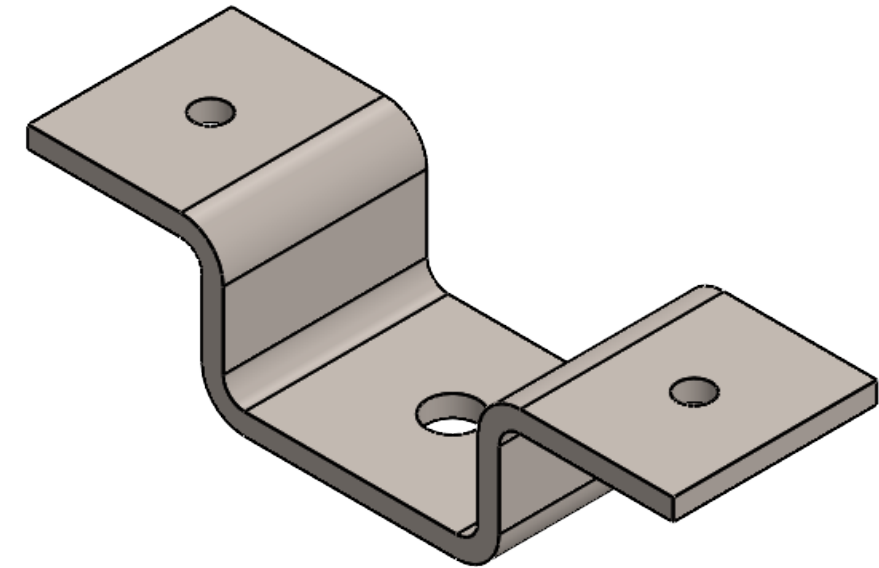
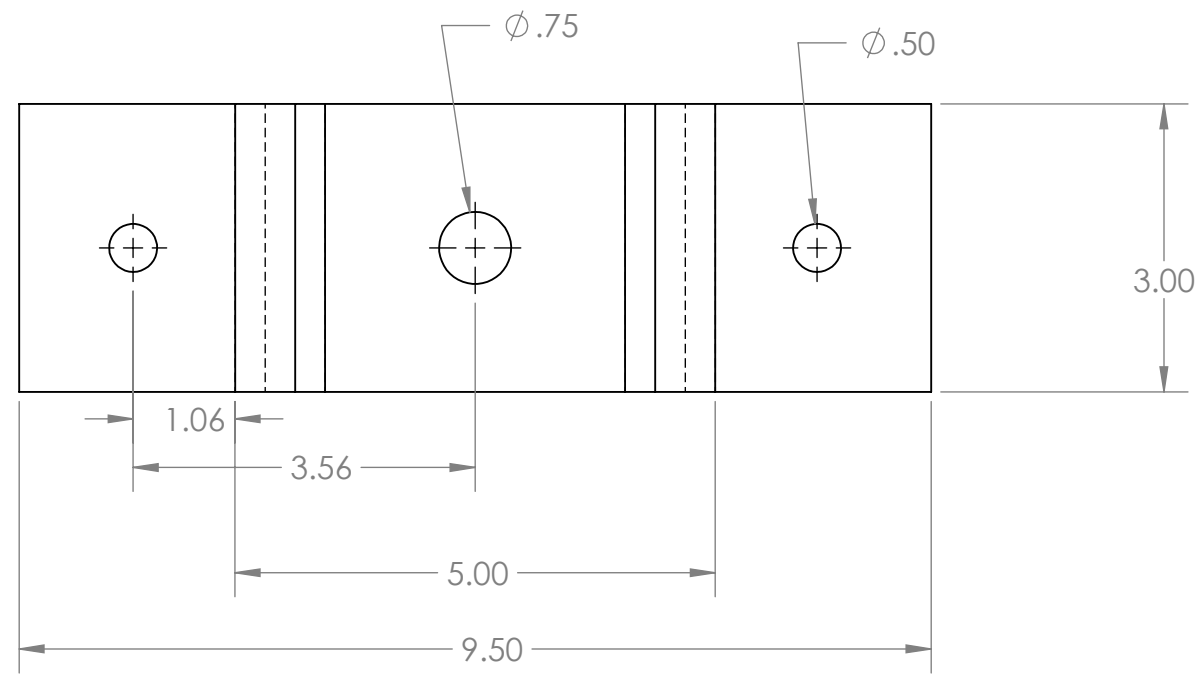
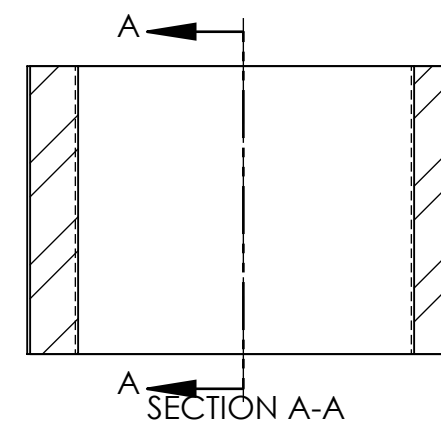





Trevor Callow
Section:64026




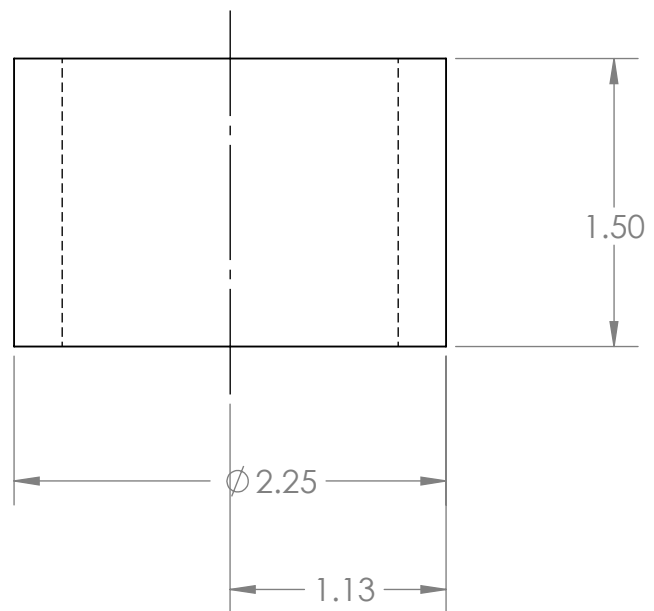






#	PART NAME	MATERIAL	QTY.
1	PIVOT1_Final_Callow	AISI 1020	1
2	U-SUPPORT1_Final_Callow	AISI 1020	1
3	BRACKET_Final_Callow	201 annealed stainless steel	1
4	BUSHING_Final_Callow	commercial bronze uns c22000 90-10 bronze	2
5	SPACER_Final_Callow	AISI 1020	1
6	Washer_Final_Callow	201 annealed stainless steel	1
7	94622A221Hex Bolt	AISI 1020	1
8	CASTLENUT 97190A010	AISI 1020 STEEL, COLD ROLLED	1
9	COTTERPIN_98338A110	AISI 1020	1
10	Shaft_Final_Callow(97042A122)	201 annealed stainless steel	1
11	Spring_Final_Callow	Commercially Pure titanium (Ti-55)	1
12	90630A135	AISI 1035 STEEL (SS)	1




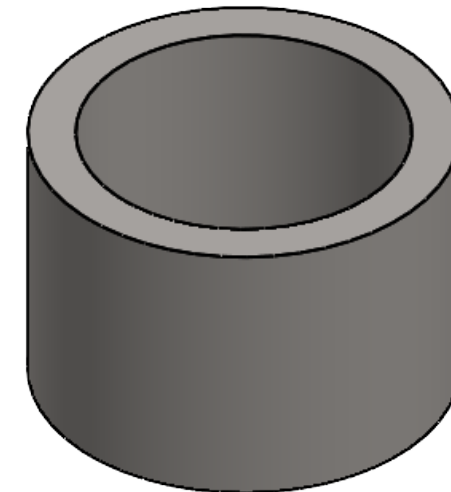


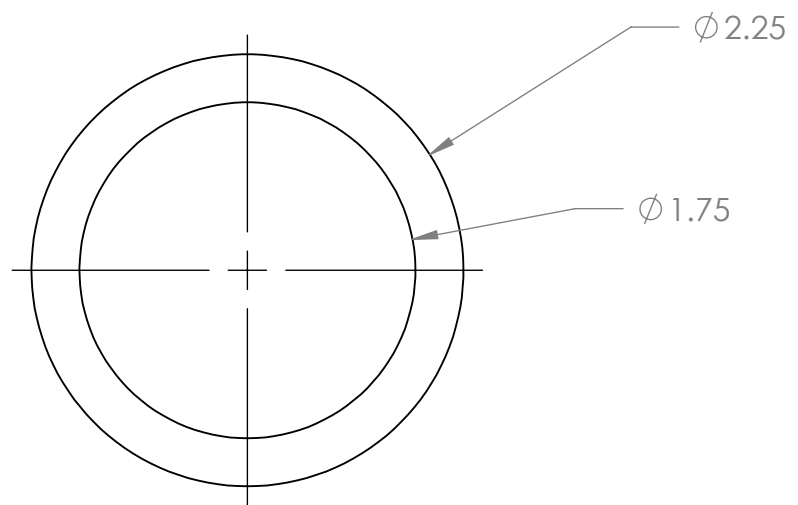


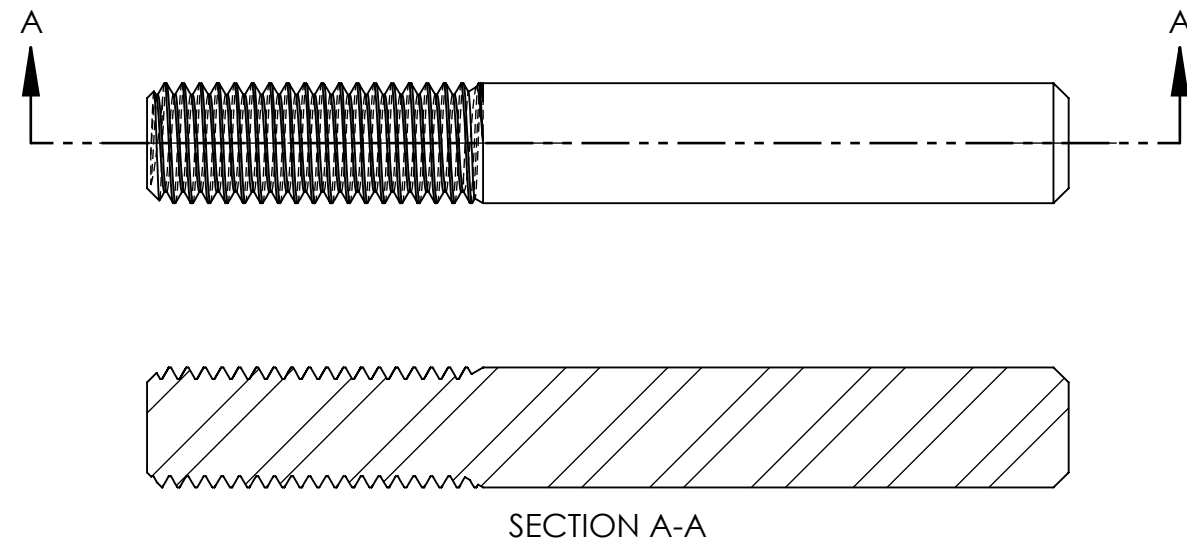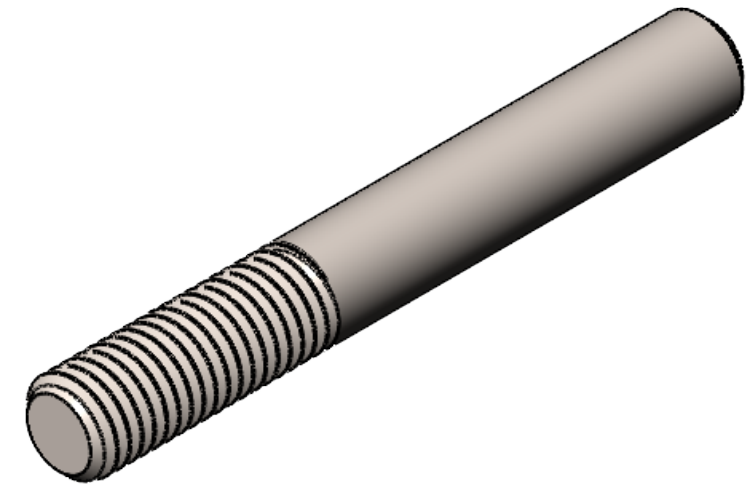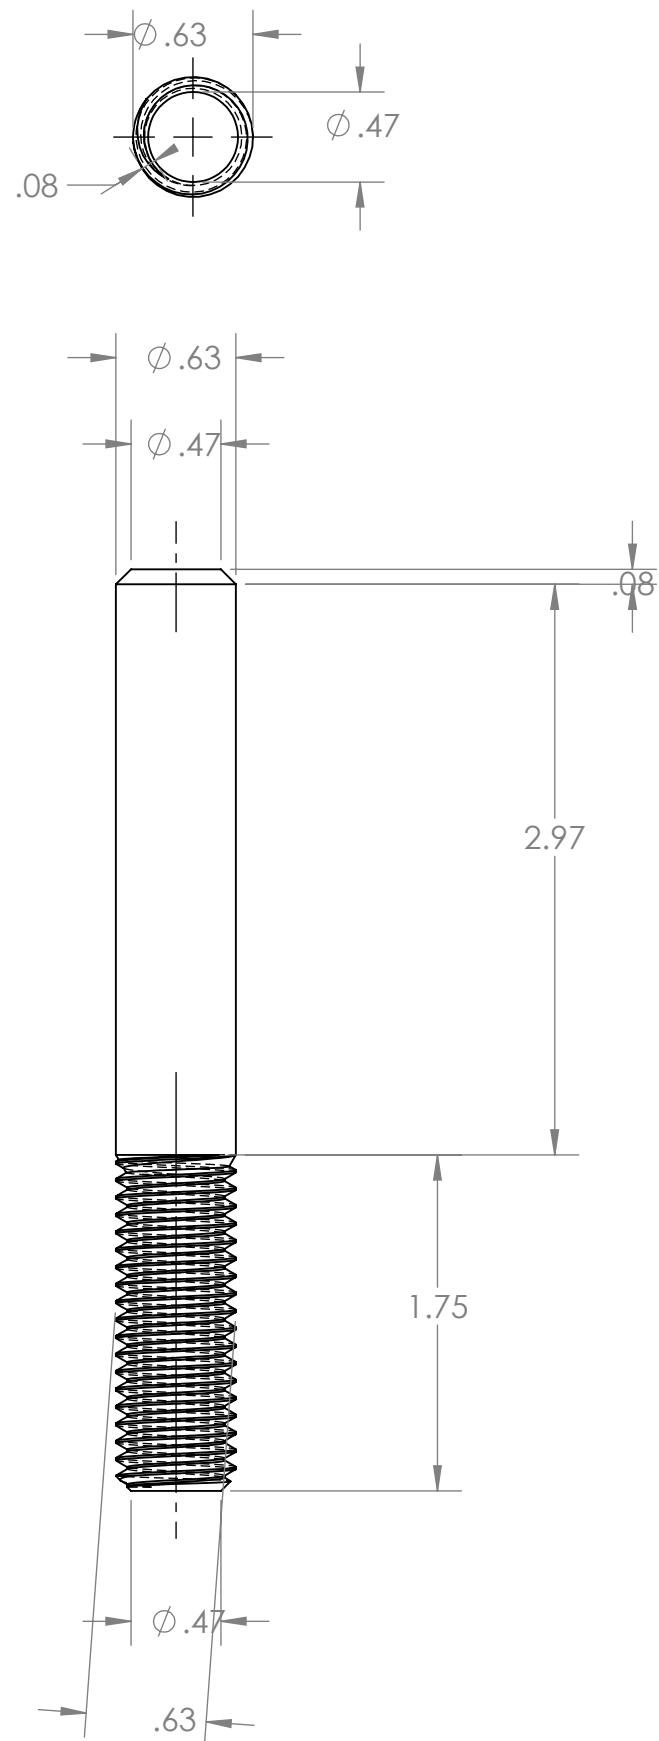

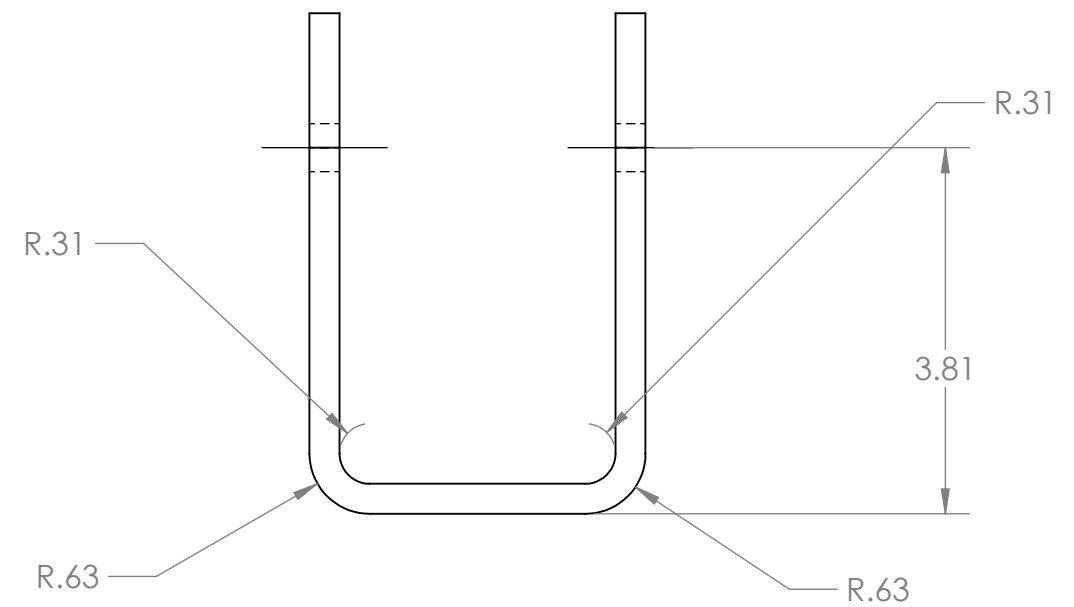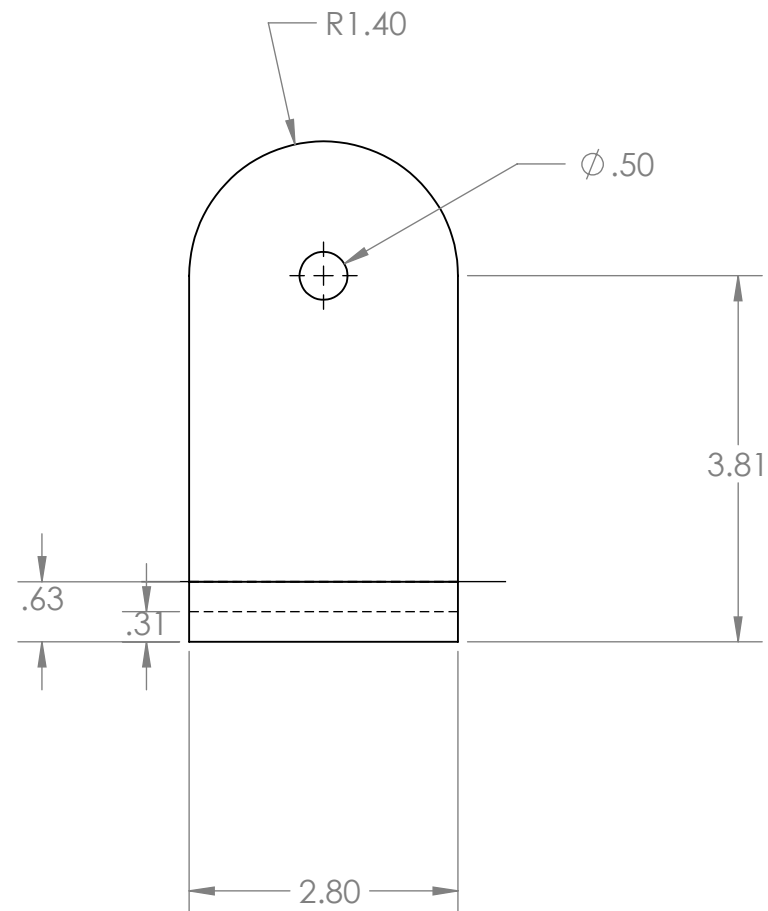
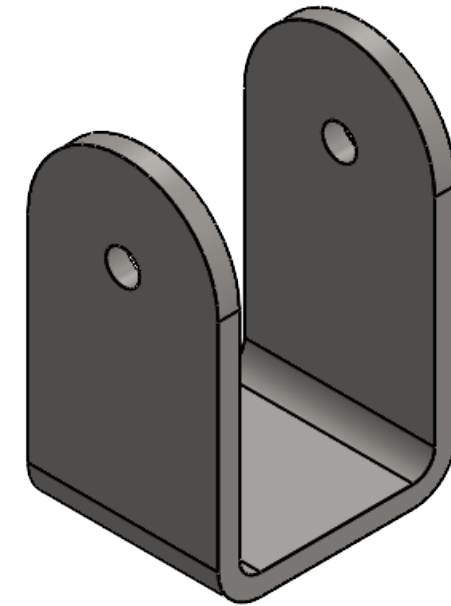
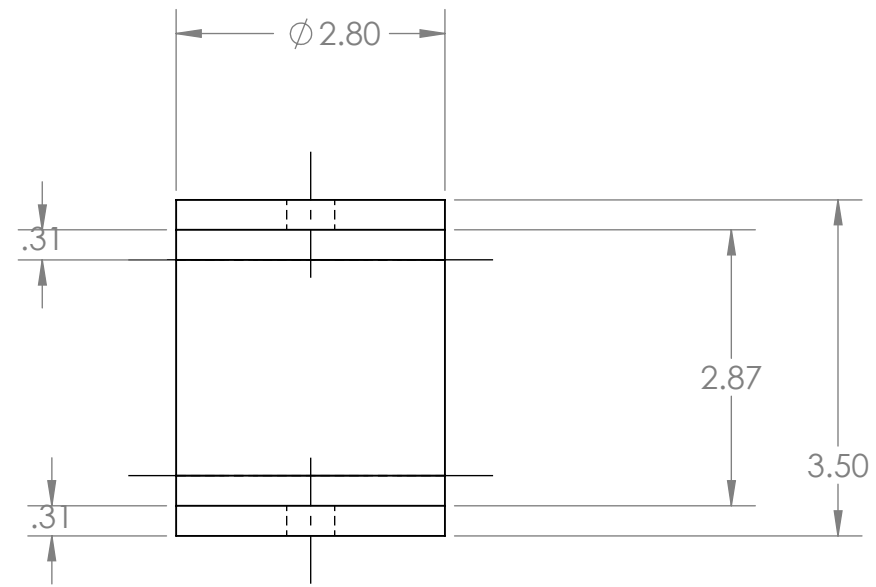


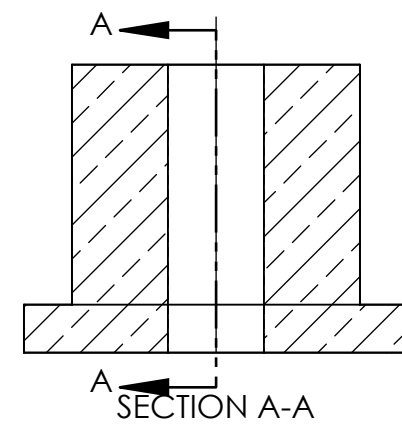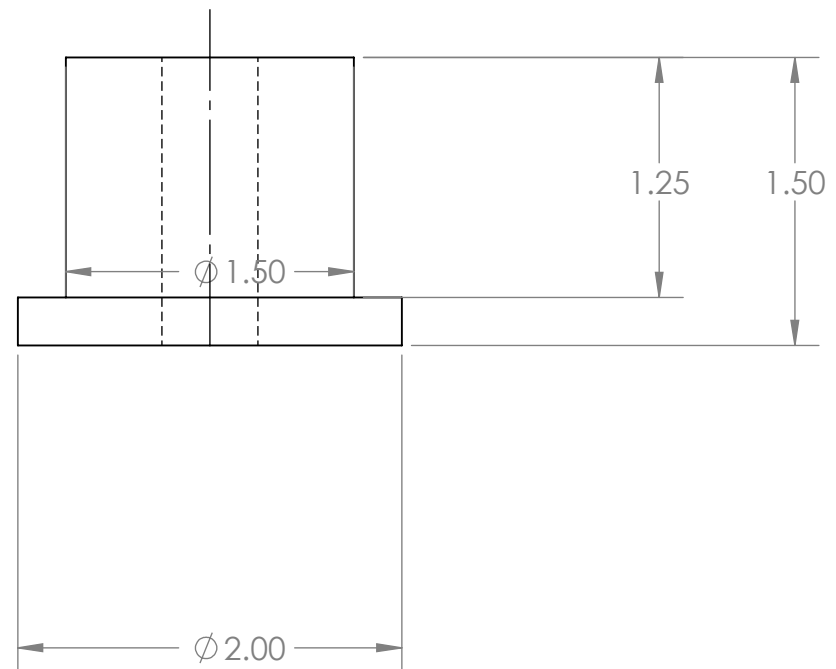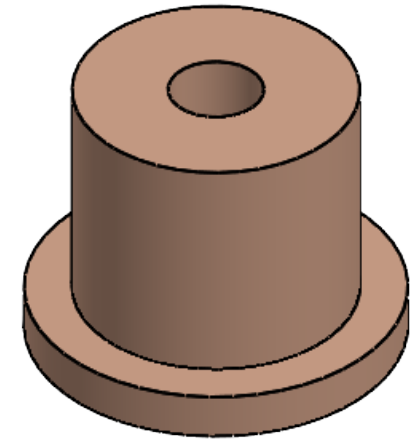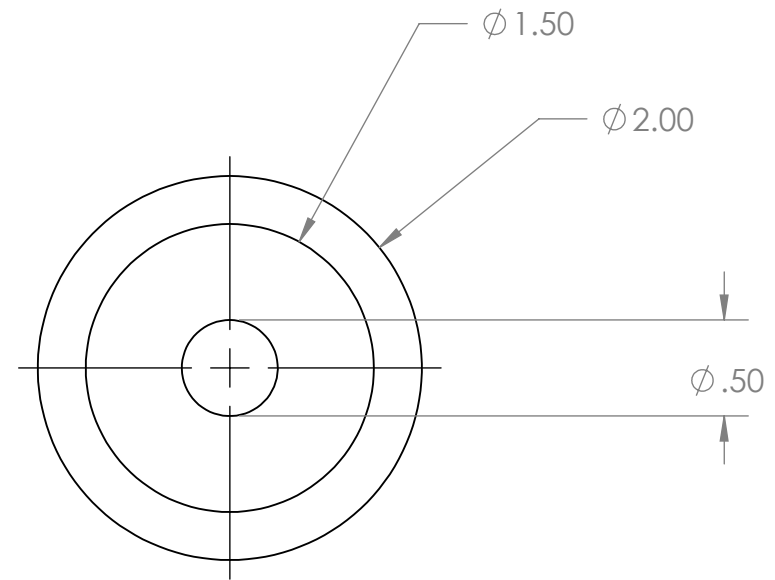

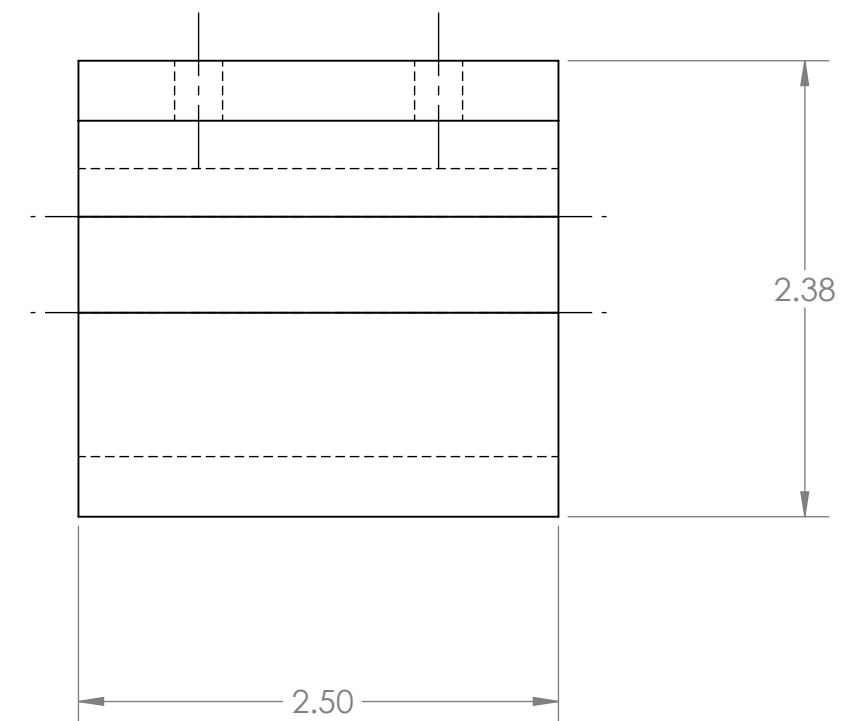
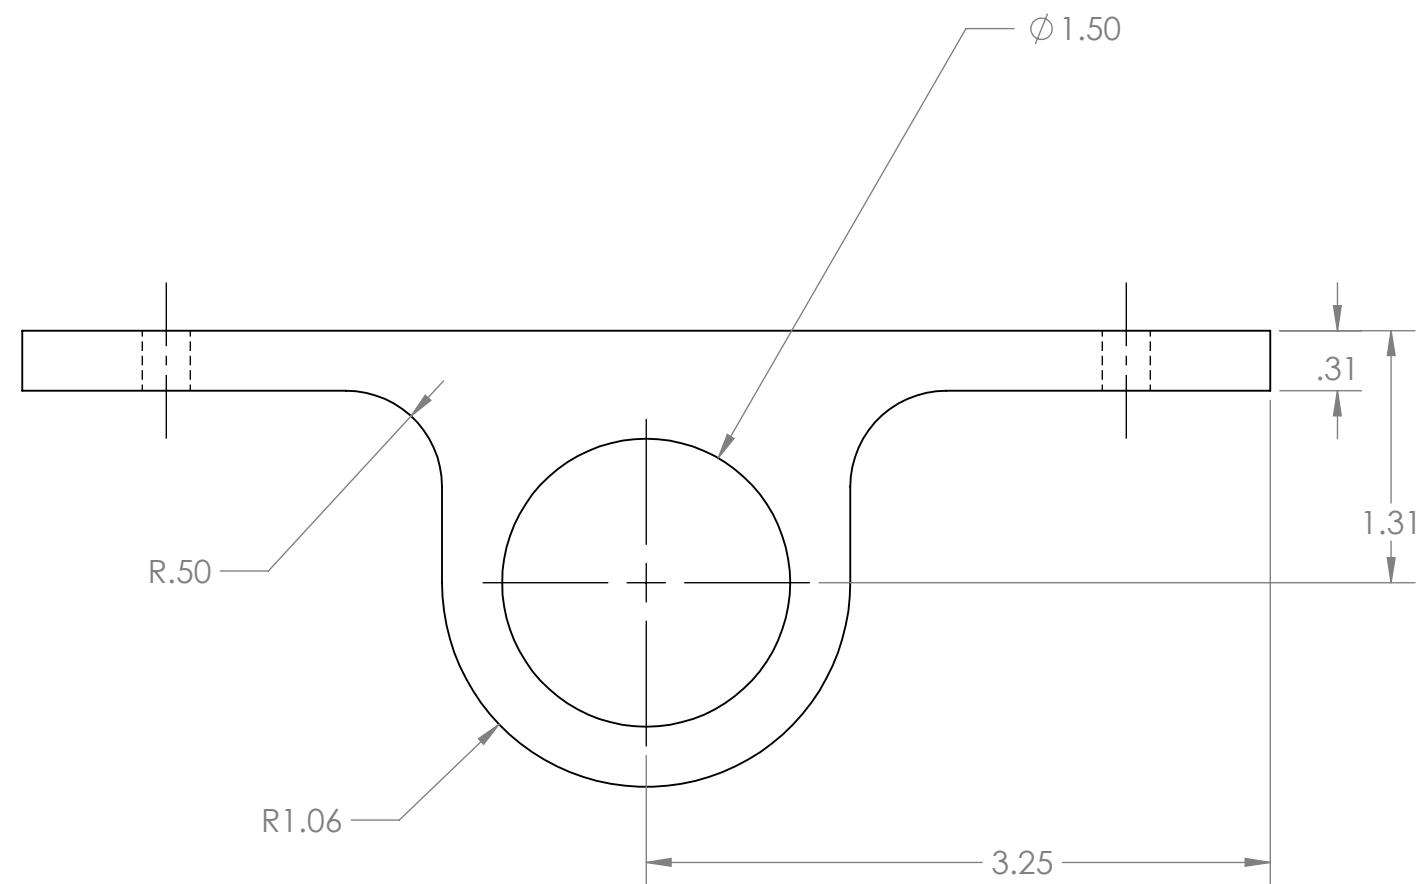
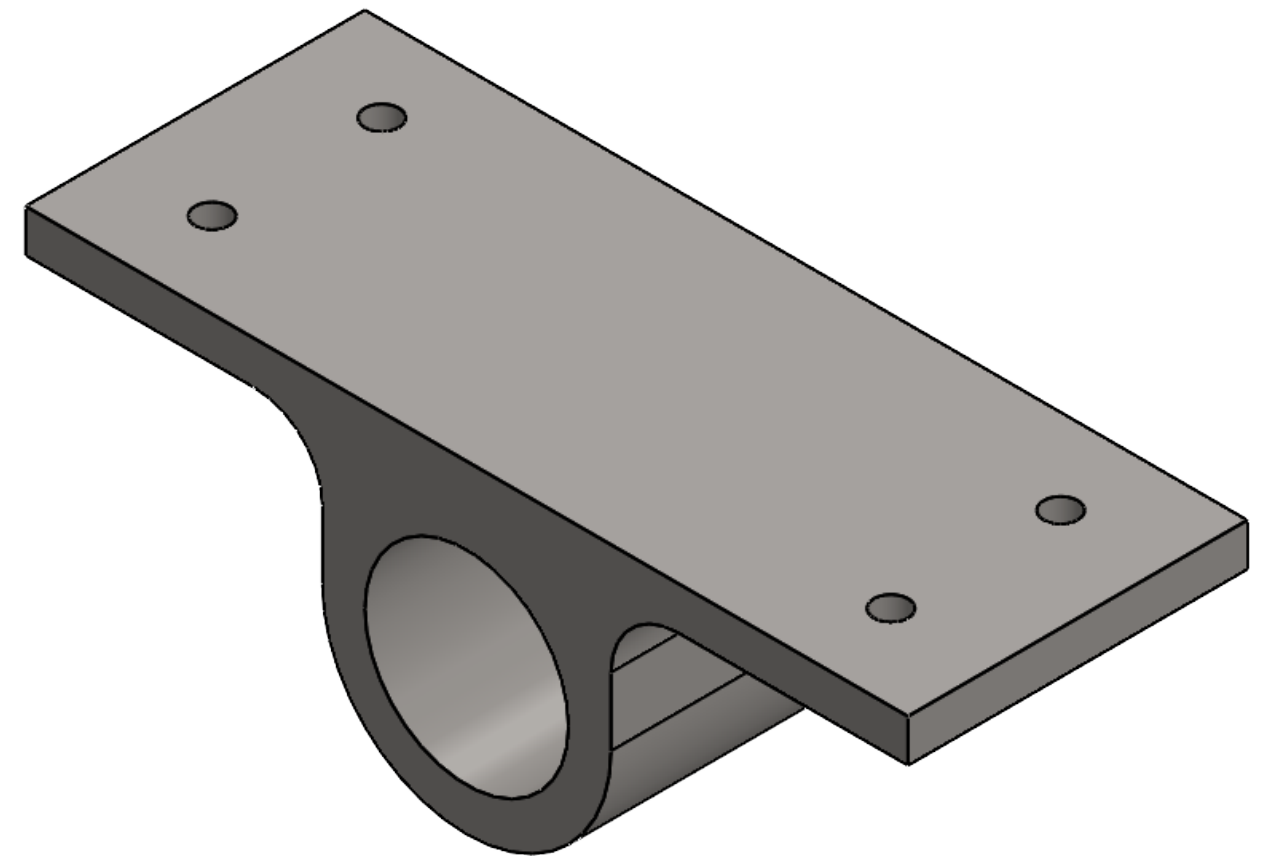
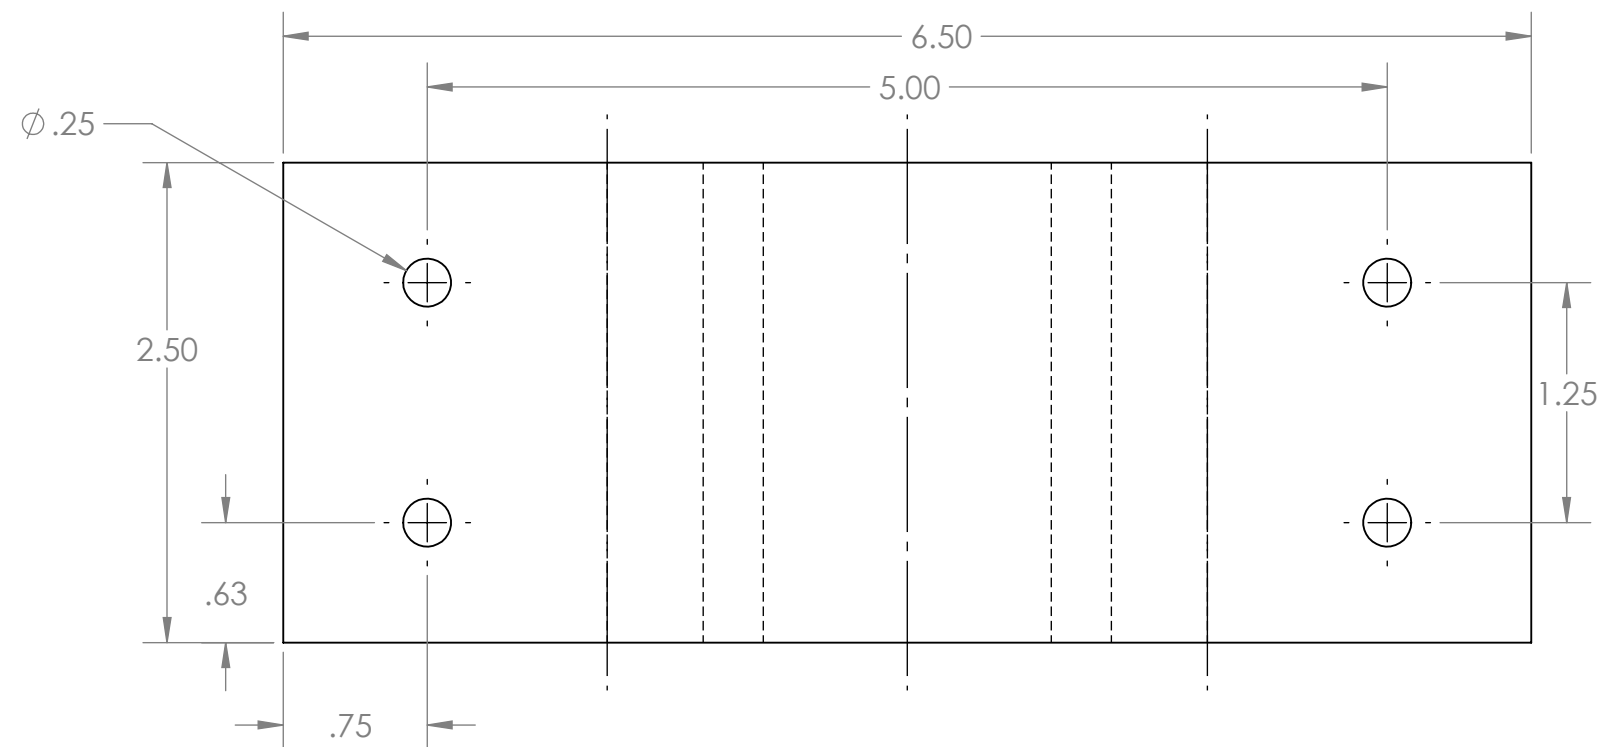




Revolution: 6.25
Pitch: .60 in

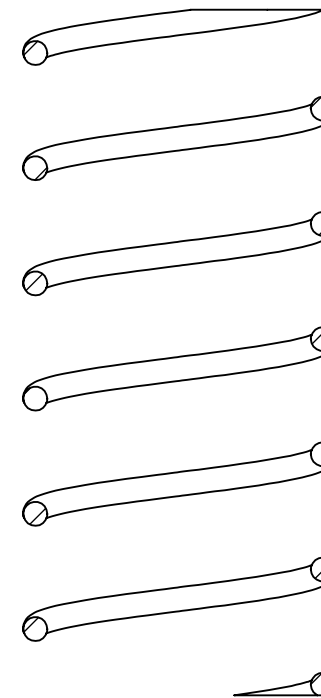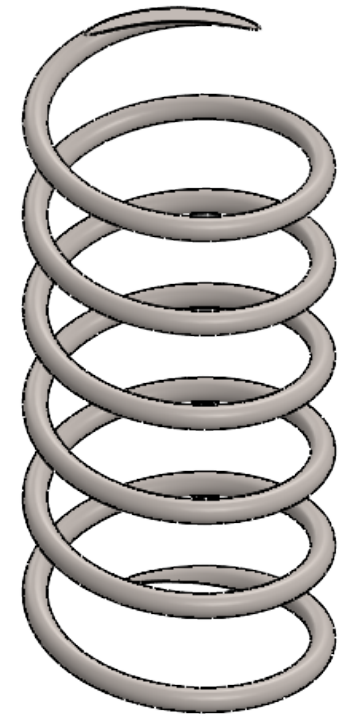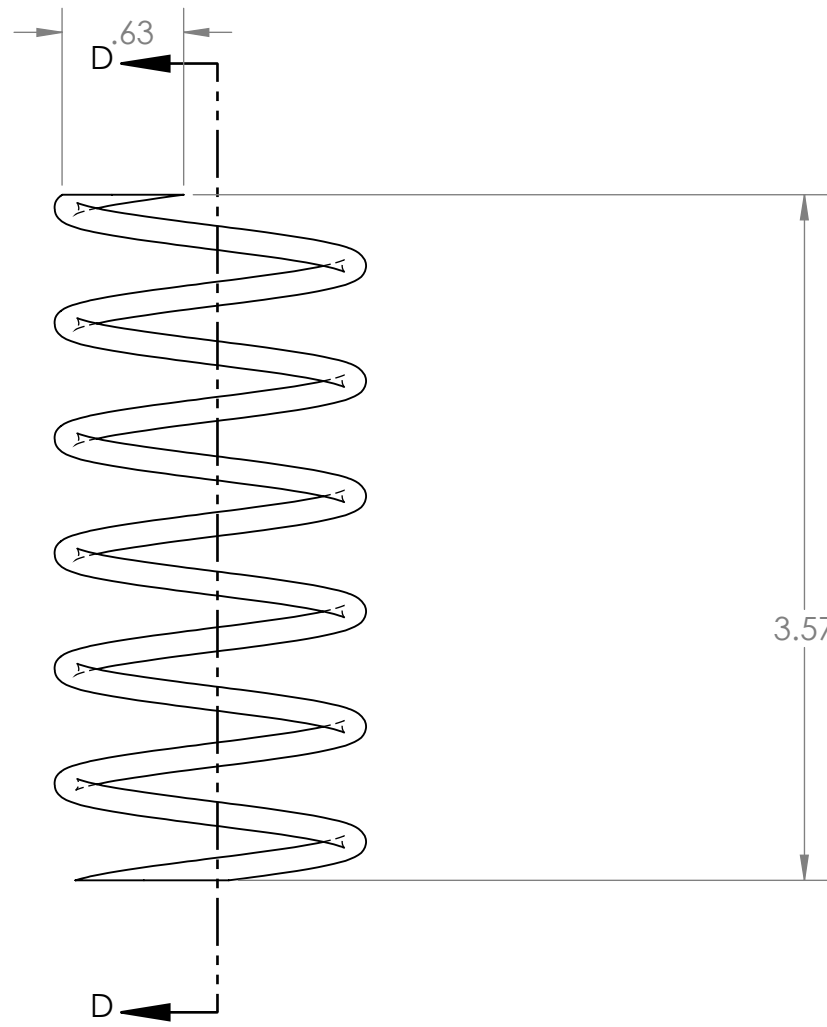

SECTION D-D

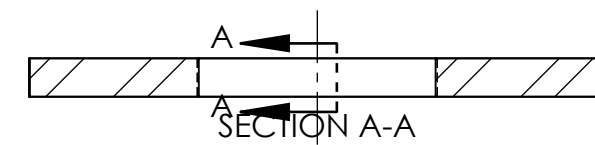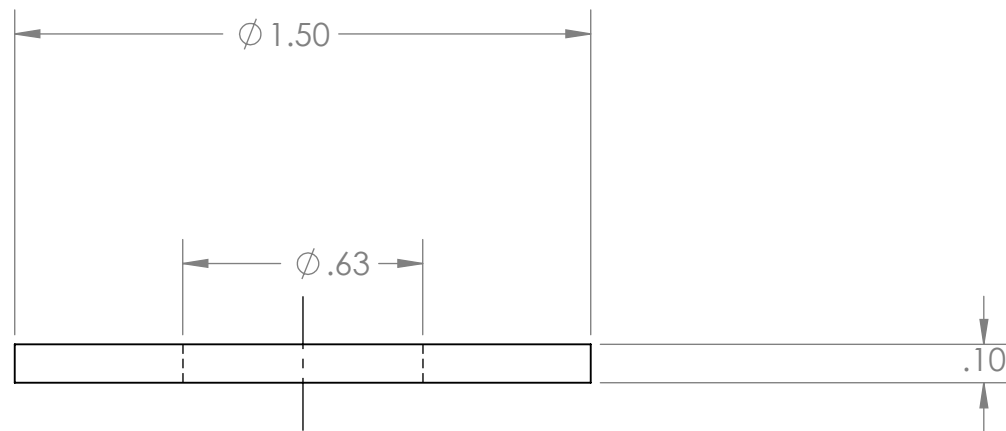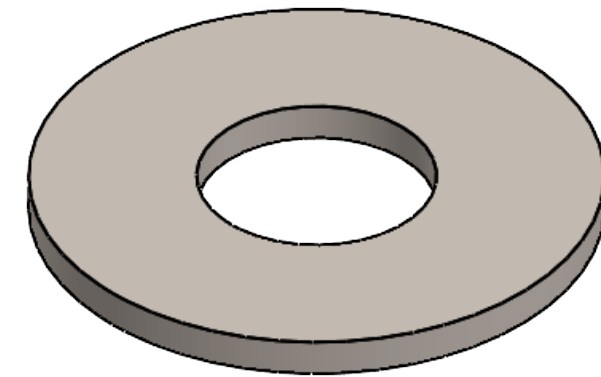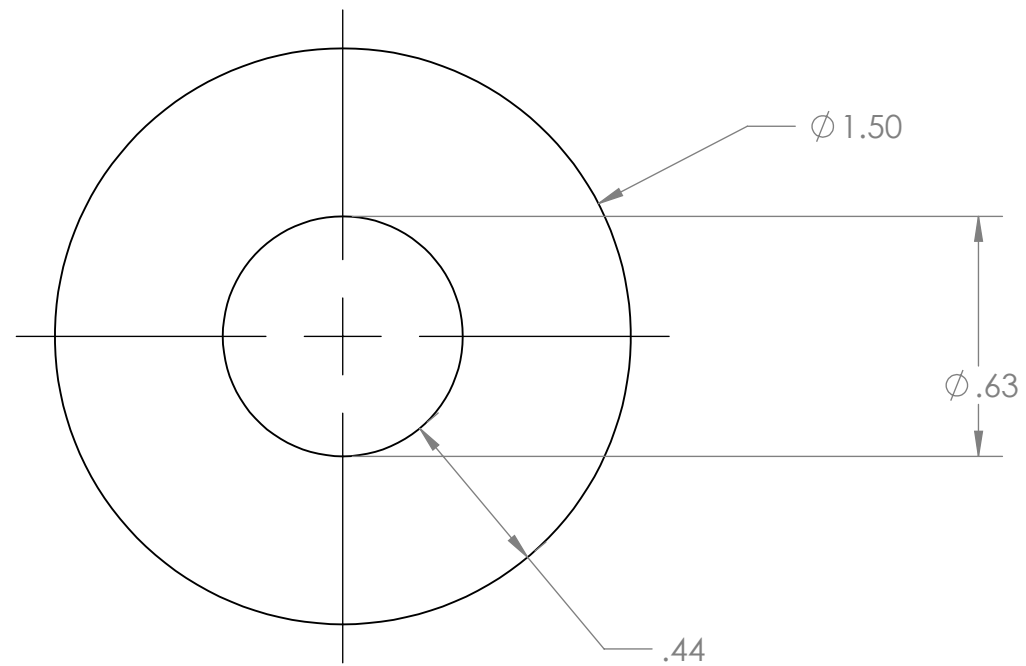

94622A221	Steel Hex Head Screw, Cotter Pin-Lockable, 5/16"-24 Thread Size, 27/32" Long	AISI 1020
97190A010	Steel Locknut for Use with Cotter Pins, Grade 5, 5/16"-18 Thread Size	AISI 1020, Cold Rolled
90630A135	High-Strength Steel Nylon-Insert Locknut Grade 8, 3/4"-10 Thread Size	AISI 1035 (SS)
97042A122	18-8 Stainless Steel Threaded on One End Stud, 5/8"-11 Thread Size, 2-1/2" Long	201 annealed stainless steel
98338A110	Zinc-Plated 1004-1045 Carbon Steel Cotter Pins 1/16" Diameter, 1" Long	AISI1020