




LCD

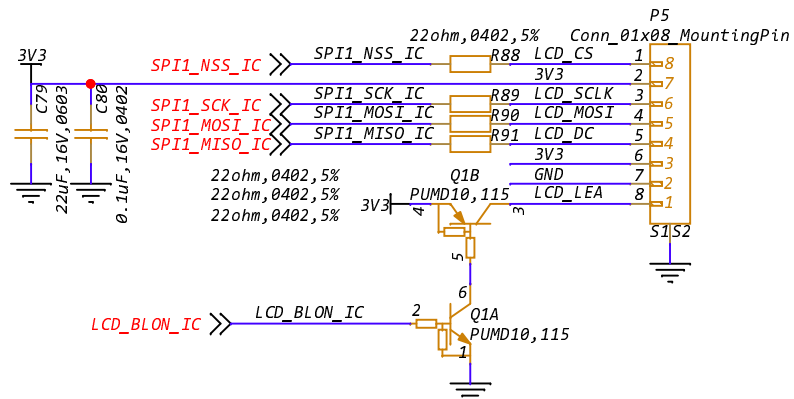


TF-Card

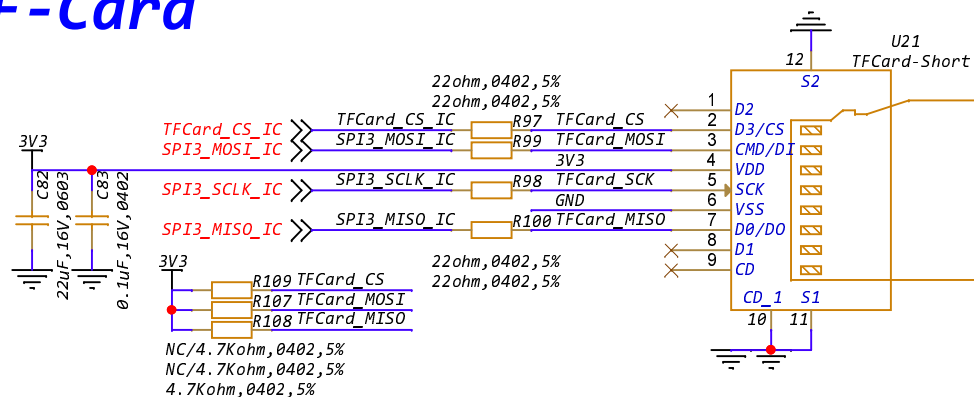


Ethernet

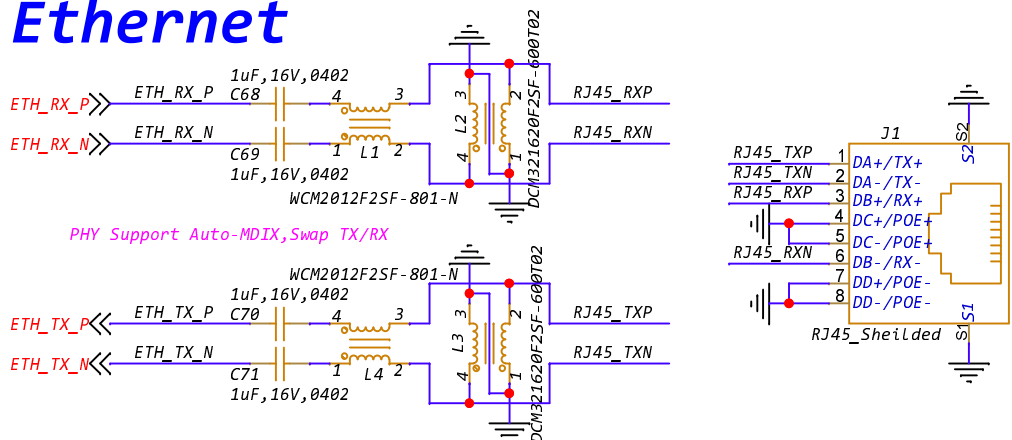

UHSIF Connector

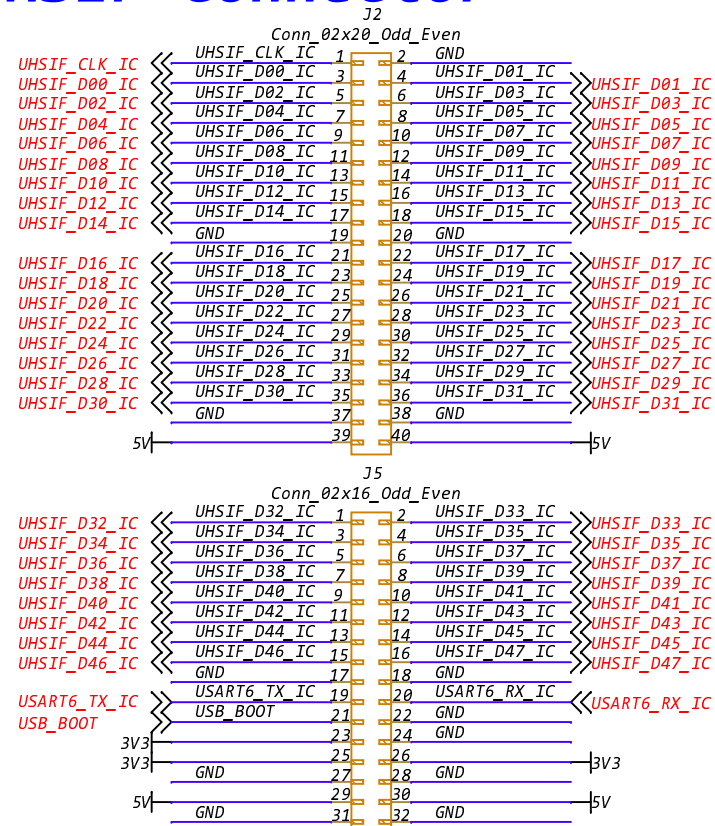


HSADC Ipex IN

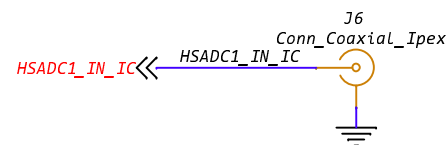


			A
Title <Title>			
Size A	Document Number <Doc>	Rev <RevCode>	
Date:	Monday, August 24, 2026	Sheet	1 of 1


MCU CH32H417

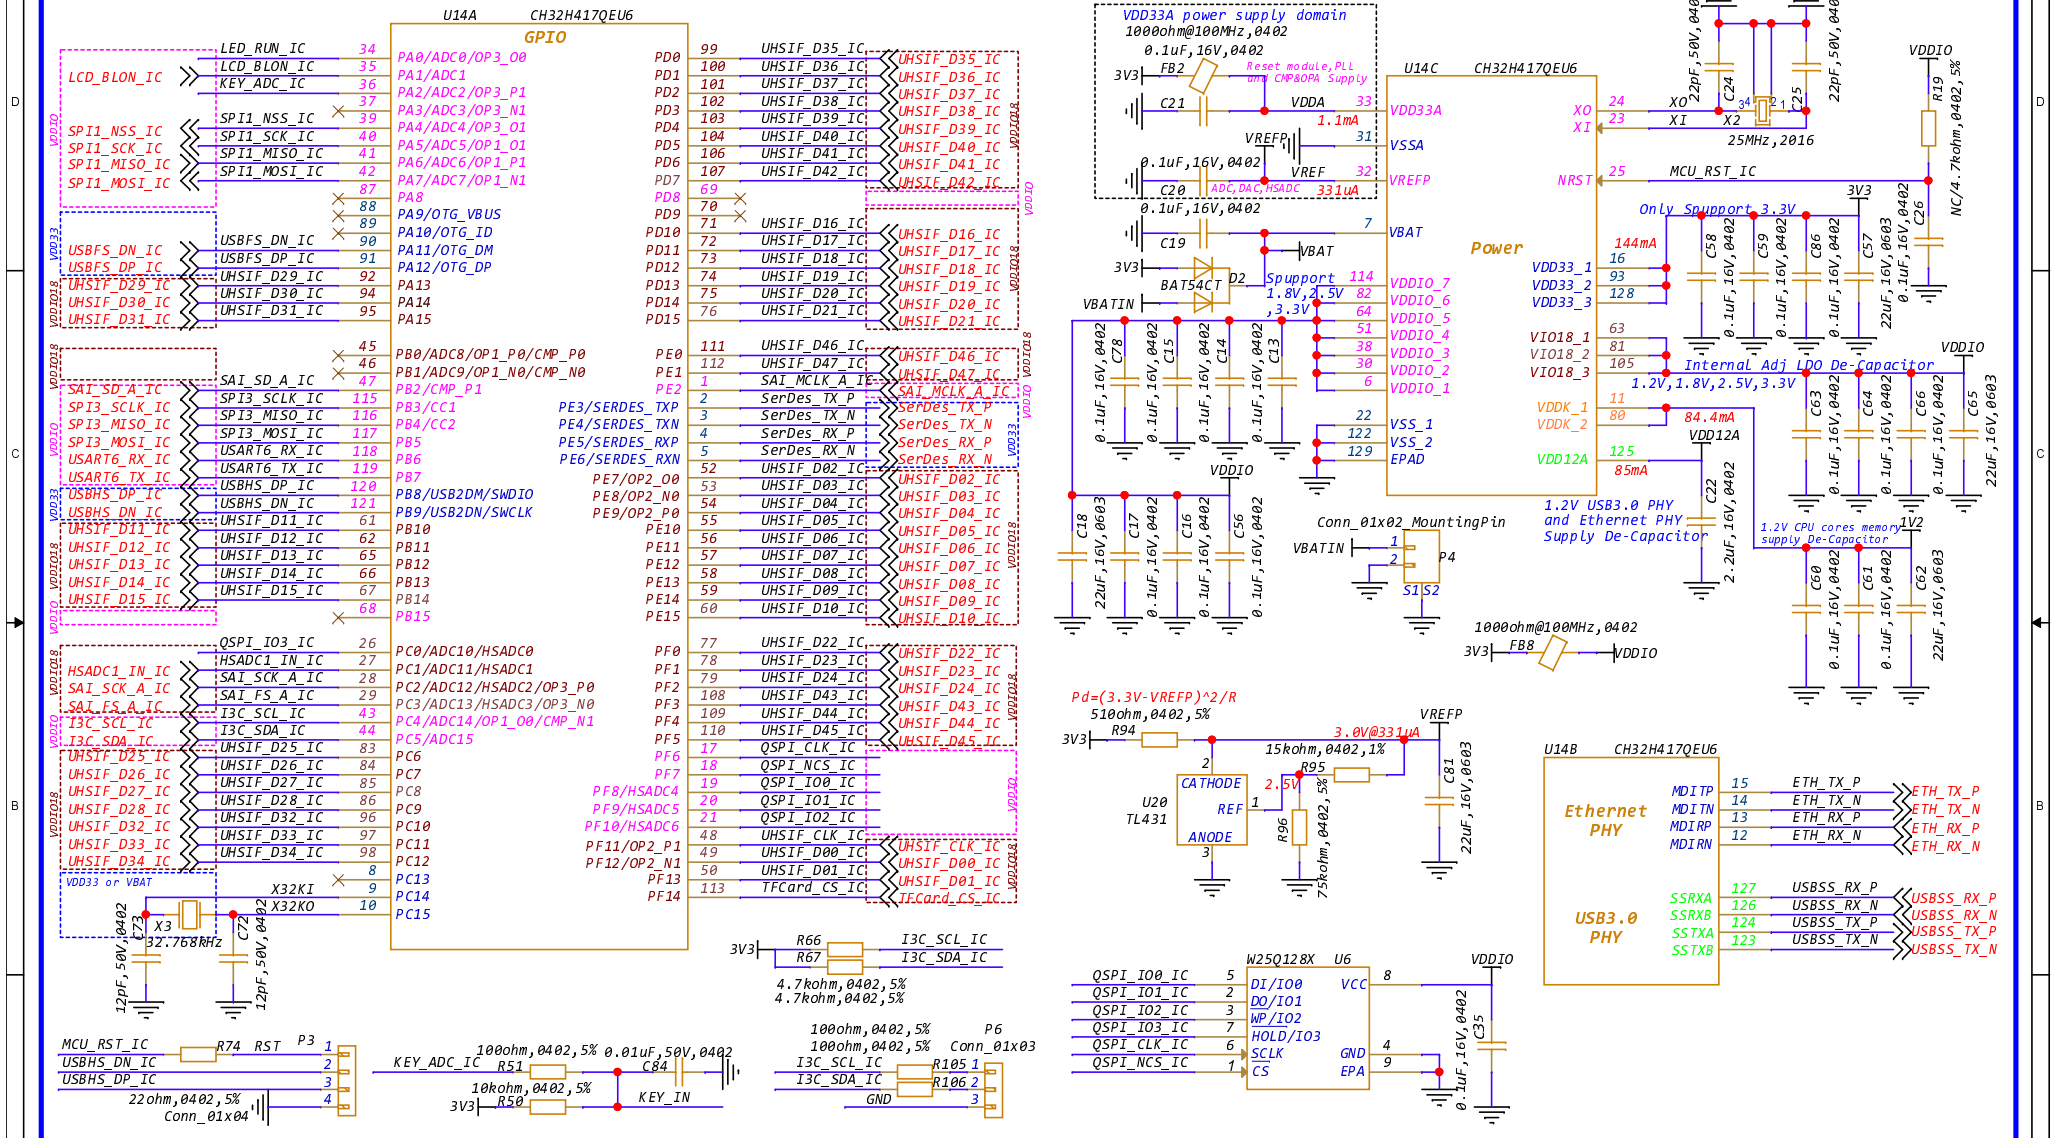

LED



KEY



BOOT


CH32H417WEU don't support BOOT.
UART BOOT don't need USB_BOOT signal

The diagram shows a blue line representing the USB_BOOT signal. A yellow box labeled R27 is connected between the RS485_TXC pin and the USB_BOOT line. The line continues to the right, ending in a double arrow pointing to the text USB_BO.


<i>BOOT</i>	<i>Location</i>
<i>0, Float</i>	<i>Internal Flash</i>
<i>1</i>	<i>USB BootLoader</i>

Title			<Title>		
Size A4	Document Number <Doc>				Rev <RevCode>
Date:	Tuesday, August 25, 2026		Sheet	1	of 1

Type-C USB3.0 Mux

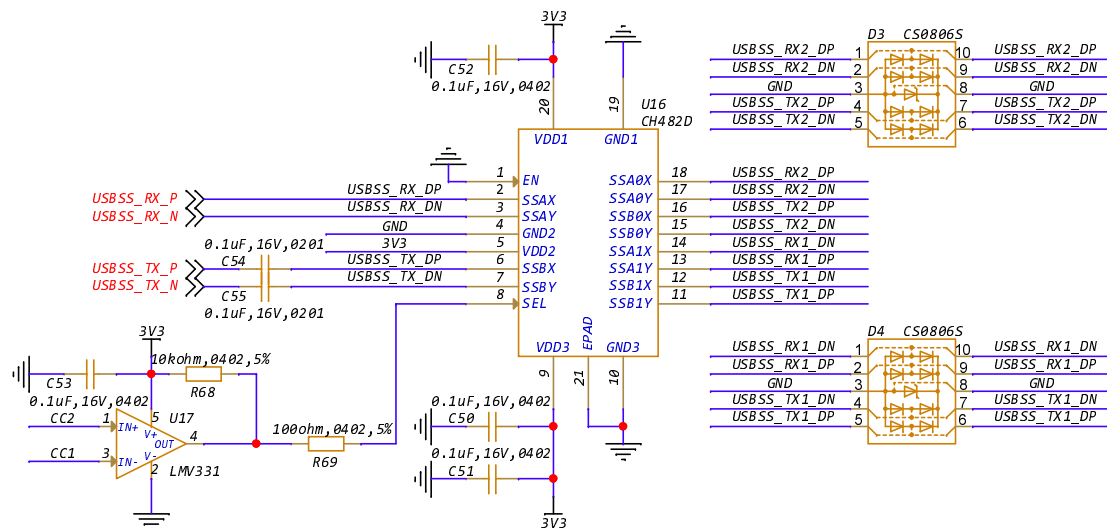


USB3.0

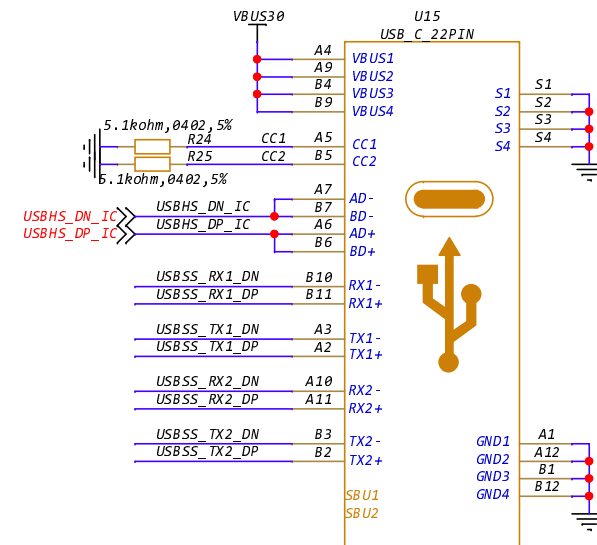


POWER


Power Oring

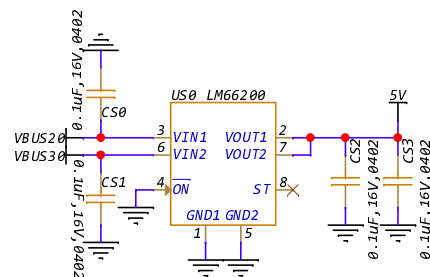


5V->1.2V

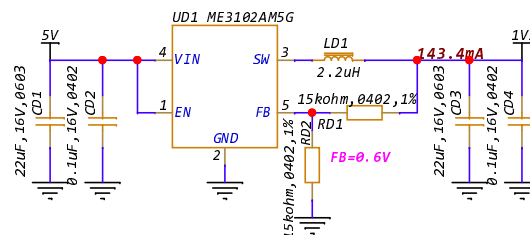

5V->3.3V

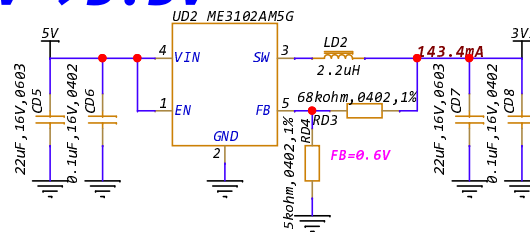


USBFS

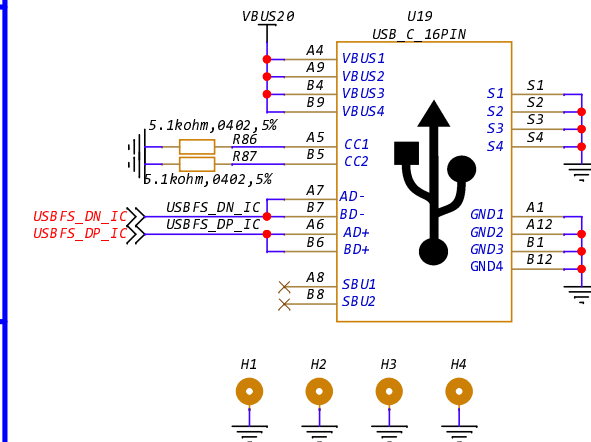


Title		<Title>
Size	Document Number	Rev
A4	<Doc>	<RevCod>
Date:	Friday, August 07, 2026	Sheet 1 of 1


SC Optical Transceiver

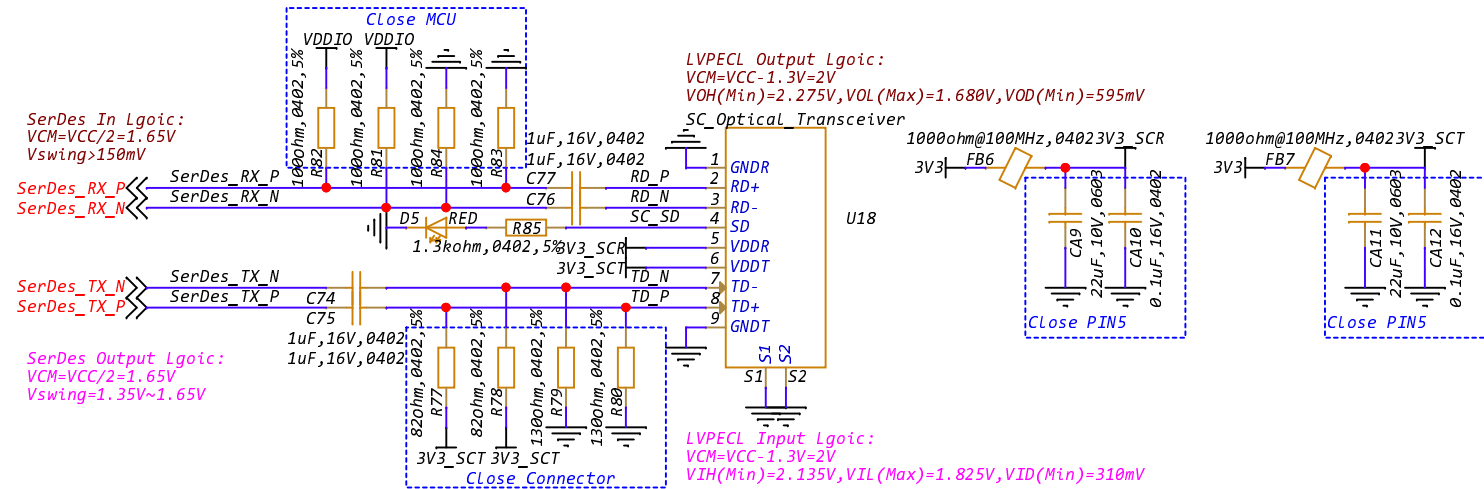

Audio ADC

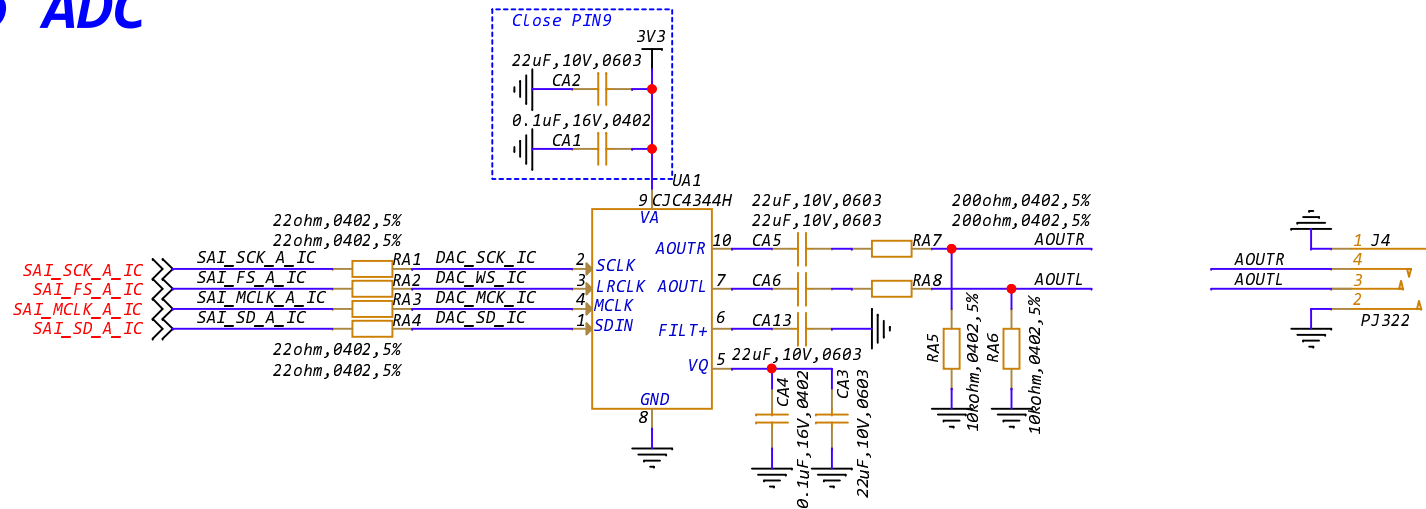

Title		<Title>
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Tuesday, August 25, 2026	Sheet 1 of 1

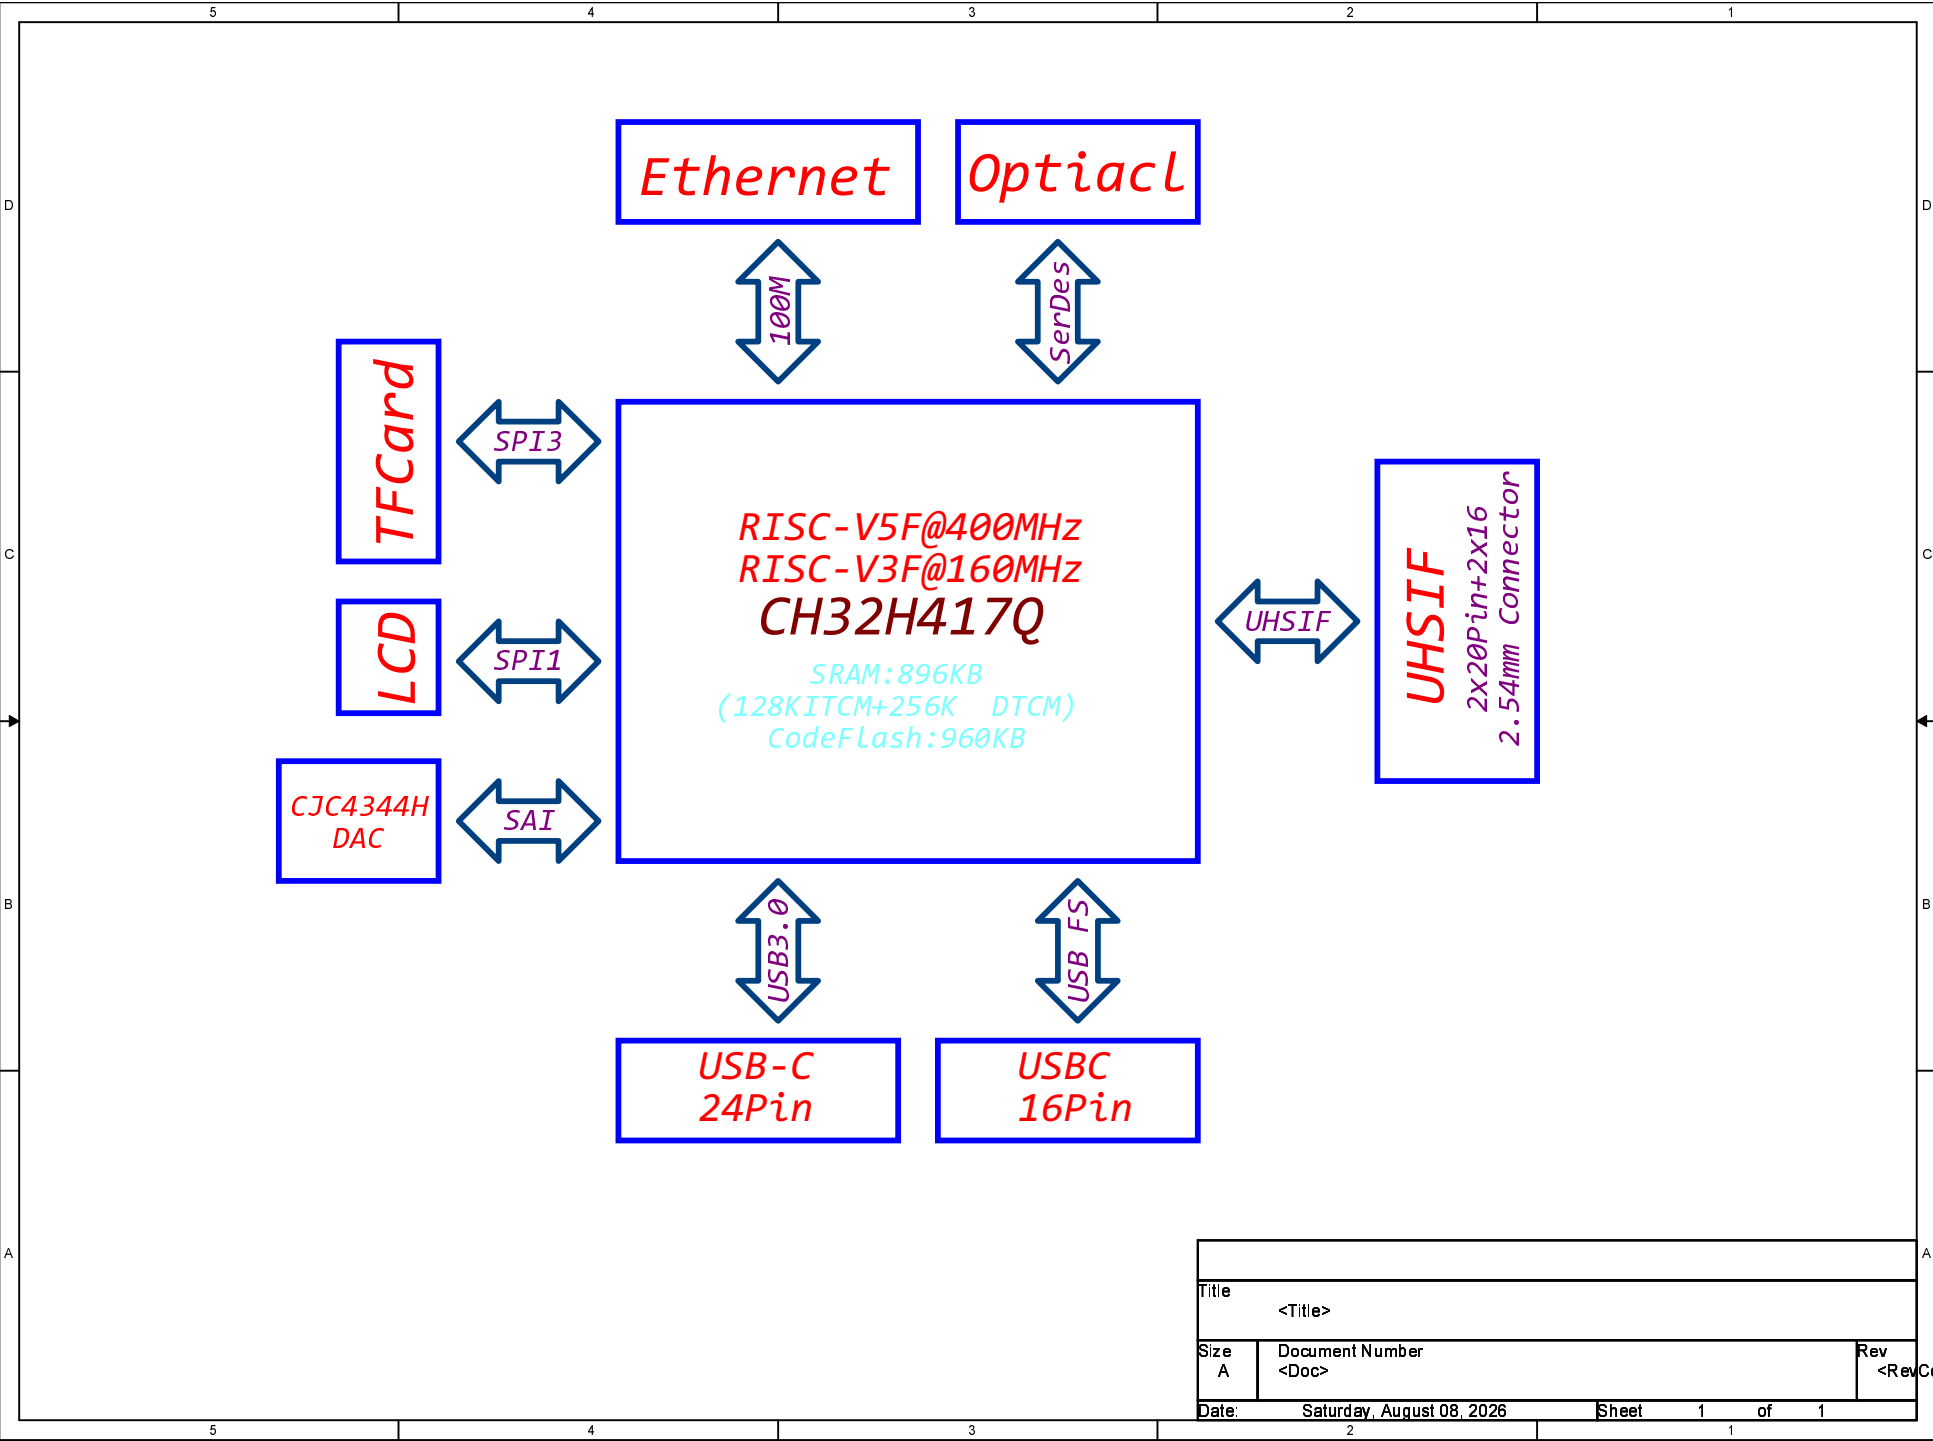

Title		
<Title>		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Saturday, August 08, 2026	Sheet 1 of 1