




LCD

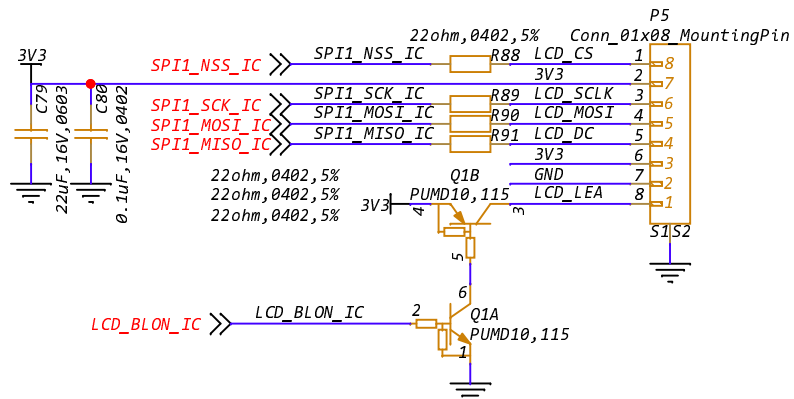



TF-Card

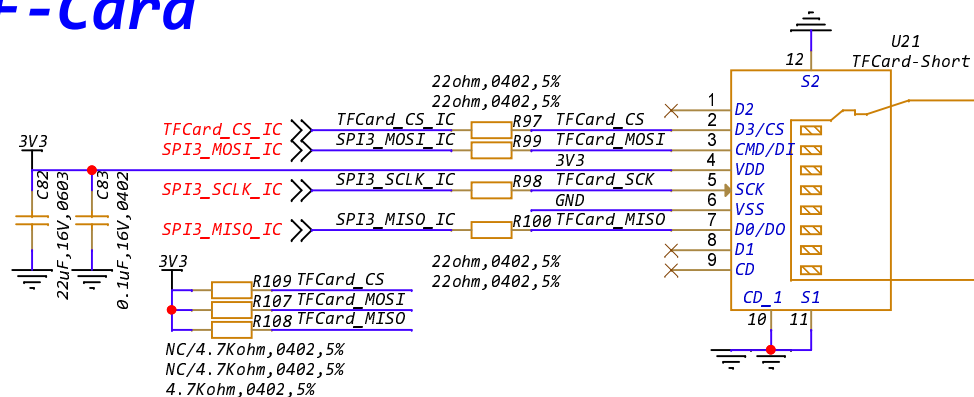


Ethernet

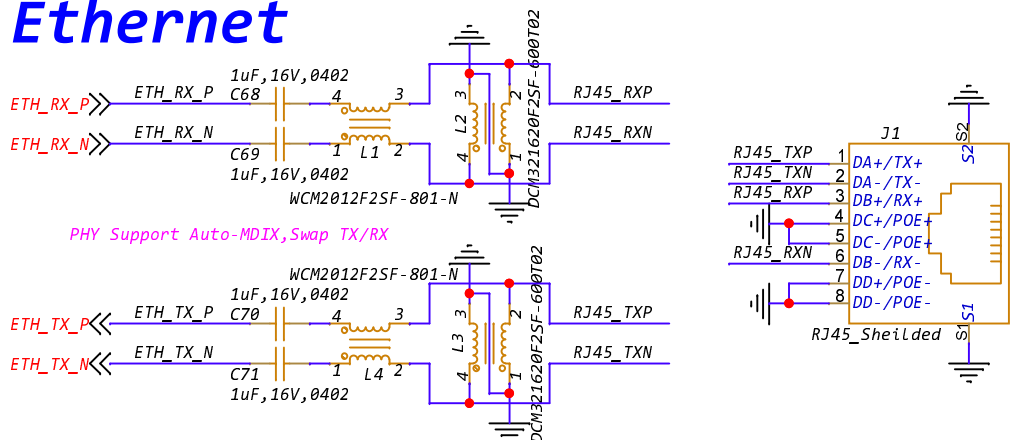

UHSIF Connector

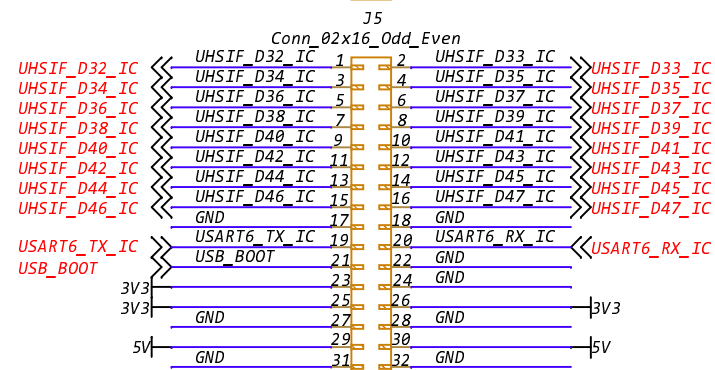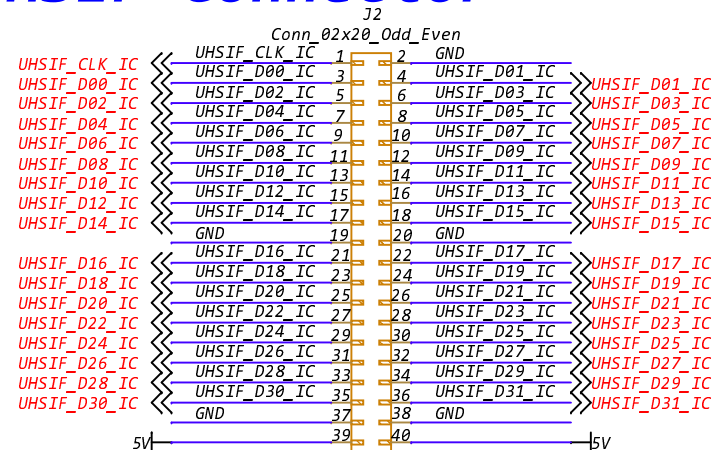


HSADC Ipex IN

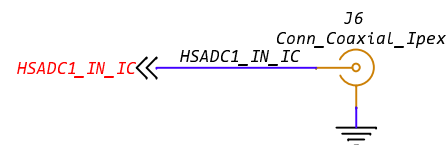


			A
Title <Title>			
Size A	Document Number <Doc>		Rev <RevCode>
Date:	Monday, August 24, 2026		Sheet 1 of 1


MCU CH32H417

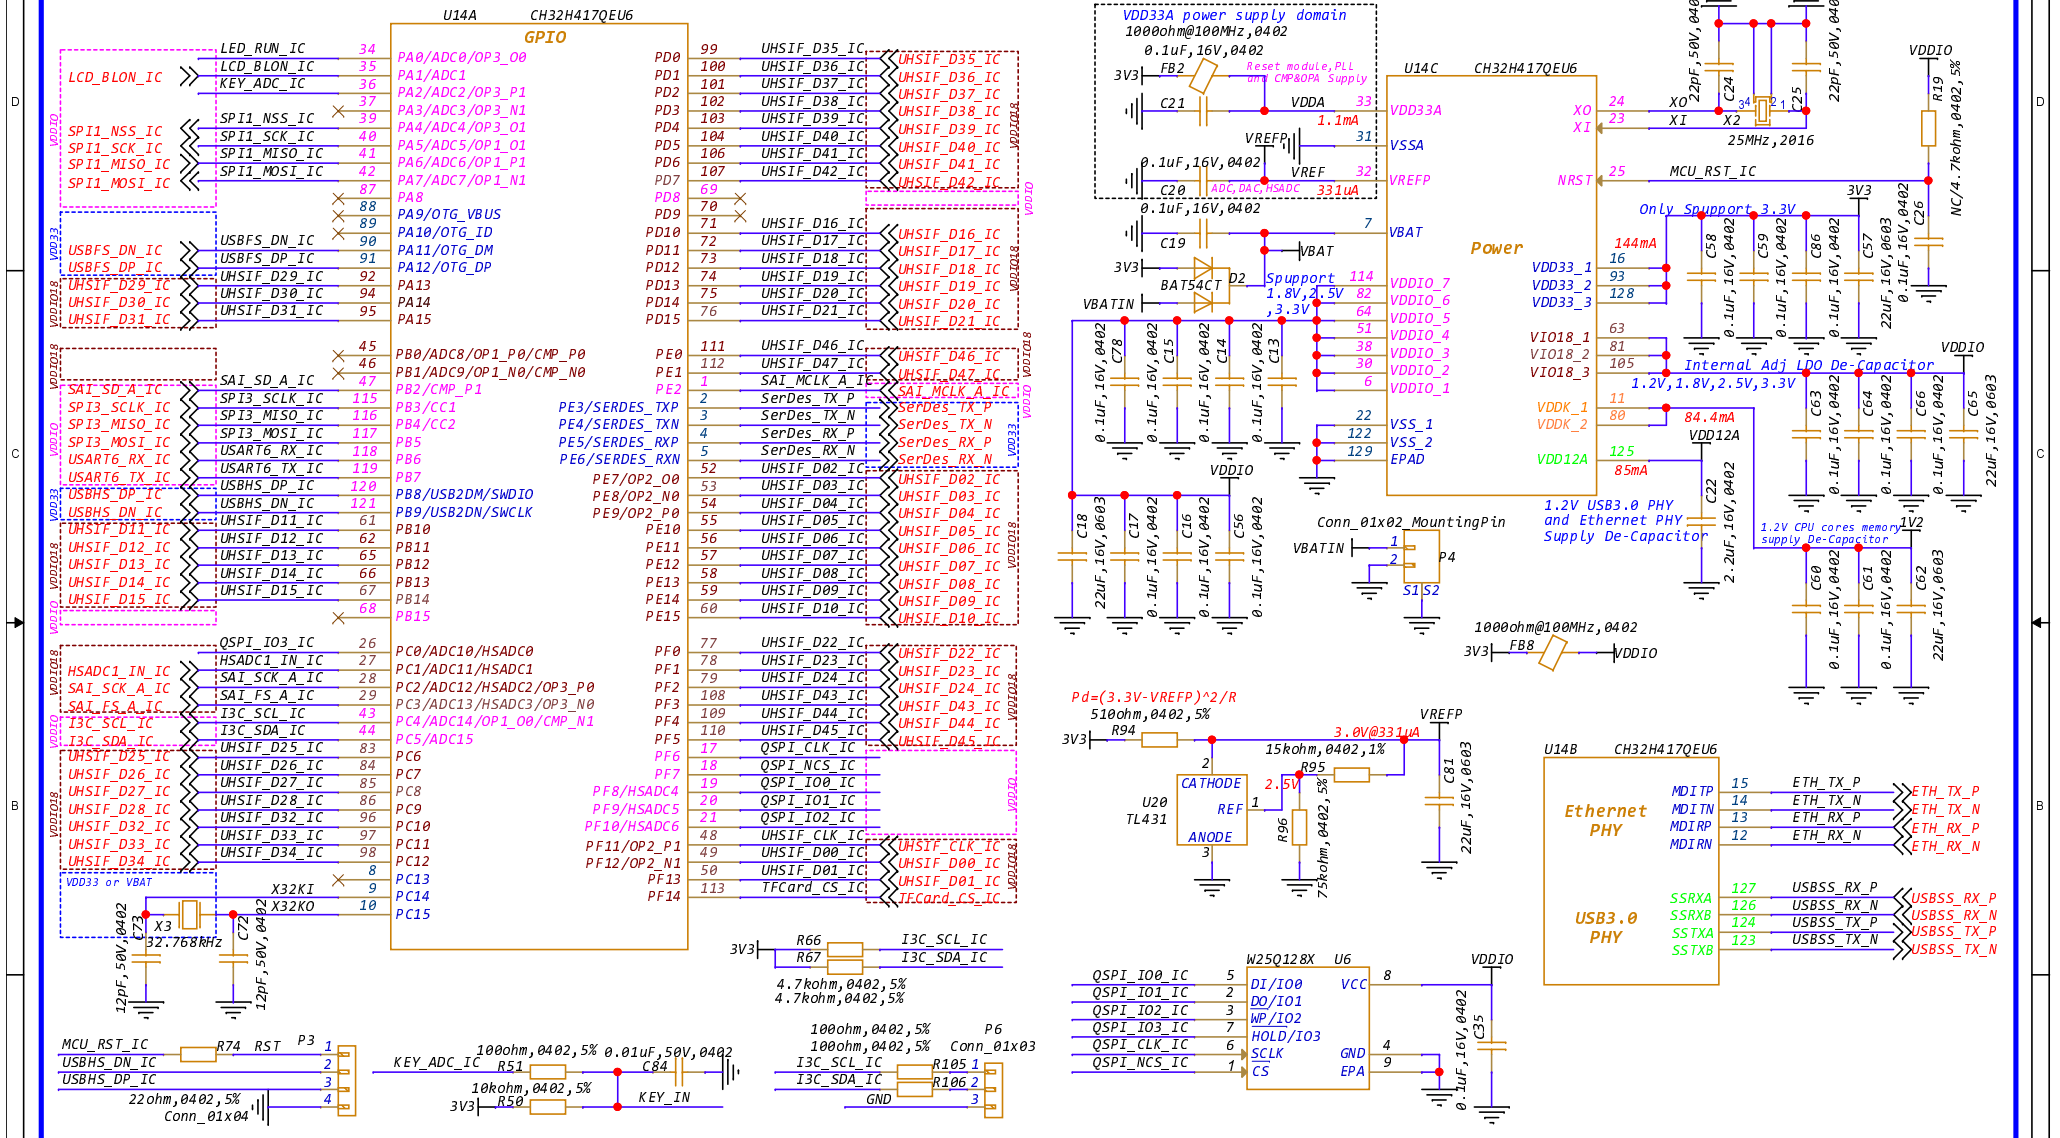

LED



KEY



BOOT


CH32H417WEU don't support BOOT.
UART BOOT don't need USB_BOOT signal

BSM017C R27 USB_BOOT


<i>BOOT</i>	<i>Location</i>
<i>0, Float</i>	<i>Internal Flash</i>
<i>1</i>	<i>USB BootLoader</i>

Title <Title>			
Size A4	Document Number <Doc>		Rev <RevCode>
Date:	Tuesday, August 25, 2026	Sheet	1 of 1

Type-C USB3.0 Mux

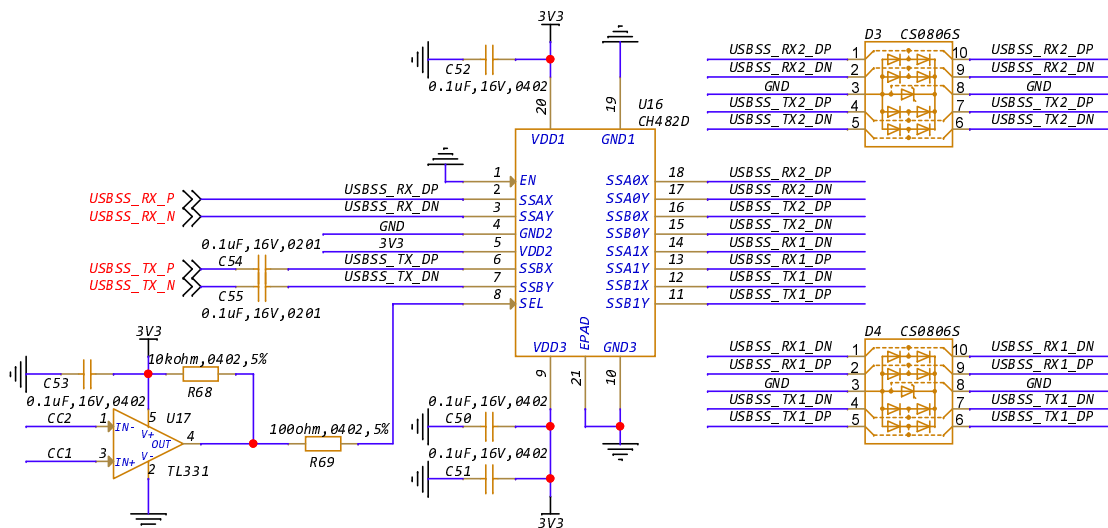


USB3.0

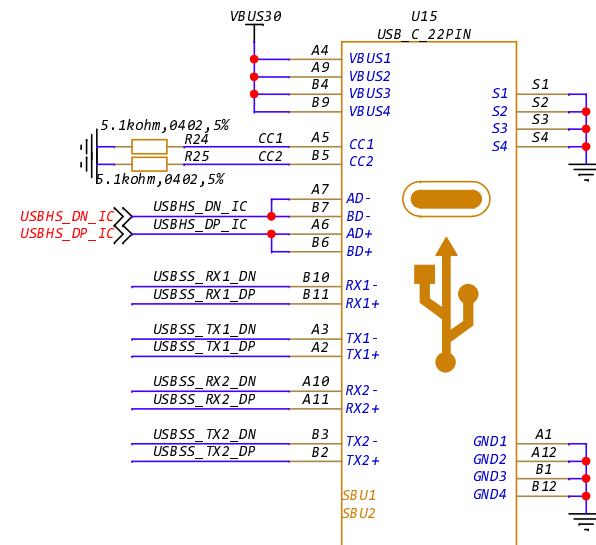


POWER


Power Oring

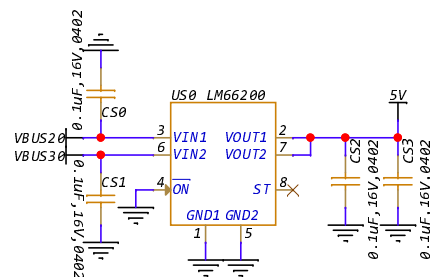


5V->1.2V

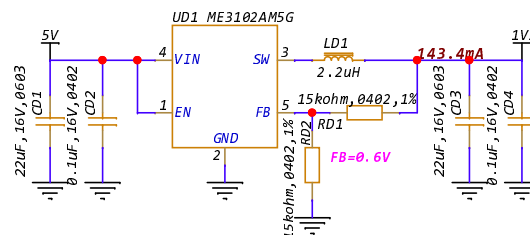


5V->3.3V

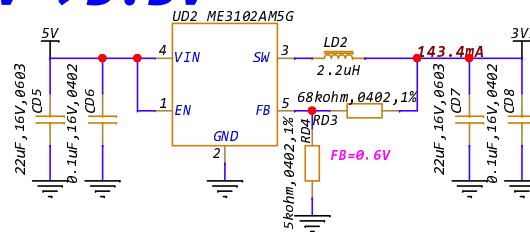


USBFS

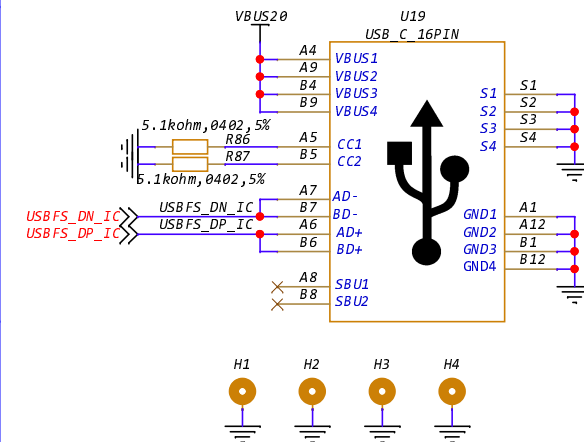

SC Optical Transceiver

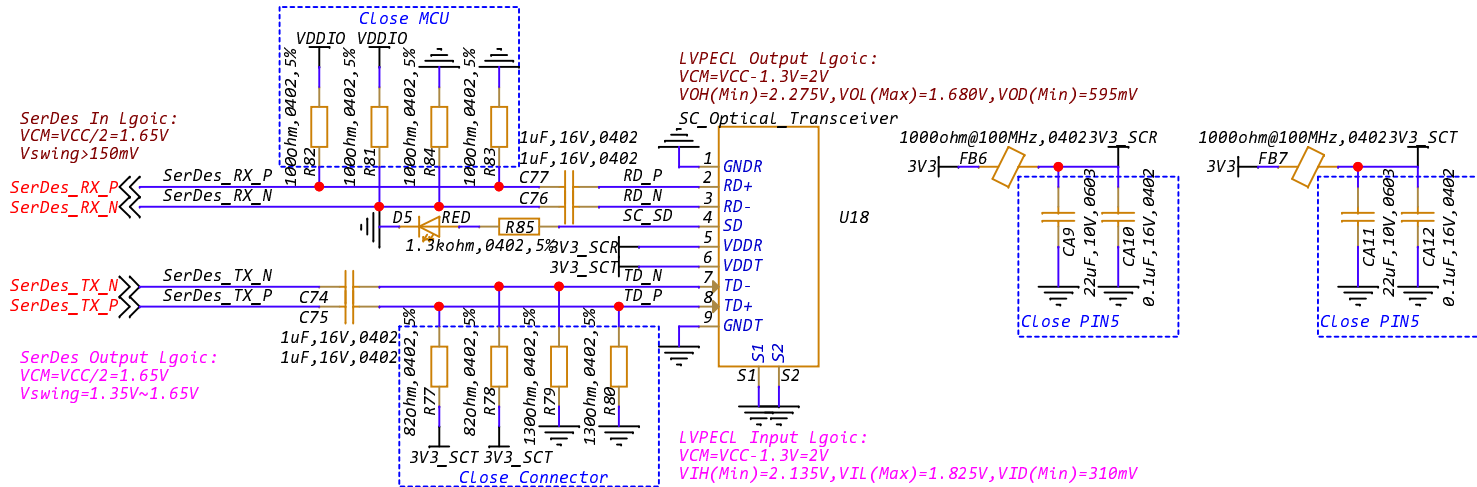

Audio ADC

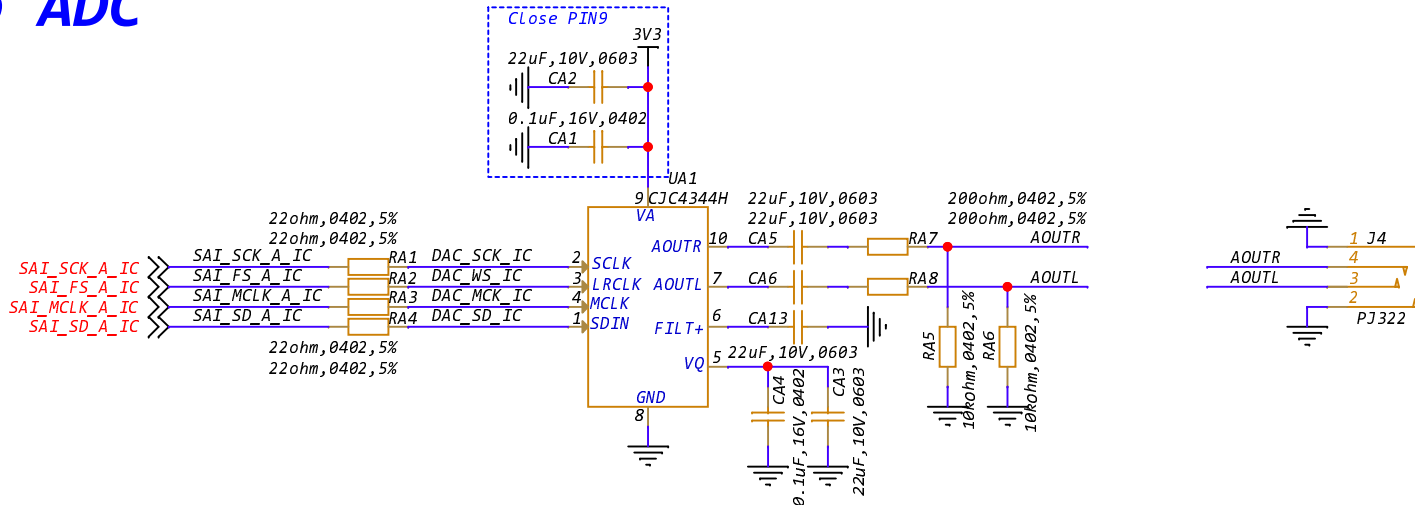

Title <Title>			
Size A	Document Number <Doc>	Rev <RevCode>	
Date:	Tuesday, August 25, 2026	Sheet	1 of 1

