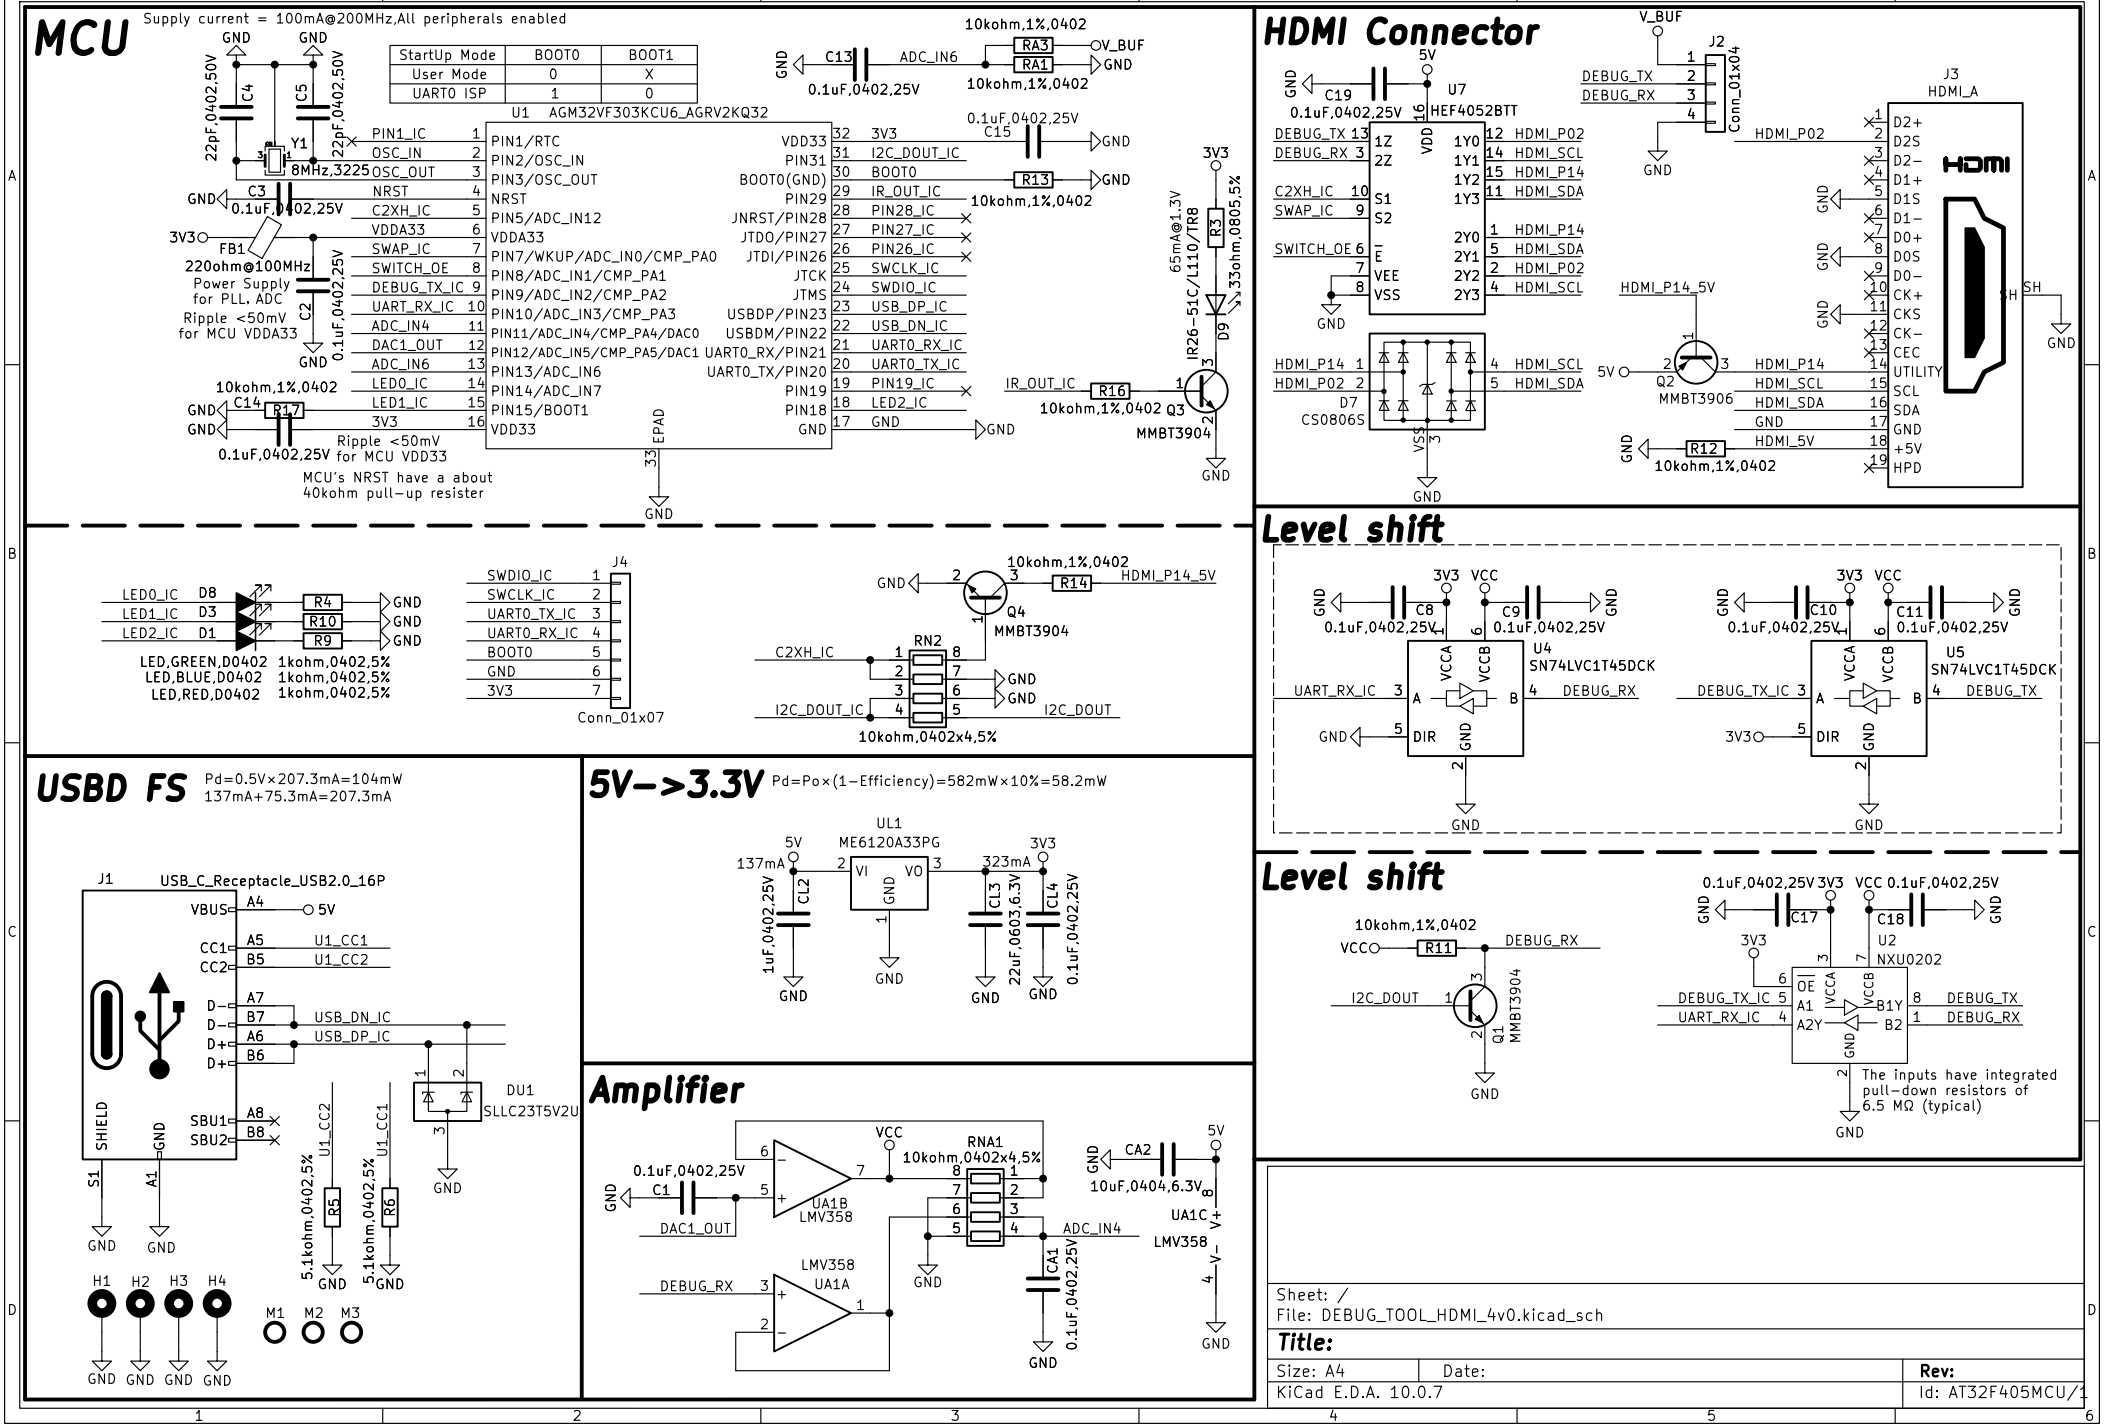

MCU
Supply current = 100mA@200MHz,All peripherals enabled
StartUp Mode | BOOT0 | BOOT1
User Mode | 0 | X
UART0 ISP | 1 | 0
U1 AGM32VF303KCU6_AGRV2KQ32
8MHz,3225
220ohm@100MHz
Power Supply for PLL. ADC
Ripple <50mV for MCU VDDA33
Ripple <50mV for MCU VDD33
MCU's NRST have a about 40kohm pull-up resister
HDMI Connector
HEF4052BTT
CS0806S
MMBT3906
Level shift
SN74LVC1T45DCK
NXU0202
The inputs have integrated pull-down resistors of 6.5 MΩ (typical)
LED,GREEN,D0402 1kohm,0402,5%
LED,BLUE,D0402 1kohm,0402,5%
LED,RED,D0402 1kohm,0402,5%
Conn_01x07
10kohm,0402x4,5%
USBD FS
Pd=0.5V×207.3mA=104mW
137mA+75.3mA=207.3mA
USB_C_Receptacle_USB2.0_16P
SLLC23T5V2U
5V->3.3V
Pd=Po×(1-Efficiency)=582mW×10%=58.2mW
ME6120A33PG
Amplifier
LMV358
Sheet: /
File: DEBUG_TOOL_HDMI_4v0.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.7
Id: AT32F405MCU/1