



CHANGSHA ELEWELL IMPORT AND EXPORT CO.,LTD

Tel : 86-15068113766

Email: sales01@china-elewell.com

Whatsapp: 008615068113766

Website:www.emtconduitpipe.com

Address:No. 238, Tianxiang Crystal Bay Office Building, No. 868 Huanhu Road,
Tianding Street, Yuelu District, Changsha City, Hunan Province, China

CABLE TIES CATALOG

CHANGSHA ELEWELL IMPORT AND EXPORT CO.,LTD
www.emtconduitpipe.com

CABLE TIES CATALOG

CHANGSHA ELEWELL IMPORT AND EXPORT CO.,LTD

目录 CONTENTS

STAINLESS STEEL CABLE TIE- BALL SELF LOCKING	01
LADDER TYPE STAINLESS STEEL CABLE TIE	12
L TYPE-STAINLESS STEEL LOCKING TIE.....	18
RELEASEABLE STAINLESS CABLE TIE.....	22
STAINLESS STEEL BAND.....	27
STAINLESS STEEL BANDING BUCKLE.....	30
CABLE TIE TOOL.....	32
STAINLESS STEEL MARKER PLATE.....	34
NYLON CABLE TIE.....	36



RoHS

» CERTIFICATE



01

不锈钢扎带—滚珠自锁式

STAINLESS steel Cable tie-ball self-locking



白钢不锈钢扎带—滚珠自锁式 Naked stainless steel cable tie-ball self-lock

产品特点 Product Features

- 材料:采用不锈钢304、316材质,各种长度皆可制作,特殊规格按客户供样制作;
- 特性:耐酸、耐腐蚀、抗张强度高,使用简单,快捷等优势;
- 温度:工作范围-60°C ~550°C。
- Characteristic:They have an unique ball locking mechanism that allow and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -60°C~550°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCN-3.5x100	100(3.9)	3.5(0.14)	0.25	25(1.00)	600(135)	100
RFCN-3.5x150	150(5.9)		0.25	37(1.46)		100
RFCN-3.5x200	200(7.87)		0.25	50(1.97)		100
RFCN-3.5x250	250(9.84)		0.25	63(2.48)		100
RFCN-3.5x300	300(11.8)		0.25	76(2.99)		100
RFCN-3.5x350	350(13.78)		0.25	89(3.5)		100
RFCN-3.5x400	400(15.75)		0.25	102(4.02)		100
RFCN-3.5x450	450(17.72)		0.25	115(4.53)		100
RFCN-4.6x150	150(5.9)	4.6(0.181)	0.25	37(1.46)	800(180)	100
RFCN-4.6x200	200(7.87)		0.25	50(1.97)		100
RFCN-4.6x250	250(9.84)		0.25	63(2.48)		100
RFCN-4.6x300	300(11.8)		0.25	76(2.99)		100
RFCN-4.6x350	350(13.78)		0.25	89(3.5)		100
RFCN-4.6x400	400(15.75)		0.25	102(4.02)		100
RFCN-4.6x450	450(17.72)		0.25	115(4.53)		100
RFCN-4.6x500	500(19.69)		0.25	128(5.04)		100
RFCN-4.6x550	550(21.65)		0.25	141(5.55)		100
RFCN-4.6x600	600(23.62)		0.25	154(6.06)		100
RFCN-7.9x150	150(5.9)	7.9(0.311)	0.25	37(1.46)	1000(225)	100
RFCN-7.9x200	200(7.87)		0.25	50(1.97)		100
RFCN-7.9x250	250(9.84)		0.25	63(2.48)		100
RFCN-7.9x300	300(11.8)		0.25	76(2.99)		100
RFCN-7.9x350	350(13.78)		0.25	89(3.5)		100
RFCN-7.9x400	400(15.75)		0.25	102(4.02)		100

白钢不锈钢扎带一滚珠自锁式

Naked stainless steel cable tie-ball self-lock



产品特点 Product Features

- 材料:采用不锈钢304、316材质,各种长度皆可制作,特殊规格按客户供样制作;
- 特性:耐酸、耐腐蚀、抗张强度高,使用简单,快捷等优势;
- 温度:工作范围 -60°C ~ 550°C。
- Characteristic:They have an unique ball locking mechanism tht allow and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -60°C~550°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

产品参数 Product Parameters


规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCN-7.9x450	450(17.72)	9(0.35)	0.25	115(4.53)	450(101)	100
RFCN-7.9x500	500(19.69)		0.25	128(5.04)		100
RFCN-7.9x550	550(21.65)		0.25	141(5.55)		100
RFCN-7.9x600	600(23.62)		0.25	154(6.06)		100
RFCN-7.9x650	650(25.59)		0.25	167(6.57)		100
RFCN-7.9x700	700(27.56)		0.25	180(7.09)		100
RFCN-7.9x750	750(29.53)		0.25	191(7.52)		100
RFCN-7.9x800	800(31.5)		0.25	193(7.59)		100
RFCN-10x200	200(7.87)	10(0.394)	0.25	50(1.97)	1000(225)	100
RFCN-10x300	300(11.8)		0.25	76(2.99)		100
RFCN-10x400	400(15.75)		0.25	102(4.02)		100
RFCN-10x500	500(19.69)		0.25	128(5.04)		100
RFCN-10x1000	1000(39.37)		0.25	286(8.11)		100
RFCN-10x1200	1200(47.24)		0.25	350(13.7)		100
RFCN-12x150	150(5.9)	12(0.472)	0.25	37(1.46)	1200(270)	100
RFCN-12x200	200(7.87)		0.25	50(1.97)		100
RFCN-12x250	250(9.84)		0.25	63(2.48)		100
RFCN-12x300	300(11.8)		0.25	76(2.99)		100
RFCN-12x350	350(13.78)		0.25	89(3.5)		100
RFCN-12x400	400(15.75)		0.25	102(4.02)		100
RFCN-12x450	450(17.72)		0.25	115(4.53)		100
RFCN-12x500	500(19.69)		0.25	128(5.04)		100
RFCN-12x550	550(21.65)		0.25	141(5.55)		100

白钢不锈钢扎带一滚珠自锁式

Naked stainless steel cable tie-ball self-lock

产品特点 Product Features

- 材料:采用不锈钢304、316材质,各种长度皆可制作,特殊规格按客户供样制作;
- 特性:耐酸、耐腐蚀、抗张强度高,使用简单,快捷等优势;
- 温度:工作范围 -60°C ~ 550°C。
- Characteristic:They have an unique ball locking mechanism tht allow and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -60°C~550°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

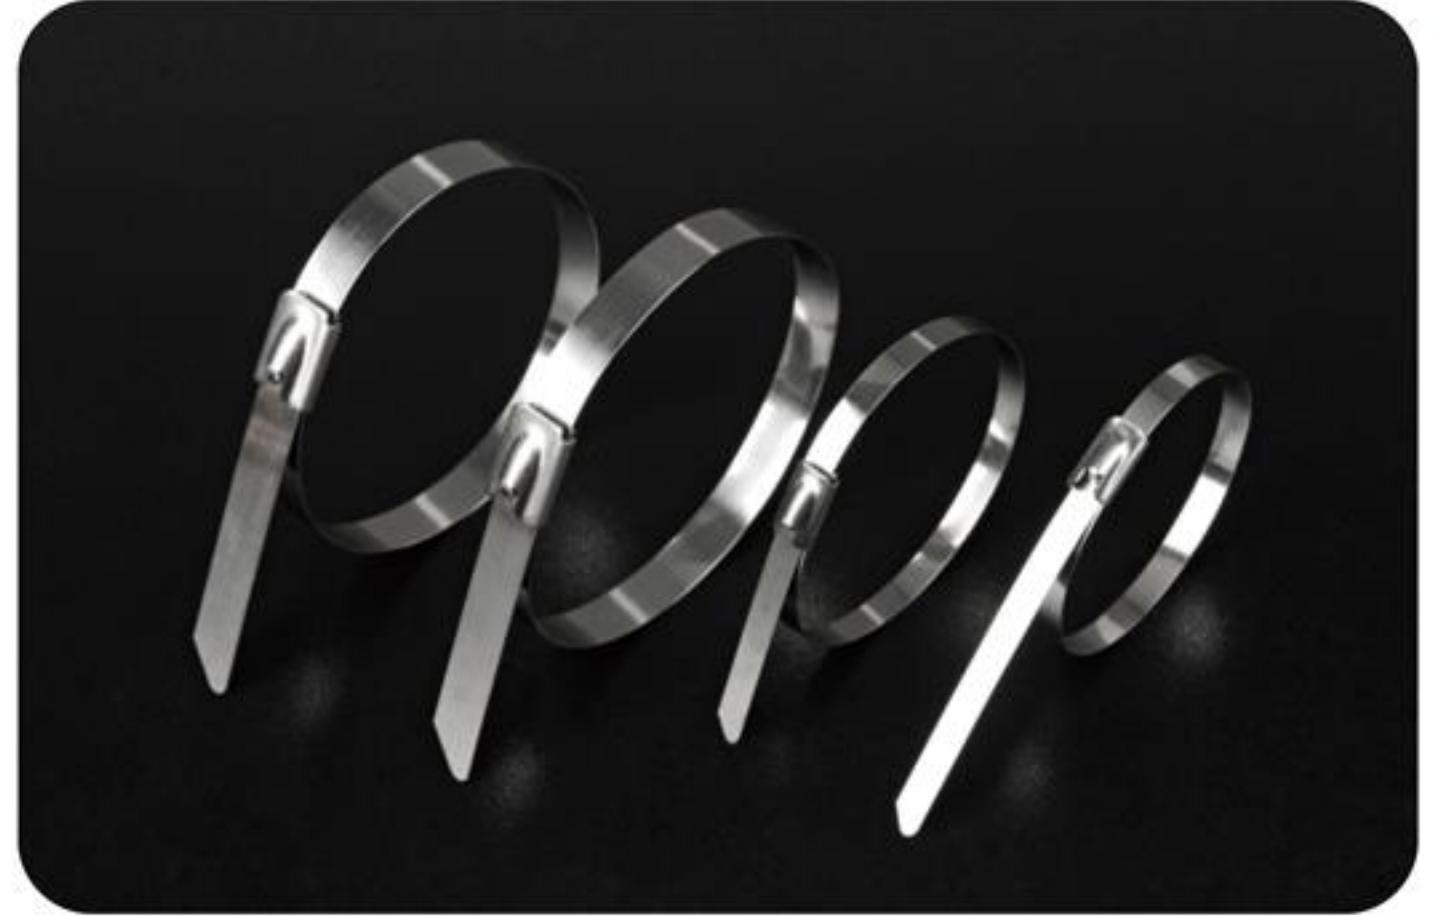

产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCN-12x600	600(23.62)	12(0.472)	0.25	154(6.06)	1200(270)	100
RFCN-12x650	650(25.59)		0.25	167(6.57)		100
RFCN-12x700	700(27.56)		0.25	180(7.09)		100
RFCN-15x200	200(7.87)		0.25	50(1.97)		100
RFCN-15x250	250(9.84)		0.25	63(2.48)		100
RFCN-15x300	300(11.8)		0.25	76(2.99)		100
RFCN-15x350	350(13.78)		0.25	89(3.5)		100
RFCN-15x400	400(15.75)		0.25	102(4.02)		100
RFCN-15x450	450(17.72)		0.25	115(4.53)		100
RFCN-15x500	500(19.69)		0.25	128(5.04)		100
RFCN-15x550	550(21.65)	15(0.59)	0.25	141(5.55)	1500(337)	100
RFCN-15x600	600(23.62)		0.25	154(6.06)		100
RFCN-15x650	650(25.59)		0.25	167(6.57)		100
RFCN-15x700	700(27.56)		0.25	180(7.09)		100
RFCN-15x750	750(29.53)		0.25	191(7.52)		100
RFCN-15x800	800(31.5)		0.25	193(7.59)		100
RFCN-15x1000	1000(39.37)		0.25	206(8.11)		100
RFCN-19x800	800(31.5)	19(0.748)	0.4	223(8.78)	1500(337)	100
RFCN-19x1000	1000(39.37)		0.4	286(11.26)		100
RFCN-19x1200	1200(47.24)		0.4	350(13.78)		100
RFCN-19x1500	1500(59.04)		0.4	445(17.52)		100
RFCN-19x1800	1800(70.87)		0.4	540(21.26)		100
RFCN-19x2000	2000(78.74)		0.4	605(23.82)		100

喷塑不锈钢扎带—滚珠自锁式

Spray stainless steel tie-ball self-locking

产品特点 Product Features

- 材料：采用不锈钢304、316材质，外喷环氧树脂热固性粉末涂料，各种长度皆可制作，接受合理的 OEM；
- 特性：耐酸、耐腐蚀、不易燃烧，抗张强度高，滚珠式结构使其具有简单，快捷，不可解开等安装上的优势；
- 温度：工作范围 -40°C ~85°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCP-3.5x100	100(3.9)	3.8(0.15)	0.4	25(1.00)	600(135)	100
RFCP-3.5x150	150(5.9)		0.4	37(1.46)		100
RFCP-3.5x200	200(7.87)		0.4	50(1.97)		100
RFCP-3.5x250	250(9.84)		0.4	63(2.48)		100
RFCP-3.5x300	300(11.8)		0.4	76(2.99)		100
RFCP-3.5x350	350(13.78)		0.4	89(3.5)		100
RFCP-3.5x400	400(15.75)		0.4	102(4.02)		100
RFCP-3.5x450	450(17.72)		0.4	115(4.53)		100
RFCP-4.6x150	150(5.9)	4.6(0.181)	0.4	37(1.46)	800(180)	100
RFCP-4.6x200	200(7.87)		0.4	50(1.97)		100
RFCP-4.6x250	250(9.84)		0.4	63(2.48)		100
RFCP-4.6x300	300(11.8)		0.4	76(2.99)		100
RFCP-4.6x350	350(13.78)		0.4	89(3.5)		100
RFCP-4.6x400	400(15.75)		0.4	102(4.02)		100
RFCP-4.6x450	450(17.72)		0.4	115(4.53)		100
RFCP-4.6x500	500(19.69)		0.4	128(5.04)		100
RFCP-4.6x550	550(21.65)		0.4	141(5.55)		100
RFCP-4.6x600	600(23.62)		0.4	154(6.06)		100
RFCC-5.6X100	150(5.9)	5. 6(0.22)	1.2	37(1.46)	350(79)	100
RFCC-5.6x200	200(7.87)		1.2	50(1.97)		100
RFCC-5.6X250	250(9.84)		1.2	63(2.48)		100
RFCC-5.6X300	300(11.8)		1.2	76(2.99)		100
RFCC-5.6X350	350(13.78)		1.2	89(3.5)		100
RFCC-5.6X400	400(15.75)		1.2	102(4.02)		100

包塑不锈钢扎带—滚珠自锁式

PVC Coated stainless steel cable tie - ball self-lock

产品特点 Product Features

- 材料：采用不锈钢304、316材质，外包电缆塑料PVC，各种长度皆可制作，接受合理的 OEM；
- 特性：耐酸、耐腐蚀、不易燃烧，抗张强度高，滚珠式结构使其具有简单，快捷，不可解开等安装上的优势；
- 温度：工作范围 -40°C ~85°C。
- Characteristic:They have an unique ball locking with PVC coating mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCC-5.6X450	450(17.72)	5. 6(0.22)	1.2	115(4.53)	350(79)	100
RFCC-5.6X500	500(19.69)		1.2	128(5.04)		100
RFCC-5.6x550	550(21.65)		1.2	141(5.55)		100
RFCC-5.6x600	600(23.62)		1.2	154(6.06)		100
RFCC-5.6x650	650(25.59)		1.2	167(6.57)		100
RFCC-5.6X700	700(27.56)		1.2	180(7.09)		100
RFCP-7.9x150	150(5.9)	7.9(0.311)	0.4	37(1.46)	1000(225)	100
RFCP-7.9x200	200(7.87)		0.4	50(1.97)		100
RFCP-7.9x250	250(9.84)		0.4	63(2.48)		100
RFCP-7.9x300	300(11.8)		0.4	76(2.99)		100
RFCP-7.9x350	350(13.78)		0.4	89(3.5)		100
RFCP-7.9x400	400(15.75)		0.4	102(4.02)		100
RFCP-7.9x450	450(17.72)		0.4	115(4.53)		100
RFCP-7.9x500	500(19.69)		0.4	128(5.04)		100
RFCP-7.9x550	550(21.65)		0.4	141(5.55)		100
RFCP-7.9x600	600(23.62)		0.4	154(6.06)		100
RFCP-7.9x650	650(25.59)	9(0.35)	0.4	167(6.57)	800(180)	100
RFCP-7.9x700	700(27.56)		0.4	180(7.09)		100
RFCP-7.9x750	750(29.53)		0.4	191(7.52)		100
RFCP-7.9x800	800(31.5)		0.4	193(7.59)		100
RFCC-9X150	150(5.9)		1.2	50(1.97)		100
RFCC-9X200	200(7.87)	9(0.35)	1.2	63(2.48)	450(101)	100
RFCC-9x250	250(9.84)		1.2	76(2.99)		100
RFCC-9X300	300(11.8)		1.2	89(3.5)		100

喷塑不锈钢扎带—滚珠自锁式

Spray stainless steel tie-ball self-locking

产品特点 Product Features

- 材料：采用不锈钢304、316材质，外喷环氧树脂热固性粉末涂料，各种长度皆可制作，接受合理的 OEM；
- 特性：耐酸、耐腐蚀、不易燃烧，抗张强度高，滚珠式结构使其具有简单，快捷，不可解开等安装上的优势；
- 温度：工作范围 -40°C ~85°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCC-9X350	350(13.78)	9(0.35)	1.2	102(4.02)	450(101)	100
RFCC-9X400	400(15.75)		1.2	115(4.53)		100
RFCC-9X450	450(17.72)		1.2	128(5.04)		100
RFCC-9X500	500(19.69)		1.2	141(5.55)		100
RFCC-9X550	550(21.65)		1.2	154(6.06)		100
RFCC-9X600	600(23.62)		1.2	167(6.57)		100
RFCC-9X650	650(25.59)		1.2	180(7.09)		100
RFCC-9x700	700(27.56)		1.2	191(7.52)		100
RFCP-10x200	200(7.87)	10(0.394)	0.4	50(1.97)	1000(225)	100
RFCP-10x300	300(11.8)		0.4	76(2.99)		100
RFCP-10x400	400(15.75)		0.4	102(4.02)		100
RFCP-10x500	500(19.69)		0.4	128(5.04)		100
RFCP-10x1000	1000(39.37)		0.4	286(8.11)		100
RFCP-10x1200	1200(47.24)		0.4	350(13.7)		100
RFCP-12x150	150(5.9)	12(0.472)	0.4	37(1.46)	1200(270)	100
RFCP-12x200	200(7.87)		0.4	50(1.97)		100
RFCP-12x250	250(9.84)		0.4	63(2.48)		100
RFCP-12x300	300(11.8)		0.4	76(2.99)		100
RFCP-12x350	350(13.78)		0.4	89(3.5)		100
RFCP-12x400	400(15.75)		0.4	102(4.02)		100
RFCP-12x450	450(17.72)		0.4	115(4.53)		100
RFCP-12x500	500(19.69)		0.4	128(5.04)		100
RFCP-12x550	550(21.65)		0.4	141(5.55)		100

喷塑不锈钢扎带—滚珠自锁式

Spray stainless steel tie-ball self-locking

产品特点 Product Features

- 材料：采用不锈钢304、316材质，外喷环氧树脂热固性粉末涂料，各种长度皆可制作，接受合理的 OEM；
- 特性：耐酸、耐腐蚀、不易燃烧，抗张强度高，滚珠式结构使其具有简单，快捷，不可解开等安装上的优势；
- 温度：工作范围 -40°C ~85°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCP-12x600	600(23.62)	12(0.472)	0.4	154(6.06)	1200(270)	100
RFCP-12x650	650(25.59)		0.4	167(6.57)		100
RFCP-12x700	700(27.56)		0.4	180(7.09)		100
RFCP-15x200	200(7.87)		0.4	50(1.97)		100
RFCP-15x250	250(9.84)		0.4	63(2.48)		100
RFCP-15x300	300(11.8)		0.4	76(2.99)		100
RFCP-15x350	350(13.78)		0.4	89(3.5)		100
RFCP-15x400	400(15.75)		0.4	102(4.02)		100
RFCP-15x450	450(17.72)		0.4	115(4.53)		100
RFCP-15x500	500(19.69)		0.4	128(5.04)		100
RFCP-15x550	550(21.65)	15(0.59)	0.4	141(5.55)	1500(337)	100
RFCP-15x600	600(23.62)		0.4	154(6.06)		100
RFCP-15x650	650(25.59)		0.4	167(6.57)		100
RFCP-15x700	700(27.56)		0.4	180(7.09)		100
RFCP-15x750	750(29.53)		0.4	191(7.52)		100
RFCP-15x800	800(31.5)		0.4	193(7.59)		100
RFCP-15x1000	1000(39.37)		0.4	206(8.11)		100
RFCP-19x800	800(31.5)	19(0.748)	0.6	223(8.78)	1500(337)	100
RFCP-19x1000	1000(39.37)		0.6	286(11.26)		100
RFCP-19x1200	1200(47.24)		0.6	350(13.78)		100
RFCP-19x1500	1500(59.04)		0.6	445(17.52)		100
RFCP-19x1800	1800(70.87)		0.6	540(21.26)		100
RFCP-19x2000	2000(78.74)		0.6	605(23.82)		100

全喷塑不锈钢扎带一滚珠自锁式

Plastic full sprayed stainless steel coated tie-ball self-lock

产品特点 Product Features

- 材料:采用不锈钢304、316材质,外喷环氧树脂热固性粉末涂料,各种长度皆可制作,接受合理的 OEM;
- 特性:耐酸、耐腐蚀、不易燃烧,抗张强度高,滚珠式结构使其具有简单,快捷,不可解开等安装上的优势;
- 温度:工作范围 -40°C ~110°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~110°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

**产品参数 Product Parameters**

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCPQ-3.5x100	100(3.9)	3.8(0.15)	0.4	25(1.00)	600(135)	100
RFCPQ-3.5x150	150(5.9)		0.4	37(1.46)		100
RFCPQ-3.5x200	200(7.87)		0.4	50(1.97)		100
RFCPQ-3.5x250	250(9.84)		0.4	63(2.48)		100
RFCPQ-3.5x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-3.5x350	350(13.78)		0.4	89(3.5)		100
RFCPQ-3.5x400	400(15.75)		0.4	102(4.02)		100
RFCPQ-3.5x450	450(17.72)		0.4	115(4.53)		100
RFCPQ-4.6x150	150(5.9)	4.6(0.181)	0.4	37(1.46)	800(180)	100
RFCPQ-4.6x200	200(7.87)		0.4	50(1.97)		100
RFCPQ-4.6x250	250(9.84)		0.4	63(2.48)		100
RFCPQ-4.6x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-4.6x350	350(13.78)		0.4	89(3.5)		100
RFCPQ-4.6x400	400(15.75)		0.4	102(4.02)		100
RFCPQ-4.6x450	450(17.72)		0.4	115(4.53)		100
RFCPQ-4.6x500	500(19.69)		0.4	128(5.04)		100
RFCPQ-4.6x550	550(21.65)		0.4	141(5.55)		100
RFCPQ-4.6x600	600(23.62)		0.4	154(6.06)		100
RFCPQ>7.9x150	150(5.9)	7.9(0.311)	0.4	37(1.46)	1000(225)	100
RFCPQ-7.9x200	200(7.87)		0.4	50(1.97)		100
RFCPQ-7.9x250	250(9.84)		0.4	63(2.48)		100
RFCPQ-7.9x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-7.9x350	350(13.78)		0.4	89(3.5)		100
RFCPQ-7.9x400	400(15.75)		0.4	102(4.02)		100

全喷塑不锈钢扎带一滚珠自锁式

Plastic full sprayed stainless steel coated tie-ball self-lock

产品特点 Product Features

- 材料:采用不锈钢304、316材质,外喷环氧树脂热固性粉末涂料,各种长度皆可制作,接受合理的 OEM;
- 特性:耐酸、耐腐蚀、不易燃烧,抗张强度高,滚珠式结构使其具有简单,快捷,不可解开等安装上的优势;
- 温度:工作范围 -40°C ~110°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~110°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

**产品参数 Product Parameters**

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCPQ-7.9x450	450(17.72)	7.9(0.311)	0.4	115(4.53)	800(180)	100
RFCPQ-7.9x500	500(19.69)		0.4	128(5.04)		100
RFCPQ-7.9x550	550(2.65)		0.4	141(5.55)		100
RFCPQ-7.9x600	600(23.62)		0.4	154(6.06)		100
RFCPQ-7.9x650	650(25.59)		0.4	167(6.57)		100
RFCPQ-7.9x700	700(27.56)		0.4	180(7.09)		100
RFCPQ-7.9x750	750(29.53)		0.4	191(7.52)		100
RFCPQ-7.9x800	800(31.5)		0.4	193(7.59)		100
RFCPQ-10x200	200(7.87)	10(0.394)	0.4	50(1.97)	1000(225)	100
RFCPQ-10x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-10x400	400(15.75)		0.4	102(4.02)		100
RFCPQ-10x500	500(19.69)		0.4	128(5.04)		100
RFCPQ-10x1000	1000(39.37)		0.4	286(8.11)		100
RFCPQ-10x1200	1200(47.24)		0.4	350(13.7)		100
RFCPQ-12x150	150(5.9)	12(0.472)	0.4	37(1.46)	1200(270)	100
RFCPQ-12x200	200(7.87)		0.4	50(1.97)		100
RFCPQ-12x250	250(9.84)		0.4	63(2.48)		100
RFCPQ-12x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-12x350	350(13.78)		0.4	89(3.5)		100
RFCPQ-12x400	400(15.75)		0.4	102(4.02)		100
RFCPQ-12x450	450(17.72)		0.4	115(4.53)		100
RFCPQ-12x500	500(19.69)		0.4	128(5.04)		100
RFCPQ-12x550	550(21.65)		0.4	141(5.55)		100

全喷塑不锈钢扎带—滚珠自锁式

Plastic full sprayed stainless steel coated tie-ball self-lock

产品特点 Product Features

- 材料：采用不锈钢304、316材质，外喷环氧树脂热固性粉末涂料，各种长度皆可制作，接受合理的 OEM；
- 特性：耐酸、耐腐蚀、不易燃烧，抗张强度高，滚珠式结构使其具有简单，快捷，不可解开等安装上的优势；
- 温度：工作范围 -40°C ~ 110°C。
- Characteristic: They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength: Non-flammability;
- Temperature: Working temperature -40°C~110°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

**产品参数 Product Parameters**

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFCPQ-12x600	600(23.62)	12(0.472)	0.4	154(6.06)	1200(270)	100
RFCPQ-12x650	650(25.59)		0.4	167(6.57)		100
RFCPQ-12x700	700(27.56)		0.4	180(7.09)		100
RFCPQ-15x200	200(7.87)	15(0.59)	0.4	50(1.97)	1500(337)	100
RFCPQ-15x250	250(9.84)		0.4	63(2.48)		100
RFCPQ-15x300	300(11.8)		0.4	76(2.99)		100
RFCPQ-15x350	350(13.78)		0.4	89(3.5)		100
RFCPQ-15x400	400(15.75)		0.4	102(4.02)		100
RFCPQ-15x450	450(17.72)		0.4	115(4.53)		100
RFCPQ-15x500	500(19.69)		0.4	128(5.04)		100
RFCPQ-15x550	550(21.65)		0.4	141(5.55)		100
RFCPQ-15x600	600(23.62)		0.4	154(6.06)		100
RFCPQ-15x650	650(25.59)		0.4	167(6.57)		100
RFCPQ-15x700	700(27.56)		0.4	180(7.09)		100
RFCPQ-15x750	750(29.53)		0.4	191(7.52)		100
RFCPQ-15x800	800(31.5)		0.4	193(7.59)		100
RFCPQ-15x1000	1000(39.37)		0.4	206(8.11)		100
RFCPQ-19x800	800(31.5)	19(0.748)	0.6	223(8.78)	1500(337)	100
RFCPQ-19x1000	1000(39.37)		0.6	286(11.26)		100
RFCPQ-19x1200	1200(47.24)		0.6	350(13.78)		100
RFCPQ-19x1500	1500(59.04)		0.6	445(17.52)		100
RFCPQ-19x1800	1800(70.87)		0.6	540(21.26)		100
RFCPQ-19x2000	2000(78.74)		0.6	605(23.82)		100

02**阶梯式不锈钢扎带/ZD带式卡箍****LADDER
Type Stainless Steel
Cable Tie**

● ZD 带式卡箍
ZD Hose Clamp

阶梯式白钢不锈钢扎带——多重锁紧式

Ladder type plastic sprayed stainless steel cable tie— Multi lock type

产品特点 Product Features

- 材料：采用不锈钢304、316材质；
- 特性：耐腐蚀多重锁紧扎带、抗张力可达250磅室内外适用；
- 适用：通讯、电力、造船及输油管道工程上应用；
- 温度：工作范围 -60°C ~550°C。
- High corrosion resistant, Multi-lock type;
- Good loop tensile strength can touch 250Lbs;
- Manufactured from type 304 and 316 stainless steel;
- Outdoor and indoor use;
- Ideal for used in telecommunication, electricity, shipbuilding and oil & gas industry;
- Temperature: Working temperature -60°C~550°C.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFJD-7X150	150(5.9)	7(0.276)	0.25	33(1.3)	1120(252)	100
RFJD-7X225	225(8.86)		0.25	57(2.2)		100
RFJD-7x300	300(11.8)		0.25	81(3.2)		100
RFJD-7x335	335(13.2)		0.25	92(3.6)		100
RFJD-7X400	400(15.7)		0.25	113(4.4)		100
RFJD-7x450	450(17.7)		0.25	129(5.1)		100
RFJD-7X490	490(19.3)		0.25	141(5.6)		100
RFJD-7X550	550(21.7)		0.25	161(6.3)		100
RFJD-7X600	600(23.6)		0.25	176(6.9)		100
RFJD-7X650	650(25.6)		0.25	192(7.6)		100
RFJD-7X700	700(27.6)		0.25	208(8.2)		100
RFJD-7X750	750(29.5)		0.25	224(8.8)		100
RFJD-7X800	800(31.5)		0.25	240(9.4)		100
RFJD-12X150	150(5.9)	12(0.472)	0.25	33(1.3)	1800(405)	100
RFJD-12x225	225(8.86)		0.25	57(2.2)		100
RFJD-12x300	300(11.8)		0.25	81(3.2)		100
RFJD-12x335	335(13.2)		0.25	92(3.6)		100
RFJD-12x400	400(15.7)		0.25	113(4.4)		100
RFJD-12x450	450(17.7)		0.25	129(5.1)		100
RFJD-12x490	490(19.3)		0.25	141(5.6)		100
RFJD-12x550	550(21.7)		0.25	161(6.3)		100
RFJD-12x600	600(23.6)		0.25	176(6.9)		100
RFJD-12x650	650(25.6)		0.25	192(7.6)		100
RFJD-12x700	700(27.6)		0.25	208(8.2)		100
RFJD-12x750	750(29.5)		0.25	224(8.8)		100
RFJD-12x800	800(31.5)		0.25	240(9.4)		100

阶梯式白钢不锈钢扎带——多重锁紧式

Ladder type plastic sprayed stainless steel cable tie— Multi lock type

产品特点 Product Features

- 材料：采用不锈钢304、316材质；
- 特性：耐腐蚀多重锁紧扎带、抗张力可达60kg室内外适用；
- 适用：通讯、电力、造船及输油管道工程上应用；
- 温度：工作范围 -60°C ~85°C。
- High corrosion resistant, Multi-lock type;
- Good loop tensile strength can touch 60kg;
- Manufactured from type 304 and 316 stainless steel;
- Outdoor and indoor use;
- Ideal for used in telecommunication, electricity, shipbuilding and oil & gas industry;
- Temperature: Working temperature -60°C~85°C.



产品参数 Product Parameters


规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFJS-7X150	150(5.9)	7(0.276)	0.4	33(1.3)	1120(252)	100
RFJS-7x225	225(8.86)		0.4	57(2.2)		100
RFJS-7X300	300(11.8)		0.4	81(3.2)		100
RFJS-7x335	335(13.2)		0.4	92(3.6)		100
RFJS-7x400	400(15.7)		0.4	113(4.4)		100
RFJS-7X450	450(17.7)		0.4	129(5.1)		100
RFJS-7X490	490(19.3)		0.4	141(5.6)		100
RFJS-7X550	550(21.7)		0.4	161(6.3)		100
RFJS-7X600	600(23.6)		0.4	176(6.9)		100
RFJS-7X650	650(25.6)		0.4	192(7.6)		100
RFJS-7X700	700(27.6)		0.4	208(8.2)		100
RFJS-7X750	750(29.5)		0.4	224(8.8)		100
RFJS-7X800	800(31.5)		0.4	240(9.4)		100
RFJS-12X150	150(5.9)	12(0.472)	0.4	33(1.3)	1800(405)	100
RFJS-12x225	225(8.86)		0.4	57(2.2)		100
RFJS-12x300	300(11.8)		0.4	81(3.2)		100
RFJS-12X335	335(13.2)		0.4	92(3.6)		100
RFJS-12x400	400(15.7)		0.4	113(4.4)		100
RFJS-12X450	450(17.7)		0.4	129(5.1)		100
RFJS-12X490	490(19.3)		0.4	141(5.6)		100
RFJS-12x550	550(21.7)		0.4	161(6.3)		100
RFJS-12x600	600(23.6)		0.4	176(6.9)		100
RFJS-12x650	650(25.6)		0.4	192(7.6)		100
RFJS-12x700	700(27.6)		0.4	208(8.2)		100
RFJS-12x750	750(29.5)		0.4	224(8.8)		100
RFJS-12x800	800(31.5)		0.4	240(9.4)		100

阶梯式喷塑不锈钢扎带——单勾锁紧式

Ladder style plastic sprayed stainless steel cable tie—Singlebarb lock type

产品特点 Product Features

- 材料:采用不锈钢304、316材质;
- 特性:耐腐蚀多重锁紧扎带、抗张力可达60kg室内外适用;
- 适用:通讯、电力、造船及输油管道工程上应用;
- 温度:工作范围 -60°C~535°C。
- High corrosion resistant, Multi-lock type;
- Good loop tensile strength can touch 60kg;
- Manufactured from type 304 and 316 stainless steel;
- Outdoor and indoor use;
- Ideal for used in telecommunication, electricity, shipbuilding and oil & gas industry;
- Temperature: Working temperature -60°C~535°C.

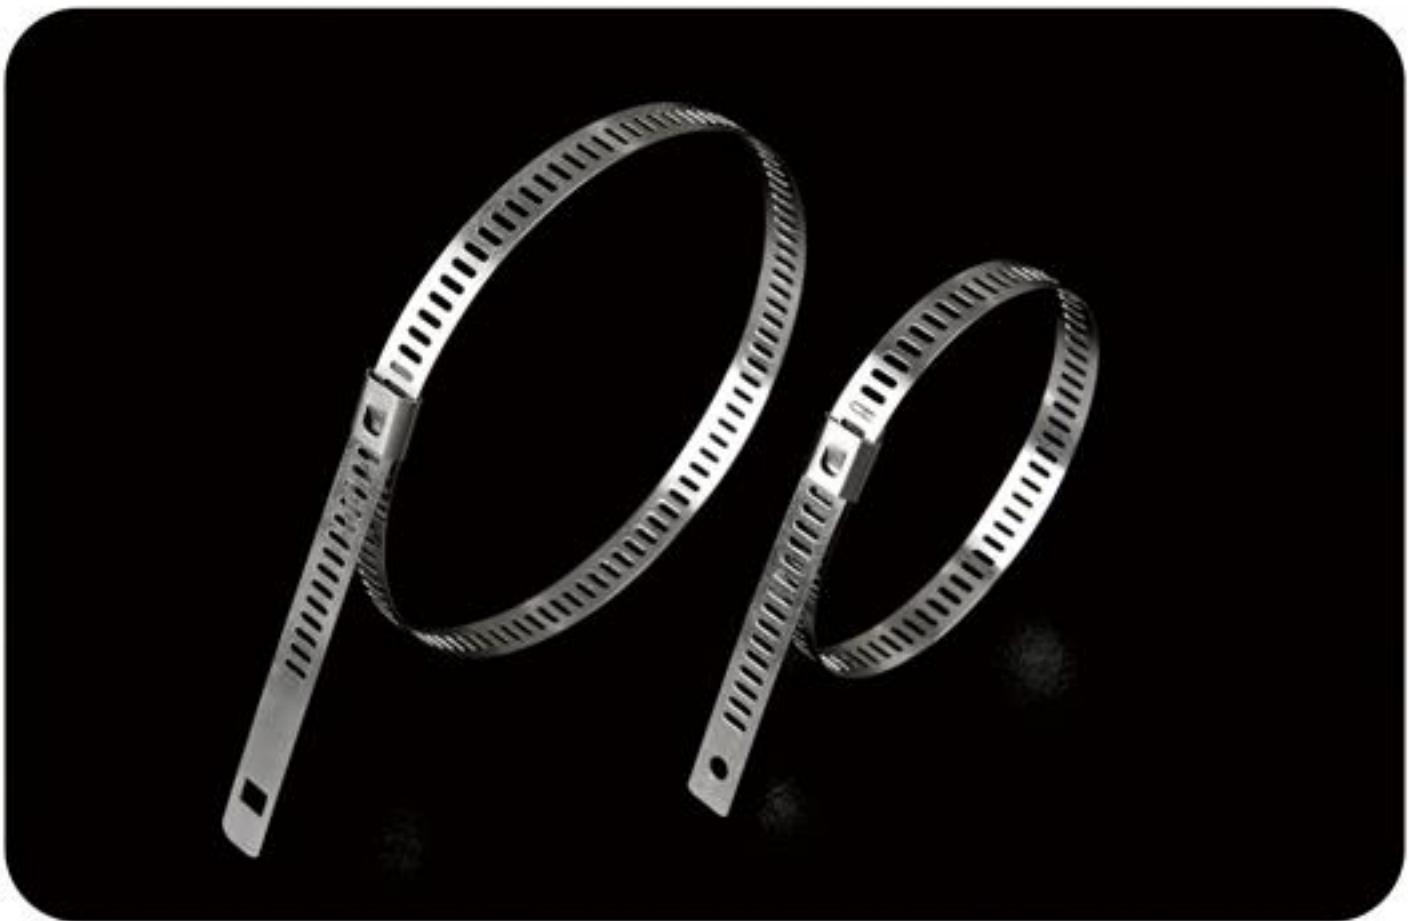

产品参数 Product Parameters


规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFJL-7X150	150(5.9)	7(0.276)	0.25	33(1.3)	1120(252)	100
RFJL-7X225	225(8.86)		0.25	57(2.2)		100
RFJL-7X300	300(11.8)		0.25	81(3.2)		100
RFJL-7X335	335(13.2)		0.25	92(3.6)		100
RFJL-7X400	400(15.7)		0.25	113(4.4)		100
RFJL-7X450	450(17.7)		0.25	129(5.1)		100
RFJL-7X490	490(19.3)		0.25	141(5.6)		100
RFJL-7X550	550(21.7)		0.25	161(6.3)		100
RFJL-7X600	600(23.6)		0.25	176(6.9)		100
RFJL-7X650	650(25.6)		0.25	192(7.6)		100
RFJL-7X700	700(27.6)		0.25	208(8.2)		100
RFJL-7X750	750(29.5)		0.25	224(8.8)		100
RFJL-7X800	800(31.5)		0.25	240(9.4)		100
RFJL-12X150	150(5.9)	12(0.472)	0.25	33(1.3)	1800(405)	100
RFJL-12x225	225(8.86)		0.25	57(2.2)		100
RFJL-12x300	300(11.8)		0.25	81(3.2)		100
RFJL-12x335	335(13.2)		0.25	92(3.6)		100
RFJL-12x400	400(15.7)		0.25	113(4.4)		100
RFJL-12x450	450(17.7)		0.25	129(5.1)		100
RFJL-12x490	490(19.3)		0.25	141(5.6)		100
RFJL-12x550	550(21.7)		0.25	161(6.3)		100
RFJL-12x600	600(23.6)		0.25	176(6.9)		100
RFJL-12x650	650(25.6)		0.25	192(7.6)		100
RFJL-12x700	700(27.6)		0.25	208(8.2)		100
RFJL-12x750	750(29.5)		0.25	224(8.8)		100
RFJL-12x800	800(31.5)		0.25	240(9.4)		100

阶梯式喷塑不锈钢扎带——单勾锁紧式

Ladder style plastic sprayed stainless steel cable tie—Singlebarb lock type

产品特点 Product Features

- 材料:采用不锈钢304、316材质;
- 特性:耐腐蚀单勾倒齿锁紧扎带,抗张力可达到60kg室内外适用;
- 适用:通讯,电力,造船及输油管道工程上应用;
- 温度:工作范围 -40°C~85°C。
- Epoxy coated, high corrosion resistant, single barb-lock type
- Good loop tensile strength can touch 60kg;
- Manufactured from type 304 and 316 stainless steel;
- Outdoor and indoor use;
- Ideal for used in telecommunication, electricity, shipbuilding and oil & gas industry;
- Temperature: Working temperature -40°C~85°C

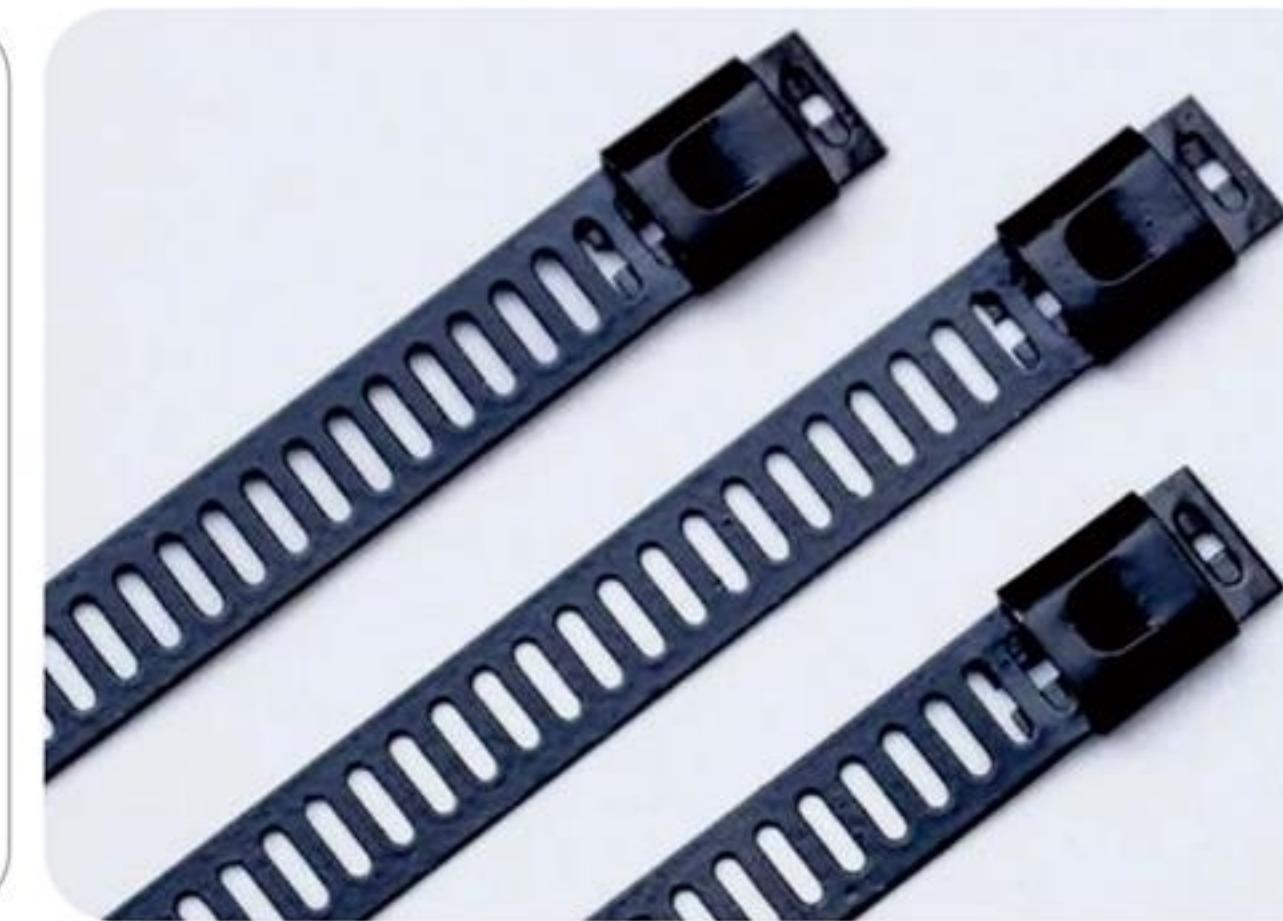

产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFJP-7X150	150(5.9)	7(0.276)	0.4	33(1.3)	1120(252)	100
RFJP-7X225	225(8.86)		0.4	57(2.2)		100
RFJP-7X300	300(11.8)		0.4	81(3.2)		100
RFJP-7X335	335(13.2)		0.4	92(3.6)		100
RFJP-7X400	400(15.7)		0.4	113(4.4)		100
RFJP-7X450	450(17.7)		0.4	129(5.1)		100
RFJP-7X490	490(19.3)		0.4	141(5.6)		100
RFJP-7X550	550(21.7)		0.4	161(6.3)		100
RFJP-7X600	600(23.6)		0.4	176(6.9)		100
RFJP-7X650	650(25.6)		0.4	192(7.6)		100
RFJP-7X700	700(27.6)		0.4	208(8.2)		100
RFJP-7X750	750(29.5)		0.4	224(8.8)		100
RFJP-7X800	800(31.5)		0.4	240(9.4)		100
RFJP-12X150	150(5.9)	12(0.472)	0.4	33(1.3)	1800(405)	100
RFJP-12x225	225(8.86)		0.4	57(2.2)		100
RFJP-12x300	300(11.8)		0.4	81(3.2)		100
RFJP-12x335	335(13.2)		0.4	92(3.6)		100
RFJP-12x400	400(15.7)		0.4	113(4.4)		100
RFJP-12x450	450(17.7)		0.4	129(5.1)		100
RFJP-12x490	490(19.3)		0.4	141(5.6)		100
RFJP-12x550	550(21.7)		0.4	161(6.3)		100
RFJP-12x600	600(23.6)		0.4	176(6.9)		100
RFJP-12x650	650(25.6)		0.4	192(7.6)		100
RFJP-12x700	700(27.6)		0.4	208(8.2)		100
RFJP-12x750	750(29.5)		0.4	224(8.8)		100
RFJP-12x800	800(31.5)		0.4	240(9.4)		100

ZD带式卡箍
ZD hose clamp**产品参数 Product Parameters**

规格型号 Part number	宽度 Approx width mm(inch)	厚度 Thickness	捆扎范围(mm) Lashing range	规格型号 Part number	宽度 Approx width mm(inch)	厚度 Thickness	规格型号 Part number
14-27			14-27mm	91-114			91-114mm
18-32			18-32mm	105-127			105-127mm
21-38			21-38mm	118-140			118-140mm
27-51			27-51mm	130-152			130-152mm
33-57			33-57mm	141-165			141-165mm
40-63			40-63mm	155-178			155-178mm
46-70	8mm/ 12mm	0.6mm	46-70mm	175-197	12mm	0.6mm	175-197mm
52-76			52-76mm	194-216			194-216mm
59-82			59-82mm	213-235			213-235mm
65-89			65-89mm	232-254			232-254mm
72-95			72-95mm	251-273			251-273mm
78-101			78-101mm	270-292			270-292mm
84-108			84-108mm	289-311			289-311mm

03**L型不锈钢扎带****L-TYPE
Stainless Steel Locking Tie**

L型白钢不锈钢扎带

L-Type naked stainless steel cable tie

产品特点 Product Features

- 材料:采用不锈钢304、316材质,各种长度皆可制作,特殊规格按客户供样制作;
- 特性:耐酸、耐腐蚀、抗张强度高,L型突起式结构使其具有简单,快捷等优势;
- 温度:工作范围 -60°C ~ 550°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone.
- High tensile strength:Non-flammability;
- Temperature:Working temperature -60°C~550°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corode etc;
- All length are available, stainless steel type:304,316.

**产品参数 Product Parameters**

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFLN-12x200	200(7.87)	12(0.47)	0.3	50(1.97)	1200(270)	100
RFLN-12x250	250(9.84)		0.3	63(2.48)		100
RFLN-12x300	300(11.8)		0.3	76(2.99)		100
RFLN-12x350	350(13.78)		0.3	89(3.5)		100
RFLN-12x400	400(15.75)		0.3	102(4.02)		100
RFLN-12x450	450(17.72)		0.3	115(4.53)		100
RFLN-12x500	500(19.69)		0.3	128(5.04)		100
RFLN-12x550	550(21.65)		0.3	141(5.55)		100
RFLN-15x250	250(9.84)	15(0.59)	0.3	63(2.48)	1500(337)	100
RFLN-15x300	300(11.8)		0.3	76(2.99)		100
RFLN-15x350	350(13.78)		0.3	89(3.5)		100
RFLN-15x400	400(15.75)		0.3	102(4.02)		100
RFLN-15x450	450(17.72)		0.3	115(4.53)		100
RFLN-15x500	500(19.69)		0.3	128(5.04)		100
RFLN-15x600	600(23.62)		0.3	154(6.06)		100
RFLN-15x700	700(27.56)		0.3	180(7.09)		100
RFLN-15x750	750(29.53)		0.3	191(7.52)		100
RFLN-15x800	800(31.5)		0.3	193(7.59)		100
RFLN-15x1000	1000(39.37)		0.3	206(8.11)		100
RFLN-19x300	300(11.8)	19(0.75)	0.4	76(2.99)	2000(440)	100
RFLN-19x400	400(15.75)		0.4	102(4.02)		100
RFLN-19x500	500(19.69)		0.4	141(5.55)		100
RFLN-19x600	600(23.62)		0.4	154(6.06)		100
RFLN-19x700	700(27.56)		0.4	180(7.09)		100
RFLN-19x800	800(31.5)		0.4	193(7.59)		100
RFLN-19x900	900(36)		0.4	200(8)		100
RFLN-19x1000	1000(39.37)		0.4	206(8.11)		100

L型喷塑不锈钢扎带

L-Type plastic sprayed stainless steel cable tie

**产品特点 Product Features**

- 材料:采用不锈钢304、316材质,外喷环氧树脂热固性粉末涂料,各种长度皆可制作,接受合理的OEM;
- 特性:耐酸、耐腐蚀、不易燃烧,抗张强度高,滚珠式结构使其具有简单,快捷,不可解开等安装上的优势;
- 温度:工作范围 -40°C ~ 85°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corode etc;
- All length are available, stainless steel type:304,316.

产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFLSP-12X150	150(5.9)	12(0.472)	0.4	37(1.46)	1200(270)	100
RFLSP-12x200	200(7.87)		0.4	50(1.97)		100
RFLSP-12x250	250(9.84)		0.4	63(2.48)		100
RFLSP-12x300	300(11.8)		0.4	76(2.99)		100
RFLSP-12x350	350(13.78)		0.4	89(3.5)		100
RFLSP-12x400	400(15.75)		0.4	102(4.02)		100
RFLSP-12X450	450(17.72)		0.4	115(4.53)		100
RFLSP-12x500	500(19.69)		0.4	128(5.04)		100
RFLSP-12x550	550(21.65)		0.4	141(5.55)		100
RFLSP-12x600	600(23.62)		0.4	154(6.06)		100
RFLSP-12x650	650(25.59)	15(0.59)	0.4	167(6.57)	1500(337)	100
RFLSP-12x700	700(27.56)		0.4	180(7.09)		100
RFLSP-15x200	200(7.87)		0.4	50(1.97)		100
RFLSP-15x250	250(9.84)		0.4	63(2.48)		100
RFLSP-15x300	300(11.8)		0.4	76(2.99)		100
RFLSP-15x350	350(13.78)		0.4	89(3.5)		100
RFLSP-15x400	400(15.75)		0.4	102(4.02)		100
RFLSP-15x450	450(17.72)		0.4	115(4.53)		100
RFLSP-15x500	500(19.69)		0.4	128(5.04)		100
RFLSP-15x550	550(21.65)		0.4	141(5.55)		100
RFLSP-15x600	600(23.62)		0.4	154(6.06)		100
RFLSP-15x650	650(25.59)		0.4	167(6.57)		100
RFLSP-15x700	700(27.56)		0.4	180(7.09)		100
RFLSP-15x750	750(29.53)		0.4	191(7.52)		100
RFLSP-15x800	800(31.5)		0.4	193(7.59)		100
RFLSP-15x900	900(36)		0.4	200(8)		100
RFLSP-15x1000	1000(39.37)		0.4	206(8.11)		100

L型包塑不锈钢扎带

L-Type PVC coated stainless steel cable tie

产品特点 Product Features

- 材料:采用不锈钢 304、316 材质,外包PVC电缆料,各种长度皆可制作,接受合理的 OEM;
- 特性:耐酸、耐腐蚀、不易燃烧,抗张强度高,L型结构使其具有简单,快捷,不可解开等安装上的优势;
- 温度:工作范围 -40°C ~85°C。
- Characteristic:They have an unique ball locking with plastic jetting mechanism that allow easily and quickly installed and not undone;
- High tensile strength:Non-flammability;
- Temperature:Working temperature -40°C~85°C;
- High resistance to acetic acid, alkali acid, sulphuric acid, corrode etc;
- All length are available, stainless steel type:304,316.

**产品参数 Product Parameters**

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFLC-12x200	200(7.87)	12(0.51)	1.2	50(1.97)	1200(270)	100
RFLC-12x250	250(9.84)		1.2	63(2.48)		100
RFLC-12x300	300(11.8)		1.2	76(2.99)		100
RFLC-12x350	350(13.78)		1.2	89(3.5)		100
RFLC-12x400	400(15.75)		1.2	102(4.02)		100
RFLC-12x450	450(17.72)		1.2	115(4.53)		100
RFLC-12x500	500(19.69)		1.2	128(5.04)		100
RFLC-12x550	550(21.65)		1.2	141(5.55)		100
RFLC-12x600	600(23.62)		1.2	154(6.06)		100
RFLC-12x650	650(25.59)		1.2	167(6.57)		100
RFLC-12x700	700(27.56)		1.2	180(7.09)		100
RFLC-16X200	200(7.87)	16(0.63)	1.2	50(1.97)	1500(337)	100
RFLC-16x250	250(9.84)		1.2	63(2.48)		100
RFLC-16x300	300(11.8)		1.2	76(2.99)		100
RFLC-16x350	350(13.78)		1.2	89(3.5)		100
RFLC-16X400	400(15.75)		1.2	102(4.02)		100
RFLC-16x450	450(17.72)		1.2	115(4.53)		100
RFLC-16x500	500(19.69)		1.2	128(5.04)		100
RFLC-16x550	550(21.65)		1.2	141(5.55)		100
RFLC-16x600	600(23.62)		1.2	154(6.06)		100
RFLC-16x650	650(25.59)		1.2	167(6.57)		100
RFLC-16x700	700(27.56)		1.2	180(7.09)		100

04**可退式不锈钢扎带****PELEASEABLE
Stainless Steel
Cable Tie**

● 不锈钢万能扎带
STAINLESS
Steel Universal Band

● 铝扎带
ALLUMINUM
Insulation Cable Tie

白钢可退式不锈钢扎带

Naked Releaseable Stainless Steel Cable Tie

产品特点 Product Features


- 材料:采用不锈钢 304、316 材质;
- 特性:可退式扎带,简单精准设计使用方便,可重复使用;
- 适用:通讯、电力、造船工业;
- 温度:工作范围 -60°C~550°C
- Made of high-strength, corrosion-resistant 304 and 316 stainless steel releasable use;
- Unique buckle design for quick, easy application and re-use;
- Ideal for inquiring electricity, telecommunication, shipbuilding industry;
- Temperature: Working temperature -60°C-550°C.



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFRUS-6.3X150	150(5.9)	6.3(0.39)	0.4	33(1.3)	800(180)	100
RFRUS-6.3X190	190(7.5)		0.4	46(1.8)		100
RFRUS-6.3X250	250(9.8)		0.4	65(2.6)		100
RFRUS-6.3X300	300(11.8)		0.4	81(3.2)		100
RFRUS-6.3X350	350(13.8)		0.4	97(3.8)		100
RFRUS-9.5X400	400(15.7)	9.5(0.39)	0.4	113(4.4)	1000(225)	100
RFRUS-9.5X450	450(17.5)		0.4	129(5.1)		100
RFRUS-9.5X490	490(19.3)		0.4	141(5.6)		100
RFRUS-9.5X550	550(21.7)		0.4	161(6.3)		100
RFRUS-9.5X600	600(23.6)		0.4	176(6.9)		100
RFRUS-9.5X650	650(25.6)		0.4	192(7.6)		100
RFRUS-9.5X700	700(27.6)		0.4	208(8.2)		100

操作解图 Operation Diagram

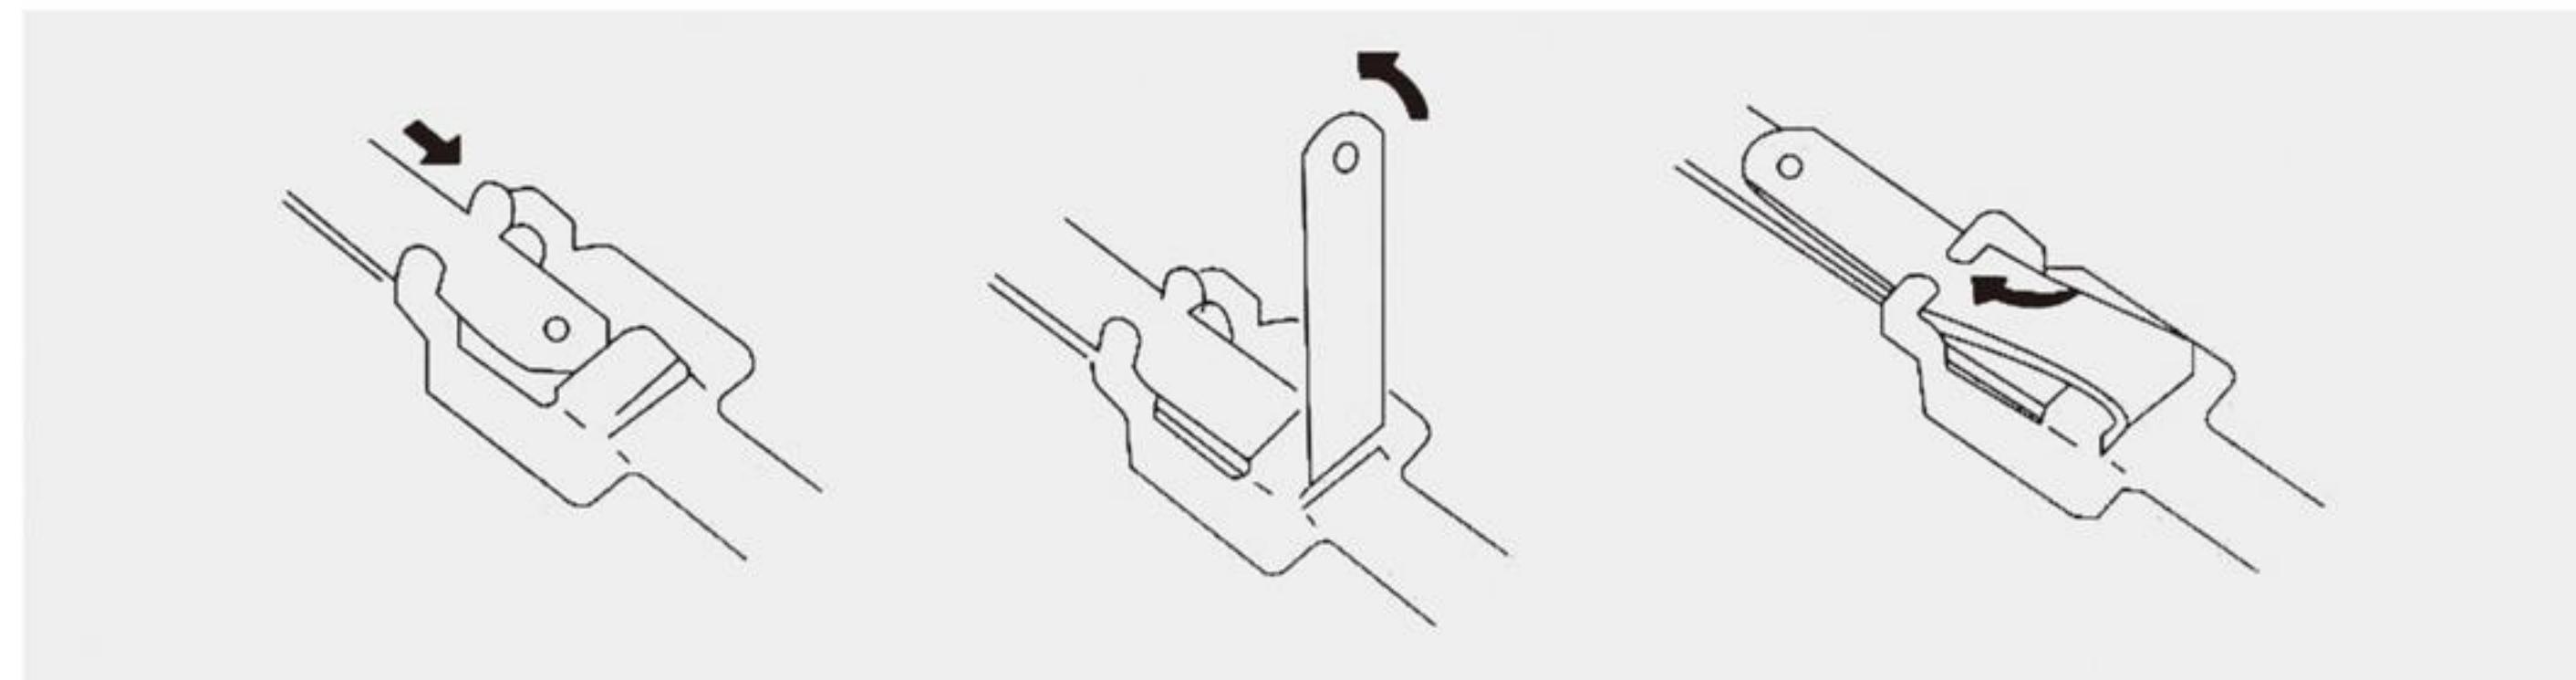

喷塑可退式不锈钢扎带

Releaseable Type Plastic Sprayed Stainless Steel Cable Tie

产品特点 Product Features


- 材料:采用不锈钢 304、316 材质,外喷环氧树脂;
- 特性:可退式扎带,简单精准设计使用方便;
- 适用:通讯、电力、造船工业;
- 温度:工作范围 -40°C~85°C
- Epoxy coated type, made of high-strength, corrosion-resistant;
- Manufactured from type 304 and 316 stainless steel;
- Releasable use, unique buckle design for quick, easy application and re-use ideal for inquiring electricity;
- Temperature: Working temperature -40°C-85°C



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFPBS-6.3X150	150(5.9)	6.3(0.39)	0.4	33(1.3)	800(180)	100
RFPBS-6.3X190	190(7.5)		0.4	46(1.8)		100
RFPBS-6.3x250	250(9.8)		0.4	65(2.6)		100
RFPBS-6.3x300	300(11.8)		0.4	81(3.2)		100
RFPBS-6.3X350	350(13.8)		0.4	97(3.8)		100
RFPBS-9.5X400	400(15.7)	9.5(0.39)	0.4	113(4.4)	1000(225)	100
RFPBS-9.5X450	450(17.5)		0.4	129(5.1)		100
RFPBS-9.5X490	490(19.3)		0.4	141(5.6)		100
RFPBS-9.5X550	550(21.7)		0.4	161(6.3)		100
RFPBS-9.5X600	600(23.6)		0.4	176(6.9)		100
RFPBS-9.5X650	650(25.6)		0.4	192(7.6)		100
RFPBS-9.5X700	700(27.6)		0.4	208(8.2)		100

操作解图 Operation Diagram

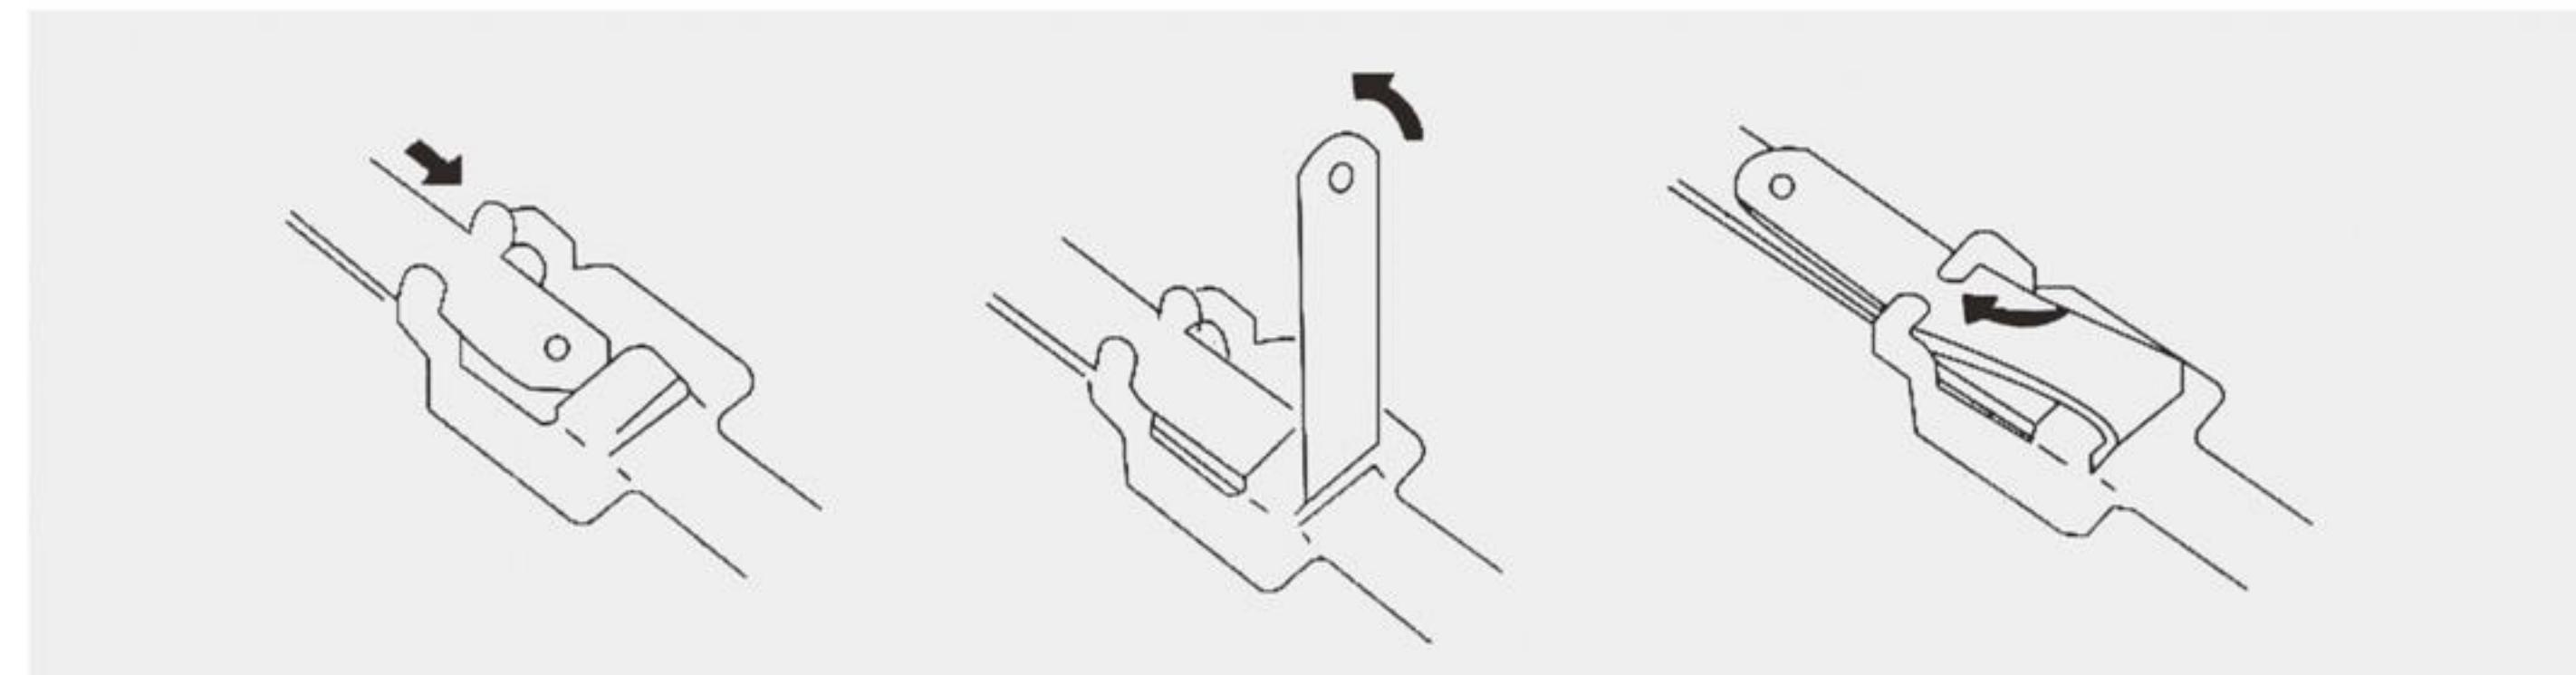

浸塑可退式不锈钢扎带

Releaseable Type Covered Stainless Steel Cable Tie

产品特点 Product Features


- 材料:采用不锈钢304、316材质,外喷环氧树脂;
- 特性:可退式扎带,简单精准设计使用方便;
- 适用:通讯、电力、造船工业;
- 温度:工作范围 -40°C~85°C
- Epoxy coated type, made of high-strength, corrosion-resistant;
- Manufactured from type 304 and 316 stainless steel;
- Releasable use, unique buckle design for quick, easy application and re-use ideal for inquiring electricity;
- Temperature: Working temperature -40C-85°C



产品参数 Product Parameters

规格型号 Part number	长度 Approx length mm(inch)	宽度 Approx width mm(inch)	厚度 Thickness	捆绑直径Max,bundle dia. mm(inch)	拉力 Min. loop tensile strength N(lbs)	(支/袋) Pcs/bag
RFRBS-6.3X150	150(5.9)	6.3(0.39)	1.2	33(1.3)	800(180)	100
RFRBS-6.3X190	190(7.5)		1.2	46(1.8)		100
RFRBS-6.3x250	250(9.8)		1.2	65(2.6)		100
RFRBS-6.3x300	300(11.8)		1.2	81(3.2)		100
RFRBS-6.3x350	350(13.8)		1.2	97(3.8)		100
RFRBS-9.5x400	400(15.7)	9.5(0.39)	1.2	113(4.4)	1000(225)	100
RFRBS-9.5X450	450(17.5)		1.2	129(5.1)		100
RFRBS-9.5X490	490(19.3)		1.2	141(5.6)		100
RFRBS-9.5X550	550(21.7)		1.2	161(6.3)		100
RFRBS-9.5x600	600(23.6)		1.2	176(6.9)		100
RFRBS-9.5X650	650(25.6)		1.2	192(7.6)		100
RFRBS-9.5X700	700(27.6)		1.2	208(8.2)		100

操作解图 Operation Diagram

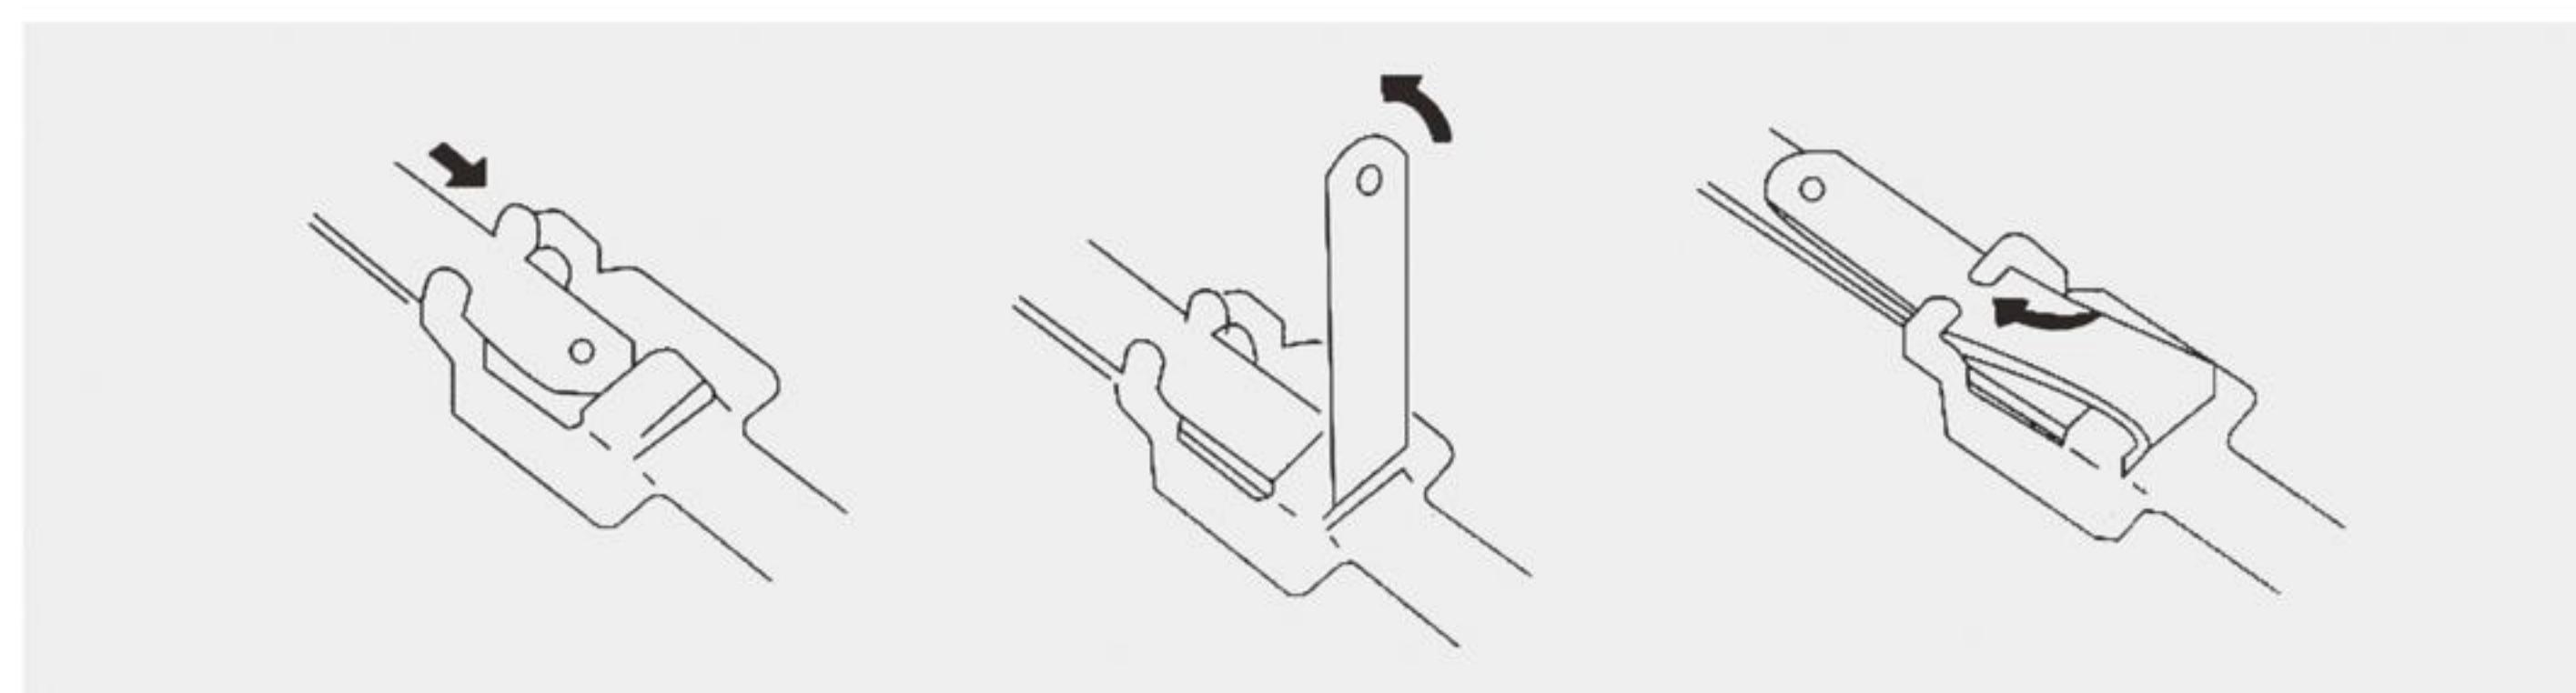

不锈钢万能扎带

Stainless Steel Universal Band



万能钢带扎 Stainless Steel Band Clamp

- 特点:万能钢带箍又名:卡箍、满意夹,主要用于电线杆上捆紧电缆、接地线、支架、吊牌等、同样适用电气化线路、电信局电杆、交通红绿灯及标识杆等部门。

●说明:

- ①万能钢带箍由金具、棘轮、箍带等零件组合而成,金具适用1mm 厚度不锈钢冲制成型。箍带选厚度 0.2mm, 宽度 14mm 不锈钢经折边后成 10mm。箍带具有非常的强度和拉力, 及光滑的边缘。
- ②万能钢带箍具有超强的凝固力, 使用时十分方便, 只要来回拨动金具就可以达到抽紧的目的, 后用力一按就会自动锁紧。
- ③箍带的长短可由用户根据需要而定制, 目前有 400mm、600mm、800mm、1000mm、1200mm、1500mm、2000mm 等规格。

●Standard and characteristic

stainless steel band clamps (clip band, satisfaction clip) is mainly used not only for attach cable, grounding conductors etc, but also forelectrification railway pole of telecommunicati trafficlights and singpole, etc.

●The detail is as following:


- ①stainless steel band clamps is consisted of bel, clamp, ratch wehh! and so on. The clamp made of high qualiy imm thickness stainless steel.The belt is also made of stainless steel who width is 14mm and thicknes is 0.2mm, After the two edaeas of the bel are hemmed, the width of bel is10mm. The belt has strong intension and pull. The two edges of the belt are smooth.
- ②Stainless steel band clamps are convenient to use. The clamp is capable of easily ahing, detaching or fastening the belt, and it can not reliable to loosen inadyertently.
- ③The length of stainless steel band clamps is in accoroance to customer's reauirement. Af present 400mm, 600mm, 800mm, 1000mm, 1200mm1500mm,2000mm specifications a so on.

产品参数 Product Parameters


规格型号 Part number	宽度 width		厚度Thickness		长度 length		最大孔径 Max bundle dia inch	(支/袋) Pcs/bag
	inch	mm	inch	mm	inch	mm		
RF-10x400	.4	10	.008	0.2	15.7	400	4.3	110
RF-10x600	.4	10	.008	0.2	23.6	600	7.1	180
RF-10x800	.4	10	.008	0.2	31.5	800	9.4	240
RF-10x900	.4	10	.008	0.2	35.4	900	10.6	270
RF-10x 1000	.4	10	.008	0.2	39.4	1000	11.8	300
RF-10X1100	.4	10	.008	0.2	43.3	1100	13.4	340
RF-10x 1200	.4	10	.008	0.2	47.2	1200	14.6	370
RF-19X1100	.8	19	.008	0.2	43.3	1100	13.4	340
RF-19x1200	.8	19	.008	0.2	47.2	1200	14.6	370
RF-19X1300	.8	19	.008	0.2	51.2	1300	15.7	400
RF-19x1400	.8	19	.008	0.2	55.1	1400	16.9	430
RF-19x1500	.8	19	.008	0.2	59.0	1500	18.1	460

05

不锈钢打包带

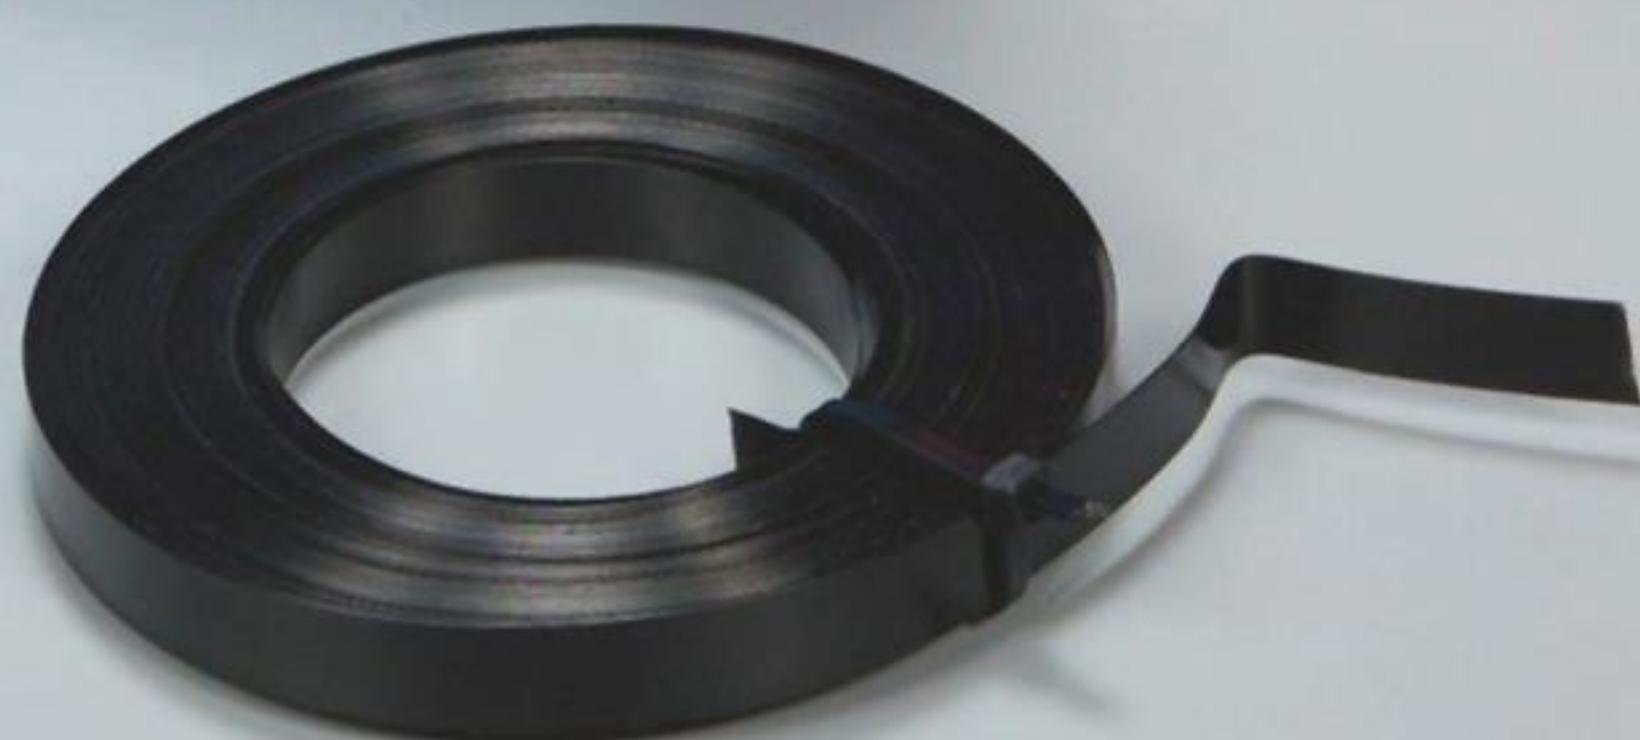STAINLESS
Steel Band

电缆扎带/配线器材
Cable Tie / Wiring Accessories

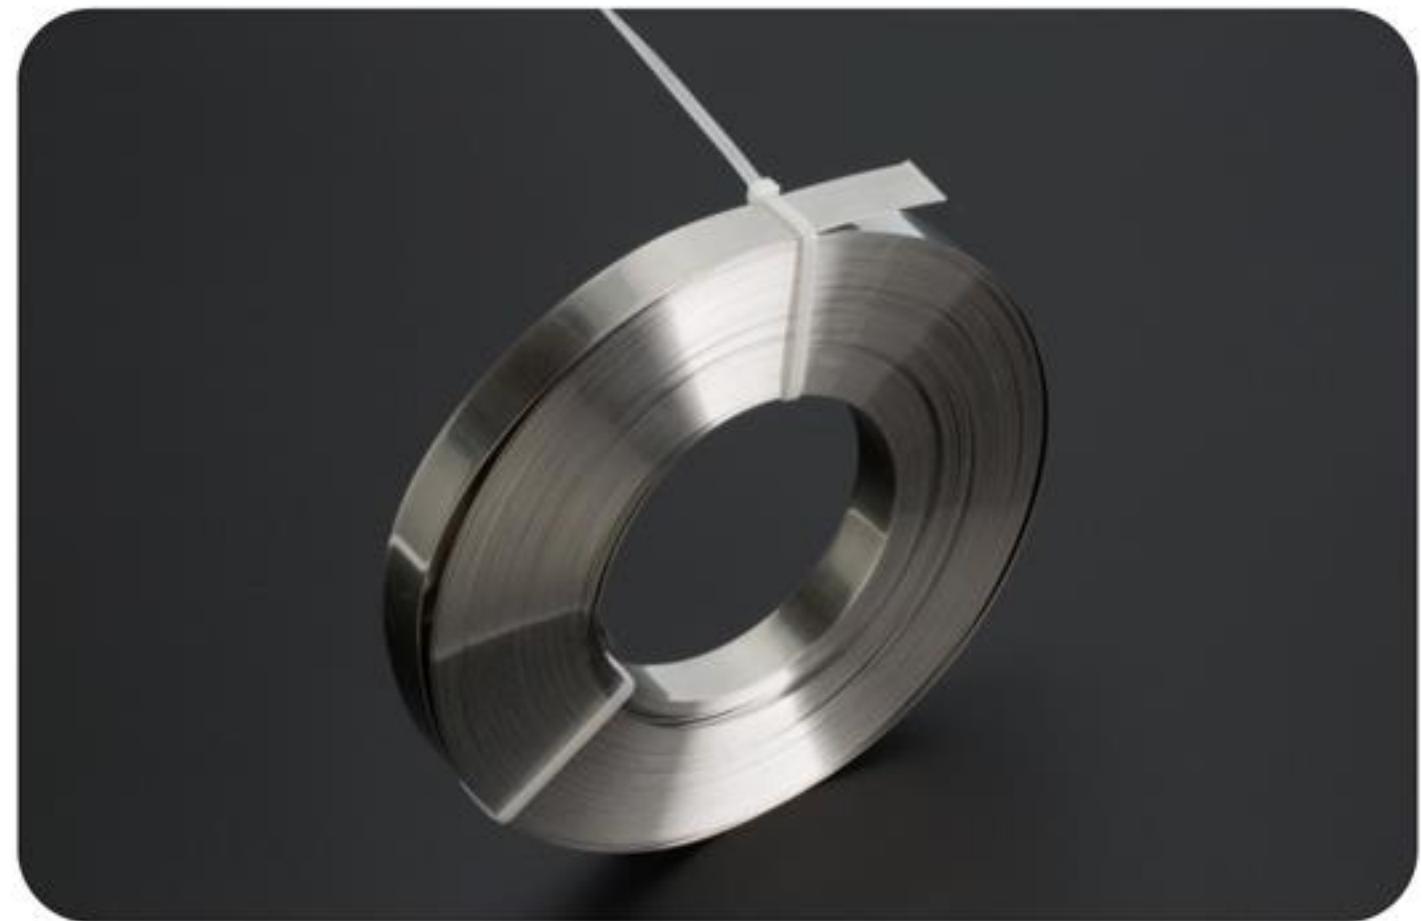不锈钢打包带
Stainless Steel strap

喷塑不锈钢盘带 Palastic Aprayed Stainless Steel Cable Tie (Disc Tape)

型号 Type	规格型号 Part number	材质 Material	涂层材质Painted layer material	表面 Surface	包装 Packing
RF-1	0.3x8	1Gr 18Nig	PVC	(黑体) Black	25M/ 盘 500M/ 箱 25M/roll 500M/carton
RF-1	0.3x10	1Gr 18Nig	PVC	(黑体) Black	25M/ 盘 500M/ 箱 25M/roll 500M/carton
RF-1	0.4x12	1Gr 18Nig	PVC	(黑体) Black	25M/ 盘 500M/ 箱 25M/roll 500M/carton
RF-1	0.4x16	1Gr 18Nig	PVC	(黑体) Black	25M/ 盘 500M/ 箱 25M/roll 500M/carton
RF-1	1.2x19	1Gr 18Nig	PVC	(黑体) Black	25M/ 盘 500M/ 箱 25M/roll 500M/carton

包塑不锈钢盘带 Plastic Covered Stainless Steel Cable Tie (Disc Tape)

型号 Type	规格型号 Part number	材质 Material	涂层材质Painted layer material	表面 Surface	包装 Packing
RF-2	1.2x8	1Gr 18Nig	(不冲孔) Non opening hole	PVC	20M/ 盘 400M/ 箱 20M/roll 400M/carton
RF-2	1.2x12	1Gr 18Nig	(不冲孔) Non opening hole	PVC	20M/ 盘 400M/ 箱 20M/roll 400M/carton
RF-2	1.2x16	1Gr 18Nig	(不冲孔) Non opening hole	PVC	20M/ 盘 400M/ 箱 20M/roll 400M/carton
RF-2	1.2x19	1Gr 18Nig	(不冲孔) Non opening hole	PVC	20M/ 盘 400M/ 箱 20M/roll 400M/carton

粘塑不锈钢盘带 Plastic Stuck Stainless Steel Cable Tie (Disc Tape)

型号 Type	规格型号 Part number	材质 Material	涂层材质Painted layer material	表面 Surface	包装 Packing
RF-3	1.2x12	1Gr 18Nig	PVC	(黑体) Black	20M/ 盘 400M/ 箱 20M/roll 400M/carton
RF-3	1.2x16	1Gr 18Nig	PVC	(黑体) Black	20M/ 盘 400M/ 箱 20M/roll 400M/carton
RF-3	1.2x19	1Gr 18Nig	PVC	(黑体) Black	20M/ 盘 400M/ 箱 20M/roll 400M/carton

白钢不锈钢打包带

Nakde Stainless Steel Band

- 不锈钢打包带与牙型打包扣、L型打包扣配套使用，安装时可用专业打包工具。使用时可以需要多长拉出多长，使用灵活不浪费。
- 材质:201、304、316 不锈钢。
- 领域:石油化工、保温管道、桥梁、输油管道、线缆、交通标志牌,广告牌、电力标志牌、电缆托架等捆扎固定。
- 包装:30m/卷, 30.5m/卷, 50m/卷, 纸盒包装(塑料盒可选)
- 规格:宽度 6mm-25mm, 厚度 0.2mm-1mm 均可订做。
- Material: stainless steel 201,304,316
- Application areas: petroleum chemical industry, bridges, pipelines,cables, traffic signs, billboards, signs, such as electric cablebracket banding fixed
- Parcking: 30my roll, 30.5m roll, 50my rol, carton packaging (plastic box optional)
- Specification: width 6mm-25mm, thickness 0.2mm-1mm can be customized.



型号 Part Number	型号 Size	宽度 Width		厚度 Thickness(mm)	包装 Package
		Inches	mm		
RF0638	6.4x0.38	1/4	6.4	0.38	100(30.5m)/ 盒
RF0938	9.5x0.38	3/8	9.5	0.38	100(30.5m)/ 盒
RF1040	10x0.4	3/8	10	0.4	100(30.5m)/ 盒
RF1340	12.7x0.4	1/2	12.7	0.4	100(30.5m)/ 盒
RF1640	16x0.4	5/8	16	0.4	100(30.5m)/ 盒
RF1940	19x0.4	3/4	19	0.4	100(30.5m)/ 盒
RF1376	12.7x0.76	1/2	13	0.76	100(30.5m)/ 盒
RF1676	16x0.76	5/8	16	0.76	100(30.5m)/ 盒
RF1970	19x0.7	3/4	19	0.7	100(30.5m)/ 盒
RF1976	19x0.76	3/4	19	0.76	100(30.5m)/ 盒

06

不锈钢打包扣

STAINLESS Steel Banding Buckle



不锈钢打包扣

Stainless Steel Banding Buckle

产品特点 Product Features

- 材料:不锈钢 201、304、316
- 用途:与同等宽度的不锈钢打包带一起使用,石油化工、保温管道,桥梁、输油管道、线缆、交通标志牌、广告牌、电力标志牌,电缆托架等捆扎固定。
- Material: stainless steel 201.304.316
- Uses: with the same width stainless steel strap used together, petro-chemical, pipe insulation, Bridges, pipelines, cables, traffic signs, billboards, electric signs, Cable trays and other bundled fixed.

**牙型不锈钢打包扣 Teeth Stainless Steel Buckle**

规格 Part Number	宽度 Width		厚度(mm) Thickness	包装PCS/box Package
	英寸 Inches	毫米 mm		
BK6.4	1/4	6.4	0.5	100
BK10	3/8	9.5	0.5/1	100
BK12.7	1/2	12.7	1.2	100
Bk16	5/8	16	1.2	100
Bk19	3/4	19	1.5	100
BK25	1	25	1.8	50

螺丝不锈钢打包扣Screw Stainless steel buckle

规格 Part Number	宽度 Width		厚度(mm) Thickness	包装PCS/box Package
	英寸 Inches	毫米 mm		
S6.4	1/4	6.4	1.3	100
S10	3/8	9.5	1.6	100
S12.7	1/2	12.7	1.8	50
S16	5/8	16	2.2	25
S19	3/4	19	2.2	25

L型不锈钢打包扣LStainless Steel Packaging Deduction

规格 Part Number	宽度 Width		厚度(mm) Thickness	包装PCS/box Package
	英寸 Inches	毫米 mm		
L8	1/4	8	0.7	100
L10	3/8	9.5	0.7	100
L12.7	1/2	12.7	0.7	100
L16	5/8	16	0.7	100
L19	3/4	19	0.8/1	100

06 扎带工具**CABLE Tie Tool**

扎带工具
Cable tie tool



LQG 不锈钢扎带工具
LQG STAINLESS CABLE TIES TOOL

- 适用于自锁式不锈钢扎带,适用扎带宽度4.6mm-8mm,厚度0.4以下具有收紧切断功能,经济实惠。
- WITH THE FUNCTION OF TENSIONING&CUTTING ETC., SUITABLE FOR SELF-LOCK STAINLESS STEEL CABLE TIES CABLE TIES: WIDTH: 4.6MM-8MM, THICKNESS: 0.25MM-0.4MM.

HS-600 不锈钢扎带工具
HS-600 STAINLESS CABLE TIES TOOL

- 适用于自锁式不锈钢扎带,适用扎带宽度4.6mm-8mm,厚度0.4以下。具有收紧自动切断功能。
- WITH THE FUNCTION OF TENSIONING&AUTO-SELF CUTTING ETC. SUITABLE FOR SELF-LOCK STAINLESS STEEL CABLE TIES. CABLE TIES: WIDTH: 4.6MM-8MM, THICKNESS: 0.25MM-0.4MM

LQA 打包工具
LQA STRAP BANDING TOOL

- 适用于各种不锈钢打包带、不锈钢扎带,适用扎带宽度8mm-20mm,厚度0.8mm以下。具有收紧切断功能。
- WITH THE FUNCTION OF TENSIONING&CUTTING ETC., SUITABLE FOR STRAP BANDING, SELF-LOCK STAINLESS STEEL CABLE TIES. CABLE TIES: WIDTH: 8MM-20MM, THICKNESS: 0.25MM-0.8MM.

RF-1908 重型手摇式扎带工具
RF-1908 HEAVY DUTY HAND-OPERATING STRAP BANDING TOOL

- 适用扎带宽度8mm-25mm,厚度1mm以下。具有收紧切断功能。
- WITH THE FUNCTION OF TENSIONING&CUTTING ETC., SUITABLE FOR STRAP BANDING, STAINLESS STEEL CABLE TIES. CABLE TIES: WIDTH: 8MM-20MM, THICKNESS: 0.25MM-0.8MM


08

不锈钢电缆标牌

**STAINLESS
Steel Marker
Plate**



不锈钢电缆标牌 Stainless Steel Marker plate

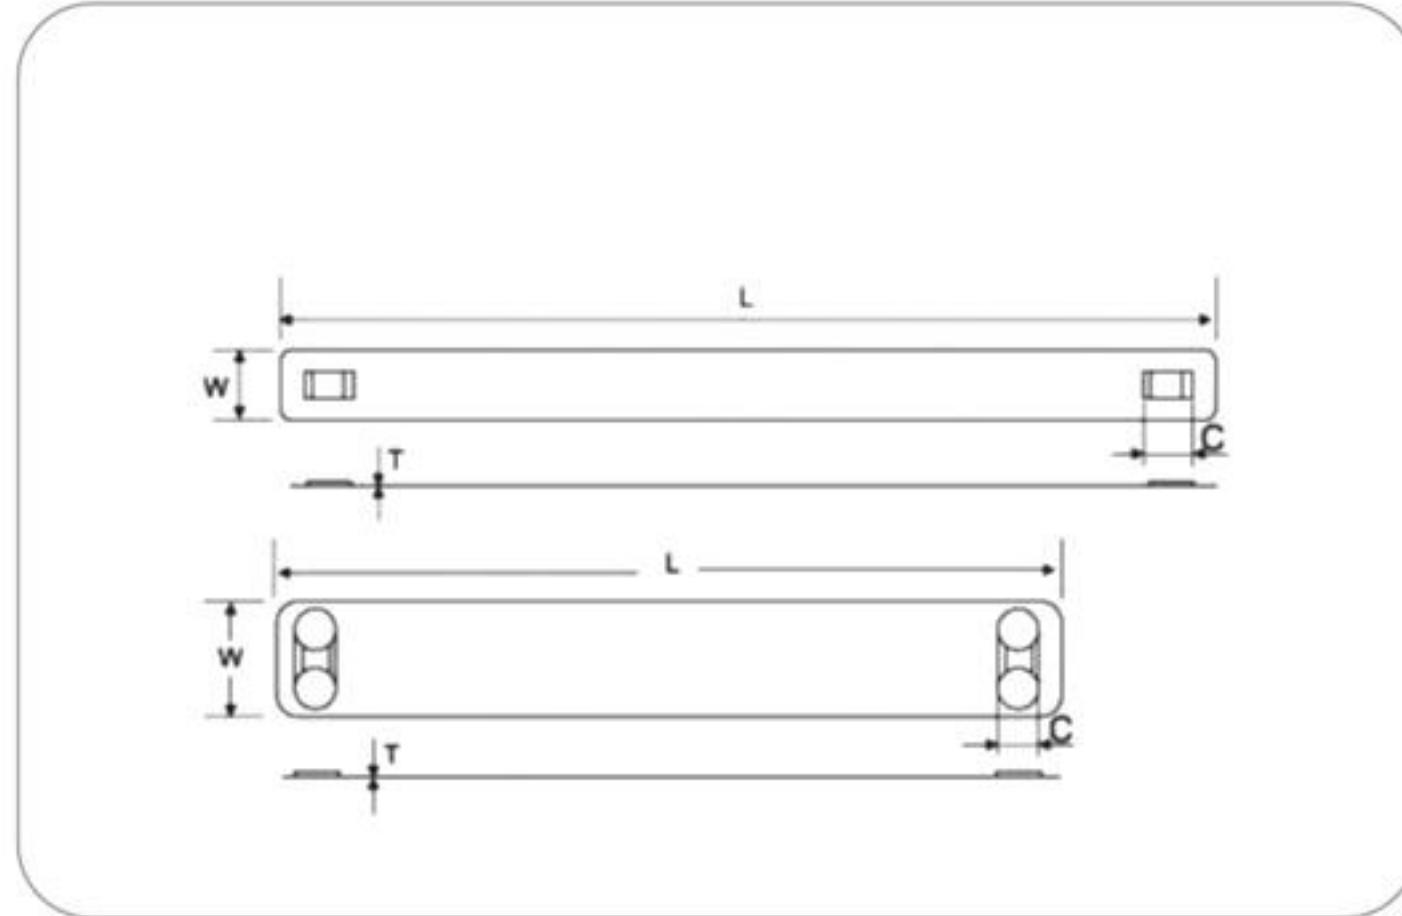

产品特点 Product Features

- 材质: 不锈钢电缆标志牌采用优质 304 不锈钢(316 供选), 产品光亮、无毛刺。一般绑在电缆上用于标记电缆。
- 方法: 使用时用两根宽度 4.6mm 的扎带固定。
- Material: Stainless steel cable signs of high quality 304 stainless steel (316 for the election), the product bright, No glitches. Generally tied to the cable for marking cables.
- Methods: 4.6mm width of ties with two fixed use.

不锈钢电缆标志带 Stainless Steel Marker Plate

规格型号 Part number	宽度(mm) width	厚度 (mm) Thickness	长度 (mm) Length	包装PCS/box Package
RFPS-9.5x89	9.5	0.4	89	100
RFPS-10x89	10	0.4	89	100
RFPS-12x110	12	0.4	110	100
RFPS-15x110	15	0.4	110	100
RFPS-19x89	19	0.4	89	100
RFPS-19x110	19	0.4	110	100
RFPS-40x50	40	1.5	50	100
RFPS-30x60	30	1.5	60	100
RFPS-25x60	25	1.5	60	100
RFPS-20x45	20	1.0	45	100

09

尼龙不锈钢嵌片扎带

Nylon Cable Tie-stainless Steel Plate Lock Cable Tie



尼龙扎线带

Nylon cable tie

产品特点 Product Features

- 材质:采用 UL 认可的尼龙66为原料,防火等级 94V-2,耐酸、不易老化,承受力强;
 - 颜色:标准颜色为白色(尼龙本色)和黑色(防紫外线);
 - 温度:零下 40°C-85°C;
 - 使用:室内外都可用,自锁式,安装快捷方便。
- Material : Nylon 66,94V-2 certificated by UL. Heat-resisting, Acid & erosion control , insulate well and not apt to age.
- Operating temperature: -40 °C to 85 °C.
- Color: Natural(or white, standard color), Uv black and other colorsare available as requested.



产品参数 Product Parameters

规格型号 Part number	长度 Length		宽度 width (mm)	捆绑范围E Bundle diameter(mm)	承受力 Tensile strength	
	inch	mm			LBS	KGS
RF-2.5X60	2.4"	60	2.5	2-11	18	8
RF-2.5X80	3.2"	80	2.5	2-16	18	8
RF-2.5X100	4.0"	100	2.5	2-22	18	8
RF-2.5X120	4.7"	120	2.5	2-30	18	8
RF-2.5X150	6.0"	150	2.5	2-35	18	8
RF-2.5X160	6.3"	160	2.5	2-40	18	8
RF-2.5x200	8.0"	200	2.5	2-50	18	8
RF-3.6X140	5.5"	140	3.6	3-33	40	18
RF-3.6X150	6.0"	150	3.6	3-35	40	18
RF-3.6X180	7.1"	180	3.6	3-45	40	18
RF-3.6X200	8.0"	200	3.6	3-50	40	18
RF-3.6X250	10"	250	3.6	3-65	40	18
RF-3.6X280	11"	280	3.6	3-70	40	18
RF-3.6x300	12"	300	3.6	3-80	40	18
RF-3.6x370	14.6"	370	3.6	3-105	40	18
RF-4.8X120	4.7"	120	4.8	3-30	50	22
RF-4.8X160	6.3"	160	4.8	3-40	50	22
RF-4.8X180	7.1"	180	4.8	3-42	50	22
RF-4.8X190	7.5"	190	4.8	3-46	50	22
RF-4.8x200	8.0"	200	4.8	3-50	50	22
RF-4.8X250	10"	250	4.8	3-65	50	22
RF-4.8x280	11"	280	4.8	3-70	50	22
RF-4.8x300	12"	300	4.8	3-80	50	22
RF-4.8x350	14"	350	4.8	3-90	50	22
RF-4.8x360	14.2"	360	4.8	3-94	50	22
RF-4.8x370	14.6"	370	4.8	3-98	50	22
RF-4.8X380	15"	380	4.8	3-102	50	22
RF-4.8X400	16"	400	4.8	3-105	50	22
RF-4.8X430	16.9"	430	4.8	3-120	50	22
RF-4.8X450	17.7"	450	4.8	3-130	50	22
RF-4.8x500	19.7"	500	4.8	3-150	50	22

尼龙扎线带

Nylon cable tie

产品特点 Product Features

- 材质:采用 UL 认可的尼龙66为原料,防火等级 94V-2,耐酸、不易老化,承受力强;
 - 颜色:标准颜色为白色(尼龙本色)和黑色(防紫外线);
 - 温度:零下 40°C-85°C;
 - 使用:室内外都可用,自锁式,安装快捷方便。
- Material : Nylon 66,94V-2 certificated by UL. Heat-resisting, Acid & erosion control , insulate well and not apt to age.
- Operating temperature: -40 °C to 85 °C.
- Color: Natural(or white, standard color), Uv black and other colorsare available as requested.



产品参数 Product Parameters

规格型号 Part number	长度 Length		宽度 width (mm)	捆绑范围E Bundle diameter(mm)	承受力 Tensile strength	
	inch	mm			LBS	KGS
RF-7.2X150	6.0"	150	7.2	3-35	120	55
RF-7.2X200	8.0"	200	7.2	3-50	120	55
RF-7.2X250	10"	250	7.2	4-65	120	55
RF-7.2X280	11"	280	7.2	4-78	120	55
RF-7.2X300	12"	300	7.2	4-80	120	55
RF-7.2X350	14"	350	7.2	4-90	120	55
RF-7.2X370	14.6"	370	7.2	4-98	120	55
RF-7.2X380	15"	380	7.2	4-100	120	55
RF-7.2X400	16"	400	7.2	4-105	120	55
RF-7.2X450	18"	450	7.2	4-110	120	55
RF-7.2X500	20"	500	7.2	4-150	120	55
RF-7.2X530	20.9"	530	7.2	4-160	120	55
RF-7.2X550	21.6"	550	7.2	4-165	120	55
RF-9.0X400	16"	400	9.0	8-105	175	79.4
RF-9.0X450	18"	450	9.0	8-118	175	79.4
RF-9.0X500	20"	500	9.0	8-150	175	79.4
RF-9.0X550	21.6"	550	9.0	8-160	175	79.4
RF-9.0X600	23.6"	600	9.0	8-170	175	79.4
RF-9.0X650	25.6"	650	9.0	8-185	175	79.4
RF-9.0X720	28.3"	720	9.0	10-195	175	79.4
RF-9.0X800	31.5"	800	9.0	10-230	175	79.4
RF-9.0X900	35.5"	900	9.0	10-265	175	79.4
RF-9.0X1000	40"	1000	9.0	10-300	175	79.4
RF-9.0X1100	433'	1100	9.0	10-335	175	79.4
RF-9.0X1200	47.2"	1200	9.0	10-370	175	79.4
RF-12x650	25.6"	650	12	14-185	250	114
RF-12x900	25.5	900	12	14-265	250	114

尼龙不锈钢嵌片扎带 NZ-1

Nylon cable tie-stainless steel Plate Lock Cable Tie

产品特点 Product Features

- 材质:采用 UL 认可的尼龙66为原料,防火等级 94V-2,耐酸、不易老化,承受力强;
- 颜色:标准颜色为白色(尼龙本色)和黑色(防紫外线);
- 温度:零下 40°C-85°C;
- 使用:室内外都可用,自锁式,安装快捷方便。
- Material : Nylon 66,94V-2 certificated by UL. Heat-resisting, Acid & erosion control , insulate well and not apt to age.
- Operating temperature: -40 °C to 85 °C.
- Color: Natural(or white, standard color), Uv black and other colors are available as requested.



产品参数 Product Parameters

型号Type	规格Specification	宽度width (mm)	长度 Length(mm)	捆绑直径 Max.bundle dia. (mm)	拉力 Min. loop tensile strength (N)
NZ-1	3×100	3	100	22	80
NZ-1	4×150	4	150	35	160
NZ-1	4×200	4	200	53	160
NZ-1	5×250	5	250	65	200
NZ-1	5×300	5	300	76	200
NZ-1	5×380	5	380	102	200
NZ-1	6×200	6	200	53	220
NZ-1	7×300	7	300	76	250
NZ-1	8×145	8	145	34	250
NZ-1	8×175	8	175	43	250
NZ-1	8×200	8	200	53	250
NZ-1	8×240	8	240	64	250
NZ-1	8×300	8	300	76	250
NZ-1	8×400	8	400	102	500
NZ-1	10×300	10	300	76	500
NZ-1	10×350	10	350	97	500
NZ-1	10×400	10	400	102	550
NZ-1	10×450	10	450	120	550
NZ-1	10×600	10	600	186	550

USAGE SCENARIO



CABLE TIES CATALOG
CHANGSHA ELEWELL IMPORT AND EXPORT CO.,LTD