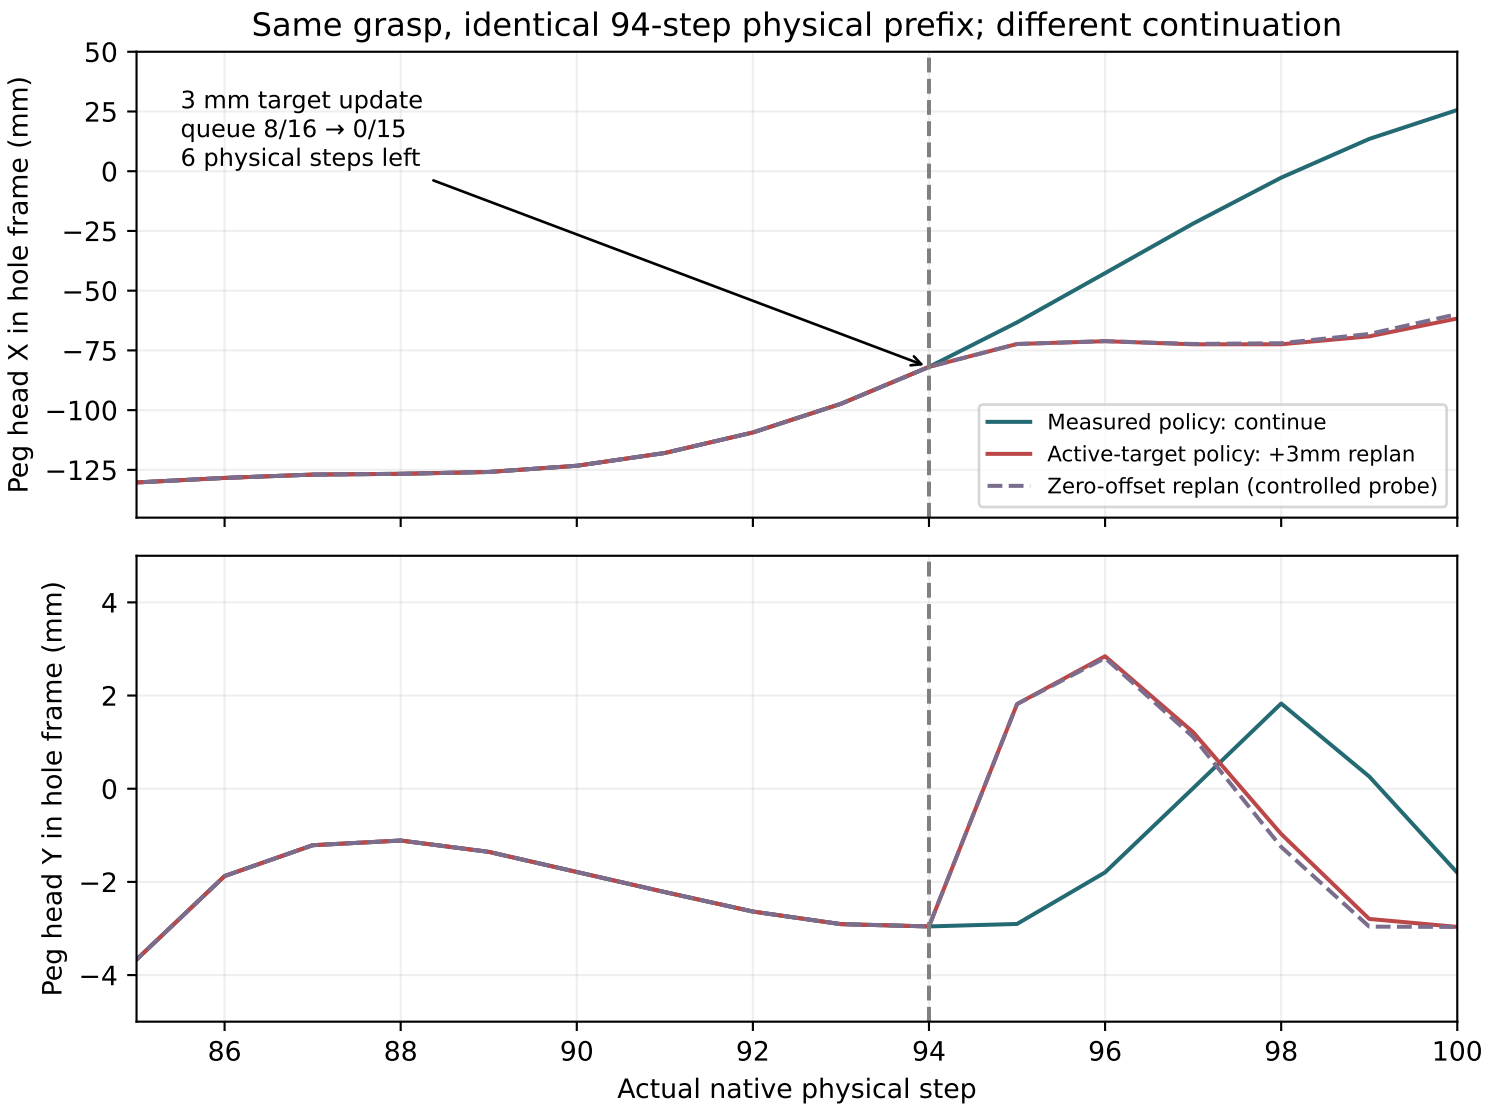
Same grasp, identical 94-step physical prefix; different continuation
3 mm target update
queue 8/16 → 0/15
6 physical steps left
Measured policy: continue
Active-target policy: +3mm replan
Zero-offset replan (controlled probe)
Peg head X in hole frame (mm)
Peg head Y in hole frame (mm)
Actual native physical step
50
25
0
−25
−50
−75
−100
−125
4
2
0
−2
−4
86
88
90
92
94
96
98
100