


EXPERIMENT 9:

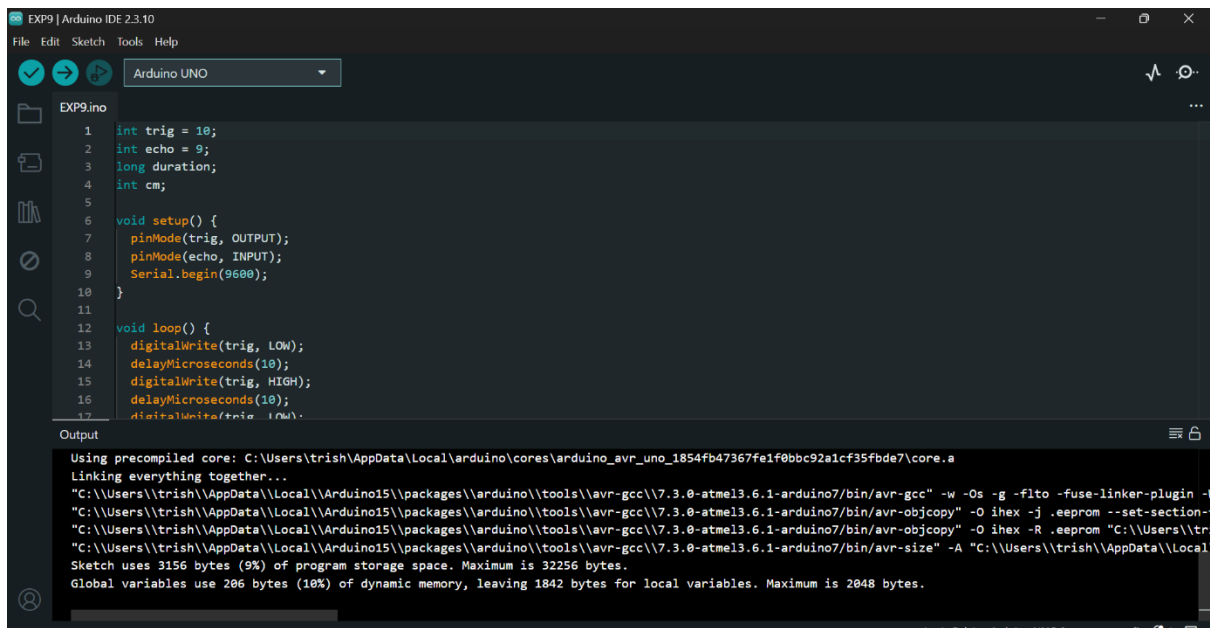

The screenshot shows the Arduino IDE interface. The main window displays the code for `EXP9.ino`. The code defines two pins, `trig` and `echo`, and a `duration` variable. The `setup` function initializes the pins and the serial port. The `loop` function sends a low pulse to the `trig` pin, delays for 10 microseconds, sends a high pulse, delays for 10 microseconds, and then sends a low pulse.

```
1 int trig = 10;
2 int echo = 9;
3 long duration;
4 int cm;
5
6 void setup() {
7   pinMode(trig, OUTPUT);
8   pinMode(echo, INPUT);
9   Serial.begin(9600);
10 }
11
12 void loop() {
13   digitalWrite(trig, LOW);
14   delayMicroseconds(10);
15   digitalWrite(trig, HIGH);
16   delayMicroseconds(10);
17   digitalWrite(trig, LOW);
18 }
```

The output window shows the compilation process, indicating that the sketch uses 3156 bytes (9%) of program storage space and 206 bytes (10%) of dynamic memory.

