EXPERIMENT-7

TOPOLOGY

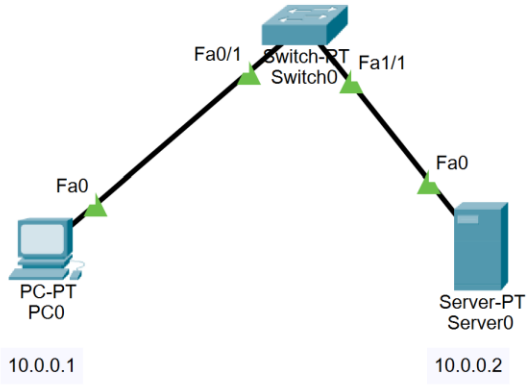

OUTPUT -

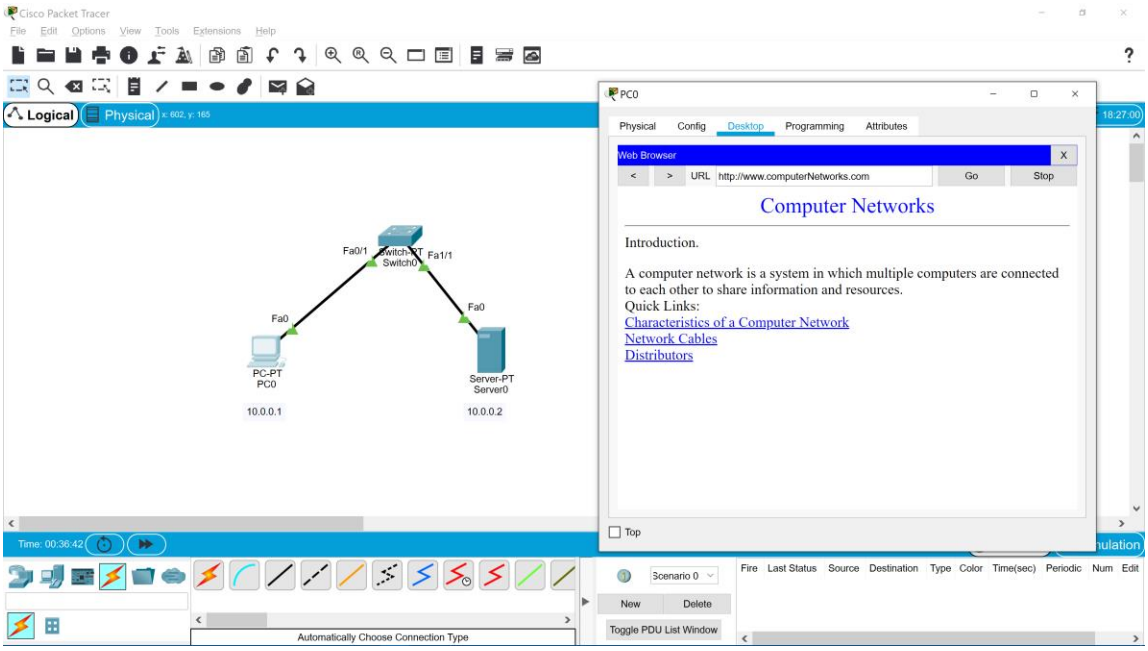

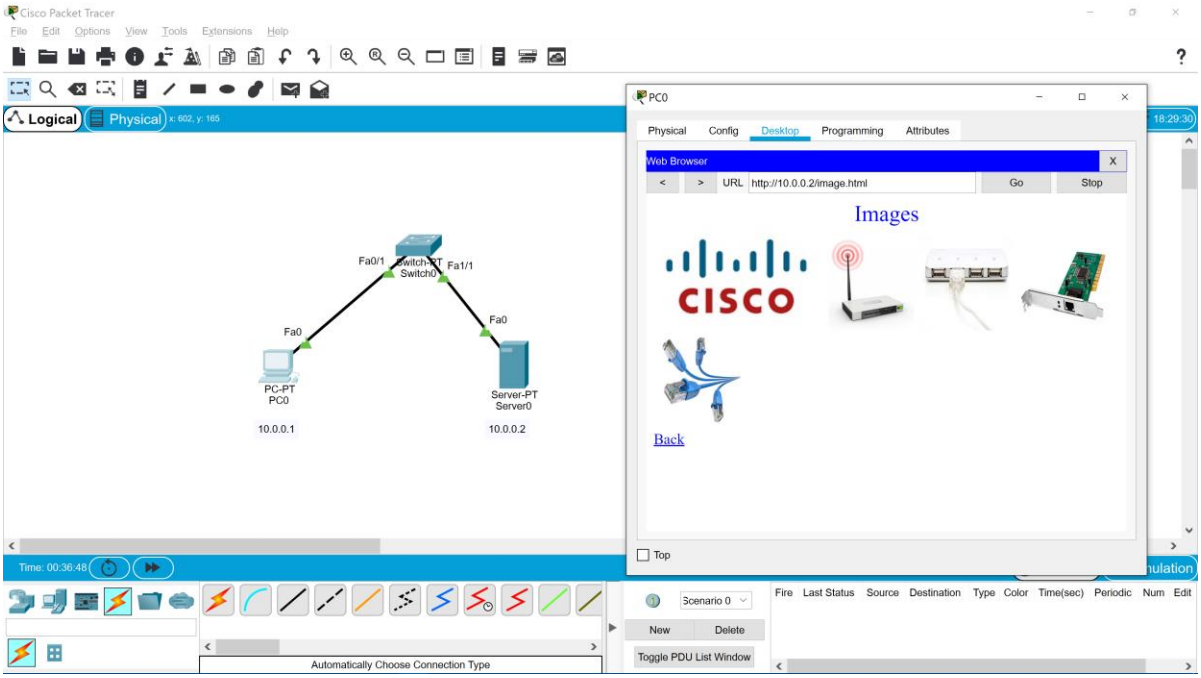
Cisco Packet Tracer
File Edit Options View Tools Extensions Help
Logical Physical
PC0
Physical Config Desktop Programming Attributes
Web Browser
URL http://10.0.0.2/image.html
Go Stop
Images
Back
Top
Fa0/1 Switch-PT Switch0 Fa1/1
Fa0
Fa0
PC-PT PC0
Server-PT Server0
10.0.0.1
10.0.0.2
Time: 00:36:48
Automatically Choose Connection Type
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit

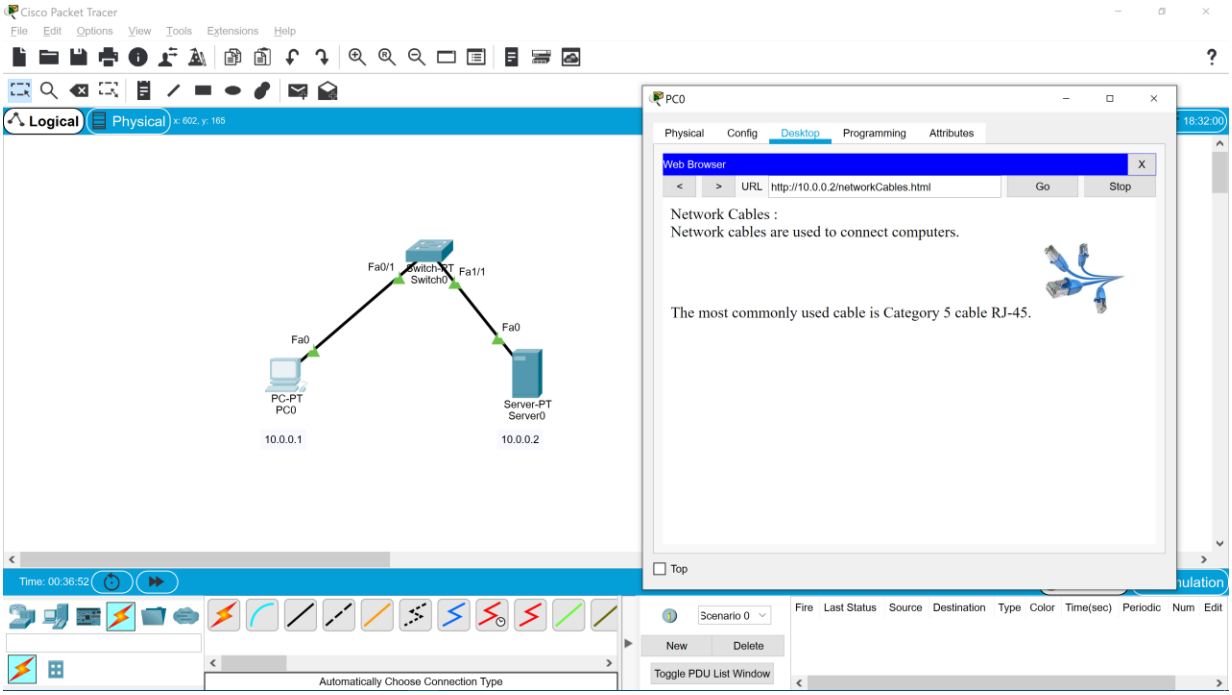
Cisco Packet Tracer
File Edit Options View Tools Extensions Help
Logical Physical
PC0
Physical Config Desktop Programming Attributes
Web Browser
URL http://10.0.0.2/networkCables.html
Go Stop
Network Cables :
Network cables are used to connect computers.
The most commonly used cable is Category 5 cable RJ-45.
Top
Fa0/1 Switch-PT Switch0 Fa1/1
Fa0
Fa0
PC-PT PC0
Server-PT Server0
10.0.0.1
10.0.0.2
Time: 00:36:52
Automatically Choose Connection Type
Scenario 0
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit