



STAINLESS STEEL ELECTRIC STORAGE



THE STAINLESS STEEL ADVANTAGE

The stainless steel cylinder in Rheem Stainless Steel Electric models delivers outstanding purity, durability and superior energy efficiency. Designed to resist corrosion for longer than conventional vitreous enamel cylinders, it also eliminates the need for a sacrificial anode, helping to reduce lifetime service costs and potentially save money over the long term.



FEATURES

- **Available in 50L - 315L sizes** – to suit most Australian families
- **50L model** - features dual handed connections & a high temperature 80°C thermostat for even more hot water
- **Up to 24% better than MEPS²** – reduces energy use, saving you money
- **Stainless steel cylinder and water fittings** – resist corrosion for longer, extending product life
- **Up to 42% lighter³** – for easier handling and installation
- **No anode** – saves on maintenance and service costs
- **Mains pressure at multiple taps** – to service multiple hot water demands at once
- **Twin element models also available** -
- 12 year cylinder warranty¹
- Manufactured in Australia

UP TO 24% BETTER THAN MEPS²

Minimum Energy Performance Standards (MEPS) are a regulated requirement that electric water heaters sold in Australia must meet. Rheem Stainless Steel electric models perform up to 24% better than MEPS, making them amongst the most efficient range on the market today.

COMES ON STEADY, HOT AND STRONG

INSTALL A







STAINLESS STEEL ELECTRIC STORAGE

STAINLESS STEEL SUITABILITY



Rheem Stainless Steel water heaters are not recommended for installation in some areas. Refer to the Rheem website www.rheem.com.au for details of areas not recommended and for which product is not covered by warranty.

Stainless Steel 80L - 315L

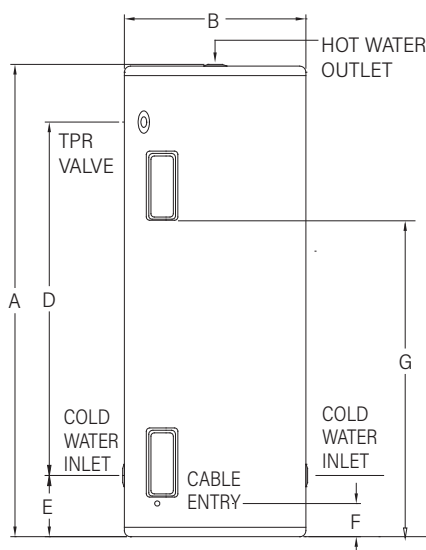

ELECTRIC STAINLESS STEEL STORAGE							
SPECIFICATIONS		50 LITRE	80 LITRE	125 LITRE	160 LITRE	250 LITRE	315 LITRE
SINGLE ELEMENT	Model	4A1050	4A1080	4A1125	4A1160	4A1250	4A1315
TWIN ELEMENT	Model					4A2250	4A2315
Hot Water Delivery	Litres	50	80	125	160	250	315
Storage Capacity	Litres	53	83	135	165	270	324
Twin Element boost	Litres		-	-	-	52	62
Voltage (single phase)		240Vac	240Vac	240Vac	240Vac	240Vac	240Vac
Maximum Supply Pressure							
– with (ECV)		960 kPa	960 kPa	960 kPa	960 kPa	680 kPa	680 kPa
– without (ECV)		1120 kPa	1120 kPa	1120 kPa	1120 kPa	800 kPa	800 kPa
Temperature & Pressure Relief Valve (TPR)		1400 kPa	1400 kPa	1400 kPa	1400 kPa	1000 kPa	1000 kPa
ECV setting		1200 kPa	1200 kPa	1200 kPa	1200 kPa	850 kPa	850 kPa
Thermostat setting (Maximum)		80°C	75°C	75°C	75°C	75°C	75°C
Hot & Cold Water connection		Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾
Warranty (Cylinder) ¹		12 years	12 years	12 years	12 years	12 years	12 years
Protection rating		IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Better than MEPS by: Single Element		4.8%	24%	17%	12%	19%	17%
Better than MEPS by: Twin Element		-	-	-	-	22%	18%
Weight (empty)	kg	17	25	30	40	45	55
Dimensions							
	A	695	885	1295	1615	1440	1760
	B	400	495	495	495	625	625
	C	432	500	500	500	630	630
	D	385	510	920	1240	1000	1320
	E	145	185	185	185	220	220
	F	93	105	105	105	145	145
	G	-	-	-	-	939	1207
	H	30	25	25	25	30	30
	J	60	55	55	55	60	60
	M	60	125	125	125	120	120

Stainless Steel 50L

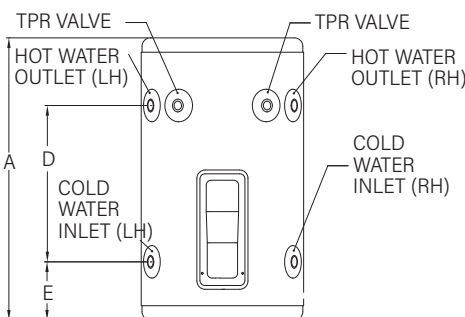

Technical data is subject to change.

50L models have left and right hand (dual handed - DH) cold water connections, hot water connections, and T&PR valve fittings.

80L-315L models have left and right hand (dual handed - DH) cold water connections, a hot water connection at the top of the water heater and a T&PR valve fitting on the left hand side.

Note: Allow additional top clearance for the hot outlet fittings and pipe work.

1. Rheem Stainless Steel Warranty: 12 Year parts on cylinder, 3 years parts and labour on cylinder, 1 year parts and labour on all other components, when installed in a domestic dwelling. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view it at www.rheem.com.au/warranty. 2. Performance varies by model. Refer to the Specification table for individual model performance. 3. Up to 42% lighter than comparable Rheem vitreous enamel water heater models of the same capacity. 4. Materials and data are subject to change without notice. ©Registered Trademark of Rheem Australia Pty Ltd.

Rheem Australia Pty Ltd.
1 Alan Street, Rydalmere, New South Wales 2116, Australia
PO Box 7508, Silverwater, New South Wales 2128, Australia

COMES ON STEADY, HOT AND STRONG

INSTALL A

