



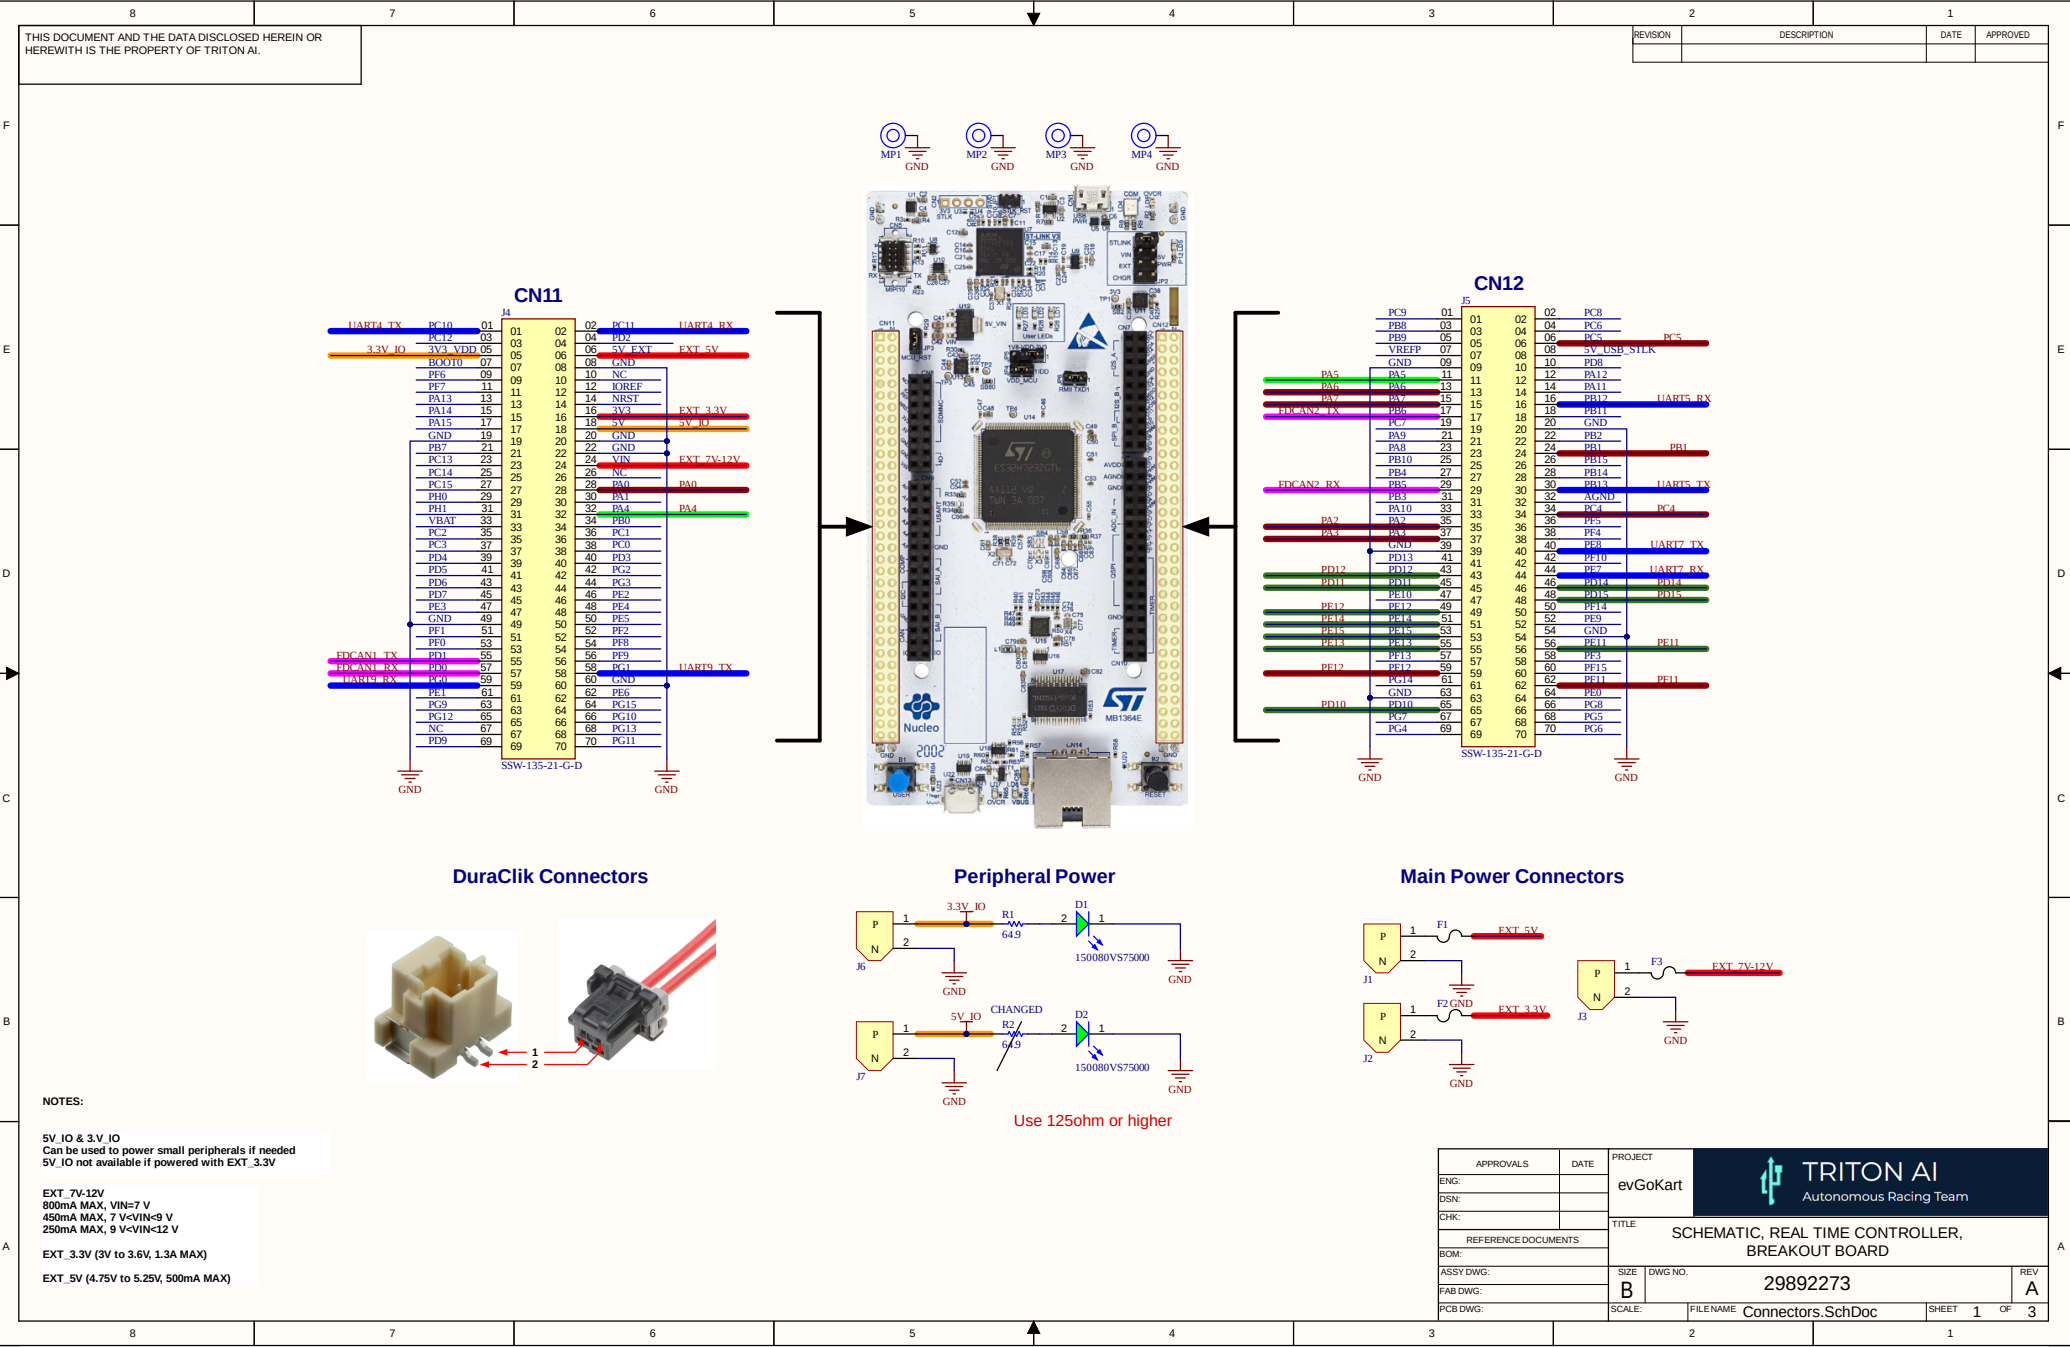

DuraClik Connectors

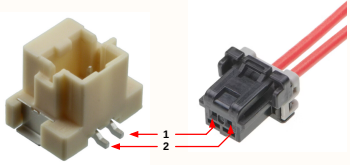

Peripheral Power

P

1

3.3V_IO

R1

64.9

D1

1

150080V575000

GND

N

2

GND

P

1

5V_IO

R2

64.9

D2

1

150080V575000

GND

N

2

GND

CHANGED

64.9

Use 125ohm or higher

Main Power Connectors

P

1

F1

EXT_5V

GND

N

2

GND

P

1

F2

EXT_3.3V

GND

N

2

GND

P

1

F3

EXT_7V-12V

GND

N

2

GND

NOTES:

5V_IO & 3.3V_IO
Can be used to power small peripherals if needed
5V_IO not available if powered with EXT_3.3V

EXT_7V-12V
800mA MAX, VIN=7 V
450mA MAX, 7 V<VIN<9 V
250mA MAX, 9 V<VIN<12 V

EXT_3.3V (3V to 3.6V, 1.3A MAX)

EXT_5V (4.75V to 5.25V, 500mA MAX)

APPROVALS

DATE

PROJECT

evGoKart

TRITON AI

Autonomous Racing Team

REFERENCE DOCUMENTS

TITLE

SCHEMATIC, REAL TIME CONTROLLER, BREAKOUT BOARD

ASSY DWG:

SIZE

DWG NO.

29892273

REV

A

FAB DWG:

SCALE:

FILENAME

Connectors.SchDoc


SHEET

1

OF

3

PCB DWG:

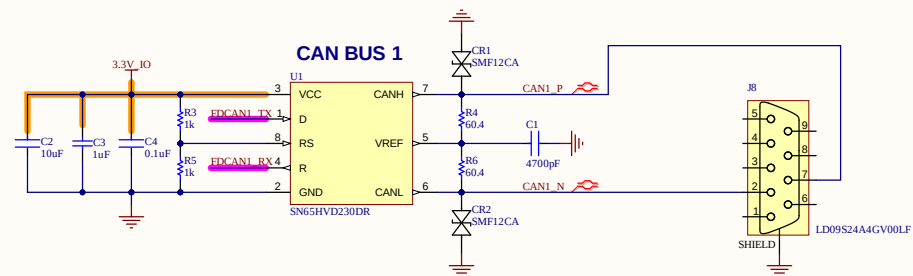

DNI R3 and R7

