# METALOR®

# Ag

## Data Sheet

| Alloy code: | 10026 | Colour: | White |
|---|---|---|---|
| General Description: | 92,5% Silver alloy, for universal use. It can easily be cupped, stamped, rolled, polished, drawn and machined. | | |

**Other properties:**




| | | |
|---|---|---|
| Density - g/cm³: | 10,40 | |
| Melting range: | 800 - 900 °C | |
| Composition: | AG: 92,50% | |
| Pickling: | Hot 10% sulphuric acid | |
| Hardness - HV5: | 75-85 | *Annealed* |

**Casting data:**




| | | |
|---|---|---|
| Flask Temp. | ≈ 600 °C | |
| Casting Temp. | 1000 - 1100 °C | |
| Cooling: | Air cooling | |
| Hardness - HV5: | 75-85 | *Post cast* |

**Recommended Solder:**



| Description: | Melting range: | Material code |
|---|---|---|
| Silver Solder EXTRA EASY | 667°C-709°C | 300018235 |
| Silver Solder EASY | 705°C-723°C | 300018236 |
| Silver Solder MEDIUM | 720°C-765°C | 300018237 |
| Silver Solder HARD | 745°C-778°C | 300018238 |
| Silver Solder ENAMELING QUALITY | 730°C-800°C | 300018234 |

**Available profiles:**

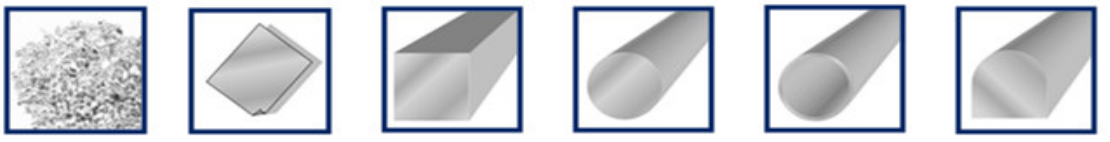


Disclaimer; Although we try to assure accuracy, Metalor cannot be responsible for typographical error on our data sheets.
Images & drawings are for illustrative purposes only and may not necessarily portray actual items sold.

Metalor Technologies (UK) Ltd - 74, Warstone Lane - GB-Birmingham B18 6NG
Phone: +44(0)121 262 3090 - Fax: +44(0)121 236 3568 - Email: watch.uk@metalor.com