



MAX. ECCENTRICITY FOR ALL DIA.'S EXCEPT O.D. 1/32"
 BORE TO BE SMOOTH FINISH FREE FROM RETRACK MARKS
 ALL VERTICAL & HORIZONTAL SURFACES TO BE RESPECTIVELY PARALLEL $\pm 1/4^\circ$
 MACHINE ALL OVER 250-500 R_a EXCEPT AS NOTED
 FINISH MACHINE R.F. 125-250 R_a



STAMP:  (MAT'L) : 300 : 26 (HEAT NO.) : (MM/YY)
 T-L DWG. MSS-300

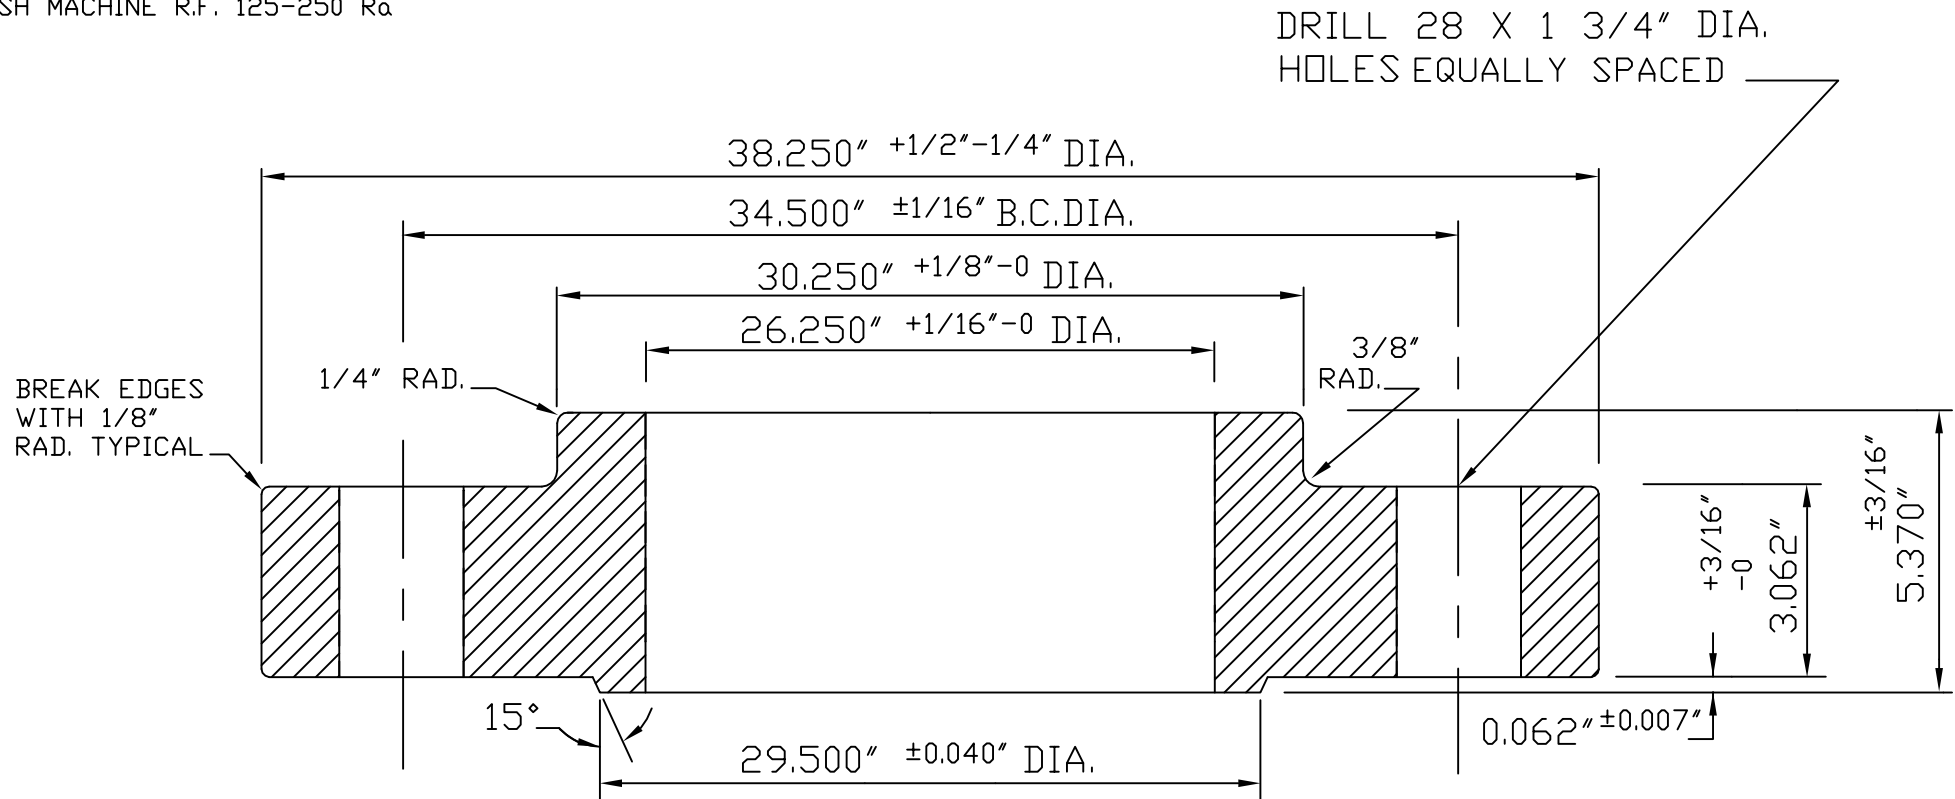

Tri-Lad Flange and Fittings Inc.
 Paris, Ontario

26 300 SD RF (INDUSTRY STANDARD)
 FACING & DRILLING PER MSS
 & B16.47 SERIES A

SCALE NTS
 DATE 8-30-2000
 DR Les Mansfield
 CK D LM

DRAWING NO.
 A-20975