TECHNICAL SPECIFICATION

Product name	Enclosure Cooling Unit (Cabinet Air Conditioner)
Model	**ECU-1200T-03R**
Date of issue	2025/06/16
Document No.	TY-JS-250616-008
Manufacturer	Guangzhou Teyu Electromechanical Co., Ltd. (S&A)

The contents of this specification are for reference only. Guangzhou Teyu Electromechanical Co., Ltd. reserves the right of final interpretation and the right to change the contents without prior notice.

1. Model Designation

```
ECU - 1200 - T - 03 - R
  |      |    |    |   └─ Function type: R – Standard; H – High-temperature;
  |      |    |    |                      EH – With electric heater; NCW – Condensate-free
  |      |    |    └────── Structure & mounting: 01 – Indoor type, internal side mounting;
  |      |    |                                  02 – Outdoor type, internal side mounting;
  |      |    |                                  03 – Indoor type, external side mounting
  |      |    └─────────── Power supply: A – 1-ph 220 V/50 Hz; B – 1-ph 220 V/60 Hz;
  |      |                               T – 1-ph 220 V/50/60 Hz
  |      └──────────────── Cooling capacity (W)
  └─────────────────────── Machine type: Enclosure Cooling Unit
```

Note: This designation covers only the main product codes of the company and is not exhaustive. Please confirm the exact model with the company before ordering; the company reserves the right of final interpretation.

2. Technical Data

2.1 Technical Parameters


Item	Unit	ECU-1200T-03R
Power supply	–	AC 1-phase 220 V, 50/60 Hz
Ambient temperature range	°C	−5 ~ 50
Cabinet temperature setting range	°C	25 ~ 38 (factory setting 30 °C)
Rated cooling capacity (50/60 Hz)	W	1200 / 1440
Rated power input (50/60 Hz)	W	680 / 760
Rated current (50/60 Hz)	A	3.0 / 3.6
Refrigerant	–	R-134a
Refrigerant charge	g	300
Noise level	dB	≤ 63
Airflow – internal circuit	m³/h	300
Airflow – external circuit	m³/h	500
Power connection	–	Reserved wiring terminals
Power cord length	m	2
Net weight	kg	28
Gross weight	kg	29
Overall dimensions (L × W × H)	mm	360 × 185 × 745
Package dimensions (L × W × H)	mm	430 × 255 × 820

Notes:
1. Cooling capacity is measured at ambient dry-bulb temperature 35 °C and cabinet internal dry-bulb temperature 35 °C (L35/L35).
2. For special operating conditions, please contact the company.

2.2 Main Components List

No.	Component	Model	Brand
1	Compressor	39F123N	Rechi (瑞智)
2	Evaporator	ZF-200×100	S&A
3	Condenser	LN-240×200	S&A
4	Evaporator fan	FLH175/042A	Xiangming (祥明)
	Condenser fan	FLH190/045D	Xiangming (祥明)
5	Controller	STC-8000H	Elitech (精创)


3. Refrigeration Schematic

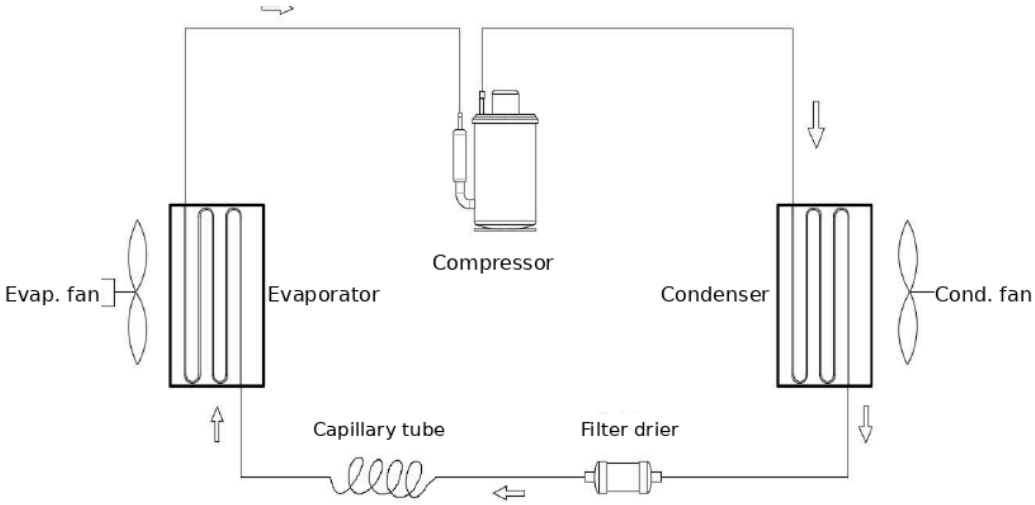

Compressor → Condenser → Filter drier → Capillary tube → Evaporator → Compressor


4. Electrical Control

4.1 Electrical Schematic

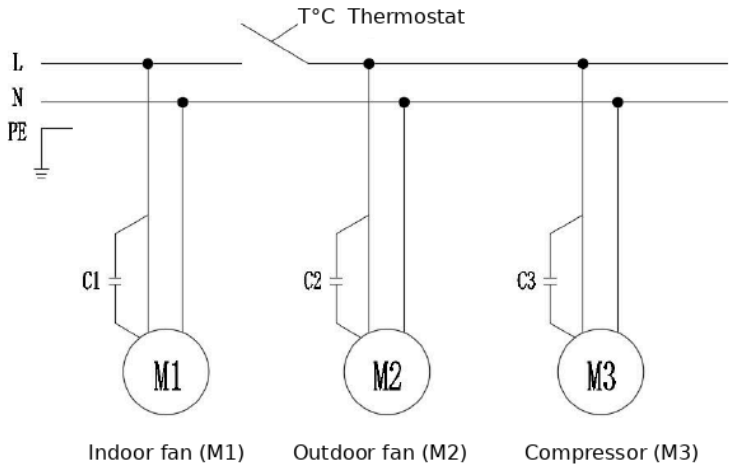

L / N / PE supply; thermostat T°C switches the line. C1–C3: motor run capacitors.


4.2 Wiring Diagram (Controller STC-8000H)

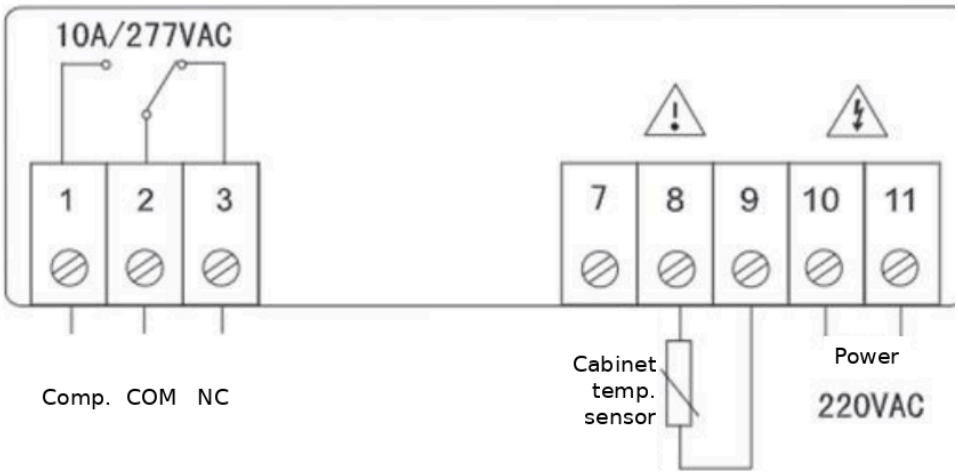

Terminal	Function
1	Compressor (output)
2	Common (COM)
3	Normally closed (NC) contact
8 – 9	Cabinet temperature sensor
10 – 11	Power supply 220 VAC

Relay contact rating: 10 A / 277 VAC.


4.3 Electrical Cabinet Panel Cut-out Dimensions (mm)

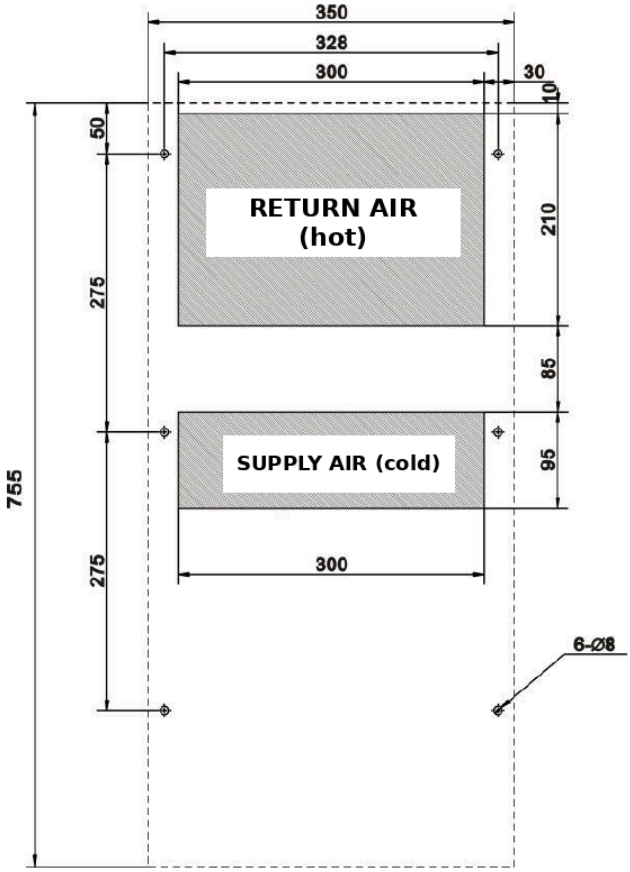

Panel cut-out drawing (dimensions in mm)

Item	Dimension
Mounting outline (W × H)	350 × 755
Return air opening (hot, upper)	300 × 210
Supply air opening (cold, lower)	300 × 95
Gap between openings	85
Fixing bolt holes	6 × Ø8
Bolt spacing – horizontal	328
Bolt spacing – vertical	275 + 275

5. Outline Drawing

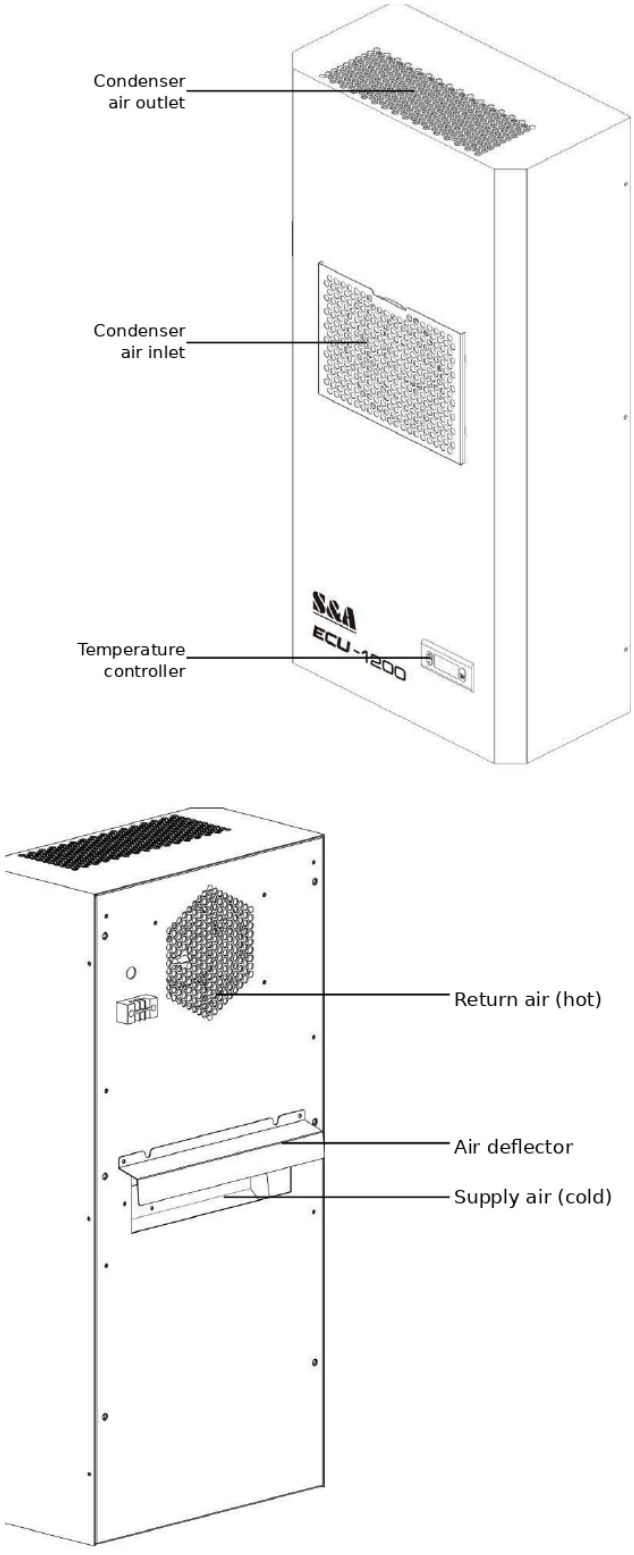

Top: front (outside) view · Bottom: rear (cabinet-side) view

Translated from the Chinese original (TY-JS-250616-008). In case of discrepancy, the Chinese original prevails.