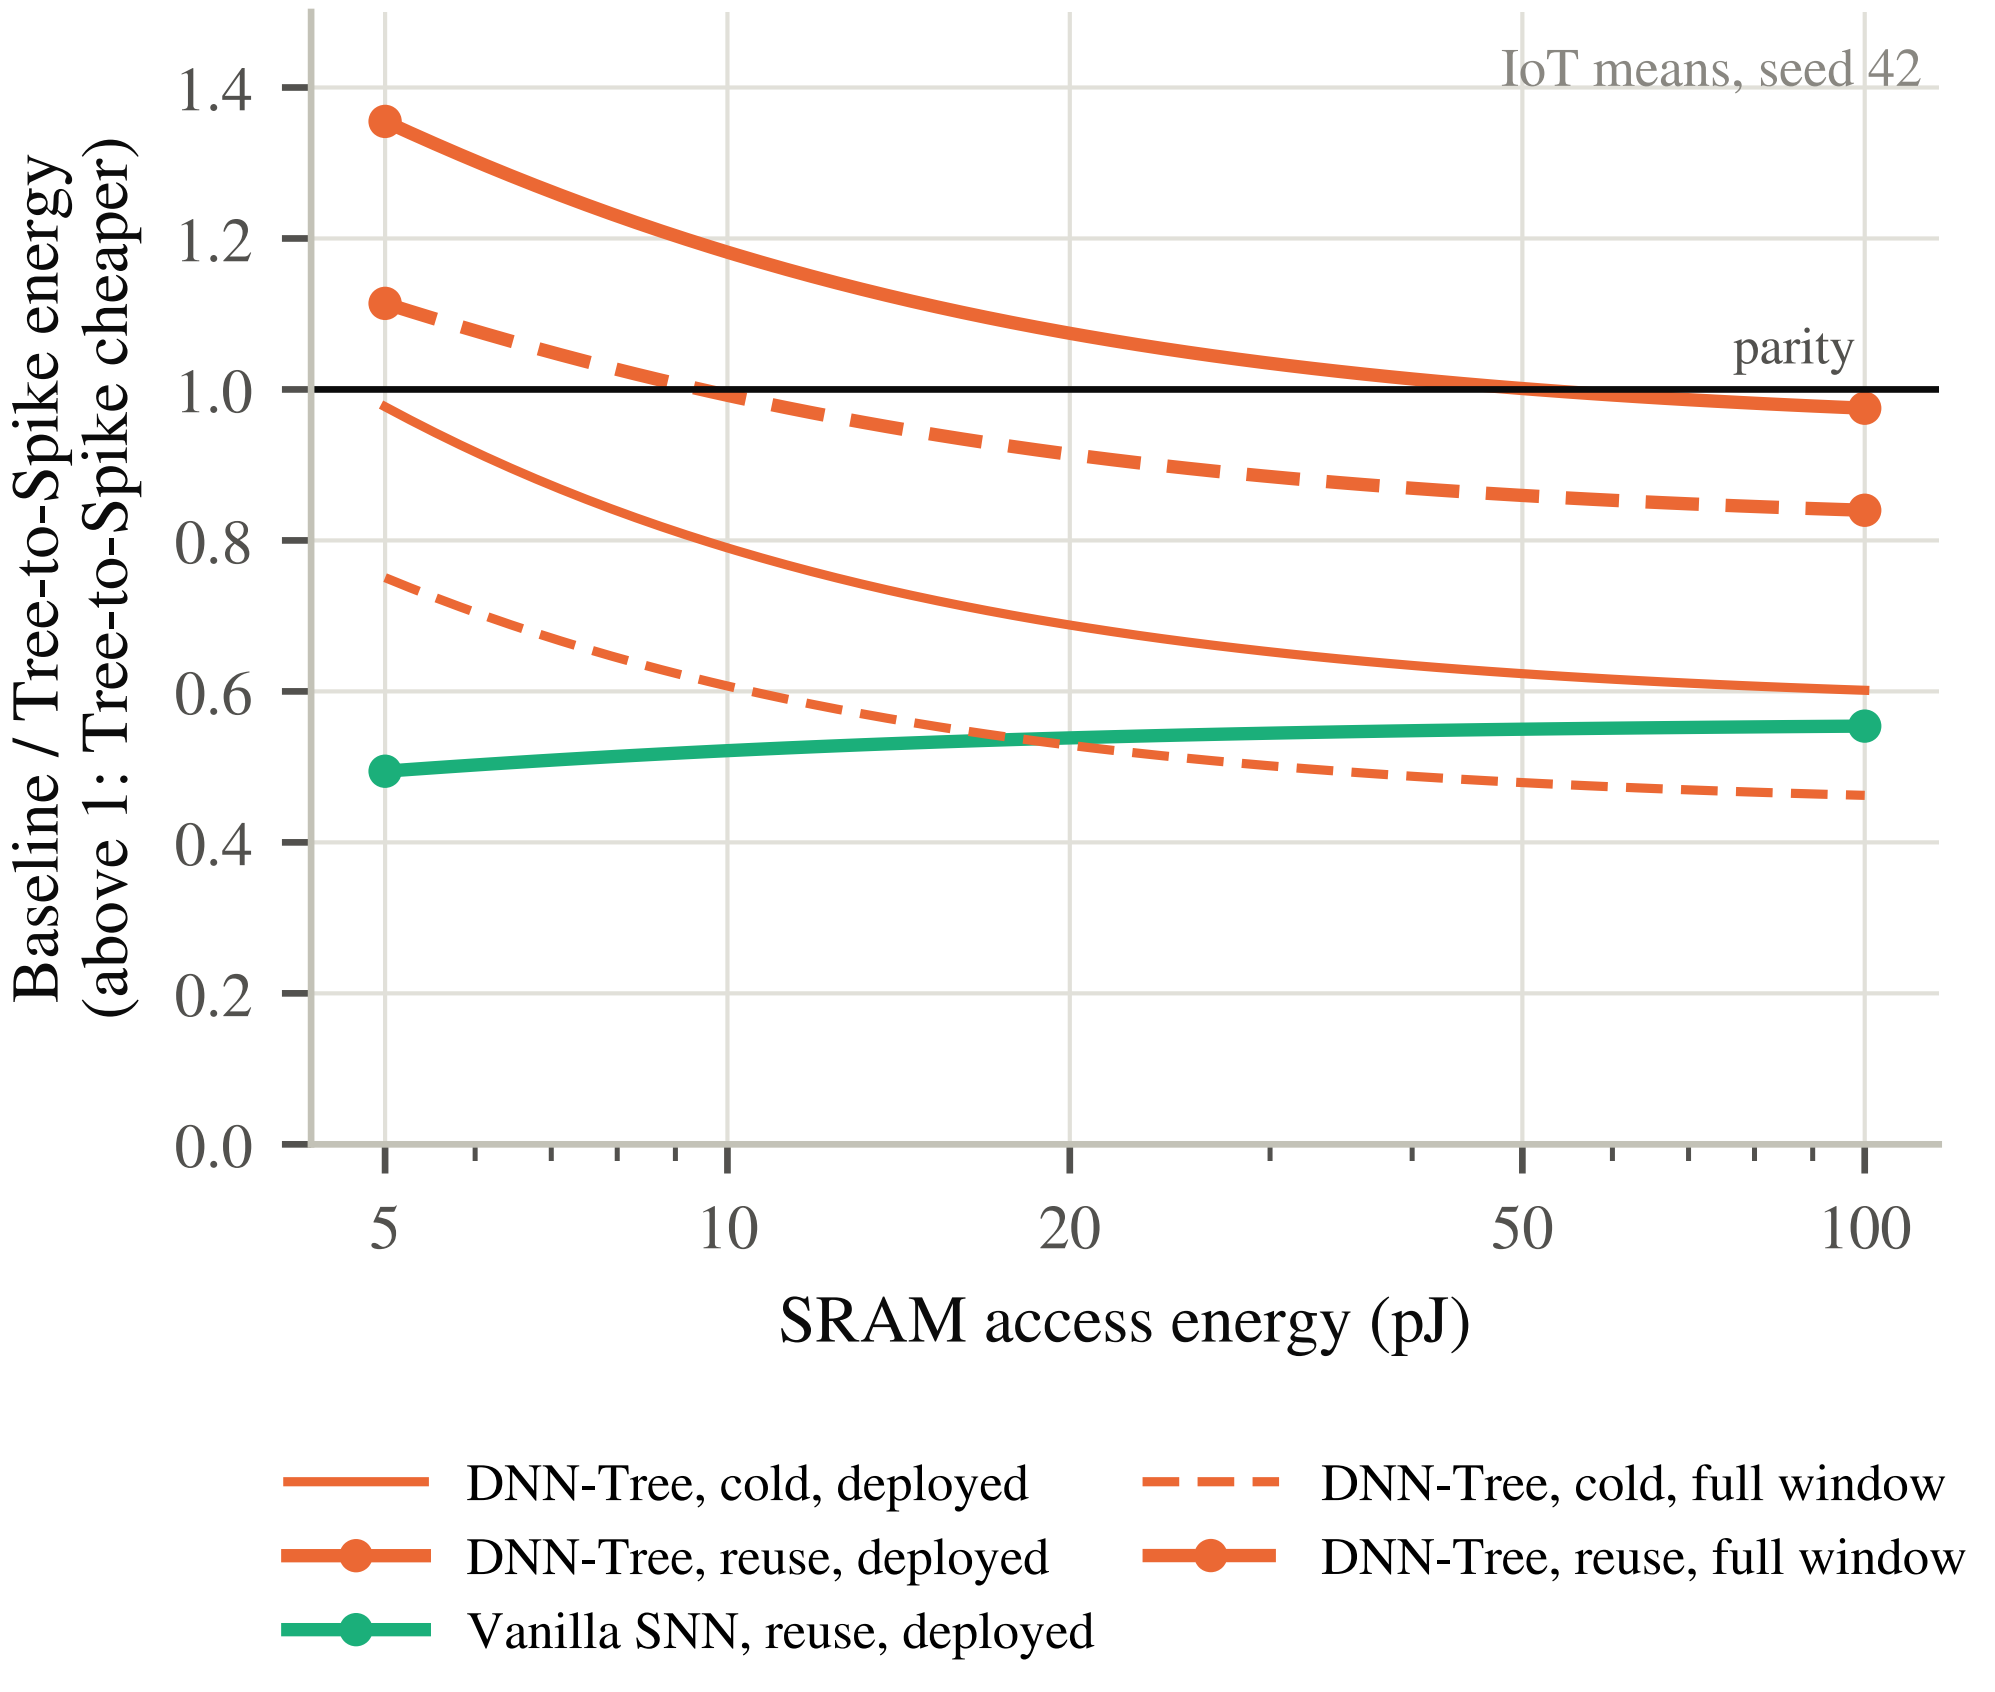
IoT means, seed 42
parity
Baseline / Tree-to-Spike energy
(above 1: Tree-to-Spike cheaper)
1.4
1.2
1.0
0.8
0.6
0.4
0.2
0.0
5
10
20
50
100
SRAM access energy (pJ)
DNN-Tree, cold, deployed
DNN-Tree, reuse, deployed
Vanilla SNN, reuse, deployed
DNN-Tree, cold, full window
DNN-Tree, reuse, full window