

Modern Myoelectric Intelligent Hand Prostheses

Tobias Stocker (Advisor: Pascal Weiner)

Seminar: Humanoid Robotics, WS 2017/18

Institute for Anthropomatics and Robotics (IAR), High Performance Humanoid Technologies (H²T)



Outline

- Motivation and Challenges
- Overview of Hand Prostheses
- Comparison of Hand Prostheses
- Conclusion

Motivation

■ Why myoelectric hand prostheses?

- Make a normal life possible for amputees
- Enable users to perform different grasps for activities of daily living (ADLs)
- Allow the user to control the hand through muscle contraction (with EMG)
- Electric actuators are rather small, quiet and have good precision and controllability



(a)



(b)



(c)



(d)



(e)

Motivation

- Desired properties:
 - comfortable (lightweight, small)
 - many different grasps possible
 - High finger forces / fast joint speed
 - easy to use
 - high durability (robust, easy to repair)
 - low-cost
 - intelligent functions (sensor-feedback, grasp adaption)

- Desired properties are contradicting \Rightarrow trade-offs are mandatory

Challenges


- „Even state-of-the art devices lack a combination of high functionality, durability, adequate cosmetic appearance, and affordability“
 - Joseph T. Belter, 2013
- Total weight should be below 500g (human hand: $\sim 400g$)
 - \Rightarrow lightweight materials, small and low number of actuators
 - \Rightarrow transmission systems that allow for many different grasps
- Finger tip force in precision grasp should be 65 N (human hand: ~ 95 N)
and joint speed should be $230^\circ/s$ (human hand: $> 2000^\circ/s$)
- Finger kinematic designs should be simple and robust
- User should be able to move the hand without concentrating
- User should get sensor feedback from the hand

Outline

- Motivation and Challenges
- Overview of Hand Prostheses
- Comparison of Hand Prostheses
- Conclusion

Year	Mass (g)	Joints	Actuators	Transmission
2015	350	11	6	Tendons

- Special feature:
 - Matches performance of other myoelectric prosthetic hands, while being very cheap (\$ 250)
 - Easy to manufacture with 3D-printer and of-the shelf parts
 - Open-source

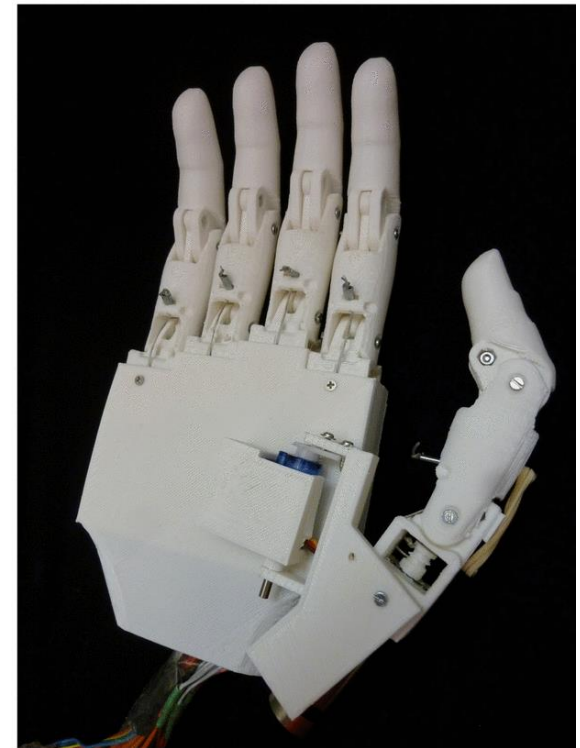

Hand of Bennett et al.

Year	Mass (g)	Joints	Actuators	Transmission
2015	546	12	4	Tendons


- Special feature:
 - Four motor units in unique configuration:
 - 2 for thumb and 1 for index (fully actuated)
 - 1 for other fingers (underactuated)
 - Embedded control system that enables self-contained control of hand movement



Hand of Zhang et al.

Year	Mass (g)	Joints	Actuators	Transmission
2015	420	15	5	Linkage


- Special feature:
 - Fingers are equipped with numerous torque and position sensors
 - Integrated motion control system consisting of a motion control subsystem and several sensory subsystems
 - New concept for sensory feedback system based on an electrical stimulator

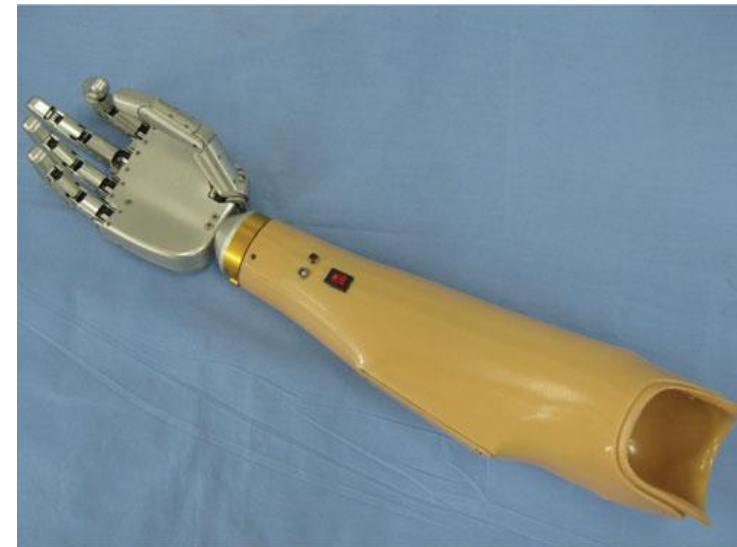

SSSA-MyHand

Year	Mass (g)	Joints	Actuators	Transmission
2016	478	10	3	Four-bar Geneva drive


- Special feature:
 - Only three actuators
 - Abduction/adduction of the thumb and flexion/extension of the index with single actuator via Geneva drive
 - Embedded controller and sensory system with force/position sensors and automatic grasp control

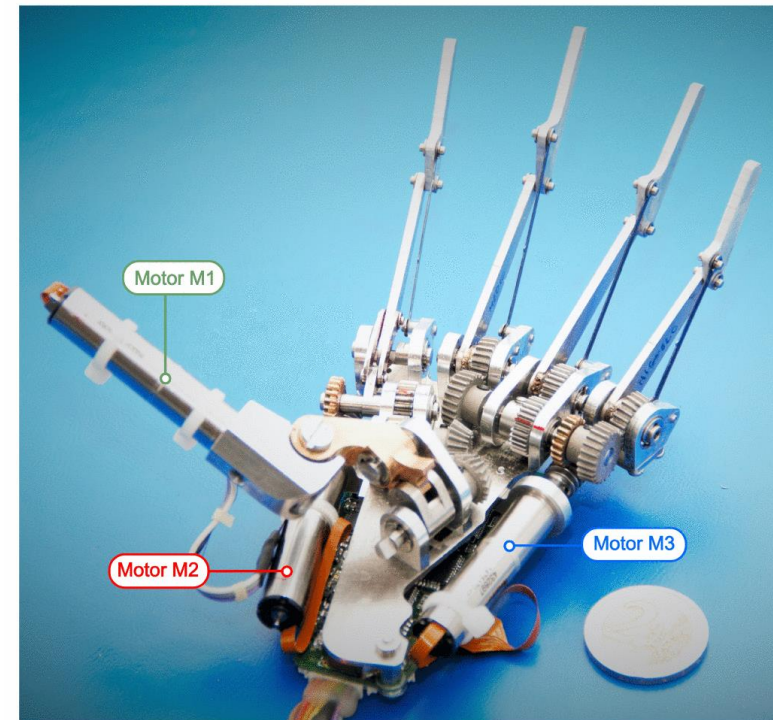

AstoHand v.1


Year	Mass (g)	Joints	Actuators	Transmission
2016	261	10	5	Tendon-spring

- Special feature:
 - Low-cost
 - Very lightweight
 - Built with 3D-printed material
(easy to manufacture and maintain)

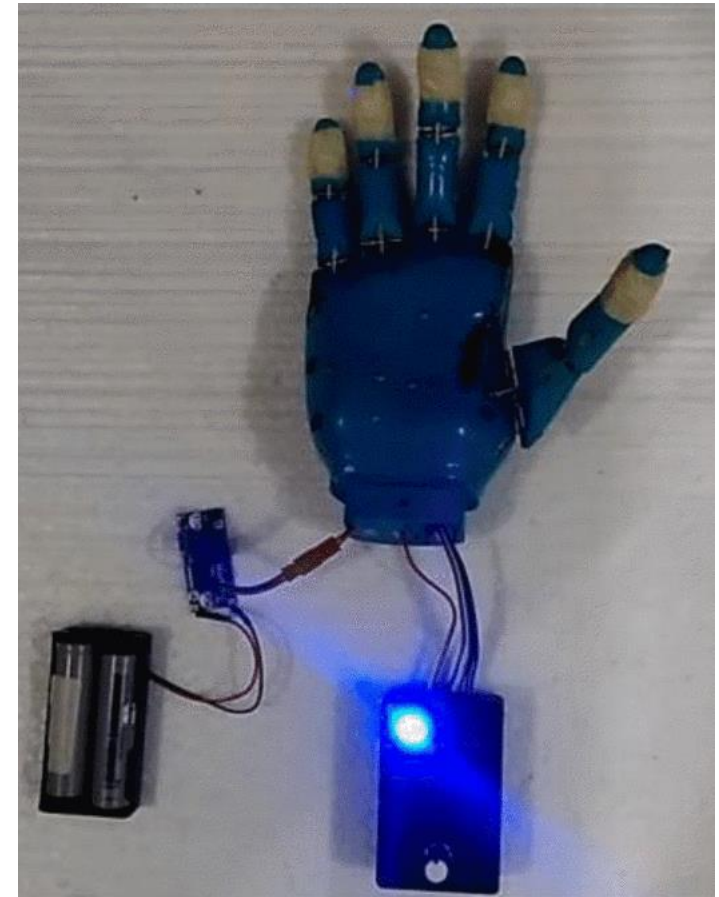

Year	Mass (g)	Joints	Actuators	Transmission
2016	-	16	4	Tendons


- Special feature:
 - Anthropomorphic grasping ability via special motion distribution mechanism structure
 - Can replicate almost all natural movement of the human hand while using few actuators

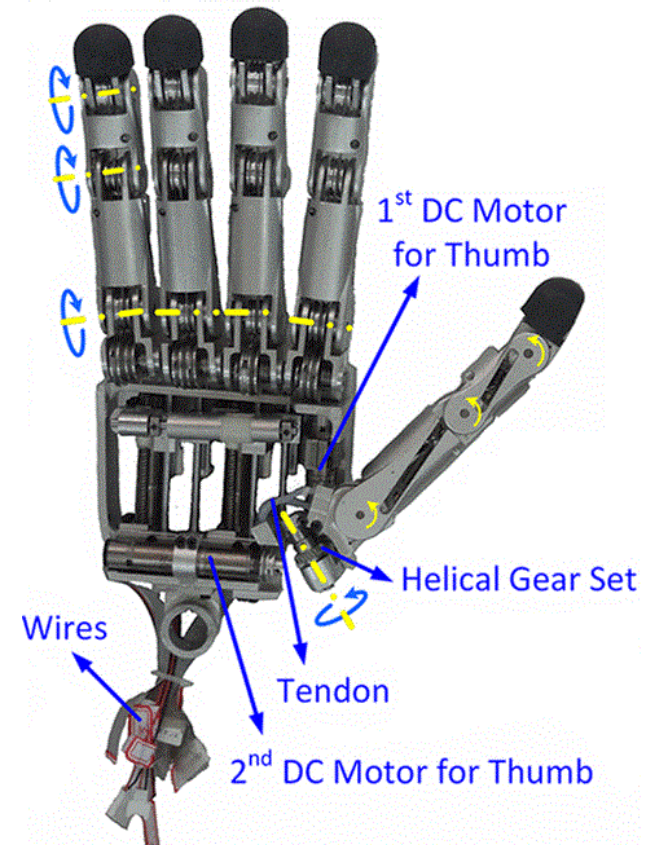

Six-DOF-Hand

Year	Mass (g)	Joints	Actuators	Transmission
2016	584	10	6	Gears/Belts


- Special feature:
 - Inexpensive
 - Open source
 - Independent finger movements
 - Actuators with encoders for motor position feedback

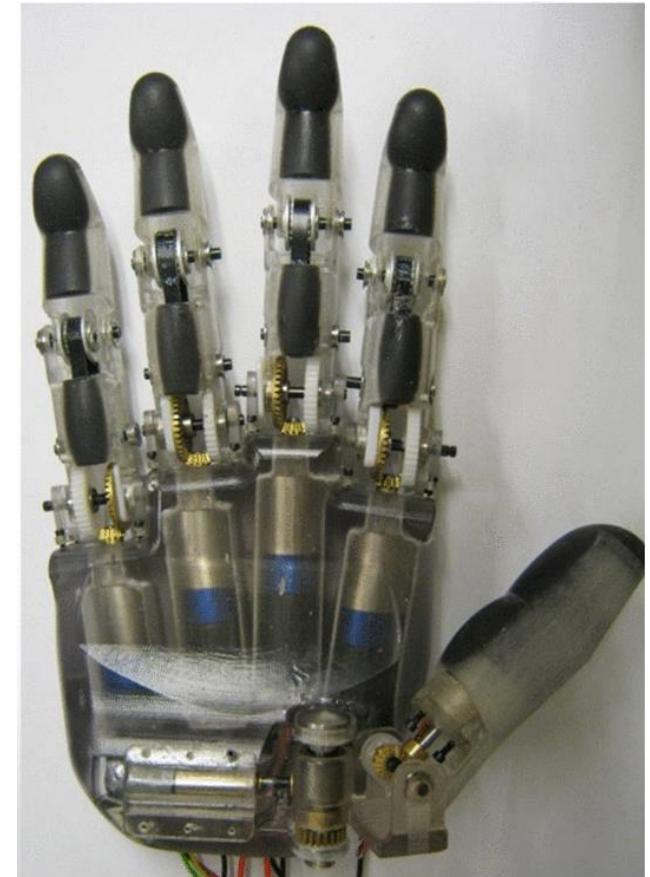

Bionic Hand

Year	Mass (g)	Joints	Actuators	Transmission
2016	-	19	13	Tendons

- Special feature:
 - Hybrid actuated with Brushless DC motors and Shape Memory Alloy (SMA)
 - Close replication of the human hand (with all structures, joints and tendons)
 - 24 degrees of freedom

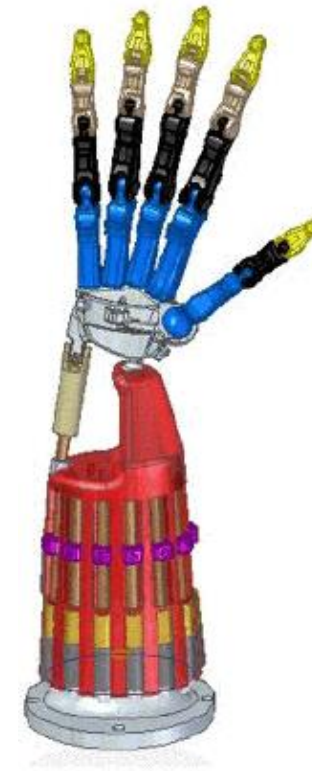

SoftHand Pro-D

Year	Mass (g)	Joints	Actuators	Transmission
2016	-	19	1	Tendons

- Special feature:
 - Strongly underactuated softhand
 - 19 joints with only one single actuator
 - Can move along two different synergistic directions to perform either precision or power grasp
 - Decoding of movement intentions using the dynamic frequency content



Year	Mass (g)	Joints	Actuators	Transmission
2017	432	10	6	Four-bar

- Special feature:
 - Simple serial communication interface to link with high-level control methods
 - The implemented low-level controller can handle individual finger position commands or hand grip pattern commands





MORA Hap-2

Year	Mass (g)	Joints	Actuators	Transmission
2017	250	14	4	Four-bar

Special feature:

- Self-adaption ability
- Finger mechanism is capable of generating passively different flexion/extension angles
- Fingers have under-actuation mechanism

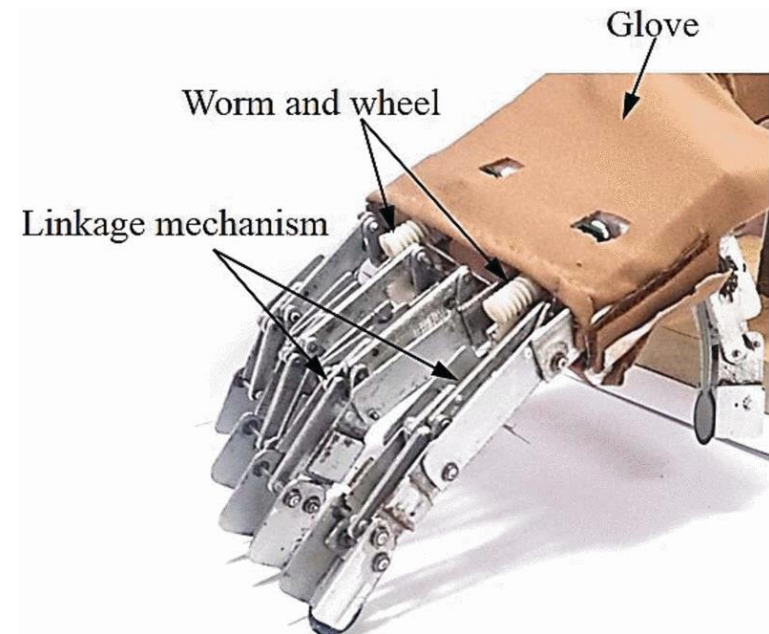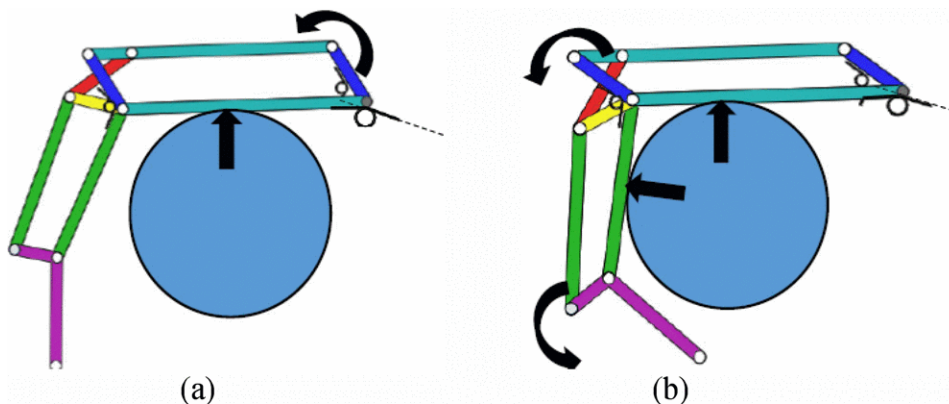

Outline

- Motivation and Challenges
- Overview of Hand Prostheses
- Comparison of Hand Prostheses
- Conclusion

Physical properties

Outline

- Motivation and Challenges
- Overview of Hand Prostheses
- Comparison of Hand Prostheses
- Conclusion

Conclusion

- Most research groups focused mainly on one important feature in their hand design
- The main goal was to develop preferably low-cost prostheses
- Only a few tried to incorporate intelligent functions