


MATHEMATICS FOR PHYSICS

Analytical Foundations and Scientific Simulations

A Modern Academic Course for Scientists and Engineers

- Coordinate Systems
- Vector Calculus
- Infinite Series
- Complex Analysis
- Matrix Algebra
- Differential Equations
- Numerical Python Models

Featuring Crisp Vector Graphics and P-S-C-T Problem Solving Framework

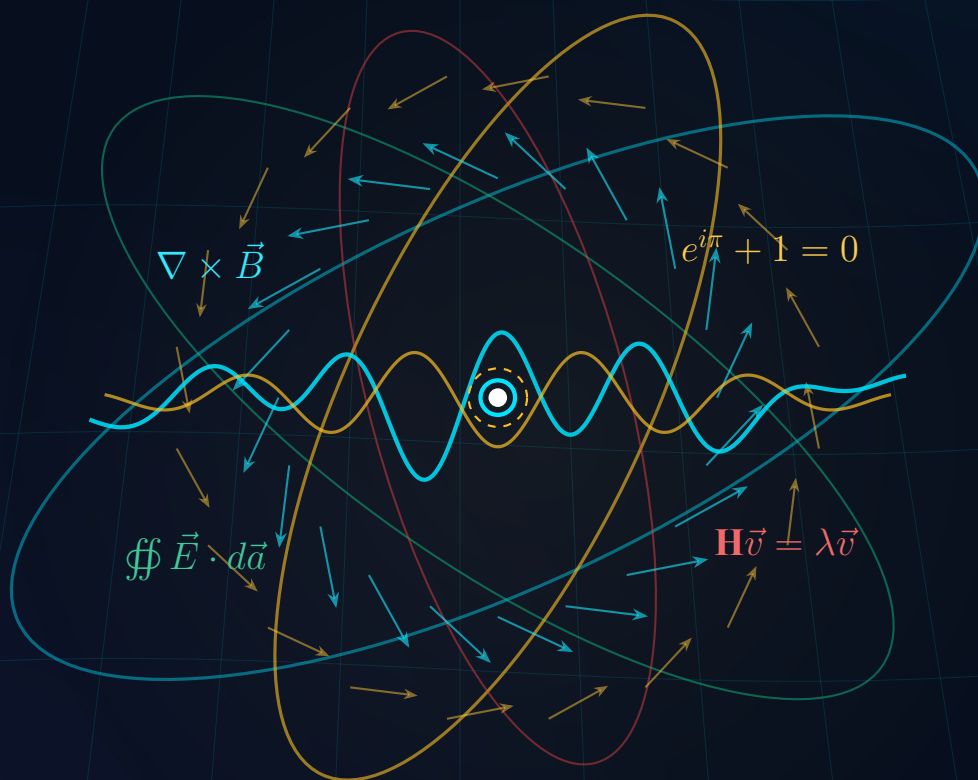

Chewa Thassana, Ph.D.

Assistant Professor of Physics

Department of Physics, Faculty of Science and Technology

Rambhai Barni Rajabhat University

MATHEMATICS FOR PHYSICS

Analytical Foundations and Scientific Simulations

A Modern Pedagogical Textbook for Undergraduate and Graduate Physics

Asst. Prof. Dr. Chewa Thassana

B.Sc. (Physics), M.Sc. (Physics), Ph.D. (Physics)



Preface

Mathematics serves as the quintessential language of physics. From classical Newtonian trajectories to general relativity and quantum field theories, physical laws achieve precision, predictive power, and beauty through mathematical formulation.

This textbook, **Mathematics for Physics**, is designed specifically for undergraduate and beginning graduate students in physics, applied physics, and related engineering disciplines. The core mission of this book is to bridge the gap between abstract mathematical formalism and concrete physical intuition. Rather than treating mathematical theorems in isolation, every technique introduced herein is directly motivated by real-world physical systems—including electromagnetic field distributions, planetary motion, oscillating circuits, and quantum state evolutions.

Pedagogical Framework: The Active Learning Cycle

To maximize conceptual retention and analytical proficiency, each chapter integrates a structured four-stage pedagogical cycle:

1. **Conceptual Motivation:** Clear physical context establishing why a specific mathematical tool is necessary.
2. **Rigorous Analytical Development:** Thorough derivations that maintain mathematical integrity without sacrificing accessibility.
3. **P-S-C-T Worked Examples:** Problem-solving modeled through four explicit steps:
 - **Picture (P):** Physical conceptualization, coordinate selection, and free-body/field sketches.
 - **Strategy (S):** Identifying applicable physical principles, conservation laws, or symmetry arguments.
 - **Calculation (C):** Step-by-step mathematical execution with dimensional verification.
 - **Think (T):** Physical interpretation of limiting cases, asymptotic behaviors, and practical implications.
4. **Numerical Integration & Python Modeling:** Modern scientific computing scripts using NumPy, SciPy, and Matplotlib to visualize complex dynamics and solve differential equations beyond closed-form limits.

How to Use This Book

Chapters 1 through 2 establish the geometric and differential foundations of curvilinear coordinates and vector calculus. Chapters 3 and 4 explore infinite series expansions and complex analysis, vital for optics and wave mechanics. Chapter 5 develops matrix mechanics and eigenvalue techniques. Chapters 6 and 7 provide a rigorous treatment of multivariable calculus and the fundamental integral transformation theorems of Gauss, Stokes, and Green. Finally, Chapters 8 and 9 focus on first- and second-order ordinary differential equations, emphasizing damped, driven, and resonant physical oscillators.

I express my deepest appreciation to my colleagues in the Department of Physics at Rambhai Barni Rajabhat University, whose scholarly feedback has greatly enriched this work, and to the dedicated physics students whose insightful questions continue to shape its evolution.

Asst. Prof. Dr. Chewa Thassana
Department of Physics, Faculty of Science and Technology
Rambhai Barni Rajabhat University (RBRU)
Chanthaburi, Thailand



Course Information

- **Course Code & Title:** PHYS2026 Mathematics for Physics
- **Credit Hours:** 3 Credits (3-0-6) [Lecture 3 hrs, Practical 0 hrs, Self-Study 6 hrs/week]
- **Curriculum:** Bachelor of Science in Physics, Core Major Requirement
- **Lead Instructor:** Asst. Prof. Dr. Chewa Thassana (chewa.t@rbru.ac.th)
- **Target Academic Level:** Year 2, Semester 1

Course Description

Advanced mathematical methods and computational techniques for physical applications. Topics include: curvilinear coordinate systems (Cartesian, cylindrical, spherical) and metric scale factors; vector analysis, gradient, divergence, curl, and conservative fields; Taylor and Maclaurin expansions, asymptotic approximations, and Fourier series; complex numbers, Euler's formula, phasors, and harmonic oscillations; matrix algebra, determinants, eigenvalues, eigenvectors, and diagonalization; multivariable differential calculus, tangent planes, directional derivatives, and Lagrange multipliers; multiple integrals, Jacobians, Gauss's Divergence theorem, and Stokes' theorem; analytical and numerical solutions of first-order and second-order ordinary differential equations with physical modeling in Python.

Course Learning Outcomes (CLOs) & Bloom's Taxonomy

Upon successful completion of this course, students will be able to:

1. **CLO 1 [Cognitive: Understanding / Remembering]:** Articulate foundational mathematical concepts and their direct correspondence to physical laws in classical mechanics, electromagnetism, and wave phenomena.

2. **CLO 2 [Cognitive: Applying / Analyzing]:** Formulate physical boundary-value problems in the most symmetrical curvilinear coordinate system and apply vector differential operators accurately.
3. **CLO 3 [Cognitive: Analyzing / Evaluating]:** Solve first- and second-order linear differential equations analytically, evaluating asymptotic behaviors, damping regimes, and resonance phenomena.
4. **CLO 4 [Practical / Skill: Creating / Computing]:** Implement scientific Python algorithms to compute numerical trajectories, evaluate matrix eigenvalues, and visualize multivariable vector fields.

Course Curriculum Map (9 Chapters)

Week	Chapter	Topic Overview	Target CLO
1–2	Chapter 1	Curvilinear Coordinate Systems & Scale Factors	CLO 1, 2
3–4	Chapter 2	Vector Analysis & Differential Field Operators	CLO 1, 2
5	Chapter 3	Infinite Series, Taylor Expansions & Approximations	CLO 1, 2
6–7	Chapter 4	Complex Analysis, Euler’s Formula & Phasors	CLO 1, 3
8–9	Chapter 5	Matrices, Eigenvalues & Coupled Oscillations	CLO 2, 4
10	Chapter 6	Multivariable Differential Calculus & Optimization	CLO 2, 3
11–12	Chapter 7	Multiple Integrals & Integral Theorems (Gauss/Stokes)	CLO 2, 3
13	Chapter 8	First-Order Ordinary Differential Equations	CLO 3, 4
14–15	Chapter 9	Second-Order ODEs, Damped Oscillations & Resonance	CLO 3, 4

Table 1: Instructional schedule and curriculum alignment with CLOs.

Evaluation and Grading Policy


- **Continuous Assessment (Formative): 60%**
 - Homework Problem Sets (Tiered Conceptual and Analytical): 25%
 - Active Learning Python Simulation Mini-Projects: 20%
 - Midterm Examination (Chapters 1–5): 15%
- **Comprehensive Final Examination (Summative): 40%**



Preface	i
Course Syllabus & Instructional Design	iii
List of Figures	viii
List of Tables	ix
1 Curvilinear Coordinate Systems & Scale Factors	1
1.1 Introduction and Cartesian Coordinate Foundations	1
1.2 Cylindrical Coordinate System	2
1.3 Spherical Coordinate System	3
1.4 Worked Examples and Physical Applications	4
1.5 Summary of Key Formulas	7
1.6 Chapter Exercises	7
2 Vector Analysis & Differential Field Operators	9
2.1 Vector Algebra and Triple Products	9
2.1.1 Triple Products and Geometric Interpretations	10
2.2 Differential Field Operators: Gradient, Divergence, and Curl	10
2.3 Conservative Vector Fields and Potential Theory	11
2.4 Worked Examples and Physical Applications	12
2.5 Summary of Key Formulas	15
2.6 Chapter Exercises	15
3 Infinite Series & Approximations	16
3.1 Introduction and Power Series Representation	16
3.2 Convergence Criteria and Radius of Convergence	17
3.3 Physical Applications: Asymptotic Expansions	18
3.3.1 Relativistic Kinetic Energy	18
3.4 Worked Examples and Physical Applications	18
3.5 Summary of Key Formulas	21
3.6 Chapter Exercises	21

4	Complex Analysis & Applications	22
4.1	Algebraic and Geometric Foundations of Complex Numbers	22
4.1.1	De Moivre's Theorem and Roots of Unity	23
4.2	Physical Applications: Phasors and AC Impedance	23
4.3	Worked Examples and Physical Applications	24
4.4	Summary of Key Formulas	26
4.5	Chapter Exercises	27
5	Linear Algebra & Matrix Mechanics	28
5.1	Matrix Operations and Special Classes of Matrices	28
5.2	The Eigenvalue Problem and Diagonalization	29
5.3	Physical Applications: Coupled Oscillators and Normal Modes	30
5.4	Worked Examples and Physical Applications	30
5.5	Summary of Key Formulas	32
5.6	Chapter Exercises	33
6	Multivariable Differential Calculus	34
6.1	Partial Derivatives and Clairaut's Symmetry Theorem	34
6.2	Total Differentials and Thermodynamic State Functions	35
6.3	Directional Derivatives and Tangent Planes	35
6.4	Constrained Optimization: The Method of Lagrange Multipliers	36
6.5	Worked Examples and Physical Applications	36
6.6	Summary of Key Formulas	38
6.7	Chapter Exercises	38
7	Multiple Integrals & Field Theorems	39
7.1	Multiple Integrals and the Jacobian Transformation	39
7.2	The Fundamental Theorems of Vector Integral Calculus	40
7.3	Worked Examples and Physical Applications	41
7.4	Summary of Key Formulas	43
7.5	Chapter Exercises	43
8	First-Order Ordinary Differential Equations	44
8.1	Classification and General Structure of ODEs	44
8.2	Fundamental Analytical Solution Methods	45
8.2.1	Separable Differential Equations	45
8.2.2	First-Order Linear ODEs and Integrating Factors	45
8.3	Physical Applications: Atmospheric Drag and Terminal Velocity	45
8.4	Worked Examples and Physical Applications	46
8.5	Summary of Key Formulas	49
8.6	Chapter Exercises	49
9	Second-Order Linear Differential Equations & Oscillations	51
9.1	Homogeneous Linear Second-Order ODEs with Constant Coefficients	51
9.2	The Damped Harmonic Oscillator and Three Dynamic Regimes	52
9.3	Driven Oscillations and Resonance	53
9.4	Worked Examples and Physical Applications	54
9.5	Summary of Key Formulas	56

9.6 Chapter Exercises	56
A Mathematical Formulas & Vector Identities	57
A.1 Differential Operators in Curvilinear Coordinates	57
A.1.1 Cartesian Coordinates (x, y, z)	57
A.1.2 Cylindrical Coordinates (ρ, ϕ, z)	57
A.1.3 Spherical Coordinates (r, θ, ϕ)	58
A.2 Fundamental Vector and Differential Identities	58
Bibliography	59
Subject Index	60
Author Biography	62

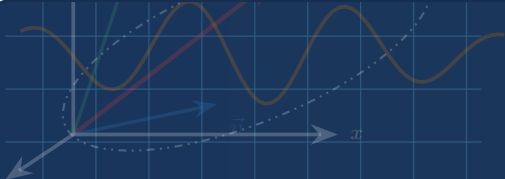

List of Figures



List of Tables

1	Instructional schedule and curriculum alignment with CLOs.	iv
1.1	Comparison of metric scale factors and volume elements across standard coordinate systems.	4
1.2	Summary of coordinate geometry relations and physical interpretations. . .	7
2.1	Summary of differential vector operators in orthogonal curvilinear coordinates.	15
3.1	Standard Maclaurin expansions of elementary mathematical physics functions.	17
3.2	Summary of infinite series expansions and physical approximations.	21
4.1	Summary of complex analysis relations in physical sciences.	26
5.1	Key matrix algebra formulas and their physical interpretations.	32
6.1	Key relations in multivariable differential calculus and thermodynamics. . .	38
7.1	Summary of fundamental integral transformation theorems.	43
8.1	Classification and solution methods for first-order ordinary differential equations.	49
9.1	Comparison of the three damping regimes in physical harmonic systems. . .	53
9.2	Key relationships for damped and driven harmonic oscillators.	56

Chapter 1

Curvilinear Coordinate Systems & Scale Factors

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Rigorously define and transform between Cartesian (x, y, z) , cylindrical (ρ, ϕ, z) , and spherical (r, θ, ϕ) coordinates.
2. Derive metric scale factors (Lamé coefficients h_i) for arbitrary orthogonal curvilinear coordinates.
3. Formulate differential displacement vectors $d\vec{r}$, directed surface elements $d\vec{a}$, and differential volume elements dV .
4. Transform position, velocity, and acceleration vectors across non-Cartesian bases with time-dependent unit vectors.
5. Apply spherical coordinates to geodesics, celestial coordinates, and satellite orbital geometry.

1.1 Introduction and Cartesian Coordinate Foundations

In theoretical physics, formulating dynamic laws, field distributions, and conservation principles requires a rigorous frame of reference. Selecting a coordinate system whose geometric symmetry reflects that of the physical boundary conditions significantly reduces the analytical complexity of governing differential equations.

The Cartesian coordinate system (x, y, z) represents the fundamental baseline. Three mutually orthogonal axes intersect at the origin $O(0, 0, 0)$, forming a right-handed basis characterized by fixed unit vectors $\hat{i}, \hat{j}, \hat{k}$ satisfying the orthonormality condition:

$$\hat{e}_i \cdot \hat{e}_j = \delta_{ij} = \begin{cases} 1, & i = j \\ 0, & i \neq j \end{cases} \quad (1.1)$$

where δ_{ij} is the Kronecker delta. The position vector $\vec{r}$ of a point $P(x, y, z)$ is:

$$\vec{r} = x\hat{i} + y\hat{j} + z\hat{k} \quad (1.2)$$

The differential displacement vector and squared infinitesimal arc length are:

$$d\vec{r} = dx\hat{i} + dy\hat{j} + dz\hat{k} \quad (1.3)$$

$$ds^2 = |d\vec{r}|^2 = dx^2 + dy^2 + dz^2 \quad (1.4)$$

The differential volume element is simply $dV = dx dy dz$.

Definition 1.1 Orthogonal Curvilinear Coordinates and Scale Factors

Let (u_1, u_2, u_3) be generalized coordinates related to Cartesian coordinates by invertibly differentiable functions $x = x(u_1, u_2, u_3)$, $y = y(u_1, u_2, u_3)$, and $z = z(u_1, u_2, u_3)$. The system is **orthogonal** if the local basis vectors are mutually perpendicular. The **metric scale factors** (Lamé coefficients) are defined as:

$$h_i = \left| \frac{\partial \vec{r}}{\partial u_i} \right| = \sqrt{\left(\frac{\partial x}{\partial u_i} \right)^2 + \left(\frac{\partial y}{\partial u_i} \right)^2 + \left(\frac{\partial z}{\partial u_i} \right)^2} \quad (1.5)$$

The unit basis vectors are $\hat{e}_i = \frac{1}{h_i} \frac{\partial \vec{r}}{\partial u_i}$. The differential line and volume elements become:

$$ds^2 = h_1^2 du_1^2 + h_2^2 du_2^2 + h_3^2 du_3^2 \quad (1.6)$$

$$dV = h_1 h_2 h_3 du_1 du_2 du_3 \quad (1.7)$$

For Cartesian coordinates, $h_x = h_y = h_z = 1$.

1.2 Cylindrical Coordinate System

Physical configurations exhibiting axial or rotational symmetry around a preferred axis—such as magnetic fields produced by long solenoids, laminar fluid flow through pipes, or rotating flywheels—are most naturally represented in cylindrical coordinates (ρ, ϕ, z) .

Here, $\rho \in [0, \infty)$ is the perpendicular radial distance from the z -axis, $\phi \in [0, 2\pi)$ is the azimuthal angle measured counterclockwise from the positive x -axis, and $z \in (-\infty, \infty)$ is the axial coordinate:

$$x = \rho \cos \phi, \quad y = \rho \sin \phi, \quad z = z \quad (1.8)$$

Inverting these relations yields:

$$\rho = \sqrt{x^2 + y^2}, \quad \phi = \arctan\left(\frac{y}{x}\right), \quad z = z \quad (1.9)$$

To compute the scale factors, we differentiate $\vec{r}(\rho, \phi, z) = \rho \cos \phi \hat{i} + \rho \sin \phi \hat{j} + z \hat{k}$:

$$\frac{\partial \vec{r}}{\partial \rho} = \cos \phi \hat{i} + \sin \phi \hat{j} \Rightarrow h_\rho = 1 \quad (1.10)$$

$$\frac{\partial \vec{r}}{\partial \phi} = -\rho \sin \phi \hat{i} + \rho \cos \phi \hat{j} \Rightarrow h_\phi = \rho \quad (1.11)$$

$$\frac{\partial \vec{r}}{\partial z} = \hat{k} \Rightarrow h_z = 1 \quad (1.12)$$

Thus, the orthonormal unit vectors are:

$$\hat{\rho} = \cos \phi \hat{i} + \sin \phi \hat{j} \quad (1.13)$$

$$\hat{\phi} = -\sin \phi \hat{i} + \cos \phi \hat{j} \quad (1.14)$$

$$\hat{k} = \hat{k} \quad (1.15)$$

The differential displacement, line element squared, and volume element are:

$$d\vec{r} = d\rho \hat{\rho} + \rho d\phi \hat{\phi} + dz \hat{k} \quad (1.16)$$

$$ds^2 = d\rho^2 + \rho^2 d\phi^2 + dz^2 \quad (1.17)$$

$$dV = \rho d\rho d\phi dz \quad (1.18)$$

Pitfall Alert: Time Derivatives of Non-Cartesian Unit Vectors

Unlike Cartesian unit vectors ($\hat{i}, \hat{j}, \hat{k}$) which remain invariant in space and time, cylindrical and spherical unit vectors depend on position. When differentiating with respect to time t :

$$\dot{\hat{\rho}} = \frac{d\hat{\rho}}{dt} = \dot{\phi} \hat{\phi}, \quad \dot{\hat{\phi}} = -\dot{\phi} \hat{\rho} \quad (1.19)$$

Neglecting these geometric derivative terms produces severe errors in velocity and acceleration derivations.

1.3 Spherical Coordinate System

For central force fields (e.g., Newtonian gravity, Coulomb potential) and spherically symmetric wave propagation, spherical coordinates (r, θ, ϕ) are indispensable.

The coordinates are defined as:

- $r \in [0, \infty)$: radial distance from the origin.
- $\theta \in [0, \pi]$: polar (zenith) angle measured from the positive z -axis.
- $\phi \in [0, 2\pi)$: azimuthal angle in the xy -plane from the positive x -axis.

The Cartesian transformation equations are:

$$x = r \sin \theta \cos \phi, \quad y = r \sin \theta \sin \phi, \quad z = r \cos \theta \quad (1.20)$$

The metric scale factors are obtained from $\vec{r}(r, \theta, \phi)$:

$$h_r = \left| \frac{\partial \vec{r}}{\partial r} \right| = 1 \quad (1.21)$$

$$h_\theta = \left| \frac{\partial \vec{r}}{\partial \theta} \right| = r \quad (1.22)$$

$$h_\phi = \left| \frac{\partial \vec{r}}{\partial \phi} \right| = r \sin \theta \quad (1.23)$$

Consequently, the differential elements are:

$$d\vec{r} = dr \hat{r} + r d\theta \hat{\theta} + r \sin \theta d\phi \hat{\phi} \quad (1.24)$$

$$ds^2 = dr^2 + r^2 d\theta^2 + r^2 \sin^2 \theta d\phi^2 \quad (1.25)$$

$$dV = r^2 \sin \theta dr d\theta d\phi \quad (1.26)$$

Coordinate System	Coordinates	Scale Factors (h_1, h_2, h_3)	Infinitesimal Volume dV
Cartesian	(x, y, z)	$(1, 1, 1)$	$dx dy dz$
Cylindrical	(ρ, ϕ, z)	$(1, \rho, 1)$	$\rho d\rho d\phi dz$
Spherical	(r, θ, ϕ)	$(1, r, r \sin \theta)$	$r^2 \sin \theta dr d\theta d\phi$

Table 1.1: Comparison of metric scale factors and volume elements across standard coordinate systems.

1.4 Worked Examples and Physical Applications

Example 1.1: Kinematic Acceleration in Cylindrical Coordinates

A point particle moves in a plane ($z = 0$) such that its radial distance is $\rho(t) = \rho_0 e^{\alpha t}$ while rotating with a constant angular speed $\omega = \dot{\phi}$. Determine the general acceleration vector $\vec{a}(t)$ in cylindrical basis.

Picture / Conceptualization: The particle spirals outward in the xy -plane. The coordinate basis vectors $\hat{\rho}$ and $\hat{\phi}$ rotate with the particle at rate ω .

Strategy / Governing Laws: Express position $\vec{r} = \rho \hat{\rho}$. Differentiate twice with respect to time, applying the kinematic chain rule to account for $\dot{\hat{\rho}} = \dot{\phi} \hat{\phi}$ and $\dot{\hat{\phi}} = -\dot{\phi} \hat{\rho}$.

Calculation / Analytical Solution: 1. Velocity vector:

$$\vec{v} = \dot{\vec{r}} = \dot{\rho} \hat{\rho} + \rho \dot{\hat{\rho}} = \dot{\rho} \hat{\rho} + \rho \dot{\phi} \hat{\phi} \quad (1.27)$$

2. Acceleration vector:

$$\begin{aligned} \vec{a} &= \frac{d\vec{v}}{dt} = \ddot{\rho} \hat{\rho} + \dot{\rho} \dot{\hat{\rho}} + (\dot{\rho} \dot{\phi} + \rho \ddot{\phi}) \hat{\phi} + \rho \dot{\phi} \dot{\hat{\phi}} \\ &= (\ddot{\rho} - \rho \dot{\phi}^2) \hat{\rho} + (2\dot{\rho} \dot{\phi} + \rho \ddot{\phi}) \hat{\phi} \end{aligned} \quad (1.28)$$

3. Substituting $\rho(t) = \rho_0 e^{\alpha t}$, $\dot{\rho} = \alpha \rho$, $\ddot{\rho} = \alpha^2 \rho$, $\dot{\phi} = \omega$, and $\ddot{\phi} = 0$:

$$\vec{a}(t) = (\alpha^2 - \omega^2) \rho_0 e^{\alpha t} \hat{\rho} + 2\alpha \omega \rho_0 e^{\alpha t} \hat{\phi} \quad (1.29)$$

Think / Physical Insights: The radial component contains the centrifugal acceleration term $-\rho \omega^2$, while the azimuthal component $2\alpha \omega \rho$ is the Coriolis acceleration. When $\alpha = \omega$, the radial acceleration vanishes, yielding purely tangential acceleration. ■

Trajectory and Scale Factor Verification in Python

```

1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 # Parameters for spiral motion
5 t = np.linspace(0, 2, 500)
6 rho_0 = 1.0
7 alpha = 0.8
8 omega = 4.0
9
10 rho = rho_0 * np.exp(alpha * t)
11 phi = omega * t
12
13 x = rho * np.cos(phi)
14 y = rho * np.sin(phi)
15
16 # Acceleration components
17 a_rho = (alpha**2 - omega**2) * rho
18 a_phi = 2 * alpha * omega * rho
19
20 print(f"At t = 1.0s: rho = {rho_0*np.exp(alpha):.3f} m")
21 print(f"Radial acceleration: {a_rho[250]:.3f} m/s^2, Tangential: {a_phi[250]:.3f} m/s^2")

```

Example 1.2: GPS Geodesic Distance from Spherical Coordinates

Two points on Earth's surface are given by geographic coordinates: Bangkok ($\lambda_1 = 13.75^\circ\text{N}$, $\phi_1 = 100.52^\circ\text{E}$) and Tokyo ($\lambda_2 = 35.68^\circ\text{N}$, $\phi_2 = 139.65^\circ\text{E}$). Using the spherical law of cosines, calculate the great-circle (geodesic) distance between them. Take Earth's mean radius $R_\oplus = 6371$ km.

Solution:

Step 1 — Convert to spherical coordinates. In physics conventions, the polar angle θ is measured from the North Pole, so $\theta = 90^\circ - \lambda$:

$$\theta_1 = 90^\circ - 13.75^\circ = 76.25^\circ, \quad \phi_1 = 100.52^\circ \quad (1.30)$$

$$\theta_2 = 90^\circ - 35.68^\circ = 54.32^\circ, \quad \phi_2 = 139.65^\circ \quad (1.31)$$

Step 2 — Apply the spherical law of cosines. The angle $\Delta\sigma$ subtended at Earth's centre between two points on a unit sphere satisfies:

$$\cos(\Delta\sigma) = \cos\theta_1 \cos\theta_2 + \sin\theta_1 \sin\theta_2 \cos(\phi_2 - \phi_1) \quad (1.32)$$

Substituting $\Delta\phi = 139.65^\circ - 100.52^\circ = 39.13^\circ$:

$$\cos(\Delta\sigma) = \cos(76.25^\circ) \cos(54.32^\circ) + \sin(76.25^\circ) \sin(54.32^\circ) \cos(39.13^\circ) \quad (1.33)$$

$$= (0.2385)(0.5835) + (0.9712)(0.8122)(0.7753) \quad (1.34)$$

$$= 0.1391 + 0.6124 = 0.7515 \quad (1.35)$$

Therefore $\Delta\sigma = \arccos(0.7515) = 41.27^\circ = 0.7203$ rad.

Step 3 — Compute the geodesic distance:

$$d = R_{\oplus} \cdot \Delta\sigma = 6371 \times 0.7203 \approx 4589 \text{ km} \quad (1.36)$$

Think / Physical Insights: This calculation underlies all GPS receiver algorithms. The Haversine formula (used in navigation software) is numerically superior to the simple cosine formula when $\Delta\sigma \rightarrow 0$, because it avoids catastrophic cancellation. For intercontinental distances, however, both formulas agree to better than 0.1%.

**Great-Circle Distance Verification in Python**

```

1 import numpy as np
2
3 def great_circle(lat1, lon1, lat2, lon2, R=6371):
4     # Convert degrees to radians
5     t1, t2 = np.radians(90 - lat1), np.radians(90 - lat2)
6     p1, p2 = np.radians(lon1), np.radians(lon2)
7     cos_dsigma = np.cos(t1)*np.cos(t2) + np.sin(t1)*np.sin(t2)*np.cos(
8         p2 - p1)
9     dsigma = np.arccos(np.clip(cos_dsigma, -1, 1))
10    return R * dsigma
11
12 d = great_circle(13.75, 100.52, 35.68, 139.65)
13 print(f"Bangkok → Tokyo great-circle distance: {d:.1f} km")
14 print(f"Subtended angle: {np.degrees(d/6371):.2f} degrees")

```

1.5 Summary of Key Formulas


Concept	Formula	Physical Significance
Metric Scale Factor	$h_i = \partial \vec{r} / \partial u_i $	Local arc length per unit coordinate variation
Infinitesimal Line Element	$ds^2 = \sum_i h_i^2 du_i^2$	Invariant metric distance in differential geometry
Cylindrical Basis Derivatives	$\dot{\hat{\rho}} = \dot{\phi} \hat{\phi}, \dot{\hat{\phi}} = -\dot{\phi} \hat{\rho}$	Origin of centripetal and Coriolis inertial terms
Spherical Solid Angle	$d\Omega = \sin \theta \, d\theta \, d\phi$	Measure of angular aperture in radiation and scattering
Great-Circle Distance	$d = R \arccos(\cos \theta_1 \cos \theta_2 + \sin \theta_1 \sin \theta_2 \cos \Delta\phi)$	Shortest path on a sphere (GPS, aviation)

Table 1.2: Summary of coordinate geometry relations and physical interpretations.

1.6 Chapter Exercises

- Analytical Transformation:** Find the spherical coordinates (r, θ, ϕ) of the point given in Cartesian coordinates by $P(-2, 2\sqrt{3}, -4)$.
- Scale Factor Derivation:** Consider parabolic cylindrical coordinates (u, v, z) defined by $x = \frac{1}{2}(u^2 - v^2)$, $y = uv$, $z = z$. Calculate scale factors h_u, h_v, h_z and show that the coordinate system is orthogonal.
- Solid Angle of a Cone:** A right-circular cone has a semi-vertical angle α . By integrating the spherical solid angle $d\Omega = \sin \theta \, d\theta \, d\phi$, prove that the solid angle subtended at the apex is $\Omega = 2\pi(1 - \cos \alpha)$.

4. **Velocity in Spherical Coordinates:** A particle moves on a sphere of radius R with $\dot{\theta} = \omega_\theta$ (const) and $\dot{\phi} = \omega_\phi$ (const). Write the velocity vector $\vec{v}$ in the spherical basis $(\hat{r}, \hat{\theta}, \hat{\phi})$ and compute its magnitude. Under what condition is $|\vec{v}|$ constant?
5. **Ellipsoidal Coordinates:** Prolate spheroidal coordinates (ξ, η, ϕ) are related to Cartesian coordinates by $x = a \sinh \xi \sin \eta \cos \phi$, $y = a \sinh \xi \sin \eta \sin \phi$, $z = a \cosh \xi \cos \eta$ where $a > 0$. Derive the three scale factors and the volume element dV .

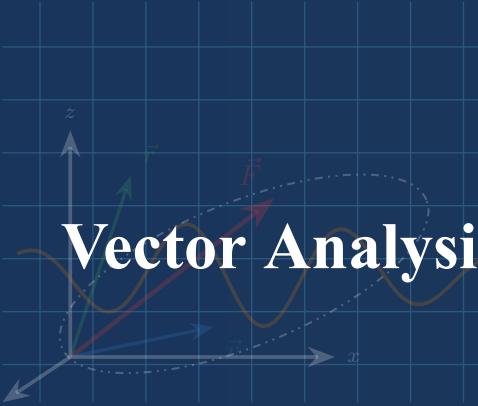

Chapter 2

Vector Analysis & Differential Field Operators

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Perform sophisticated algebraic manipulations with dot, cross, and triple vector products.
2. Compute and physically interpret gradient (∇), divergence ($\nabla \cdot$), and curl ($\nabla \times$) in Cartesian and curvilinear geometries.
3. Evaluate conservative vector fields, construct scalar potential functions, and test for irrotational and solenoidal conditions.
4. Formulate vector identities essential for electrodynamics, continuum mechanics, and fluid dynamics.
5. Visualize vector fields and streamline topologies computationally using scientific Python.

2.1 Vector Algebra and Triple Products

Physical quantities characterized by both magnitude and spatial orientation are represented mathematically as vectors. In three-dimensional Euclidean space, let $\vec{A} = A_x \hat{i} + A_y \hat{j} + A_z \hat{k}$ and $\vec{B} = B_x \hat{i} + B_y \hat{j} + B_z \hat{k}$.

The scalar (dot) product is defined by:

$$\vec{A} \cdot \vec{B} = |\vec{A}||\vec{B}| \cos \theta = A_x B_x + A_y B_y + A_z B_z \quad (2.1)$$

The vector (cross) product produces an orthogonal axial vector according to the right-hand

rule:

$$\vec{A} \times \vec{B} = |\vec{A}||\vec{B}| \sin \theta \hat{n} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix} \quad (2.2)$$

2.1.1 Triple Products and Geometric Interpretations

The **scalar triple product** represents the signed volume of the parallelepiped subtended by vectors $\vec{A}, \vec{B}, \vec{C}$:

$$\vec{A} \cdot (\vec{B} \times \vec{C}) = \begin{vmatrix} A_x & A_y & A_z \\ B_x & B_y & B_z \\ C_x & C_y & C_z \end{vmatrix} \quad (2.3)$$

This product is cyclic: $\vec{A} \cdot (\vec{B} \times \vec{C}) = \vec{B} \cdot (\vec{C} \times \vec{A}) = \vec{C} \cdot (\vec{A} \times \vec{B})$.

The **vector triple product** satisfies the celebrated “BAC–CAB” identity:

$$\vec{A} \times (\vec{B} \times \vec{C}) = \vec{B}(\vec{A} \cdot \vec{C}) - \vec{C}(\vec{A} \cdot \vec{B}) \quad (2.4)$$

This identity is fundamental in classical mechanics for formulating the angular momentum of rotating rigid bodies $\vec{L} = \sum m_i [\vec{r}_i \times (\vec{\omega} \times \vec{r}_i)]$.

2.2 Differential Field Operators: Gradient, Divergence, and Curl

Spatial variation of physical fields requires the Del (Nabla) vector differential operator:

$$\nabla \equiv \hat{i} \frac{\partial}{\partial x} + \hat{j} \frac{\partial}{\partial y} + \hat{k} \frac{\partial}{\partial z} \quad (2.5)$$

Definition 2.1 The Gradient of a Scalar Field

For a scalar field $\psi(x, y, z)$, the **gradient** $\nabla\psi$ is a vector field pointing in the direction of the greatest rate of spatial increase of ψ , with magnitude equal to that maximum directional rate of change:

$$\nabla\psi = \frac{\partial\psi}{\partial x} \hat{i} + \frac{\partial\psi}{\partial y} \hat{j} + \frac{\partial\psi}{\partial z} \hat{k} \quad (2.6)$$

Geometrically, $\nabla\psi$ is perpendicular to the equipotential or level surface $\psi(x, y, z) = C$ at every point.

Definition 2.2 The Divergence of a Vector Field

The **divergence** of a vector field $\vec{A}$ represents the net volumetric flux density outflow per unit infinitesimal volume from a given point:

$$\nabla \cdot \vec{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z} \quad (2.7)$$

If $\nabla \cdot \vec{A} = 0$ everywhere, the field is called **solenoidal** (e.g., the magnetic field $\vec{B}$ in Maxwell's second law $\nabla \cdot \vec{B} = 0$, indicating the non-existence of magnetic monopoles).

Definition 2.3 The Curl of a Vector Field

The **curl** of a vector field $\vec{A}$ measures the microscopic circulation density or rotational vorticity around an infinitesimal loop:

$$\nabla \times \vec{A} = \left(\frac{\partial A_z}{\partial y} - \frac{\partial A_y}{\partial z} \right) \hat{i} + \left(\frac{\partial A_x}{\partial z} - \frac{\partial A_z}{\partial x} \right) \hat{j} + \left(\frac{\partial A_y}{\partial x} - \frac{\partial A_x}{\partial y} \right) \hat{k} \quad (2.8)$$

A vector field with $\nabla \times \vec{A} = \vec{0}$ is called **irrotational** or **conservative**.

Theorem 2.1 Null Identities of Vector Calculus

For any twice continuously differentiable scalar field ψ and vector field $\vec{A}$:

$$\nabla \times (\nabla \psi) = \vec{0} \quad (\text{The curl of any gradient field is identically zero}) \quad (2.9)$$

$$\nabla \cdot (\nabla \times \vec{A}) = 0 \quad (\text{The divergence of any curl field is identically zero}) \quad (2.10)$$

Pitfall Alert: Common Operator Confusion

Do not confuse the Laplacian of a scalar with the vector Laplacian. For a scalar field:

$$\nabla^2 \psi = \nabla \cdot (\nabla \psi) = \frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} + \frac{\partial^2 \psi}{\partial z^2} \quad (2.11)$$

For a vector field, the vector Laplacian is defined via the curl-of-curl identity:

$$\nabla^2 \vec{A} \equiv \nabla(\nabla \cdot \vec{A}) - \nabla \times (\nabla \times \vec{A}) \quad (2.12)$$

In Cartesian coordinates, $\nabla^2 \vec{A} = (\nabla^2 A_x)\hat{i} + (\nabla^2 A_y)\hat{j} + (\nabla^2 A_z)\hat{k}$, but this component-wise equality fails in curvilinear coordinates because unit vectors depend on spatial coordinates!

2.3 Conservative Vector Fields and Potential Theory

A vector force field $\vec{F}$ is conservative if the work done $W = \int_C \vec{F} \cdot d\vec{r}$ between any two points is independent of the path. The following four statements are mathematically equiv-

alent in a simply connected domain:

1. $\oint_C \vec{F} \cdot d\vec{r} = 0$ for every closed contour C .
2. $\int_A^B \vec{F} \cdot d\vec{r}$ is path-independent.
3. $\vec{F}$ can be expressed as the negative gradient of a scalar potential: $\vec{F} = -\nabla V$.
4. $\vec{F}$ is irrotational everywhere: $\nabla \times \vec{F} = \vec{0}$.

2.4 Worked Examples and Physical Applications

Example 2.1: Testing Conservatism and Finding the Potential Function

Consider the gravitational/electrostatic type force field:

$$\vec{F}(x, y, z) = (2xy + z^3)\hat{i} + x^2\hat{j} + 3xz^2\hat{k} \quad (2.13)$$

Determine whether $\vec{F}$ is conservative. If so, construct its potential energy function $V(x, y, z)$ such that $\vec{F} = -\nabla V$ with $V(0, 0, 0) = 0$.

Picture / Conceptualization: The field components depend on polynomial combinations of spatial coordinates. We test whether the field possesses microscopic vorticity.

Strategy / Governing Laws: Compute $\nabla \times \vec{F}$. If the curl vanishes identically, determine V by integrating the partial derivative conditions $-\frac{\partial V}{\partial x} = F_x$, $-\frac{\partial V}{\partial y} = F_y$, $-\frac{\partial V}{\partial z} = F_z$.

Calculation / Analytical Solution: 1. Evaluate the curl:

$$\nabla \times \vec{F} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ \frac{\partial}{\partial x} & \frac{\partial}{\partial y} & \frac{\partial}{\partial z} \\ 2xy + z^3 & x^2 & 3xz^2 \end{vmatrix} = \hat{i}(0-0) - \hat{j}(3z^2-3z^2) + \hat{k}(2x-2x) = \vec{0} \quad (2.14)$$

Because $\nabla \times \vec{F} = \vec{0}$ everywhere, $\vec{F}$ is conservative.

2. Integrate for $V(x, y, z)$:

$$\frac{\partial V}{\partial x} = -(2xy + z^3) \Rightarrow V(x, y, z) = -x^2y - xz^3 + g(y, z) \quad (2.15)$$

$$\frac{\partial V}{\partial y} = -x^2 + \frac{\partial g}{\partial y} = -x^2 \Rightarrow \frac{\partial g}{\partial y} = 0 \Rightarrow g(y, z) = h(z) \quad (2.16)$$

$$\frac{\partial V}{\partial z} = -3xz^2 + h'(z) = -3xz^2 \Rightarrow h'(z) = 0 \Rightarrow h(z) = C \quad (2.17)$$

Given the reference condition $V(0, 0, 0) = 0$, the integration constant is $C = 0$. Thus:

$$V(x, y, z) = -(x^2y + xz^3) \quad (2.18)$$

Think / Physical Insights: Because $\vec{F} = -\nabla V$, moving a test particle along any closed trajectory in this field yields net zero energy dissipation, ensuring complete conservation of mechanical energy $E = T + V$. ■

Vector Field Divergence and Streamline Visualization

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 # Define 2D grid
5 Y, X = np.mgrid[-2:2:100j, -2:2:100j]
6
7 # Dipole-like electric vector field
8 U = X / (X**2 + Y**2 + 0.1)**1.5
9 V = Y / (X**2 + Y**2 + 0.1)**1.5
10
```

```

11 # Numerical divergence: dU/dx + dV/dy
12 dx = X[0, 1] - X[0, 0]
13 dy = Y[1, 0] - Y[0, 0]
14 div = np.gradient(U, axis=1)/dx + np.gradient(V, axis=0)/dy
15
16 print(f"Max divergence near core: {np.max(div):.2f}")
17 print("Streamlines smoothly diverge radially outwards from the positive
    source.")

```

Example 2.2: Magnetic Torque on a Current Loop

A rectangular current loop of width a and height b carries a steady current I . The loop lies in the xy -plane with its normal $\hat{n} = \hat{k}$. An external uniform magnetic field $\vec{B} = B_0(\hat{i} + \sqrt{3}\hat{j})$ is applied. Find (i) the net magnetic force on the loop, (ii) the magnetic torque $\vec{\tau} = \vec{m} \times \vec{B}$, and (iii) the potential energy $U = -\vec{m} \cdot \vec{B}$.

Solution:

The magnetic dipole moment is $\vec{m} = I(ab)\hat{k} = IAb\hat{k}$ where $A = ab$.

(i) Net force on a rigid current loop in a uniform field is zero:

$$\vec{F}_{\text{net}} = I \oint (d\vec{l} \times \vec{B}) = I \left(\oint d\vec{l} \right) \times \vec{B} = \vec{0} \quad (2.19)$$

since $\oint d\vec{l} = \vec{0}$ for a closed path.

(ii) Magnetic torque:

$$\vec{\tau} = \vec{m} \times \vec{B} = (IAb\hat{k}) \times B_0(\hat{i} + \sqrt{3}\hat{j}) \quad (2.20)$$

$$= IAbB_0 \left[(\hat{k} \times \hat{i}) + \sqrt{3}(\hat{k} \times \hat{j}) \right] \quad (2.21)$$

$$= IAbB_0 \left[\hat{j} + \sqrt{3}(-\hat{i}) \right] = IAbB_0(-\sqrt{3}\hat{i} + \hat{j}) \quad (2.22)$$

The torque magnitude is:

$$|\vec{\tau}| = IAbB_0\sqrt{3+1} = 2IAbB_0 \quad (2.23)$$

(iii) Potential energy:

$$U = -\vec{m} \cdot \vec{B} = -(IAb\hat{k}) \cdot B_0(\hat{i} + \sqrt{3}\hat{j}) = 0 \quad (2.24)$$

The potential energy is zero because $\vec{m} \perp \vec{B}$ (the loop is in a metastable orientation).

Think / Physical Insights: The torque $\vec{\tau}$ acts to align $\vec{m}$ with $\vec{B}$, reducing U to its minimum $-|\vec{m}||\vec{B}|$. This is the fundamental operating principle of electric motors and galvanometers. The torque is maximum when $\vec{m} \perp \vec{B}$ (as here) and vanishes at equilibrium. ■

2.5 Summary of Key Formulas

Operator / Law	Mathematical Definition	Physical Meaning
Gradient $\nabla\psi$	$\sum_i \frac{1}{h_i} \frac{\partial\psi}{\partial u_i} \hat{e}_i$	Maximum directional spatial derivative; normal to level surfaces
Divergence $\nabla \cdot \vec{A}$	$\frac{1}{h_1 h_2 h_3} \sum_i \frac{\partial}{\partial u_i} \left(\frac{h_1 h_2 h_3}{h_i} A_i \right)$	Net outflow flux density per unit volume (sources and sinks)
Curl $\nabla \times \vec{A}$	$\frac{1}{h_1 h_2 h_3} \begin{vmatrix} h_1 \hat{e}_1 & h_2 \hat{e}_2 & h_3 \hat{e}_3 \\ \partial/\partial u_1 & \partial/\partial u_2 & \partial/\partial u_3 \\ h_1 A_1 & h_2 A_2 & h_3 A_3 \end{vmatrix}$	Circulation vorticity around microscopic loops
Laplacian $\nabla^2\psi$	$\nabla \cdot (\nabla\psi)$	Mean curvature; appears in Poisson and wave equations
Magnetic Torque	$\vec{\tau} = \vec{m} \times \vec{B}, U = -\vec{m} \cdot \vec{B}$	Aligns current loop with external field (motor principle)

Table 2.1: Summary of differential vector operators in orthogonal curvilinear coordinates.

2.6 Chapter Exercises

- BAC-CAB Expansion:** Prove algebraically that $(\vec{A} \times \vec{B}) \cdot (\vec{C} \times \vec{D}) = (\vec{A} \cdot \vec{C})(\vec{B} \cdot \vec{D}) - (\vec{A} \cdot \vec{D})(\vec{B} \cdot \vec{C})$.
- Angular Velocity Field:** The velocity field of a rigid body rotating with constant angular velocity $\vec{\omega} = \omega \hat{k}$ is $\vec{v} = \vec{\omega} \times \vec{r}$. Calculate $\nabla \cdot \vec{v}$ and $\nabla \times \vec{v}$. What is the physical significance of $\nabla \times \vec{v}$?
- Solenoidal and Irrotational Check:** Show that the field $\vec{B}(\vec{r}) = \frac{\vec{m} \times \vec{r}}{r^3}$ (magnetic dipole field) satisfies $\nabla \cdot \vec{B} = 0$ for $r \neq 0$.
- Orbital Angular Momentum:** An electron in a hydrogen atom moves in a circular orbit of radius $a_0 = 0.529 \text{ \AA}$ with speed $v = 2.19 \times 10^6 \text{ m/s}$. Calculate the orbital angular momentum $\vec{L} = m_e \vec{r} \times \vec{v}$ and show that $|\vec{L}| = \hbar$ (the reduced Planck constant).
- Stokes' Theorem Application:** The vector field $\vec{F} = (y^2 - z^2)\hat{i} + (z^2 - x^2)\hat{j} + (x^2 - y^2)\hat{k}$. Use Stokes' theorem to evaluate $\oint_C \vec{F} \cdot d\vec{l}$ where C is the intersection of the sphere $x^2 + y^2 + z^2 = 1$ with the plane $x + y + z = 0$.



Chapter 3

Infinite Series & Approximations

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Expand transcendental and algebraic functions into infinite power series using Taylor and Maclaurin theorems.
2. Rigorously determine radii and intervals of convergence using the Ratio, Root, and Integral tests.
3. Apply binomial and asymptotic series to model perturbation phenomena in classical and modern physics.
4. Evaluate truncation errors and quantify higher-order anharmonic corrections (e.g., large-amplitude pendulums, relativistic dynamics).
5. Validate series approximations and compute truncation errors computationally using Python.

3.1 Introduction and Power Series Representation

Many fundamental differential equations in physics cannot be integrated into elementary closed-form expressions. Infinite series expansions serve as one of the most powerful analytical instruments in mathematical physics, enabling us to approximate complex potentials, linearize nonlinear dynamical equations, and study asymptotic limits.

A general power series centered at $x = x_0$ is defined as:

$$S(x) = \sum_{n=0}^{\infty} a_n(x - x_0)^n = a_0 + a_1(x - x_0) + a_2(x - x_0)^2 + \cdots \quad (3.1)$$

Theorem 3.1 Taylor and Maclaurin Series Expansion

If a real- or complex-valued function $f(x)$ is infinitely differentiable (C^∞) in an open neighborhood containing x_0 , it may be represented by its **Taylor series**:

$$f(x) = \sum_{n=0}^{\infty} \frac{f^{(n)}(x_0)}{n!} (x - x_0)^n \quad (3.2)$$

When the expansion is centered at the origin ($x_0 = 0$), it is designated as a **Maclaurin series**:

$$f(x) = \sum_{n=0}^{\infty} \frac{f^{(n)}(0)}{n!} x^n = f(0) + f'(0)x + \frac{f''(0)}{2!}x^2 + \frac{f'''(0)}{3!}x^3 + \dots \quad (3.3)$$

3.2 Convergence Criteria and Radius of Convergence

A power series is physically meaningful only within its domain of convergence. The series $\sum a_n(x - x_0)^n$ converges absolutely inside the interval $|x - x_0| < R$, where R is the **radius of convergence**.

Definition 3.1 Cauchy-Hadamard and D'Alembert Ratio Tests

The radius of convergence R can be calculated directly from the series coefficients:

$$\frac{1}{R} = \lim_{n \rightarrow \infty} \left| \frac{a_{n+1}}{a_n} \right| \quad \text{or} \quad \frac{1}{R} = \lim_{n \rightarrow \infty} \sqrt[n]{|a_n|} \quad (3.4)$$

- If $R = \infty$, the series converges for all $x \in \mathbb{R}$ (e.g., e^x , $\sin x$, $\cos x$).
- If $0 < R < \infty$, the series converges for $|x - x_0| < R$ and diverges for $|x - x_0| > R$.
- The boundary points $x = x_0 \pm R$ must be investigated individually using the Alternating Series (Leibniz) test or the Integral test.

Function	Maclaurin Series Expansion	Radius R	Interval
e^x	$1 + x + \frac{x^2}{2!} + \frac{x^3}{3!} + \dots = \sum_{n=0}^{\infty} \frac{x^n}{n!}$	∞	$(-\infty, \infty)$
$\sin x$	$x - \frac{x^3}{3!} + \frac{x^5}{5!} - \dots = \sum_{n=0}^{\infty} \frac{(-1)^n x^{2n+1}}{(2n+1)!}$	∞	$(-\infty, \infty)$
$\cos x$	$1 - \frac{x^2}{2!} + \frac{x^4}{4!} - \dots = \sum_{n=0}^{\infty} \frac{(-1)^n x^{2n}}{(2n)!}$	∞	$(-\infty, \infty)$
$\ln(1+x)$	$x - \frac{x^2}{2} + \frac{x^3}{3} - \frac{x^4}{4} + \dots = \sum_{n=1}^{\infty} \frac{(-1)^{n-1} x^n}{n}$	1	$(-1, 1]$
$(1+x)^p$	$1 + px + \frac{p(p-1)}{2!}x^2 + \frac{p(p-1)(p-2)}{3!}x^3 + \dots$	1	$(-1, 1)$

Table 3.1: Standard Maclaurin expansions of elementary mathematical physics functions.

Pitfall Alert: Truncation Outside the Radius of Convergence

Approximating a function by the first few terms of its Taylor series is only valid when $|x - x_0| \ll R$. Attempting to compute $(1 + x)^{-1/2}$ for $x = 2.5$ using $1 - \frac{1}{2}x + \frac{3}{8}x^2$ leads to diverging oscillations, because x lies outside the unit convergence radius $R = 1$.

3.3 Physical Applications: Asymptotic Expansions**3.3.1 Relativistic Kinetic Energy**

In special relativity, the total energy of a particle with rest mass m moving at speed v is $E = \gamma mc^2$, where $\gamma = (1 - v^2/c^2)^{-1/2}$. The relativistic kinetic energy is:

$$K = E - mc^2 = (\gamma - 1)mc^2 = \left[\left(1 - \frac{v^2}{c^2} \right)^{-1/2} - 1 \right] mc^2 \quad (3.5)$$

In the non-relativistic limit ($v \ll c$, so $\beta \equiv v/c \ll 1$), we apply the generalized binomial expansion $(1 - \beta^2)^{-1/2} = 1 + \frac{1}{2}\beta^2 + \frac{3}{8}\beta^4 + \frac{5}{16}\beta^6 + \mathcal{O}(\beta^8)$:

$$K = \left(1 + \frac{1}{2}\frac{v^2}{c^2} + \frac{3}{8}\frac{v^4}{c^4} + \cdots - 1 \right) mc^2 = \frac{1}{2}mv^2 + \frac{3}{8}m\frac{v^4}{c^2} + \mathcal{O}\left(\frac{v^6}{c^4}\right) \quad (3.6)$$

The leading term recovers classical Newtonian kinetic energy $K_{\text{classical}} = \frac{1}{2}mv^2$, while the second term provides the first-order relativistic correction!

3.4 Worked Examples and Physical Applications**Example 3.1: Large-Amplitude Simple Pendulum Period Correction**

The exact differential equation of an undamped simple pendulum of length L is:

$$\frac{d^2\theta}{dt^2} + \frac{g}{L} \sin \theta = 0 \quad (3.7)$$

Using the Maclaurin expansion of $\sin \theta$, obtain the third-order governing equation and derive the fractional correction to the natural frequency $\omega_0 = \sqrt{g/L}$ for finite amplitude θ_0 .

Picture / Conceptualization: For tiny amplitudes $\theta \ll 1$, $\sin \theta \approx \theta$, giving simple harmonic motion. For larger amplitudes, restoring torque is weaker than linear, lengthening the oscillation period.

Strategy / Governing Laws: Expand $\sin \theta = \theta - \frac{\theta^3}{6} + \mathcal{O}(\theta^5)$. Substitute this into the equation of motion to produce the Duffing-type nonlinear oscillator:

$$\ddot{\theta} + \omega_0^2 \left(\theta - \frac{\theta^3}{6} \right) = 0 \quad (3.8)$$

Calculation / Analytical Solution: Assume an approximate harmonic solution $\theta(t) \approx \theta_0 \cos(\omega t)$. Using the trigonometric identity $\cos^3(\omega t) = \frac{3}{4} \cos(\omega t) + \frac{1}{4} \cos(3\omega t)$

$\frac{1}{4} \cos(3\omega t)$, substitute into the nonlinear term:

$$-\omega^2 \theta_0 \cos(\omega t) + \omega_0^2 \left[\theta_0 \cos(\omega t) - \frac{\theta_0^3}{6} \left(\frac{3}{4} \cos(\omega t) + \frac{1}{4} \cos(3\omega t) \right) \right] = 0 \quad (3.9)$$

Equating the secular fundamental harmonic coefficients of $\cos(\omega t)$:

$$-\omega^2 + \omega_0^2 \left(1 - \frac{\theta_0^2}{8} \right) = 0 \Rightarrow \omega \approx \omega_0 \sqrt{1 - \frac{\theta_0^2}{8}} \approx \omega_0 \left(1 - \frac{\theta_0^2}{16} \right) \quad (3.10)$$

The modified period $T = \frac{2\pi}{\omega}$ becomes:

$$T \approx \frac{T_0}{1 - \frac{\theta_0^2}{16}} \approx T_0 \left(1 + \frac{\theta_0^2}{16} \right) \quad (3.11)$$

Think / Physical Insights: For an initial amplitude $\theta_0 = 30^\circ \approx 0.524$ rad, the period increases by approximately $\frac{(0.524)^2}{16} \approx 1.7\%$. This demonstrates why high-precision mechanical clocks require amplitude stabilization. ■

Taylor Series Truncation Error Analysis in Python

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 x = np.linspace(-2, 2, 200)
5 f_exact = np.sin(x)
6
7 # Taylor polynomials centered at 0
8 p1 = x
9 p3 = x - x**3 / 6.0
10 p5 = x - x**3 / 6.0 + x**5 / 120.0
11
12 err_p1 = np.abs(f_exact - p1)
13 err_p3 = np.abs(f_exact - p3)
14 err_p5 = np.abs(f_exact - p5)
15
16 print(f"At x = 1.0 rad: Exact={np.sin(1.0):.6f}")
17 print(f"P1 error: {err_p1[150]:.6f}, P3 error: {err_p3[150]:.6f}, P5
    error: {err_p5[150]:.6f}")
```

Example 3.2: Fourier Series of a Square Wave

A periodic square wave with period $T = 2\pi$ is defined by:

$$f(x) = \begin{cases} +1, & 0 < x < \pi \\ -1, & \pi < x < 2\pi \end{cases}$$

Derive the Fourier series and calculate the partial sums S_1 , S_3 , and S_5 . Verify the Gibbs phenomenon.

Solution:

The Fourier coefficients are:

$$a_0 = \frac{1}{\pi} \int_0^{2\pi} f(x) dx = 0 \quad (\text{odd function}) \quad (3.12)$$

$$a_n = \frac{1}{\pi} \int_0^{2\pi} f(x) \cos(nx) dx = 0 \quad (\text{odd integrand}) \quad (3.13)$$

$$b_n = \frac{1}{\pi} \int_0^{2\pi} f(x) \sin(nx) dx = \frac{2}{n\pi} [1 - \cos(n\pi)] \quad (3.14)$$

Since $1 - \cos(n\pi) = 0$ for even n and $= 2$ for odd n :

$$f(x) = \frac{4}{\pi} \sum_{k=0}^{\infty} \frac{\sin((2k+1)x)}{2k+1} = \frac{4}{\pi} \left(\sin x + \frac{\sin 3x}{3} + \frac{\sin 5x}{5} + \dots \right) \quad (3.15)$$

At $x = \pi/2$, the series gives the Leibniz formula: $f(\pi/2) = \frac{4}{\pi} (1 - \frac{1}{3} + \frac{1}{5} - \dots) = 1$
✓

Think / Physical Insights: The Gibbs phenomenon is the $\approx 9\%$ overshoot (1.0895 instead of 1) near the discontinuity that persists no matter how many harmonics are included. It originates from the inability of any finite set of smooth sinusoids to represent a sharp jump discontinuity. In signal processing, the Gibbs phenomenon motivates windowed Fourier transforms (Hann, Hamming windows). ■

Fourier Series Partial Sums and Gibbs Phenomenon in Python

```
1 import numpy as np
2
3 x = np.linspace(0.01, 2*np.pi - 0.01, 2000)
4
5 def fourier_square(x, N):
6     s = np.zeros_like(x)
7     for k in range(N):
8         n = 2*k + 1
9         s += np.sin(n * x) / n
10    return 4/np.pi * s
11
12 for N in [1, 3, 5, 21]:
13     s = fourier_square(x, N)
14     print(f"N={N:2d} harmonics: max value = {s.max():.4f} (Gibbs
overshoot: {100*(s.max()-1):.1f}%)")
```

3.5 Summary of Key Formulas

Expansion / Test	Mathematical Formula	Physical Application
Taylor Series	$f(x) = \sum_{n=0}^{\infty} \frac{f^{(n)}(x_0)}{n!} (x - x_0)^n$	Perturbation theory, equilibrium potential expansions
Ratio Test Radius	$R = \lim_{n \rightarrow \infty} a_n / a_{n+1} $	Valid boundary limits for mathematical physics models
Binomial Expansion	$(1 + x)^p = 1 + px + \frac{p(p-1)}{2} x^2 + \dots$	Relativistic velocity limits, electrostatic multipole fields
Small Angle Approximation	$\cos \theta \approx 1 - \frac{\theta^2}{2}, \sin \theta \approx \theta$	Harmonic oscillator approximations in mechanics and optics
Fourier Series (odd)	$f(x) = \frac{4}{\pi} \sum_{k=0}^{\infty} \frac{\sin((2k+1)x)}{2k+1}$	Signal decomposition, heat conduction, quantum wave packets

Table 3.2: Summary of infinite series expansions and physical approximations.

3.6 Chapter Exercises

- Electric Dipole Potential:** Two point charges $+q$ and $-q$ are situated on the z -axis at $z = +d/2$ and $z = -d/2$. Write the exact potential at $(0, 0, z)$ for $z > d/2$, and use the binomial series to show that the leading term is the dipole potential $V \approx \frac{qd}{4\pi\epsilon_0 z^2}$.
- Planck's Radiation Law Limit:** Planck's spectral energy density is given by $\rho(\nu) = \frac{8\pi h\nu^3}{c^3} \frac{1}{e^{h\nu/k_B T} - 1}$. Expand the exponential for $h\nu \ll k_B T$ to deduce the classical Rayleigh-Jeans formula.
- Radius of Convergence:** Determine the radius of convergence of the series $\sum_{n=1}^{\infty} \frac{n^2 x^n}{3^n (n+1)!}$.
- Fourier Coefficient Parseval's Theorem:** For a square-integrable function $f(x)$ on $[-\pi, \pi]$ with Fourier coefficients a_n, b_n , Parseval's theorem states $\frac{1}{\pi} \int_{-\pi}^{\pi} |f(x)|^2 dx = \frac{a_0^2}{2} + \sum_{n=1}^{\infty} (a_n^2 + b_n^2)$. Apply Parseval's theorem to the square wave above to prove $\sum_{k=0}^{\infty} \frac{1}{(2k+1)^2} = \frac{\pi^2}{8}$.
- Asymptotic Expansion of Stirling:** The Gamma function satisfies $\ln \Gamma(n+1) = n \ln n - n + \frac{1}{2} \ln(2\pi n) + O(1/n)$. Use this to estimate the number of digits in $100!$ (i.e., $\lfloor \log_{10}(100!) \rfloor + 1$).



Chapter 4

Complex Analysis & Applications

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Seamlessly represent complex numbers in Cartesian, polar, and complex exponential Euler forms.
2. Apply de Moivre's theorem to compute powers, roots of unity, and evaluate trigonometric sums.
3. Formulate AC circuits, wave interference, and damped oscillations using complex phasor notation.
4. Understand the foundations of complex differentiability and the Cauchy-Riemann conditions.
5. Compute and visualize complex impedance spectra and frequency responses using Python.

4.1 Algebraic and Geometric Foundations of Complex Numbers

In classical mechanics, optics, and quantum mechanics, physical quantities that oscillate with specific phase relationships are most elegantly described using complex variables. A complex number $z \in \mathbb{C}$ is an ordered pair of real numbers (x, y) written as:

$$z = x + iy, \quad i^2 = -1 \quad (4.1)$$

where $x = \text{Re}(z)$ is the real part, and $y = \text{Im}(z)$ is the imaginary part. The complex conjugate of z is:

$$z^* = \bar{z} = x - iy \quad (4.2)$$

The modulus (absolute magnitude) $|z|$ and argument $\theta = \arg(z)$ are defined geometrically in the **Argand plane**:

$$|z| = \sqrt{zz^*} = \sqrt{x^2 + y^2}, \quad \theta = \arctan\left(\frac{y}{x}\right) \quad (4.3)$$

Theorem 4.1 Euler's Formula and Polar Representation

For any real angle $\theta \in \mathbb{R}$:

$$e^{i\theta} = \cos \theta + i \sin \theta \quad (4.4)$$

Any complex number can thus be written in polar exponential form:

$$z = re^{i\theta} = |z|(\cos \theta + i \sin \theta) \quad (4.5)$$

When $\theta = \pi$, Euler's formula produces the renowned identity connecting fundamental constants:

$$e^{i\pi} + 1 = 0 \quad (4.6)$$

4.1.1 De Moivre's Theorem and Roots of Unity

For any integer $n \in \mathbb{Z}$:

$$(\cos \theta + i \sin \theta)^n = \cos(n\theta) + i \sin(n\theta) \iff (e^{i\theta})^n = e^{in\theta} \quad (4.7)$$

The n distinct n -th roots of a complex number $z_0 = r_0 e^{i\theta_0}$ are distributed evenly on a circle of radius $\sqrt[n]{r_0}$:

$$z_k = \sqrt[n]{r_0} \exp \left[i \left(\frac{\theta_0 + 2k\pi}{n} \right) \right], \quad k = 0, 1, \dots, n-1 \quad (4.8)$$

4.2 Physical Applications: Phasors and AC Impedance

In alternating current (AC) electrical networks and wave optics, sinusoidal voltages, currents, and fields of angular frequency ω are represented as the real part of complex rotating vectors (phasors):

$$V(t) = V_0 \cos(\omega t + \phi) = \operatorname{Re} \left[\tilde{V}_0 e^{i\omega t} \right], \quad \tilde{V}_0 = V_0 e^{i\phi} \quad (4.9)$$

Since time differentiation corresponds simply to multiplication by $i\omega$:

$$\frac{d}{dt} \left[\tilde{V}_0 e^{i\omega t} \right] = i\omega \left[\tilde{V}_0 e^{i\omega t} \right] \quad (4.10)$$

differential equations governing linear dynamic circuits reduce to algebraic linear equations!

Definition 4.1 Complex Impedance

The generalized complex impedance $\tilde{Z} \equiv \frac{\tilde{V}}{\tilde{I}}$ for fundamental circuit elements is:

- Resistor (R): $\tilde{Z}_R = R$ (current and voltage are in phase).
- Inductor (L): $V = L \frac{dI}{dt} \Rightarrow \tilde{Z}_L = i\omega L = \omega L e^{i\pi/2}$ (voltage leads current by 90°).
- Capacitor (C): $I = C \frac{dV}{dt} \Rightarrow \tilde{Z}_C = \frac{1}{i\omega C} = -\frac{i}{\omega C} = \frac{1}{\omega C} e^{-i\pi/2}$ (voltage lags current by 90°).

Pitfall Alert: Taking Real Parts Before Nonlinear Operations

The complex exponential trick works strictly for **linear** operators (differentiation, integration, linear superposition). When calculating nonlinear physical quantities such as power dissipation $P(t) = V(t)I(t)$ or electromagnetic energy density, one **must take the real parts first** before multiplying:

$$P(t) = \text{Re}[\tilde{V}(t)] \cdot \text{Re}[\tilde{I}(t)] \neq \text{Re}[\tilde{V}(t)\tilde{I}(t)] \quad (4.11)$$

The time-averaged power for sinusoidal steady-state is $\langle P \rangle = \frac{1}{2} \text{Re}[\tilde{V}_0 \tilde{I}_0^*] = V_{\text{rms}} I_{\text{rms}} \cos \phi$.

4.3 Worked Examples and Physical Applications**Example 4.1: Series RLC Circuit Analysis via Complex Impedance**

A series RLC circuit is driven by an alternating voltage source $V(t) = V_0 \cos(\omega t)$. Derive the analytical expression for the steady-state current amplitude I_0 and phase angle ϕ between voltage and current.

Picture / Conceptualization: Resistor, inductor, and capacitor are wired in series. The driving voltage phasor is $\tilde{V} = V_0$.

Strategy / Governing Laws: The total equivalent impedance of elements in series is the sum of their individual complex impedances:

$$\tilde{Z}_{\text{total}} = \tilde{Z}_R + \tilde{Z}_L + \tilde{Z}_C = R + i \left(\omega L - \frac{1}{\omega C} \right) \quad (4.12)$$

The complex current phasor is given by Ohm's law in the frequency domain: $\tilde{I} = \frac{\tilde{V}}{\tilde{Z}_{\text{total}}}$.

Calculation / Analytical Solution: 1. Magnitude of total impedance:

$$|\tilde{Z}_{\text{total}}| = \sqrt{R^2 + \left(\omega L - \frac{1}{\omega C} \right)^2} \quad (4.13)$$

2. Phase angle of impedance:

$$\phi = \arg(\tilde{Z}_{\text{total}}) = \arctan\left(\frac{\omega L - \frac{1}{\omega C}}{R}\right) \quad (4.14)$$

3. Current phasor:

$$\tilde{I} = \frac{V_0}{|\tilde{Z}_{\text{total}}|e^{i\phi}} = \frac{V_0}{\sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}}e^{-i\phi} \quad (4.15)$$

4. Physical real current:

$$I(t) = \text{Re}[\tilde{I}e^{i\omega t}] = \frac{V_0}{\sqrt{R^2 + (\omega L - \frac{1}{\omega C})^2}} \cos(\omega t - \phi) \quad (4.16)$$

Think / Physical Insights: At the resonance frequency $\omega_0 = \frac{1}{\sqrt{LC}}$, the inductive and capacitive reactances cancel exactly ($\omega L = 1/\omega C$). The impedance becomes purely real and minimal ($|\tilde{Z}| = R$), maximizing current amplitude $I_0 = V_0/R$ with $\phi = 0$. ■

Complex Impedance and Resonance Response in Python

```
1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 # RLC Circuit Parameters
5 R = 50.0          # Ohms
6 L = 100e-3        # 100 mH
7 C = 10e-6         # 10 uF
8 V0 = 10.0         # Volts
9
10 omega_0 = 1.0 / np.sqrt(L * C)
11 freq = np.linspace(50, 400, 500)
12 omega = 2 * np.pi * freq
13
14 # Complex impedance calculation
15 Z = R + 1j * (omega * L - 1.0 / (omega * C))
16 I_mag = V0 / np.abs(Z)
17 phase_deg = np.angle(Z, deg=True)
18
19 print(f"Resonance Frequency f_0 = {omega_0 / (2*np.pi):.2f} Hz")
20 print(f"Max Current at resonance = {V0 / R:.3f} A")
```

Example 4.2: Quantum Phase Interference and the Double-Slit Experiment

A quantum particle passes simultaneously through two slits separated by distance d . The probability amplitudes from the two slits at an angle θ are complex numbers $\psi_1 = Ae^{i\phi_1}$ and $\psi_2 = Ae^{i\phi_2}$, where the phase difference is $\delta = \phi_2 - \phi_1 = \frac{2\pi d \sin \theta}{\lambda}$. Calculate (i) the total amplitude $\psi = \psi_1 + \psi_2$, (ii) the probability density $|\psi|^2$, and

(iii) the positions of constructive and destructive interference.

Solution:

(i) Total amplitude:

$$\psi = Ae^{i\phi_1}(1 + e^{i\delta}) = Ae^{i\phi_1} \cdot 2 \cos\left(\frac{\delta}{2}\right) e^{i\delta/2} = 2A \cos\left(\frac{\delta}{2}\right) e^{i(\phi_1 + \delta/2)} \quad (4.17)$$

(ii) Probability density (using modulus squared):

$$|\psi|^2 = |2A \cos(\delta/2)|^2 = 4A^2 \cos^2\left(\frac{\pi d \sin \theta}{\lambda}\right) \quad (4.18)$$

(iii) Interference conditions:

$$\text{Constructive: } \cos^2(\delta/2) = 1 \Rightarrow \delta = 2m\pi \Rightarrow d \sin \theta = m\lambda, \quad m \in \mathbb{Z} \quad (4.19)$$

$$\text{Destructive: } \cos^2(\delta/2) = 0 \Rightarrow \delta = (2m + 1)\pi \Rightarrow d \sin \theta = \left(m + \frac{1}{2}\right) \lambda \quad (4.20)$$

Think / Physical Insights: The interference pattern $\propto \cos^2(\delta/2)$ arises entirely from the complex algebra of probability amplitudes. Unlike classical probability (which would give $|\psi_1|^2 + |\psi_2|^2 = 2A^2$, a featureless sum), quantum mechanics predicts an oscillating pattern — an experimentally verified signature of wave-particle duality. The cross term $2\text{Re}[\psi_1\psi_2^*] = 2A^2 \cos \delta$ is the quantum interference term.


4.4 Summary of Key Formulas

Concept	Formula	Physical Application
Euler's Formula	$e^{i\theta} = \cos \theta + i \sin \theta$	Wave kinematics, rotation operator in quantum mechanics
Complex Impedance	$\tilde{Z} = R + i(\omega L - \frac{1}{\omega C})$	Frequency-domain analysis of AC filters and oscillators
Average Real Power	$\langle P \rangle = \frac{1}{2} \text{Re}[\tilde{V}_0 \tilde{I}_0^*]$	Electrical power transmission, optical energy absorption
Cauchy-Riemann	$\frac{\partial u}{\partial x} = \frac{\partial v}{\partial y}, \quad \frac{\partial u}{\partial y} = -\frac{\partial v}{\partial x}$	2D electrostatics, potential flow around aerofoils
Quantum Interference	$ \psi_1 + \psi_2 ^2 = \psi_1 ^2 + \psi_2 ^2 + 2\text{Re}[\psi_1\psi_2^*]$	Double-slit experiment, thin-film optical coatings

Table 4.1: Summary of complex analysis relations in physical sciences.

4.5 Chapter Exercises

1. **Roots of Unity:** Determine all four roots of the equation $z^4 + 16 = 0$ in polar and Cartesian form, and plot them in the Argand plane.
2. **Trigonometric Summation:** Using the geometric series formula with complex exponentials, evaluate the sum $\sum_{k=0}^n \cos(k\theta)$.
3. **Parallel RLC Network:** Derive the equivalent complex admittance $\tilde{Y} = 1/\tilde{Z}$ for a parallel combination of R , L , and C , and find the anti-resonance condition.
4. **Cauchy's Integral Formula:** Evaluate the contour integral $\oint_C \frac{e^{iz}}{z^2+1} dz$ where C is the circle $|z| = 2$ traversed counterclockwise. Use the residue theorem and state which poles lie inside C .
5. **Phasor Power Factor:** A series RL circuit has resistance $R = 50 \, \Omega$ and inductance $L = 0.2 \, \text{H}$. For a source voltage $\tilde{V} = 240e^{i0} \, \text{V}$ at $f = 50 \, \text{Hz}$, calculate the complex power $\tilde{S} = \frac{1}{2}\tilde{V}\tilde{I}^*$ and the power factor $\cos \phi$.

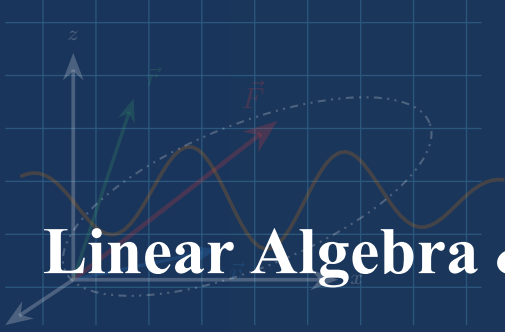

Chapter 5

Linear Algebra & Matrix Mechanics

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Perform matrix operations, evaluate determinants, and construct matrix inverses.
2. Classify symmetric, orthogonal, Hermitian, and unitary transformation matrices.
3. Formulate and solve the secular eigenvalue problem $\det(\mathbf{A} - \lambda \mathbf{I}) = 0$.
4. Diagonalize linear operators and construct similarity transformation matrices.
5. Apply matrix techniques to physical problems: coupled oscillators, normal modes, moment of inertia tensors, and quantum mechanical observables.
6. Solve large eigenvalue systems numerically using Python's 'numpy.linalg'.

5.1 Matrix Operations and Special Classes of Matrices

Linear relationships permeate theoretical physics. Systems of linear equations, spatial rotations, coordinate transformations, and quantum state evolutions are formulated through matrices.

Let $\mathbf{A} \in \mathbb{C}^{n \times n}$ denote an $n \times n$ square matrix with elements A_{ij} .

- **Transpose:** $(\mathbf{A}^T)_{ij} = A_{ji}$.
- **Complex Conjugate Transpose (Hermitian Adjoint):** $\mathbf{A}^\dagger \equiv (\mathbf{A}^*)^T$, so $(\mathbf{A}^\dagger)_{ij} = A_{ji}^*$.
- **Trace:** $\text{Tr}(\mathbf{A}) = \sum_{i=1}^n A_{ii}$ (invariant under cyclic permutations).

- **Determinant:** Scalar measure of volumetric scaling under the linear transformation $\det(\mathbf{A})$. If $\det(\mathbf{A}) \neq 0$, the matrix is invertible, with inverse satisfying $\mathbf{A}\mathbf{A}^{-1} = \mathbf{I}$.

Definition 5.1 Classification of Transformation Matrices

A square matrix $\mathbf{A}$ is classified according to its algebraic symmetries:

- **Symmetric:** $\mathbf{A}^T = \mathbf{A}$ (Real entries).
- **Orthogonal:** $\mathbf{A}^T \mathbf{A} = \mathbf{I} \Rightarrow \mathbf{A}^{-1} = \mathbf{A}^T$ (Preserves Euclidean vector norms and angles; e.g., 3D rotation matrices).
- **Hermitian:** $\mathbf{A}^\dagger = \mathbf{A}$ (Generalization of symmetric to complex space; all eigenvalues are real, representing quantum observables).
- **Unitary:** $\mathbf{U}^\dagger \mathbf{U} = \mathbf{I} \Rightarrow \mathbf{U}^{-1} = \mathbf{U}^\dagger$ (Preserves quantum probability amplitudes; e.g., time evolution operator $U(t) = e^{-iHt/\hbar}$).

5.2 The Eigenvalue Problem and Diagonalization

Definition 5.2 Secular Equation

A non-zero column vector $\vec{v} \neq \vec{0}$ is an **eigenvector** of $\mathbf{A}$ with corresponding **eigenvalue** λ if:

$$\mathbf{A}\vec{v} = \lambda\vec{v} \iff (\mathbf{A} - \lambda\mathbf{I})\vec{v} = \vec{0} \quad (5.1)$$

For non-trivial solutions to exist, the coefficient matrix must be singular, yielding the **characteristic (secular) equation**:

$$\det(\mathbf{A} - \lambda\mathbf{I}) = 0 \quad (5.2)$$

Expanding this determinant yields an n -th degree polynomial whose roots are the eigenvalues $\lambda_1, \lambda_2, \dots, \lambda_n$.

Theorem 5.1 Spectral Theorem for Hermitian Matrices

If $\mathbf{A}$ is an $n \times n$ Hermitian (or real symmetric) matrix:

1. All n eigenvalues λ_k are strictly real.
2. Eigenvectors corresponding to distinct eigenvalues are mutually orthogonal: $\vec{v}_i^\dagger \vec{v}_j = 0$ for $\lambda_i \neq \lambda_j$.
3. There exists a unitary matrix $\mathbf{U}$ formed by orthonormalized eigenvectors as columns such that:

$$\mathbf{U}^\dagger \mathbf{A} \mathbf{U} = \mathbf{\Lambda} = \text{diag}(\lambda_1, \lambda_2, \dots, \lambda_n) \quad (5.3)$$

Pitfall Alert: Non-Commutative Matrix Products

Matrix multiplication is fundamentally non-commutative: in general, $\mathbf{AB} \neq \mathbf{BA}$. The commutator is defined as:

$$[\mathbf{A}, \mathbf{B}] \equiv \mathbf{AB} - \mathbf{BA} \quad (5.4)$$

In quantum mechanics, if two observable operators do not commute ($[\mathbf{A}, \mathbf{B}] \neq \mathbf{0}$), they cannot be measured simultaneously with arbitrary precision (Robertson-Schrödinger uncertainty relation $\Delta A \Delta B \geq \frac{1}{2} | \langle [\mathbf{A}, \mathbf{B}] \rangle |$).

5.3 Physical Applications: Coupled Oscillators and Normal Modes

Consider two identical masses m connected by springs of stiffness k between fixed walls and coupled by a central spring of stiffness k_c . The equations of motion are:

$$m\ddot{x}_1 = -kx_1 - k_c(x_1 - x_2) \quad (5.5)$$

$$m\ddot{x}_2 = -kx_2 - k_c(x_2 - x_1) \quad (5.6)$$

In matrix notation, defining displacement vector $\vec{x} = \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}$:

$$m \begin{pmatrix} \ddot{x}_1 \\ \ddot{x}_2 \end{pmatrix} + \begin{pmatrix} k + k_c & -k_c \\ -k_c & k + k_c \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix} \quad (5.7)$$

Assuming harmonic solutions $\vec{x}(t) = \vec{v}e^{i\omega t}$, we obtain the generalized eigenvalue problem $\mathbf{K}\vec{v} = \omega^2 m\vec{v}$.

5.4 Worked Examples and Physical Applications

Example 5.1: Normal Modes of Coupled Masses

Find the normal frequencies ω_1, ω_2 and normal mode vectors for the coupled system with $k_c = k$.

Picture / Conceptualization: Two masses oscillating along a straight line. In mode 1, they oscillate in phase (center spring unstretched). In mode 2, they oscillate in anti-phase (center spring maximally stretched).

Strategy / Governing Laws: The stiffness matrix with $k_c = k$ is $\mathbf{K} = k \begin{pmatrix} 2 & -1 \\ -1 & 2 \end{pmatrix}$. Solve the characteristic equation $\det(\mathbf{K} - \lambda m \mathbf{I}) = 0$, where $\lambda = \omega^2$.

Calculation / Analytical Solution: 1. Secular determinant:

$$\begin{vmatrix} 2k - m\omega^2 & -k \\ -k & 2k - m\omega^2 \end{vmatrix} = 0 \implies (2k - m\omega^2)^2 - k^2 = 0 \quad (5.8)$$

2. Solving for ω^2 :

$$2k - m\omega^2 = \pm k \Rightarrow \omega_1^2 = \frac{k}{m}, \quad \omega_2^2 = \frac{3k}{m} \quad (5.9)$$

3. Eigenvectors (Normal Modes): For $\omega_1 = \sqrt{k/m}$:

$$\begin{pmatrix} k & -k \\ -k & k \end{pmatrix} \begin{pmatrix} v_{11} \\ v_{12} \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix} \Rightarrow v_{11} = v_{12} \Rightarrow \vec{v}_1 = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 1 \end{pmatrix} \quad (5.10)$$

For $\omega_2 = \sqrt{3k/m}$:

$$\begin{pmatrix} -k & -k \\ -k & -k \end{pmatrix} \begin{pmatrix} v_{21} \\ v_{22} \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix} \Rightarrow v_{21} = -v_{22} \Rightarrow \vec{v}_2 = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ -1 \end{pmatrix} \quad (5.11)$$

Think / Physical Insights: In the symmetric mode $\vec{v}_1$, both masses move in unison ($x_1 = x_2$), so the coupling spring never changes length, yielding the single-mass frequency $\omega_1 = \sqrt{k/m}$. In the antisymmetric mode $\vec{v}_2$, the masses move in opposite directions ($x_1 = -x_2$), subjecting each mass to strong restoring force from the coupling spring and increasing the natural frequency to $\sqrt{3k/m}$. ■

Eigenvalue and Normal Mode Computation in Python

```
1 import numpy as np
2
3 # System parameters
4 m = 1.0 # kg
5 k = 10.0 # N/m
6
7 # Stiffness matrix K
8 K = np.array([[2*k, -k],
9               [-k, 2*k]])
10
11 # Eigenvalues and eigenvectors
12 evals, evcs = np.linalg.eigh(K / m)
13 frequencies = np.sqrt(evals)
14
15 print(f"Normal Mode Frequencies (rad/s): {frequencies}")
16 print("Orthonormal Eigenvectors (Columns):")
17 print(evcs)
```

Example 5.2: Diagonalization of a 2D Moment of Inertia Tensor

A thin rigid lamina consists of two equal point masses m located at $\vec{r}_1 = (a, 0, 0)$ and $\vec{r}_2 = (0, b, 0)$. Find the inertia tensor $\mathbf{I}$, determine its eigenvalues (principal moments), and find the principal axes of rotation.

Solution:

The inertia tensor components are $I_{jk} = \sum_{\alpha} m_{\alpha} (\delta_{jk} |\vec{r}_{\alpha}|^2 - r_{\alpha j} r_{\alpha k})$.
For mass 1 at $(a, 0, 0)$: $|\vec{r}_1|^2 = a^2$. For mass 2 at $(0, b, 0)$: $|\vec{r}_2|^2 = b^2$.

Assembling the relevant 2×2 block in the xy -plane:

$$I_{xx} = m(0^2) + m(b^2) = mb^2 \quad (5.12)$$

$$I_{yy} = m(a^2) + m(0^2) = ma^2 \quad (5.13)$$

$$I_{xy} = I_{yx} = -m(a)(0) - m(0)(b) = 0 \quad (5.14)$$

The inertia tensor (in the xy -plane) is diagonal:

$$\mathbf{I} = m \begin{pmatrix} b^2 & 0 \\ 0 & a^2 \end{pmatrix} \quad (5.15)$$

The eigenvalues are $I_1 = mb^2$ (rotation about $\hat{x}$) and $I_2 = ma^2$ (rotation about $\hat{y}$). The eigenvectors are simply $\hat{e}_1 = \hat{x}$ and $\hat{e}_2 = \hat{y}$, confirming that the coordinate axes are already principal axes.

Now consider a perturbed configuration where an additional product of inertia coupling $I_{xy} = -mab/2$ is introduced. The characteristic equation is:

$$\det \begin{pmatrix} mb^2 - \lambda & -mab/2 \\ -mab/2 & ma^2 - \lambda \end{pmatrix} = 0 \implies \lambda^2 - m(a^2 + b^2)\lambda + m^2 \left(a^2b^2 - \frac{a^2b^2}{4} \right) = 0 \quad (5.16)$$

$$\lambda_{1,2} = \frac{m(a^2 + b^2)}{2} \pm \frac{m}{2} \sqrt{(a^2 - b^2)^2 + a^2b^2} \quad (5.17)$$

Think / Physical Insights: Diagonalizing $\mathbf{I}$ is physically equivalent to finding a body frame in which the angular momentum $\vec{L} = \mathbf{I}\vec{\omega}$ is always parallel to $\vec{\omega}$. This frame defines the principal axes. For a free rigid body, rotation about the largest and smallest principal moments is stable (Tennis Racket Theorem). ■

5.5 Summary of Key Formulas

Property / Operation	Formula	Physical Meaning
Characteristic Equation	$\det(\mathbf{A} - \lambda\mathbf{I}) = 0$	Frequencies of normal modes, energy eigenvalues
Hermitian Matrix	$\mathbf{H}^\dagger = \mathbf{H}$	Observables in quantum theory have real spectra
Unitary Transformation	$\mathbf{U}^\dagger\mathbf{U} = \mathbf{I}$	Conservation of total probability and vector lengths
Inertia Tensor Diagonalization	$\mathbf{R}^T\mathbf{I}\mathbf{R} = \text{diag}(I_1, I_2, I_3)$	Finding principal axes of rotation in rigid body mechanics
Spectral Theorem	$\mathbf{A} = \sum_i \lambda_i \hat{v}_i\rangle\langle\hat{v}_i $	Any Hermitian operator is a sum of projections onto eigenstates

Table 5.1: Key matrix algebra formulas and their physical interpretations.

5.6 Chapter Exercises

1. **Pauli Spin Matrices:** The Pauli spin matrices in quantum mechanics are $\sigma_x = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}$, $\sigma_y = \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix}$, $\sigma_z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}$. Prove that each is Hermitian and find their eigenvalues and normalized eigenvectors.
2. **Inertia Tensor:** A system consists of three equal masses m located at $(a, 0, 0)$, $(0, a, a)$, and $(0, 0, a)$. Calculate the inertia tensor components I_{ij} and diagonalize the matrix to determine the principal moments of inertia.
3. **Three-Coupled Oscillators:** Write the 3×3 stiffness matrix for three coupled masses in a ring topology and calculate the normal mode frequencies.
4. **Cayley-Hamilton Theorem:** Every square matrix satisfies its own characteristic equation. Verify this for $\mathbf{A} = \begin{pmatrix} 3 & 1 \\ 2 & 4 \end{pmatrix}$ by computing $\mathbf{A}^2 - 7\mathbf{A} + 10\mathbf{I}$ and confirming it equals the zero matrix.
5. **Singular Value Decomposition (SVD):** Explain what the singular values σ_i of a real matrix $\mathbf{M}$ represent geometrically. For the matrix $\mathbf{M} = \begin{pmatrix} 3 & 0 \\ 4 & 5 \end{pmatrix}$, compute $\mathbf{M}^T \mathbf{M}$ and find its eigenvalues, which are σ_i^2 .



Chapter 6

Multivariable Differential Calculus

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Compute partial derivatives and verify Clairaut's theorem for mixed second-order derivatives.
2. Construct total differentials and distinguish exact differentials from inexact differentials in thermodynamics.
3. Apply the multivariable chain rule to moving frames and coordinate transformations.
4. Calculate directional derivatives, normal vectors, and tangent planes to level surfaces.
5. Locate and classify unconstrained critical points using the Hessian determinant test.
6. Solve constrained physical optimization problems using the method of Lagrange multipliers.

6.1 Partial Derivatives and Clairaut's Symmetry Theorem

Physical fields in classical mechanics, thermodynamics, and electromagnetism depend on multiple spatial and temporal coordinates (x, y, z, t) . For a scalar function $f(x, y)$, the **partial derivative** with respect to x measures the rate of change while holding y strictly constant:

$$\frac{\partial f}{\partial x} \equiv \lim_{\Delta x \rightarrow 0} \frac{f(x + \Delta x, y) - f(x, y)}{\Delta x} \quad (6.1)$$

Theorem 6.1 Clairaut's Theorem on Mixed Partial

If the partial derivatives $\frac{\partial^2 f}{\partial x \partial y}$ and $\frac{\partial^2 f}{\partial y \partial x}$ exist and are continuous on an open disk containing point (x_0, y_0) , then the order of differentiation is commutative:

$$\frac{\partial^2 f}{\partial x \partial y} = \frac{\partial^2 f}{\partial y \partial x} \quad (6.2)$$

In thermodynamics, this mathematical symmetry generates the powerful **Maxwell relations** connecting pressure, volume, temperature, and entropy.

6.2 Total Differentials and Thermodynamic State Functions

The **total differential** of a function $f(x, y, z)$ represents the first-order change induced by arbitrary infinitesimal increments (dx, dy, dz) :

$$df = \frac{\partial f}{\partial x}dx + \frac{\partial f}{\partial y}dy + \frac{\partial f}{\partial z}dz = \nabla f \cdot d\vec{r} \quad (6.3)$$

Definition 6.1 Exact vs. Inexact Differentials

A differential form $\delta Q = P(x, y)dx + Q(x, y)dy$ is **exact** if it can be written as the total differential of a state function $f(x, y)$, which requires:

$$\frac{\partial P}{\partial y} = \frac{\partial Q}{\partial x} \quad (6.4)$$

In thermodynamics, internal energy $dU = TdS - PdV$ is an exact differential (a state function independent of path), whereas heat δQ and work δW are inexact differentials whose integrals depend explicitly on the thermodynamic process path.

Pitfall Alert: Thermodynamic Notation and Constrained Variables

In thermodynamics, writing $\frac{\partial U}{\partial T}$ is ambiguous because internal energy can be expressed in terms of (T, V) or (T, P) . One must always specify the held-constant variable explicitly using subscripts:

$$\left(\frac{\partial U}{\partial T}\right)_V \neq \left(\frac{\partial U}{\partial T}\right)_P \quad (6.5)$$

6.3 Directional Derivatives and Tangent Planes

The directional derivative of $f(x, y, z)$ along a unit direction vector $\hat{u} = u_x\hat{i} + u_y\hat{j} + u_z\hat{k}$ is:

$$D_{\hat{u}}f = \nabla f \cdot \hat{u} = |\nabla f| \cos \theta \quad (6.6)$$

The rate of change is maximized when $\hat{u}$ points along the gradient ($\theta = 0$), where $D_{\hat{u}}f = |\nabla f|$. It vanishes when $\hat{u}$ is tangent to the level surface ($\theta = 90^\circ$).

For a level surface defined by $F(x, y, z) = 0$, the gradient vector $\vec{n} = \nabla F(x_0, y_0, z_0)$ is strictly normal to the tangent plane at (x_0, y_0, z_0) . The equation of the **tangent plane** is:

$$\nabla F(x_0, y_0, z_0) \cdot (\vec{r} - \vec{r}_0) = 0 \iff F_x(x - x_0) + F_y(y - y_0) + F_z(z - z_0) = 0 \quad (6.7)$$

6.4 Constrained Optimization: The Method of Lagrange Multipliers

Physical systems frequently settle into equilibrium states that minimize potential energy or maximize entropy subject to geometric or conservation constraints.

Theorem 6.2 Lagrange Multiplier Principle

To find the extrema of an objective function $f(x, y, z)$ subject to an equality constraint $g(x, y, z) = 0$, the gradients of f and g must be parallel at the extremum point:

$$\nabla f = \lambda \nabla g \quad (6.8)$$

where λ is the **Lagrange multiplier**. Along with the constraint $g(x, y, z) = 0$, this yields four equations in four unknowns (x, y, z, λ) .

6.5 Worked Examples and Physical Applications

Example 6.1: Minimizing Electrostatic Potential Energy on a Constraint Surface

A charged particle moves on the elliptical cylinder constraint surface $g(x, y) = x^2 + 4y^2 - 4 = 0$ in the presence of an electrostatic potential $V(x, y) = x^2 + y^2 - 2x$. Determine the location of the constrained equilibrium point that minimizes potential energy.

Picture / Conceptualization: The particle is physically confined to an elliptical wire loop. The stable equilibrium position corresponds to the lowest point of the potential energy landscape on this ellipse.

Strategy / Governing Laws: Apply the Lagrange multiplier condition $\nabla V = \lambda \nabla g$ with the ellipse constraint $g(x, y) = 0$.

Calculation / Analytical Solution: 1. Compute gradients:

$$\nabla V = (2x - 2)\hat{i} + 2y\hat{j} \quad (6.9)$$

$$\nabla g = 2x\hat{i} + 8y\hat{j} \quad (6.10)$$

2. Set up component equations:

$$2x - 2 = 2\lambda x \implies x(1 - \lambda) = 1 \implies x = \frac{1}{1 - \lambda} \quad (6.11)$$

$$2y = 8\lambda y \implies y(1 - 4\lambda) = 0 \quad (6.12)$$

3. Case Analysis:

- **Case A:** $y = 0$. Substituting into constraint $x^2 + 4(0) = 4 \implies x = \pm 2$.

- At $(2, 0)$: $V(2, 0) = 4 + 0 - 4 = 0$.
- At $(-2, 0)$: $V(-2, 0) = 4 + 0 + 4 = 8$.

• **Case B:** $1 - 4\lambda = 0 \Rightarrow \lambda = 1/4$. Then $x = \frac{1}{1-1/4} = \frac{4}{3}$. From constraint: $(4/3)^2 + 4y^2 = 4 \Rightarrow \frac{16}{9} + 4y^2 = 4 \Rightarrow 4y^2 = \frac{20}{9} \Rightarrow y = \pm \frac{\sqrt{5}}{3}$. Evaluating potential:

$$V\left(\frac{4}{3}, \pm \frac{\sqrt{5}}{3}\right) = \left(\frac{4}{3}\right)^2 + \frac{5}{9} - 2\left(\frac{4}{3}\right) = \frac{16 + 5 - 24}{9} = -\frac{3}{9} = -\frac{1}{3} \quad (6.13)$$

Think / Physical Insights: Comparing the values: $V(4/3, \pm\sqrt{5}/3) = -1/3$ is strictly lower than $V(2, 0) = 0$ and $V(-2, 0) = 8$. Thus, there are two symmetric stable equilibrium points at $(4/3, \pm\sqrt{5}/3)$. ■

Lagrange Multiplier Contour Plot in Python

```
1 import numpy as np
2
3 # Verify potential values on the ellipse x = 2*cos(t), y = sin(t)
4 t = np.linspace(0, 2*np.pi, 1000)
5 x = 2 * np.cos(t)
6 y = np.sin(t)
7 V = x**2 + y**2 - 2*x
8
9 min_idx = np.argmin(V)
10 print(f"Numerical Minimum V = {V[min_idx]:.4f} at x = {x[min_idx]:.4f},
11       y = {y[min_idx]:.4f}")
12 print(f"Analytical Minimum: -1/3 = {-1/3:.4f}, x = 4/3 = {4/3:.4f}, y =
13       sqrt(5)/3 = {np.sqrt(5)/3:.4f}")
```

Example 6.2: Fourier's Heat Law and the Temperature Gradient

A cylindrical aluminium rod of length L has its left end maintained at $T_0 = 100^\circ\text{C}$ and its right end at $T_L = 20^\circ\text{C}$. At steady state, the temperature profile along the rod is $T(x) = T_0 + (T_L - T_0)\frac{x}{L}$. Calculate (i) the temperature gradient ∇T , (ii) the heat flux vector $\vec{q} = -k\nabla T$ with thermal conductivity $k = 237 \text{ W m}^{-1}\text{K}^{-1}$, and (iii) verify that $\nabla^2 T = 0$ at steady state.

Solution:

(i) Temperature gradient in the x -direction:

$$\nabla T = \frac{dT}{dx} \hat{i} = \frac{T_L - T_0}{L} \hat{i} = \frac{20 - 100}{L} \hat{i} = -\frac{80}{L} \hat{i} \quad [\text{K m}^{-1}] \quad (6.14)$$

(ii) Heat flux vector (Fourier's law):

$$\vec{q} = -k\nabla T = -237 \times \left(-\frac{80}{L}\right) \hat{i} = \frac{18960}{L} \hat{i} \quad [\text{W m}^{-2}] \quad (6.15)$$

The positive sign confirms heat flows in the $+x$ direction (from hot to cold).

(iii) Laplacian verification:

$$\nabla^2 T = \frac{d^2 T}{dx^2} = \frac{d}{dx} \left(-\frac{80}{L} \right) = 0 \quad \checkmark \quad (6.16)$$

This confirms the linear profile satisfies Laplace's equation $\nabla^2 T = 0$, as expected for steady-state heat conduction with no internal heat sources.

Think / Physical Insights: At steady state, the heat equation $\frac{\partial T}{\partial t} = \alpha \nabla^2 T$ reduces to Laplace's equation $\nabla^2 T = 0$. The temperature profile is harmonic — it has no local maxima or minima in the interior (maximum principle). This same mathematical structure governs electrostatic potential, gravitational potential, and steady-state diffusion. ■


6.6 Summary of Key Formulas

Theorem / Concept	Formula	Physical Application
Clairaut's Symmetry	$\frac{\partial^2 f}{\partial x \partial y} = \frac{\partial^2 f}{\partial y \partial x}$	Maxwell relations in thermodynamics, integrability of potentials
Total Differential	$df = \sum_i \frac{\partial f}{\partial x_i} dx_i$	First law of thermodynamics, propagation of experimental errors
Directional Derivative	$D_{\hat{u}} f = \nabla f \cdot \hat{u}$	Temperature gradients in heat conduction, pressure gradients in meteorology
Lagrange Multipliers	$\nabla f = \sum_k \lambda_k \nabla g_k$	Microcanonical entropy maximization, constraint forces in D'Alembert mechanics
Fourier's Heat Law	$\vec{q} = -k \nabla T$	Heat conduction, Fick's diffusion, Darcy's porous flow

Table 6.1: Key relations in multivariable differential calculus and thermodynamics.

6.7 Chapter Exercises

- Thermodynamic Maxwell Relation:** From the Helmholtz free energy $F = U - TS$ with $dF = -SdT - PdV$, prove that $\left(\frac{\partial S}{\partial V}\right)_T = \left(\frac{\partial P}{\partial T}\right)_V$.
- Tangent Plane to an Ellipsoid:** Find the equation of the tangent plane to the ellipsoid $\frac{x^2}{a^2} + \frac{y^2}{b^2} + \frac{z^2}{c^2} = 1$ at an arbitrary point (x_0, y_0, z_0) .
- Maximum Area with Fixed Perimeter:** Use Lagrange multipliers to prove that among all rectangles of fixed perimeter P , the square encloses the maximum area.
- Gradient in Spherical Coordinates:** A spherically symmetric gravitational potential is $\Phi(r) = -GM/r$. Calculate $\vec{g} = -\nabla \Phi$ in spherical coordinates and verify that $\nabla \cdot \vec{g} = 0$ for $r \neq 0$ (Gauss's law in vacuum).
- Second Derivative Test in 2D:** The function $f(x, y) = x^3 + y^3 - 3xy$ has a critical point structure. Find all critical points, compute the Hessian determinant $D = f_{xx}f_{yy} - f_{xy}^2$ at each, and classify each as a local minimum, maximum, or saddle point.

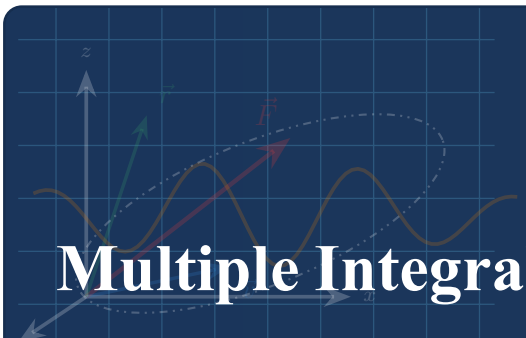

Chapter 7

Multiple Integrals & Field Theorems

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Evaluate multiple integrals over general domains using Fubini's theorem.
2. Perform coordinate transformations in multivariable integrals using the Jacobian determinant.
3. Calculate line integrals of vector fields along specified paths and surface fluxes through arbitrary surfaces.
4. State, prove, and apply Green's theorem, Stokes' circulation theorem, and Gauss's Divergence theorem.
5. Connect differential and integral formulations of physical laws (Maxwell's equations, continuity equation).
6. Implement numerical multiple integration algorithms in Python.

7.1 Multiple Integrals and the Jacobian Transformation

Physical quantities such as total mass $M = \iiint \rho(\vec{r}) dV$, center of mass $\vec{r}_{\text{cm}} = \frac{1}{M} \iiint \vec{r} \rho dV$, and moments of inertia require integration over two- and three-dimensional spatial manifolds.

When changing integration variables from (x, y, z) to curvilinear coordinates (u, v, w) , the volume transformation is scaled by the absolute value of the **Jacobian determinant**:

$$J \equiv \frac{\partial(x, y, z)}{\partial(u, v, w)} = \begin{vmatrix} \frac{\partial x}{\partial u} & \frac{\partial x}{\partial v} & \frac{\partial x}{\partial w} \\ \frac{\partial y}{\partial u} & \frac{\partial y}{\partial v} & \frac{\partial y}{\partial w} \\ \frac{\partial z}{\partial u} & \frac{\partial z}{\partial v} & \frac{\partial z}{\partial w} \end{vmatrix} \quad (7.1)$$

The integral transformation law is:

$$\iiint_V f(x, y, z) dx dy dz = \iiint_{V'} f(x(u, v, w), y(u, v, w), z(u, v, w)) |J| du dv dw \quad (7.2)$$

For orthogonal curvilinear coordinates, the Jacobian equals the product of the scale factors: $|J| = h_1 h_2 h_3$. Specifically:

- Cylindrical: $|J| = \rho \Rightarrow dV = \rho d\rho d\phi dz$.
- Spherical: $|J| = r^2 \sin \theta \Rightarrow dV = r^2 \sin \theta dr d\theta d\phi$.

7.2 The Fundamental Theorems of Vector Integral Calculus

Theorem 7.1 Green's Theorem in the Plane

Let C be a positively oriented (counterclockwise), piecewise-smooth, simple closed curve enclosing region $D \subset \mathbb{R}^2$. If $P(x, y)$ and $Q(x, y)$ have continuous partial derivatives on D :

$$\oint_C (P dx + Q dy) = \iint_D \left(\frac{\partial Q}{\partial x} - \frac{\partial P}{\partial y} \right) dA \quad (7.3)$$

Theorem 7.2 Stokes' Theorem (Circulation Theorem)

Let S be an oriented piecewise-smooth surface bounded by a closed contour $C = \partial S$ oriented by the right-hand rule with respect to the unit normal $\hat{n}$. For any continuously differentiable vector field $\vec{A}$:

$$\oint_C \vec{A} \cdot d\vec{r} = \iint_S (\nabla \times \vec{A}) \cdot d\vec{a} \quad (7.4)$$

In electrodynamics, applying Stokes' theorem to Faraday's law $\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$ generates the macroscopic induction law:

$$\mathcal{E} = \oint_C \vec{E} \cdot d\vec{r} = -\frac{d}{dt} \iint_S \vec{B} \cdot d\vec{a} = -\frac{d\Phi_B}{dt} \quad (7.5)$$

Theorem 7.3 Gauss's Divergence Theorem

Let V be a compact three-dimensional region bounded by a closed surface $S = \partial V$ oriented with an outward-pointing unit normal $\hat{n}$. For any continuously differentiable vector field $\vec{A}$:

$$\oint_S \vec{A} \cdot d\vec{a} = \iiint_V (\nabla \cdot \vec{A}) dV \quad (7.6)$$

Gauss's divergence theorem bridges the microscopic differential form of Gauss's law $\nabla \cdot \vec{E} = \frac{\rho}{\epsilon_0}$ and its macroscopic integral form $\oint_S \vec{E} \cdot d\vec{a} = \frac{Q_{\text{enclosed}}}{\epsilon_0}$.

Pitfall Alert: Orientation and Right-Hand Rule Conventions

In Stokes' theorem, the boundary curve C must be traversed such that when walking along C with one's head pointing in the direction of the surface normal $\hat{n}$, the surface S lies to one's left. In Gauss's theorem, S must be a **closed** surface, and $d\vec{a} = \hat{n} da$ must point **outward**.

7.3 Worked Examples and Physical Applications**Example 7.1: Verification of Gauss's Divergence Theorem**

Let $\vec{F}(x, y, z) = x\hat{i} + y\hat{j} + z\hat{k} = \vec{r}$. Verify Gauss's divergence theorem over a solid sphere of radius R centered at the origin.

Picture / Conceptualization: The vector field points radially outward everywhere from the origin with magnitude proportional to distance. The bounding surface is the sphere S of radius R .

Strategy / Governing Laws: Evaluate both sides of $\oint_S \vec{F} \cdot d\vec{a} = \iiint_V (\nabla \cdot \vec{F}) dV$ independently and compare the results.

Calculation / Analytical Solution: 1. Volume integral: Compute the divergence of the position vector:

$$\nabla \cdot \vec{r} = \frac{\partial x}{\partial x} + \frac{\partial y}{\partial y} + \frac{\partial z}{\partial z} = 1 + 1 + 1 = 3 \quad (7.7)$$

Integrate over the spherical volume:

$$\iiint_V (\nabla \cdot \vec{F}) dV = 3 \iiint_V dV = 3 \left(\frac{4}{3} \pi R^3 \right) = 4\pi R^3 \quad (7.8)$$

2. Surface integral: On the spherical surface of radius R , the outward unit normal is $\hat{n} = \hat{r}$, and the vector field is $\vec{F} = R\hat{r}$. The surface area element is $d\vec{a} = \hat{r} da$.

$$\oint_S \vec{F} \cdot d\vec{a} = \oint_S (R\hat{r}) \cdot (\hat{r} da) = R \oint_S da = R(4\pi R^2) = 4\pi R^3 \quad (7.9)$$

Think / Physical Insights: Both calculations yield precisely $4\pi R^3$. The divergence theorem converted a two-dimensional spherical surface integral into a trivial volume integral of a constant scalar divergence! ■

Numerical Verification of Flux through a Sphere

```

1 import numpy as np
2
3 # Monte Carlo integration over unit sphere
4 N = 1000000
5 pts = np.random.uniform(-1, 1, (N, 3))
6 r_sq = np.sum(pts**2, axis=1)
7 inside = pts[r_sq <= 1.0]
8

```

```

9 vol_sphere = (len(inside) / N) * 8.0 # Box volume is 2^3 = 8
10 div_F = 3.0
11 vol_integral = div_F * vol_sphere
12
13 exact = 4.0 * np.pi * (1.0)**3
14 print(f"Numerical Volume Integral: {vol_integral:.4f}")
15 print(f"Exact Analytical Flux:      {exact:.4f}")

```

Example 7.2: Gauss's Law for a Uniformly Charged Sphere

A solid sphere of radius R carries a uniform charge density ρ_0 [C m^{-3}]. Using the divergence theorem, (i) derive the electric field $\vec{E}$ for $r < R$ (interior) and $r > R$ (exterior), and (ii) verify that Gauss's law $\oint_S \vec{E} \cdot d\vec{a} = Q_{\text{enc}}/\epsilon_0$ holds at both a spherical Gaussian surface of radius $r < R$ and $r = 2R$.

Solution:

By spherical symmetry, $\vec{E} = E(r)\hat{r}$. Choose a concentric Gaussian sphere of radius r .

(i) Interior region ($r < R$): The enclosed charge is $Q_{\text{enc}} = \rho_0 \cdot \frac{4}{3}\pi r^3$.

$$\oint_S \vec{E} \cdot d\vec{a} = E(r) \cdot 4\pi r^2 = \frac{Q_{\text{enc}}}{\epsilon_0} = \frac{\rho_0}{\epsilon_0} \cdot \frac{4\pi r^3}{3} \Rightarrow \boxed{E(r) = \frac{\rho_0 r}{3\epsilon_0}, \quad r \leq R} \quad (7.10)$$

(ii) Exterior region ($r > R$): The total charge is $Q = \rho_0 \cdot \frac{4}{3}\pi R^3$.

$$E(r) \cdot 4\pi r^2 = \frac{Q}{\epsilon_0} = \frac{\rho_0 R^3}{3\epsilon_0} \cdot \frac{4\pi}{1} \Rightarrow \boxed{E(r) = \frac{\rho_0 R^3}{3\epsilon_0 r^2} = \frac{Q}{4\pi\epsilon_0 r^2}, \quad r > R} \quad (7.11)$$

Verification at $r = 2R$:

$$\Phi_E = E(2R) \cdot 4\pi(2R)^2 = \frac{\rho_0 R^3}{3\epsilon_0(2R)^2} \cdot 16\pi R^2 = \frac{4\pi\rho_0 R^3}{3\epsilon_0} = \frac{Q}{\epsilon_0} \quad \checkmark \quad (7.12)$$

Think / Physical Insights: The interior field grows linearly with r (analogous to a restoring Hookean force), while the exterior field follows an inverse-square law. This is Coulomb's law in disguise. The same mathematical structure appears in Newtonian gravity inside a massive shell (Newton's shell theorem), confirming that the divergence theorem is the unifying mathematical framework behind both laws. ■

7.4 Summary of Key Formulas

Theorem	Integral Equation	Physical Meaning
Green's Theorem	$\oint_{\partial D} (Pdx + Qdy) = \iint_D \left(\frac{\partial Q}{\partial x} - \frac{\partial P}{\partial y} \right) dA$	Planar circulation equals enclosed vorticity flux
Stokes' Theorem	$\oint_{\partial S} \vec{A} \cdot d\vec{r} = \iint_S (\nabla \times \vec{A}) \cdot d\vec{a}$	Faraday's induction and Ampère's circuital laws
Divergence Theorem	$\oiint_{\partial V} \vec{A} \cdot d\vec{a} = \iiint_V (\nabla \cdot \vec{A}) dV$	Gauss's law for electrostatic and gravitational flux
Jacobian Rule	$dV = \det J du_1 du_2 du_3$	Geometric volume distortion under curvilinear transforms
Gauss's Law	$\oiint_S \vec{E} \cdot d\vec{a} = Q_{\text{enc}}/\epsilon_0$	Electric flux through closed surface = enclosed charge/ ϵ_0

Table 7.1: Summary of fundamental integral transformation theorems.

7.5 Chapter Exercises

- Stokes' Theorem on a Paraboloid:** Verify Stokes' theorem for $\vec{A} = -y\hat{i} + x\hat{j} + z\hat{k}$ over the paraboloid surface $z = 1 - x^2 - y^2$ ($z \geq 0$) bounded by the unit circle in the xy -plane.
- Gravitational Field Divergence:** Show that for the Newtonian gravitational field $\vec{g} = -\frac{GM}{r^2}\hat{r}$, $\oiint_S \vec{g} \cdot d\vec{a} = -4\pi GM$ for any closed surface enclosing the origin.
- Jacobian in Elliptic Coordinates:** Calculate the Jacobian determinant for planar elliptic coordinates $x = a \cosh u \cos v$, $y = a \sinh u \sin v$.
- Ampère's Law via Stokes:** An infinite straight wire carries steady current I . Using Stokes' theorem with $\vec{B} = \frac{\mu_0 I}{2\pi\rho}\hat{\phi}$ in cylindrical coordinates, verify Ampère's law $\oint_C \vec{B} \cdot d\vec{l} = \mu_0 I$ for a circular loop of radius ρ around the wire.
- Solid Angle via Divergence:** Use the identity $\nabla \cdot (\vec{r}/r^3) = 4\pi\delta^3(\vec{r})$ and the divergence theorem to prove that the solid angle subtended by a closed surface S at a point P inside it equals 4π .

Chapter 8

First-Order Ordinary Differential Equations

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Classify ordinary differential equations by order, degree, and linearity.
2. Solve separable, homogeneous, exact, and linear first-order differential equations analytically.
3. Construct and apply integrating factors $\mu(x) = \exp\left(\int P(x) dx\right)$ to solve general linear ODEs.
4. Formulate dynamical initial-value problems for charging capacitors (RC), energizing inductors (RL), and thermal relaxation.
5. Model nonlinear atmospheric drag (quadratic air resistance) and calculate terminal velocities.
6. Implement adaptive numerical ODE solvers using Python's `scipy.integrate.solve_ivp`.

8.1 Classification and General Structure of ODEs

In dynamical systems, Newton's second law $\vec{F} = m \frac{d^2 \vec{r}}{dt^2}$, radioactive decay $\frac{dN}{dt} = -\lambda N$, and circuit laws are formulated as differential equations relating an unknown function to its derivatives.

An ordinary differential equation (ODE) contains only one independent variable. The **order** is the highest derivative present. A first-order ODE can be written in explicit form:

$$\frac{dy}{dx} = f(x, y) \quad \text{or differential form} \quad M(x, y) dx + N(x, y) dy = 0 \quad (8.1)$$

8.2 Fundamental Analytical Solution Methods

8.2.1 Separable Differential Equations

If the right-hand side factors into functions of x and y separately:

$$\frac{dy}{dx} = g(x)h(y) \implies \frac{1}{h(y)} dy = g(x) dx \quad (8.2)$$

Integrating both sides yields the general solution:

$$\int \frac{1}{h(y)} dy = \int g(x) dx + C \quad (8.3)$$

8.2.2 First-Order Linear ODEs and Integrating Factors

A first-order equation is **linear** if it can be arranged in the canonical standard form:

$$\frac{dy}{dx} + P(x)y = Q(x) \quad (8.4)$$

Theorem 8.1 The Integrating Factor Method

Multiplying both sides by the **integrating factor** $\mu(x) \equiv \exp\left(\int P(x) dx\right)$ transforms the left-hand side into the derivative of a product:

$$\frac{d}{dx} [\mu(x)y] = \mu(x)Q(x) \quad (8.5)$$

Integrating directly yields the general solution:

$$y(x) = \frac{1}{\mu(x)} \left[\int \mu(x)Q(x) dx + C \right] \quad (8.6)$$

Pitfall Alert: Ensuring Standard Normal Form

Before computing the integrating factor $\mu(x) = e^{\int P(x)dx}$, the differential equation **must** have a leading coefficient of unity for $\frac{dy}{dx}$. If given $x\frac{dy}{dx} + 2y = 4x^2$, one must first divide by x to identify $P(x) = 2/x$, giving $\mu(x) = e^{\int (2/x)dx} = x^2$.

8.3 Physical Applications: Atmospheric Drag and Terminal Velocity

Consider a body of mass m falling vertically under gravity g through a fluid. At high Reynolds numbers (e.g., a skydiver in air), the drag force is proportional to the square of velocity:

$$F_{\text{drag}} = -cv^2, \quad c = \frac{1}{2}\rho_{\text{air}}C_D A \quad (8.7)$$

Newton's second law gives:

$$m \frac{dv}{dt} = mg - cv^2 \implies \frac{dv}{dt} = g \left(1 - \frac{v^2}{v_t^2} \right) \quad (8.8)$$

where $v_t \equiv \sqrt{\frac{mg}{c}}$ is the **terminal velocity**, reached when drag balances gravity ($dv/dt = 0$).

8.4 Worked Examples and Physical Applications

Example 8.1: Analytical Solution of Skydiver with Quadratic Drag

Assuming the skydiver drops from rest ($v(0) = 0$), solve the nonlinear ODE for $v(t)$ and compute the time required to reach 95% of terminal velocity.

Picture / Conceptualization: The skydiver accelerates downward. As speed increases, opposing air drag grows quadratically until it equals gravitational weight.

Strategy / Governing Laws: The equation is separable: $\frac{dv}{1-(v/v_t)^2} = g dt$. Integrate using partial fractions or the hyperbolic substitution $\int \frac{du}{1-u^2} = \tanh^{-1}(u)$.

Calculation / Analytical Solution: 1. Separate variables:

$$\int \frac{dv}{v_t^2 - v^2} = \frac{g}{v_t^2} \int dt \quad (8.9)$$

Using the standard integral $\int \frac{dv}{v_t^2 - v^2} = \frac{1}{2v_t} \ln \left| \frac{v_t + v}{v_t - v} \right|$:

$$\frac{1}{2v_t} \ln \left(\frac{v_t + v}{v_t - v} \right) = \frac{gt}{v_t^2} + C \quad (8.10)$$

2. Initial condition $v(0) = 0 \Rightarrow \ln(1) = 0 \Rightarrow C = 0$. 3. Exponentiating both sides:

$$\frac{v_t + v}{v_t - v} = e^{2gt/v_t} \Rightarrow v(t) = v_t \left(\frac{e^{2gt/v_t} - 1}{e^{2gt/v_t} + 1} \right) = v_t \tanh \left(\frac{gt}{v_t} \right) \quad (8.11)$$

4. Time to reach $v = 0.95v_t$:

$$\tanh \left(\frac{gt_{95}}{v_t} \right) = 0.95 \Rightarrow \frac{gt_{95}}{v_t} = \tanh^{-1}(0.95) = \frac{1}{2} \ln \left(\frac{1.95}{0.05} \right) = \frac{1}{2} \ln(39) \approx 1.832 \quad (8.12)$$

Therefore:

$$t_{95} \approx 1.832 \frac{v_t}{g} \quad (8.13)$$

For a typical human skydiver with $v_t \approx 54$ m/s (195 km/h) and $g = 9.8$ m/s²:

$$t_{95} \approx 1.832 \left(\frac{54}{9.8} \right) \approx 10.1 \text{ seconds} \quad (8.14)$$

Think / Physical Insights: Because $\tanh(x) \rightarrow 1$ as $x \rightarrow \infty$, the terminal velocity is approached asymptotically. In approximately 10 seconds, the skydiver reaches over 95% of their final steady speed. ■

Nonlinear ODE Integration with SciPy solve_ivp

```
1 import numpy as np
2 from scipy.integrate import solve_ivp
3 import matplotlib.pyplot as plt
4
5 g = 9.8
6 vt = 54.0
7
```

```

8 def ode_drag(t, v):
9     return g * (1.0 - (v / vt)**2)
10
11 sol = solve_ivp(ode_drag, [0, 20], [0.0], t_eval=np.linspace(0, 20,
12     200))
13
14 v_analytical = vt * np.tanh(g * sol.t / vt)
15 max_error = np.max(np.abs(sol.y[0] - v_analytical))
16
17 print(f"Terminal velocity: {vt:.1f} m/s")
18 print(f"Maximum discrepancy between numerical and analytical solutions:
19     {max_error:.2e} m/s")

```

Example 8.2: Logistic Population Growth — Nonlinear First-Order ODE

A bacterial population $N(t)$ in a nutrient-limited environment obeys the logistic equation:

$$\frac{dN}{dt} = rN \left(1 - \frac{N}{K}\right) \quad (8.15)$$

where $r = 0.5 \text{ h}^{-1}$ is the intrinsic growth rate and $K = 10^6$ cells is the carrying capacity. Given $N(0) = 1000$ cells, (i) solve the ODE analytically, (ii) find the time $t_{1/2}$ when $N = K/2$, and (iii) determine $\lim_{t \rightarrow \infty} N(t)$.

Solution:

(i) Separation of variables:

$$\frac{dN}{N(1 - N/K)} = r dt \Rightarrow \int \left(\frac{1}{N} + \frac{1}{K - N} \right) dN = r dt \quad (8.16)$$

Integrating both sides:

$$\ln N - \ln(K - N) = rt + C \Rightarrow \frac{N}{K - N} = Ae^{rt}, \quad A = \frac{N_0}{K - N_0} \quad (8.17)$$

Solving for $N(t)$:

$$N(t) = \frac{K}{1 + \left(\frac{K - N_0}{N_0} \right) e^{-rt}} = \frac{10^6}{1 + 999 e^{-0.5t}} \quad (8.18)$$

(ii) Time to reach $N = K/2$:

$$\frac{K}{2} = \frac{K}{1 + Ce^{-rt_{1/2}}} \Rightarrow Ce^{-rt_{1/2}} = 1 \Rightarrow t_{1/2} = \frac{\ln(K/N_0 - 1)}{r} = \frac{\ln 999}{0.5} \approx 13.8 \text{ h} \quad (8.19)$$

(iii) Long-time limit: $\lim_{t \rightarrow \infty} N(t) = K = 10^6$ cells (carrying capacity is a stable equilibrium).

Think / Physical Insights: The inflection point (maximum growth rate) occurs at $N = K/2$. The logistic model appears in epidemiology (SIR model), tumour growth kinetics, the adoption curve of technologies (Bass diffusion model), and enzyme kinetics (Michaelis-Menten equation). The Bernoulli substitution $u = N^{1-1} = N^0$ is not needed here — separation of variables suffices due to the product structure. ■

Logistic Growth Numerical vs. Analytical Comparison

```

1 import numpy as np
2 from scipy.integrate import solve_ivp
3
4 r, K, N0 = 0.5, 1e6, 1000.0
5
6 def logistic(t, N):
7     return r * N * (1 - N / K)
8
9 sol = solve_ivp(logistic, [0, 40], [N0], dense_output=True)
10 t_test = np.linspace(0, 40, 5)
11 N_analytical = K / (1 + ((K - N0)/N0) * np.exp(-r * t_test))
12 N_numerical = sol.sol(t_test)[0]
13
14 for t, Na, Nn in zip(t_test, N_analytical, N_numerical):
15     print(f"t={t:4.0f}h   Analytical={Na:.0f}   Numerical={Nn:.0f}   Err={
16         abs(Na-Nn):.2e}")

```

8.5 Summary of Key Formulas

Equation Type	Standard Form	Solution Method
Separable	$\frac{dy}{dx} = g(x)h(y)$	Direct integration: $\int \frac{dy}{h(y)} = \int g(x)dx + C$
Linear 1st-Order	$\frac{dy}{dx} + P(x)y = Q(x)$	Integrating factor: $\mu(x) = \exp(\int P(x)dx)$
Exact Equation	$M dx + N dy = 0, \frac{\partial M}{\partial y} = \frac{\partial N}{\partial x}$	Potential function: $\phi(x, y) = C$
RC Circuit Discharge	$R \frac{dQ}{dt} + \frac{Q}{C} = 0$	Exponential relaxation: $Q(t) = Q_0 e^{-t/\tau}, \tau = RC$
Logistic Equation	$\frac{dN}{dt} = rN(1 - N/K)$	Separation: $N(t) = K/[1 + (K/N_0 - 1)e^{-rt}]$

Table 8.1: Classification and solution methods for first-order ordinary differential equations.

8.6 Chapter Exercises

- Series RL Circuit:** A circuit consists of an inductance L and resistance R connected to a constant voltage V_0 . At $t = 0$, the switch is closed. Solve $L \frac{dI}{dt} + RI = V_0$ with $I(0) = 0$ and identify the time constant.
- Newton's Law of Cooling:** A metal ingot at 800°C is placed in a quenching bath maintained at 25°C . After 2 minutes, the temperature is 400°C . Determine the time required for the temperature to drop to 50°C .
- Bernoulli Differential Equation:** Solve the nonlinear Bernoulli equation $\frac{dy}{dx} + \frac{1}{x}y = xy^2$ using the change of variable $u = y^{1-2} = y^{-1}$.

4. **Mixing Problem:** A tank initially contains 100 L of pure water. Saltwater with concentration 2 g/L flows in at rate 3 L/min, and well-mixed solution drains at 3 L/min. Write and solve the ODE for salt mass $m(t)$, and find the limiting salt concentration.
5. **Radioactive Chain Decay:** Nuclide A decays to B (decay constant λ_A), and B decays to stable C (λ_B). Given $N_A(0) = N_0$ and $N_B(0) = 0$, solve the coupled system to find $N_B(t)$. Show that N_B reaches a maximum at $t^* = \ln(\lambda_B/\lambda_A)/(\lambda_B - \lambda_A)$.

Chapter 9

Second-Order Linear Differential Equations & Oscillations

Chapter Learning Objectives

Upon mastering this chapter, students will be able to:

1. Solve homogeneous linear second-order ODEs with constant coefficients using the characteristic auxiliary equation.
2. Classify and physically interpret the three distinct damping regimes: overdamped, critically damped, and underdamped.
3. Find particular solutions to inhomogeneous ODEs using undetermined coefficients and variation of parameters.
4. Analyze driven mechanical and electrical oscillators, deriving the amplitude magnification and phase lag curves.
5. Calculate the resonance frequency, resonance peak height, and bandwidth in terms of the Quality factor (Q).
6. Compute and simulate damped and driven multi-frequency resonances numerically in Python.

9.1 Homogeneous Linear Second-Order ODEs with Constant Coefficients

Second-order differential equations are central to physics because Newton's second law $\vec{F} = m \frac{d^2 \vec{x}}{dt^2}$, wave equations $\nabla^2 \psi = \frac{1}{v^2} \frac{\partial^2 \psi}{\partial t^2}$, and Schrödinger's equation are all of second order.

The standard homogeneous equation with real constant coefficients is:

$$a \frac{d^2 x}{dt^2} + b \frac{dx}{dt} + cx = 0 \quad (9.1)$$

Substituting the trial solution $x(t) = e^{rt}$ yields the algebraic **characteristic equation**:

$$ar^2 + br + c = 0 \implies r_{1,2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a} \quad (9.2)$$

9.2 The Damped Harmonic Oscillator and Three Dynamic Regimes

Consider a particle of mass m attached to a spring of constant k moving in a viscous damping medium with drag force $F_d = -b\dot{x}$. Newton's second law gives:

$$m\ddot{x} + b\dot{x} + kx = 0 \iff \ddot{x} + 2\gamma\dot{x} + \omega_0^2 x = 0 \quad (9.3)$$

where $\omega_0 \equiv \sqrt{k/m}$ is the **undamped natural frequency**, and $\gamma \equiv \frac{b}{2m}$ is the **damping coefficient**. The characteristic roots are:

$$r_{1,2} = -\gamma \pm \sqrt{\gamma^2 - \omega_0^2} \quad (9.4)$$

Depending on the discriminant $\Delta = \gamma^2 - \omega_0^2$, the system exhibits three distinct physical regimes:

1. **Overdamped** ($\gamma > \omega_0$): Roots are real, distinct, and negative. The mass returns exponentially to equilibrium without oscillating:

$$x(t) = C_1 e^{-(\gamma - \sqrt{\gamma^2 - \omega_0^2})t} + C_2 e^{-(\gamma + \sqrt{\gamma^2 - \omega_0^2})t} \quad (9.5)$$

2. **Critically Damped** ($\gamma = \omega_0$): Repeated real root $r_1 = r_2 = -\gamma$. The system returns to equilibrium in the fastest possible time without overshoot:

$$x(t) = (C_1 + C_2 t) e^{-\gamma t} \quad (9.6)$$

This is the ideal design for automobile shock absorbers and analog galvanometer meters.

3. **Underdamped** ($\gamma < \omega_0$): Roots are complex conjugates $r_{1,2} = -\gamma \pm i\omega_d$, where $\omega_d \equiv \sqrt{\omega_0^2 - \gamma^2}$ is the **damped angular frequency**:

$$x(t) = A e^{-\gamma t} \cos(\omega_d t - \phi) \quad (9.7)$$

The system oscillates with exponentially decaying amplitude envelopes $\pm A e^{-\gamma t}$.

Regime	Condition	Characteristic Roots	Oscillatory?	Engineering Application
Overdamped	$\gamma > \omega_0$	Real, distinct: $r_1 \neq r_2 < 0$	No	Heavy industrial door closers
Critically Damped	$\gamma = \omega_0$	Real, repeated: $r = -\gamma$	No	Vehicle suspension, seismographs
Underdamped	$\gamma < \omega_0$	Complex: $-\gamma \pm i\omega_d$	Yes	Quartz clocks, atomic force microscopy

Table 9.1: Comparison of the three damping regimes in physical harmonic systems.

9.3 Driven Oscillations and Resonance

When subjected to an external sinusoidal driving force $F(t) = F_0 \cos(\omega t)$, the equation of motion becomes:

$$\ddot{x} + 2\gamma\dot{x} + \omega_0^2 x = \frac{F_0}{m} \cos(\omega t) \quad (9.8)$$

The steady-state particular solution is:

$$x_p(t) = A(\omega) \cos(\omega t - \delta) \quad (9.9)$$

where the steady-state amplitude $A(\omega)$ and phase lag $\delta(\omega)$ are:

$$A(\omega) = \frac{F_0/m}{\sqrt{(\omega_0^2 - \omega^2)^2 + 4\gamma^2\omega^2}} \quad (9.10)$$

$$\delta(\omega) = \arctan\left(\frac{2\gamma\omega}{\omega_0^2 - \omega^2}\right) \quad (9.11)$$

Definition 9.1 Resonance Frequency and Quality Factor

The amplitude $A(\omega)$ reaches its absolute maximum at the **amplitude resonance frequency**:

$$\omega_r = \sqrt{\omega_0^2 - 2\gamma^2} \quad (\text{valid for } \gamma < \omega_0/\sqrt{2}) \quad (9.12)$$

The sharpness of the resonance curve is quantified by the dimensionless **Quality factor** (Q):

$$Q \equiv \frac{\omega_0}{2\gamma} = \frac{\omega_0}{\Delta\omega_{\text{FWHM}}} \quad (9.13)$$

where $\Delta\omega_{\text{FWHM}}$ is the full width at half-maximum of the energy resonance profile.

Pitfall Alert: Distinction Between Three Characteristic Frequencies

Do not conflate the three distinct frequencies in damped systems:

- Undamped natural frequency: $\omega_0 = \sqrt{k/m}$.
- Damped natural frequency: $\omega_d = \sqrt{\omega_0^2 - \gamma^2} < \omega_0$.
- Amplitude resonance frequency: $\omega_r = \sqrt{\omega_0^2 - 2\gamma^2} < \omega_d < \omega_0$.

Only in the weakly damped limit ($\gamma \ll \omega_0$ or $Q \gg 1$) do these three frequencies converge: $\omega_0 \approx \omega_d \approx \omega_r$.

9.4 Worked Examples and Physical Applications**Example 9.1: Driven Oscillator Amplitude and Phase Response**

An instrument package of mass $m = 2.0$ kg is mounted on springs with effective constant $k = 800$ N/m and damping $b = 4.0$ N · s/m. A harmonic shaker applies driving force $F_0 = 10$ N at frequency $\omega = 18$ rad/s. Calculate: (a) undamped frequency ω_0 , (b) damping ratio γ , (c) quality factor Q , and (d) steady-state amplitude A and phase lag δ .

Picture / Conceptualization: The mass is driven harmonically near its natural resonance. Damping limits the peak amplitude.

Strategy / Governing Laws: Use the definitions $\omega_0 = \sqrt{k/m}$, $\gamma = b/(2m)$, and the steady-state response formulas for $A(\omega)$ and $\delta(\omega)$.

Calculation / Analytical Solution: 1. Natural frequency and damping parameter:

$$\omega_0 = \sqrt{\frac{800}{2.0}} = 20 \text{ rad/s} \quad (9.14)$$

$$\gamma = \frac{4.0}{2(2.0)} = 1.0 \text{ s}^{-1} \quad (9.15)$$

2. Quality factor:

$$Q = \frac{\omega_0}{2\gamma} = \frac{20}{2(1.0)} = 10 \quad (9.16)$$

3. Steady-state amplitude at $\omega = 18$ rad/s:

$$\omega_0^2 - \omega^2 = 20^2 - 18^2 = 400 - 324 = 76 \text{ (rad/s)}^2 \quad (9.17)$$

$$2\gamma\omega = 2(1.0)(18) = 36 \text{ (rad/s)}^2 \quad (9.18)$$

$$\text{Denominator} = \sqrt{(76)^2 + (36)^2} = \sqrt{5776 + 1296} = \sqrt{7072} \approx 84.1 \text{ (rad/s)}^2 \quad (9.19)$$

$$A(18) = \frac{F_0/m}{\text{Denominator}} = \frac{10/2.0}{84.1} = \frac{5.0}{84.1} \approx 0.0595 \text{ m} = 5.95 \text{ cm} \quad (9.20)$$

4. Phase lag:

$$\delta = \arctan\left(\frac{36}{76}\right) = \arctan(0.4737) \approx 0.442 \text{ rad} = 25.3^\circ \quad (9.21)$$

Think / Physical Insights: Because $\omega < \omega_0$, the driving frequency is below resonance, and the response lags by less than 90° ($\delta = 25.3^\circ$). At exact resonance ($\omega = \omega_0 = 20$ rad/s), the phase lag would be exactly 90° , and amplitude would reach $A_{\max} \approx \frac{F_0/m}{2\gamma\omega_0} = \frac{5.0}{40} = 0.125$ m = 12.5 cm. ■

Driven Harmonic Resonance Curves in Python

```

1 import numpy as np
2 import matplotlib.pyplot as plt
3
4 omega_0 = 20.0
5 F0_m = 5.0
6 omega = np.linspace(5, 35, 1000)
7
8 for Q in [2, 5, 10, 20]:
9     gamma = omega_0 / (2 * Q)
10    A = F0_m / np.sqrt((omega_0**2 - omega**2)**2 + 4 * gamma**2 *
11    omega**2)
12    print(f"Q = {Q:2d}: Peak Amplitude = {np.max(A)*100:.2f} cm")

```

Example 9.2: Driven RLC Resonance and Q-Factor Analysis

A series RLC circuit has $L = 10$ mH, $C = 100$ μ F, $R = 2$ Ω , and is driven by $\mathcal{E}(t) = 12 \cos(\omega t)$ V. (i) Find the resonance frequency ω_0 , (ii) compute the Q-factor and bandwidth $\Delta\omega$, (iii) calculate the maximum current amplitude at resonance, and (iv) identify the analogous mechanical oscillator.

Solution:

(i) Resonance frequency:

$$\omega_0 = \frac{1}{\sqrt{LC}} = \frac{1}{\sqrt{10 \times 10^{-3} \times 100 \times 10^{-6}}} = \frac{1}{\sqrt{10^{-6}}} = 1000 \text{ rad/s} \quad (9.22)$$

Corresponding to $f_0 = \omega_0/2\pi \approx 159.2$ Hz.

(ii) Q-factor and bandwidth:

$$Q = \frac{\omega_0 L}{R} = \frac{1000 \times 0.010}{2} = \boxed{5} \quad \Delta\omega = \frac{\omega_0}{Q} = \frac{1000}{5} = 200 \text{ rad/s} \quad (9.23)$$

The $Q = 5$ indicates moderate selectivity: at frequencies $|\omega - \omega_0| > 100$ rad/s, the response amplitude falls below $1/\sqrt{2}$ of peak.

(iii) Maximum current at resonance (where $X_L = X_C$ cancel):

$$\tilde{Z}(\omega_0) = R + i(\omega_0 L - 1/\omega_0 C) = R + 0 = 2 \Omega \Rightarrow \boxed{I_{\max} = \frac{\mathcal{E}_0}{R} = \frac{12}{2} = 6 \text{ A}} \quad (9.24)$$

(iv) Mechanical analogy: The RLC equation $L\ddot{Q} + R\dot{Q} + Q/C = \mathcal{E}_0 \cos \omega t$ maps exactly to $m\ddot{x} + b\dot{x} + kx = F_0 \cos \omega t$ via: $L \leftrightarrow m$, $R \leftrightarrow b$, $1/C \leftrightarrow k$, $Q \leftrightarrow x$, $\mathcal{E}_0 \leftrightarrow F_0$.

Think / Physical Insights: The Q-factor simultaneously quantifies: (1) energy stored relative to energy dissipated per cycle, $Q = 2\pi E/\Delta E_{\text{cycle}}$; (2) frequency

selectivity (bandwidth); and (3) oscillation longevity after the drive is switched off ($\tau_{\text{decay}} = Q/\omega_0$). High- Q resonators (quartz crystal, optical cavities) are fundamental to precise timekeeping and spectroscopy. ■

9.5 Summary of Key Formulas

Oscillator Parameter	Formula	Physical Meaning
Natural Frequency	$\omega_0 = \sqrt{k/m}$	Oscillation frequency without damping or driving
Damped Frequency	$\omega_d = \sqrt{\omega_0^2 - \gamma^2}$	Actual oscillation rate under viscous resistance
Amplitude Resonance	$\omega_r = \sqrt{\omega_0^2 - 2\gamma^2}$	Frequency of maximum steady-state displacement response
Quality Factor (Q)	$Q = \frac{\omega_0}{2\gamma} = 2\pi \frac{E}{\Delta E_{\text{cycle}}}$	Measure of energy retention per cycle and frequency selectivity
RLC Resonance	$\omega_0 = 1/\sqrt{LC}$, $Q = \omega_0 L/R$	Electrical analogue of the mechanical oscillator

Table 9.2: Key relationships for damped and driven harmonic oscillators.

9.6 Chapter Exercises

- Underdamped Logarithmic Decrement:** Show that the ratio of two successive maximum displacements x_n and x_{n+1} of an underdamped oscillator separated by period $T = 2\pi/\omega_d$ satisfies $\delta_{\log} \equiv \ln(x_n/x_{n+1}) = \gamma T = \frac{2\pi\gamma}{\sqrt{\omega_0^2 - \gamma^2}}$.
- Bridge Resonance Safety:** An army detachment marches across a suspension bridge of mass $M = 50,000$ kg and natural frequency $f_0 = 1.2$ Hz. Explain why troops are ordered to break step using the resonance amplitude formula.
- Electrical-Mechanical Analogies:** Construct a dictionary table mapping mass m , damping b , spring k , position x , and driving force F_0 to their electrical series LRC circuit counterparts.
- Coupled Pendulums:** Two identical pendulums of length ℓ are connected by a spring of constant k at their midpoints. Let θ_1 and θ_2 be the angular displacements. Write the linearised equations of motion, introduce normal coordinates $q_{\pm} = \theta_1 \pm \theta_2$, and identify the two normal mode frequencies $\omega_{\pm}$.
- Critically Damped Shock Absorber:** A car's suspension system has spring constant $k = 12$ kN/m and effective mass $m = 300$ kg. Calculate the critical damping coefficient $b_c = 2\sqrt{mk}$ needed to eliminate oscillation after a road bump, and write the general solution $x(t)$ for critical damping with initial conditions $x(0) = x_0$, $\dot{x}(0) = 0$.

Chapter A

Mathematical Formulas & Vector Identities

A.1 Differential Operators in Curvilinear Coordinates

Let ψ denote a smooth scalar field and $\vec{A} = A_1\hat{e}_1 + A_2\hat{e}_2 + A_3\hat{e}_3$ denote a continuously differentiable vector field.

A.1.1 Cartesian Coordinates (x, y, z)

Metric scale factors: $h_x = 1, h_y = 1, h_z = 1$.

$$\nabla\psi = \frac{\partial\psi}{\partial x}\hat{i} + \frac{\partial\psi}{\partial y}\hat{j} + \frac{\partial\psi}{\partial z}\hat{k} \quad (\text{A.1})$$

$$\nabla \cdot \vec{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z} \quad (\text{A.2})$$

$$\nabla \times \vec{A} = \left(\frac{\partial A_z}{\partial y} - \frac{\partial A_y}{\partial z} \right) \hat{i} + \left(\frac{\partial A_x}{\partial z} - \frac{\partial A_z}{\partial x} \right) \hat{j} + \left(\frac{\partial A_y}{\partial x} - \frac{\partial A_x}{\partial y} \right) \hat{k} \quad (\text{A.3})$$

$$\nabla^2\psi = \frac{\partial^2\psi}{\partial x^2} + \frac{\partial^2\psi}{\partial y^2} + \frac{\partial^2\psi}{\partial z^2} \quad (\text{A.4})$$

A.1.2 Cylindrical Coordinates (ρ, ϕ, z)

Metric scale factors: $h_\rho = 1, h_\phi = \rho, h_z = 1$.

$$\nabla\psi = \frac{\partial\psi}{\partial\rho}\hat{\rho} + \frac{1}{\rho}\frac{\partial\psi}{\partial\phi}\hat{\phi} + \frac{\partial\psi}{\partial z}\hat{k} \quad (\text{A.5})$$

$$\nabla \cdot \vec{A} = \frac{1}{\rho}\frac{\partial}{\partial\rho}(\rho A_\rho) + \frac{1}{\rho}\frac{\partial A_\phi}{\partial\phi} + \frac{\partial A_z}{\partial z} \quad (\text{A.6})$$

$$\nabla \times \vec{A} = \left(\frac{1}{\rho}\frac{\partial A_z}{\partial\phi} - \frac{\partial A_\phi}{\partial z} \right) \hat{\rho} + \left(\frac{\partial A_\rho}{\partial z} - \frac{\partial A_z}{\partial\rho} \right) \hat{\phi} + \frac{1}{\rho} \left(\frac{\partial(\rho A_\phi)}{\partial\rho} - \frac{\partial A_\rho}{\partial\phi} \right) \hat{k} \quad (\text{A.7})$$

$$\nabla^2\psi = \frac{1}{\rho}\frac{\partial}{\partial\rho} \left(\rho \frac{\partial\psi}{\partial\rho} \right) + \frac{1}{\rho^2}\frac{\partial^2\psi}{\partial\phi^2} + \frac{\partial^2\psi}{\partial z^2} \quad (\text{A.8})$$

A.1.3 Spherical Coordinates (r, θ, ϕ)

Metric scale factors: $h_r = 1$, $h_\theta = r$, $h_\phi = r \sin \theta$.

$$\nabla \psi = \frac{\partial \psi}{\partial r} \hat{r} + \frac{1}{r} \frac{\partial \psi}{\partial \theta} \hat{\theta} + \frac{1}{r \sin \theta} \frac{\partial \psi}{\partial \phi} \hat{\phi} \quad (\text{A.9})$$

$$\nabla \cdot \vec{A} = \frac{1}{r^2} \frac{\partial}{\partial r} (r^2 A_r) + \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (\sin \theta A_\theta) + \frac{1}{r \sin \theta} \frac{\partial A_\phi}{\partial \phi} \quad (\text{A.10})$$

$$\begin{aligned} \nabla \times \vec{A} = & \frac{1}{r \sin \theta} \left(\frac{\partial (\sin \theta A_\phi)}{\partial \theta} - \frac{\partial A_\theta}{\partial \phi} \right) \hat{r} \\ & + \frac{1}{r} \left(\frac{1}{\sin \theta} \frac{\partial A_r}{\partial \phi} - \frac{\partial (r A_\phi)}{\partial r} \right) \hat{\theta} + \frac{1}{r} \left(\frac{\partial (r A_\theta)}{\partial r} - \frac{\partial A_r}{\partial \theta} \right) \hat{\phi} \end{aligned} \quad (\text{A.11})$$

$$\nabla^2 \psi = \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial \psi}{\partial r} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial \psi}{\partial \theta} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2 \psi}{\partial \phi^2} \quad (\text{A.12})$$

A.2 Fundamental Vector and Differential Identities

$$\vec{A} \cdot (\vec{B} \times \vec{C}) = \vec{B} \cdot (\vec{C} \times \vec{A}) = \vec{C} \cdot (\vec{A} \times \vec{B}) \quad (\text{A.13})$$

$$\vec{A} \times (\vec{B} \times \vec{C}) = (\vec{A} \cdot \vec{C}) \vec{B} - (\vec{A} \cdot \vec{B}) \vec{C} \quad (\text{A.14})$$

$$\nabla \cdot (\nabla \times \vec{A}) = 0 \quad (\text{Divergence of a curl is zero}) \quad (\text{A.15})$$

$$\nabla \times (\nabla \psi) = \vec{0} \quad (\text{Curl of a gradient is zero}) \quad (\text{A.16})$$

$$\nabla \times (\nabla \times \vec{A}) = \nabla (\nabla \cdot \vec{A}) - \nabla^2 \vec{A} \quad (\text{A.17})$$

$$\nabla (\vec{A} \cdot \vec{B}) = \vec{A} \times (\nabla \times \vec{B}) + \vec{B} \times (\nabla \times \vec{A}) + (\vec{A} \cdot \nabla) \vec{B} + (\vec{B} \cdot \nabla) \vec{A} \quad (\text{A.18})$$



Bibliography

Arfken, G. B., Weber, H. J., & Harris, F. E. (2013). *Mathematical Methods for Physicists: A Comprehensive Guide* (7th ed.). Academic Press / Elsevier.

Boas, M. L. (2006). *Mathematical Methods in the Physical Sciences* (3rd ed.). John Wiley & Sons.

Griffiths, D. J. (2017). *Introduction to Electrodynamics* (4th ed.). Cambridge University Press.

Griffiths, D. J., & Schroeter, D. F. (2018). *Introduction to Quantum Mechanics* (3rd ed.). Cambridge University Press.


Riley, K. F., Hobson, M. P., & Bence, S. J. (2006). *Mathematical Methods for Physics and Engineering* (3rd ed.). Cambridge University Press.

Serway, R. A., & Jewett, J. W. (2018). *Physics for Scientists and Engineers with Modern Physics* (10th ed.). Cengage Learning.

Thassana, C. (2026). *Modern Physics with Computational Modeling and Virtual Reality Simulations*. Rambhai Barni Rajabhat University Press.

Tipler, P. A., & Mosca, G. (2020). *Physics for Scientists and Engineers* (6th ed.). W. H. Freeman.

Zill, D. G. (2018). *A First Course in Differential Equations with Modeling Applications* (11th ed.). Cengage Learning.

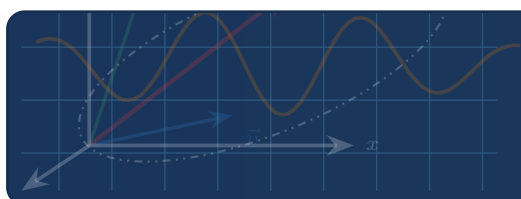

Subject Index

- Argand Plane, 22
- Binomial Expansion, 16
- Cartesian Coordinates, 1
- Cauchy-Riemann Equations, 22
- Chain Rule, 34
- Complex Impedance, 22
- Complex Numbers, 22
- Conservative Fields, 9
- Convergence Tests, 16
- Coordinate Systems, 1
- Coupled Oscillators, 28
- Critically Damped, 51
- Cross Product, 9
- Curl, 9
- Cylindrical Coordinates, 1
- Damped Oscillations, 51
- De Moivre's Theorem, 22
- Determinants, 28
- Diagonalization, 28
- Differential Elements, 1
- Differential Equations, 44
- Directional Derivative, 34
- Divergence, 9
- Dot Product, 9
- Driven Oscillations, 51
- Eigenvalues, 28
- Eigenvectors, 28
- Euler's Formula, 22
- Exact Equations, 44
- Gauss's Divergence Theorem, 39
- Gradient, 9
- Green's Theorem, 39
- Harmonic Oscillator, 51
- Harmonic Waves, 22
- Hermitian Matrix, 28
- Inertia Tensor, 28
- Infinite Series, 16
- Integrating Factor, 44
- Jacobian Determinant, 39
- Lagrange Multipliers, 34
- Lamé Coefficients, 1
- Laplacian, 9
- Line Integrals, 39
- Lorentz Force, 9
- Maclaurin Series, 16
- Matrix Algebra, 28
- Maxwell's Equations, 39
- Metric Tensor, 1
- Multiple Integrals, 39
- Multivariable Calculus, 34
- Ordinary Differential Equations, 44
- Overdamped, 51
- Partial Derivatives, 34
- Phasors, 22
- Quality Factor, 51
- Radius of Convergence, 16
- Ratio Test, 16
- RC Circuit Transient, 44
- Relativistic Energy Approximation, 16
- Resonance, 51
- Scalar Triple Product, 9
- Scale Factors, 1
- Second-Order ODEs, 51

Separable Equations, 44
Spherical Coordinates, 1
Stokes' Theorem, 39
Surface Integrals, 39

Tangent Plane, 34
Taylor Series, 16
Terminal Velocity, 44

Thermodynamic Potentials, 34
Time Constant, 44
Total Differential, 34

Underdamped, 51
Unitary Matrix, 28

Vector Analysis, 9
Vector Triple Product, 9

Author Biography



Asst. Prof. Dr. Chewa Thassana

Department of Physics, Faculty of Science and Technology
Rambhai Barni Rajabhat University (RBRU)

Email: `chewa.t@rbru.ac.th`

Educational Background

- **Ph.D. in Physics**
Doctor of Philosophy in Physics
- **M.Sc. in Physics**
Master of Science in Physics
- **B.Sc. in Physics**
Bachelor of Science in Physics (Honors)

Teaching Responsibilities

- Mathematics for Physics
- Modern Physics & Quantum Concepts
- Advanced Physics Laboratory
- Computational Physics & Scientific Python

Research Interests

- **Theoretical & Mathematical Physics:** Differential geometry, vector calculus, and nonlinear oscillations.
- **Computational Physics:** High-performance scientific numerical simulations and Python modeling.
- **Immersive Educational Technology:** Augmented, Virtual, and Extended Reality (AR/VR/XR) in STEM.
- **Artificial Intelligence in Education:** Machine learning and AI-assisted physics learning environments.