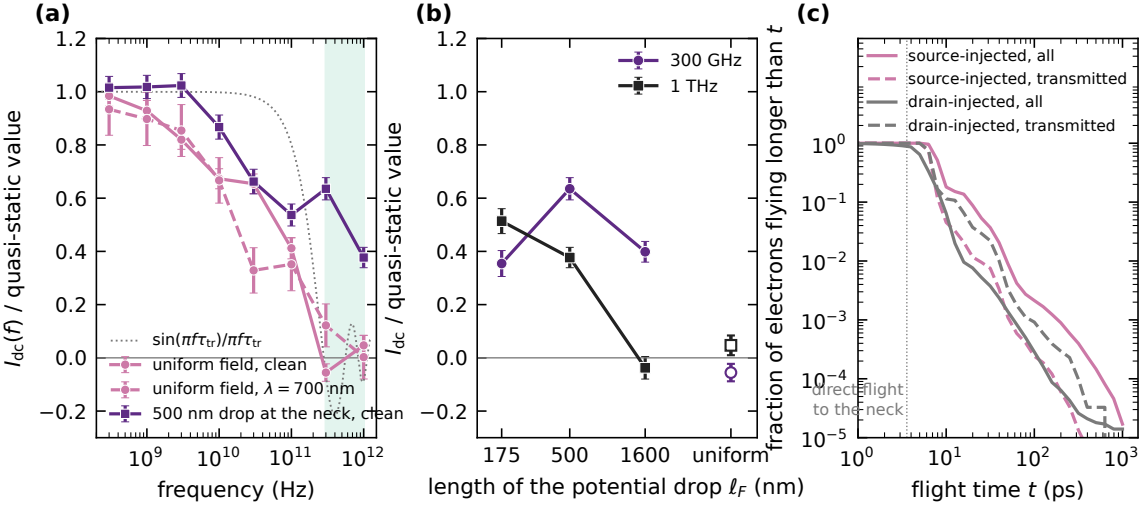
(a)
(b)
(c)
$I_{dc}(f)$ / quasi-static value
frequency (Hz)
$\sin(\pi f\tau_{tr})/\pi f\tau_{tr}$
uniform field, clean
uniform field, $\lambda = 700$ nm
500 nm drop at the neck, clean
I_{dc} / quasi-static value
300 GHz
1 THz
length of the potential drop ℓ_F (nm)
uniform
fraction of electrons flying longer than t
source-injected, all
source-injected, transmitted
drain-injected, all
drain-injected, transmitted
direct flight to the neck
flight time t (ps)