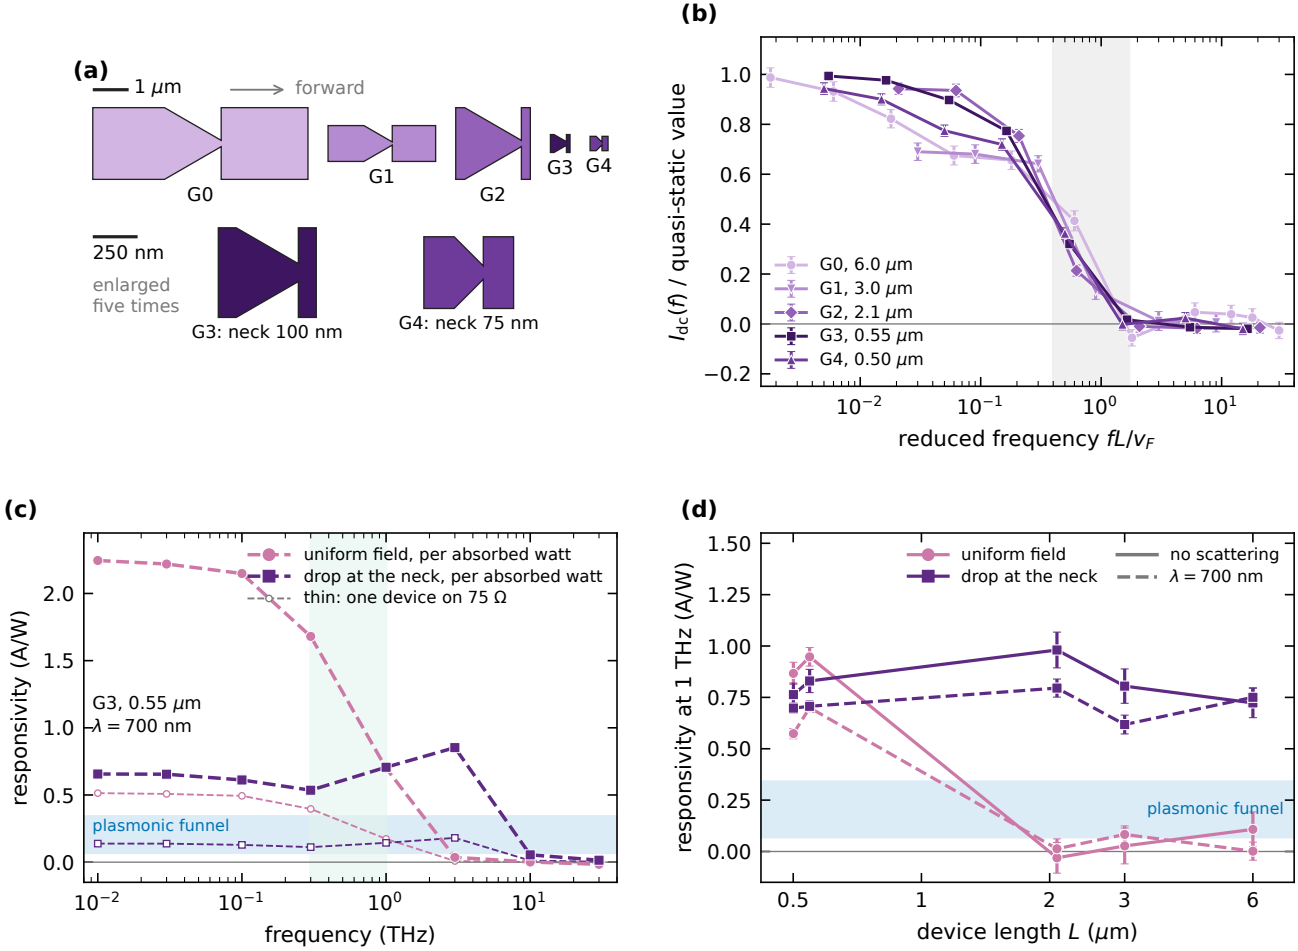
(a)
1 μm
forward
G0
G1
G2
G3
G4
250 nm
enlarged
five times
G3: neck 100 nm
G4: neck 75 nm
(b)
$I_{dc}(f)$ / quasi-static value
G0, 6.0 μm
G1, 3.0 μm
G2, 2.1 μm
G3, 0.55 μm
G4, 0.50 μm
reduced frequency fL/v_F
(c)
uniform field, per absorbed watt
drop at the neck, per absorbed watt
thin: one device on 75 Ω
G3, 0.55 μm
λ = 700 nm
plasmonic funnel
responsivity (A/W)
frequency (THz)
(d)
uniform field
drop at the neck
no scattering
λ = 700 nm
plasmonic funnel
responsivity at 1 THz (A/W)
device length L (μm)