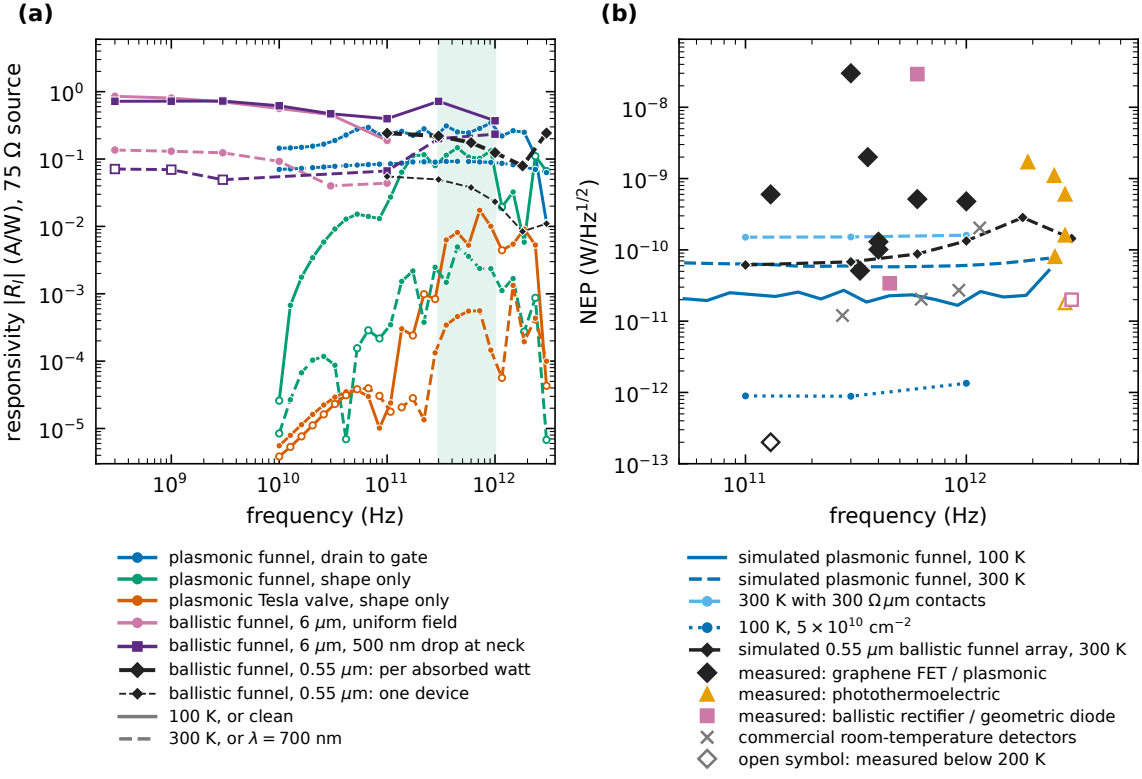
(a)
responsivity $|R_I|$ (A/W), 75 Ω source
frequency (Hz)
(b)
NEP (W/Hz$^{1/2}$)
frequency (Hz)
plasmonic funnel, drain to gate
plasmonic funnel, shape only
plasmonic Tesla valve, shape only
ballistic funnel, 6 μm, uniform field
ballistic funnel, 6 μm, 500 nm drop at neck
ballistic funnel, 0.55 μm: per absorbed watt
ballistic funnel, 0.55 μm: one device
100 K, or clean
300 K, or $\lambda = 700$ nm
simulated plasmonic funnel, 100 K
simulated plasmonic funnel, 300 K
300 K with 300 Ω μm contacts
100 K, 5×10^{10} cm^{-2}
simulated 0.55 μm ballistic funnel array, 300 K
measured: graphene FET / plasmonic
measured: photothermoelectric
measured: ballistic rectifier / geometric diode
commercial room-temperature detectors
open symbol: measured below 200 K