Task-Independent EEG based Subject Identification using Auditory Stimulus

Vinothkumar D.[1], Mari Ganesh Kumar[1], Abhishek Kumar[1], Hitesh Gupta[1], Saranya M. S.[1],
Mriganka Sur[2], Hema A. Murthy[1]

[1]Department of Computer Science and Engineering, Indian Institute of Technology Madras
[2]Department of Brain and Cognitive Sciences, Massachusetts Institute of Technology
{vinoth, mari, abkumar, hiteshg, saranms}@.iitm.ac.in, msur@mit.edu, hema@cse.iitm.ac.in

Abstract

Recent studies have shown that task-specific electroencephalography (EEG) can be used as a reliable biometric. This paper extends this study to task-independent EEG with auditory stimuli. Data collected from 40 subjects in response to various types of audio stimuli, using a 128 channel EEG system is presented to different classifiers, namely, k-nearest neighbor (k-NN), artificial neural network (ANN) and universal background model - Gaussian mixture model (UBM-GMM). It is observed that k-NN and ANN perform well when testing is performed intrasession, while UBM-GMM framework is more robust when testing is performed intersession. This can be attributed to the fact that the correspondence of the sensor locations across sessions is only approximate. It is also observed that EEG from parietal and temporal regions contain more subject information although the performance using all the 128 channel data is marginally better.

Index Terms: subject identification, electroencephalography, EEG biometrics, brain signals

1. Introduction

The objective of this paper is to extract signatures from EEG signals to uniquely recognize individuals. The study of subject-specific EEG signatures started with the analysis of genetic traits in twins [1] just 12 years after the first EEG recording on humans [2]. The task of identifying subject singular signatures has its use in the following applications. The first one being the ability to use EEG signals as a biometric system to uniquely authenticate/recognize individuals. Biometric systems that use brain signals are difficult to spoof. For example, face detection can be spoofed by facemasks, fingerprints by gummy fingers, voice print by replayed audio, eye scanner by contact lenses and high-resolution photographs. In addition to the robustness of EEG based recognition systems against spoofing and stealing, it is impossible for an intruder to force a user to authenticate. The measured brain waves can be analysed to detect stress and deny access [3].

The task of subject identification (Subject ID) from EEG is similar to that of identifying a speaker from a speech signal where the phoneme information, language information, and speaker information are present. There are some studies in the literature [4–6] where ideas from speech processing have been exploited for EEG analyses. In speaker identification (Speaker ID), the objective is to remove the phone information while preserving the speaker information. Contradicting this, in automatic speech recognition (ASR), the speaker-specific information is first discarded before processing the phone information [7, 8]. In EEG, irrespective of the task, information that discriminates among subjects [9, 10] is present, due to morphological and functional plasticity traits. The ultimate objective with EEG is to separate the subject dependent, and independent signatures. These subject-independent signatures could then be leveraged to build appropriate task-specific brain-computer interfaces (BCI).

The main challenges to be tackled while modeling these subject-specific traits include: (i) the design of elicitation protocols that discriminate subjects and (ii) permanence of the measured signatures over time [11]. The commonly used elicitation protocols for EEG biometrics include resting state responses with open and closed eyes, event-related potentials during some cognitive task. A detailed review of these different elicitation protocols and their performance can be found in [11, 12]. Some of the previous works have shown subject identification across tasks [13], in which each trial unit consists of responses to a particular task. Irrespective of the elicitation protocol, each of the results have shown success in subject identification, suggesting that any EEG signal must contain subject-specific traits. The main issue is that the responses for different tasks may come from different brain areas. This makes task-independent subject identification a challenging problem.

The human brain is known to be highly plastic. Hence, the reproducibility of the subject-specific EEG signatures over multiple acquisitions is also critical. In addition to biometrics, in clinical applications, it is not desirable to have a significant variance between various acquisitions. This problem has been the objective of many studies in clinical neurophysiology [9, 14–18]. These clinical studies suggest that alpha rhythms are more or less permanent. Despite these efforts, the issue of repeatability has not yet received necessary attention from the engineering community working on EEG as a biometric [11]. [19–22] are some of the works that have reported the performance of EEG biometric with intersession repeatability. Although they have reported reasonable accuracy on a small number of subjects, the variability across task is not analyzed, and the duration of the EEG signal required for subject identification is also not studied.

The most widely used classifiers for identifying subjects include k-NN [23], ANN [23–25] and support vector machines (SVM) [21, 26]. Apart from this, inspired by speaker verification, UBM-GMM [4, 6, 27–30] is also used for EEG subject recognition. In [4], the UBM-GMM system is evaluated across sessions in a verification setting with only 6 subjects as clients. In the same study, as the features were concatenated from different channels, the performance degrades significantly for intersession testing. In other studies, the UBM-GMM system was not tested across different acquisitions. The objective of this paper is two-fold:

1. Find a robust machine learning algorithm among ANN, UBM-GMM, and k-NN that scales well across sessions, and across tasks
2. Study the performance variability across different areas

Table 1: *Details of data collection protocols.*

No.	Experiment Names	Description	Total No. of Sessions	Total Duration (in minutes)
1	Odd ball paradigm with audio beeps	Audio beeps of two different frequencies were played as target and non-target stimulus. The subjects were expected to respond to target stimulus through mouse clicks.	20	265
2	Familiar and unfamiliar words	The subjects were presented with common words and uncommon words. They were expected to respond with a mouse click on hearing a familiar word.	14	196
3	Imagining binary answers	A set of questions with the answer being either yes or no were presented to the subjects. They were asked to imagine the answer and then respond with a mouse click. Left click was used for positive responses and right click for negative responses.	19	276
4	Semantically opposite words	Semantically opposite words such as "yes" and "no" were played to the subject over multiple trials. Subject was instructed to respond with left and right mouse clicks depending on the semantics of the word being played.	11	158
5	Passive listening	Subjects listened passively to a variety of audio stimuli such as stories, music, and sounds that trigger attention (for example sirens and the scattering of glass).	31	364

of the brain and duration of the EEG signal.

The rest of the paper is organized in the following manner: Section 2 discusses the different protocols used for EEG data collection. Section 3 describes the features and Section 4 describes the classifiers used to build the biometric system. The experimental setup is explained in Section 5. The results of subject identification along with the test for intersession repeatability is discussed in Section 6. Section 7 compares EEG subject identification with speaker identification. A supplementary analysis of the UBM-GMM result is discussed in Section 8, followed by conclusions in Section 9.

2. Data collection

EEG signals were recorded using a 128 channel EEG system provided by Electrical Geodesics, Inc (EGI) [31]. For this task, 95 sessions of data were obtained from 40 healthy subjects with their age ranging from 22 to 38. 15 of 40 subjects came for multiple sessions. All the subjects were made to sit in an anechoic chamber, and were presented with audio stimuli. For all the recording sessions the subjects were asked to keep their eyes closed.

Different protocols of stimuli were used to collect the dataset. All the protocols had a minute of resting state before and after the presentation of the stimuli. After the initial resting state, different kinds of audio stimuli were played to the subject. Each of these experiments followed different protocols. Details of all the protocols are given in Table 1. Protocols 1 to 4 have a cognitive load and the subjects were expected to perform some action based on the stimulus. The subjects were required to perform either a mental (imagined speech) or a motor activity (mouse clicks). In protocol 5, the subjects were expected to passively listen to audio stimuli such as stories and music. These five different protocols were designed to cover a diverse set of tasks or mental states limiting to auditory stimuli.

The brain signals obtained from all the different experimental protocols are then divided uniformly into trials of uniform length. It is to be noted that, this division is independent of the cognitive state, such as, whether the subject is in resting state or listening to an audio stimulus or giving feedback through motor/mental activity. The details of how these trials are used in our experiments can be found in Section 5.

3. Features

Some of the commonly used features for EEG biometrics include autoregressive (AR) coefficients [20, 21, 24, 32] and spectral features [9, 19, 23, 25, 33, 34]. While AR coefficients are the most widely used features, a slight change in the estimated coefficients can change the location of the root significantly in the *z*-domain. Raw power spectral density (PSD) features were used as features in this work. Contrasting with speaker identification, the resolution of EEG as a function of frequency is assumed to be linear. As the range of EEG signals is about 50 Hz, the full band consisting of frequency up to 50 Hz was used initially. In the literature, it has been established that different bands correspond to different states/actions of the subject. Hence, different sub-bands based subject identification (alpha [8 - 13 Hz], beta [13 - 30 Hz] and gamma [30 - 50 Hz]) is also performed in this study.

4. Classifiers

The UBM-GMM [4, 35] framework is a probabilistic framework first proposed in speaker verification/recognition. The UBM-GMM enables a common space in which the learned features can be represented. The UBM-GMM with M components is mixture model and is given by:

$$p(\bar{\mathrm{x}}|\lambda) = \sum_{k=1}^{M} w_k \mathcal{N}(\bar{\mathrm{x}}|\bar{\mu}_k, \boldsymbol{\Sigma}_k) \qquad (1)$$

where $\bar{\mathrm{x}}$ is the feature vector, $\mathcal{N}(\bar{\mathrm{x}}|\bar{\mu}_k, \boldsymbol{\Sigma}_k)$ is Gaussian with mean $\bar{\mu}_k$ and covariance $\boldsymbol{\Sigma}_k$. w_k is the weight associated with k-th Gaussian. The UBM is trained using feature vectors from all subjects, and all sessions. Subject-specific models are then built by adapting the UBM to subject-specific data using maximum-a-posteriori (MAP) adaptation. All the channels/electrodes of the EEG signal are considered to be independent. Although in the literature [4, 27, 29, 30], the feature vectors are concatenated across channels, with 128 channels, concatenation of feature vectors could lead to overfitting owing to the paucity of data. During testing, the likelihood is normalized

by performing a likelihood ratio test [35], given by Equation 2. Here λ_i is the subject-specific model, while λ_{ubm} is the UBM-GMM model. T is the number of feature vectors for a given length of time, and C is the total number of channels in the EEG signal. The final decision is made using:

$$S_{\text{ID}} = \underset{i}{\arg\max} \left(\frac{1}{C \times T} \sum_{c=1}^{C} \sum_{t=1}^{T} \{log\ P(\bar{\text{x}}_t^c | \lambda_i) \right.$$
$$\left. - log\ P(\bar{\text{x}}_t^c | \lambda_{\text{UBM}}) \} \right) \quad (2)$$

For ANN, the PSD features were concatenated from all the channels and then used. During testing, the probabilities obtained from concatenated frames are averaged across all the frames of PSD to get the subject label. When each channel's feature vectors were considered to be independent, ANN did not converge. k-NN being a non-parametric method, the frames of the PSD were averaged to get an average spectrum, and then concatenated across channels. Similar to ANN, k-NN also failed to give good results without channel concatenation.

5. Experimental setup

The experiments in this paper are designed to answer the following questions.

1. How conclusively can subjects be identified from EEG irrespective of the task?
2. Can the same subject-specific signatures be detected across multiple sessions or acquisitions?

The first question is answered by taking all the 40 subjects from different data collection protocols in Table 1. The data collected from various protocols are divided uniformly into task-independent trials of EEG data. These trials are assumed to be independent data instances for the classification problem. These trials are randomly divided in the ratio 60:10:30 as train, validation, and test for building, evaluating and testing the models respectively. It is to be noted that, training data is taken from all the sessions for each subject. This experiment will be referred to as "*intrasession testing*" in the following sections. To address the second question, 15 subjects with multiple session data are only considered. In this approach, the train and test data are split according to the number of sessions. The train and test sessions are chosen to be mutually exclusive (no overlap). This experiment will be referred to as "*intersession testing*" as the modeled signatures are tested across different sessions. The system performance is also evaluated for various trial lengths. In Figure 1.**A - C** correspond to topographic maps of different trials in a single session of a subject. Similarly, Figure 1.**D - F** correspond to the maps of the same subject obtained from a different session. Figure 1.**G - L** belong to a different subject. From the figures, variability can be observed across trials, sessions, and subjects. Nevertheless, different trials and sessions from the same subject (comparing within **A - F** and **G - L**) are observed to be more similar, compared to that of the maps across subjects (comparing between **A - F** and **G - L**).

Another set of experiments were performed to determine the area of the brain that contains signatures that are more subject singular.

The classification accuracy is used as an evaluation metric to test the performance of the systems in all the experiments. Classification accuracy is the total percentage of trials for which the subjects were identified correctly.
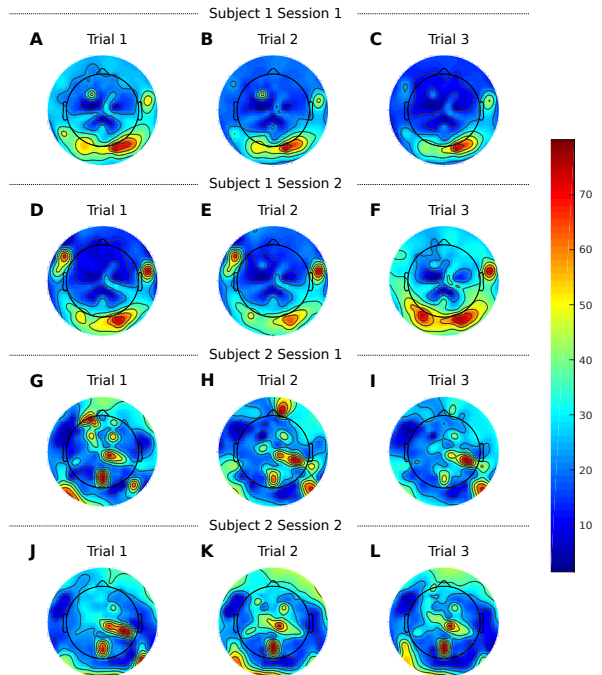

Figure 1: *Topographic plot of averaged beta band power for various trials and subjects. The trials* **A** *-* **F** *belong to subject* 1, *while trials* **G** *-* **L** *belong to subject* 2. *Sessions corresponds to different days of recording from the same subject.*

6. Results and discussion

As discussed in Section 5, the dataset was initially divided into trials of length 30 and 70 seconds. The result of *intrasession testing* with 40 subjects is given in Table 2 and the same for *intersession testing* with 15 subjects is given in Table 3. From Table 2, it can be observed that in intrasession trials, ANN achieves a maximum accuracy of 100%, when the length of the trial is 70s. The performance of k-NN is similar while that of UBM-GMM is relatively poor. All the three classification results indicate that subject information is indeed present in EEG signals, especially for intrasession.

Intersession testing is a harder problem as compared to the intrasession testing. Some factors such as placement of the electrodes, the time of the recording and the mental state of the subject could be different across sessions for the same subject. From Table 3, it can be inferred that the UBM-GMM based classifier is relatively more robust across sessions compared to ANN and k-NN. The results in Table 3 also indicate that there is a significant difference in performance across bands, with gamma showing the worst performance.

Table 2: *Accuracy (in %) of intrasession testing on 40 subjects.*

Classifiers Features	k-NN		ANN		UBM-GMM	
	30s	*70s*	*30s*	*70s*	*30s*	*70s*
PSD (All Bands)	96.1	90.9	86.3	86.3	89.5	91.2
PSD (Alpha Band)	95.3	94.3	97.4	89.9	60.8	72.5
PSD (Beta Band)	98.8	97.9	99.3	94.5	82.2	89.4
PSD (Gamma Band)	98.5	95.1	99.9	**100**	51.0	55.9

Table 3: *Accuracy (in %) of intersession testing on 15 subjects.*

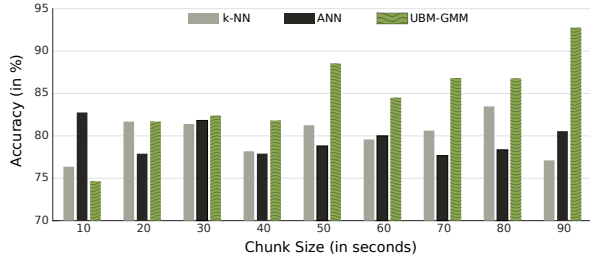| Classifiers / Features	k-NN		ANN		UBM-GMM	
	30s	*70s*	*30s*	*70s*	*30s*	*70s*
PSD (All Bands)	44.6	42.7	67.5	73.8	74.5	78.6
PSD (Alpha Band)	58.4	58.3	60.6	57.3	55.4	61.2
PSD (Beta Band)	81.4	80.6	81.8	78.4	81.7	**86.8**
PSD (Gamma Band)	59.3	57.3	66.2	67.9	35.1	39.8

Figure 2: *Accuracy of subject Identification for various duration of EEG signals*

The length of trial was varied from 10s-90s with an increment of 10s, to determine the optimal length of EEG signal required for subject ID. The results of all three Subject ID systems using PSD features from the beta band for different length of the data is shown in Figure 2. This analysis is performed only for *intersession testing*. Observe that the accuracy increases as the length of the data increases, for the UBM-GMM system. It is also evident that the UBM-GMM system performs far better than the ANN and k-NN system across sessions, as the duration of trial increases.

Table 4: *Accuracy (in %) obtained using a subset of channels from different brain areas for intersession testing.*

	All Channels	Frontal Lobe	Parietal Lobe	Occipital Lobe	Temporal Lobe
UBM-GMM	81.7	71.8	79.4	74.7	76.1

The results discussed so far have used all the 128 channels. It is possible that these subject-specific traits are present actively in some particular area of the brain. Therefore, while adapting and evaluating the UBM-GMM system, only channels belonging to a specific lobe of the brain were used. The result of this evaluation is given in Table 4. The results in Table 4 were computed for the trial length of 30s and beta band. From the Table 4, although all channels perform better, the performance from parietal and temporal lobe is also high. The high performance of the temporal lobe may be attributed to the use of audio stimuli in all the protocols used for data collection.

7. Comparison with speaker identification

Although subject identification using EEG signals and speaker identification have many similarities, there are some important differences. The first and the foremost difference is the sampling rate. While a sampling rate of 8 kHz is used for speaker identification tasks, EEG uses a rate of 250 Hz. Hence for subject identification, a larger time window is required to estimate the PSD. Owing to the low sampling rate, longer duration of EEG signals are required to identify a subject accurately. This is also evident from Figure 2.

The channels/electrodes used to record EEG signals are very different from the channels/microphones used to record speech. Between sessions, the location of different electrodes on the scalp can vary. UBM-GMM is, therefore, a better framework compared to k-NN and ANN for subject identification, as it transforms every feature vector to a vector of posteriors in the UBM-GMM space, which is akin to transforming the feature vectors non-linearly.

8. Analysis of the UBM-GMM system

The results in Table 2 and 3, suggest that UBM-GMM based system performs well in both *classical* and *intersession testing*. The EEG signatures vary significantly from subject to subject due to morphology and plasticity of the brain. Since the UBM-GMM is trained independent of a specific subject, it should be able to model a subspace, from which new subject-specific models can be obtained via MAP adaptation. To verify this hypothesis, in the *intrasession testing* scenario (40 subjects), only a set of random 20 subjects were used for training, and the remaining 20 subjects were only used for adaptation. The same was repeated for *intersession testing* experiment (15 subjects) by retaining random 8 subjects only for adaptation. The result was validated across three folds of splits, and the same can be found in Table 5.

Table 5: *Accuracy (in %) of subjects used for UBM training (UBM subjects) vs subjects used only for MAP adaptation (Adaption only subjects).*

		UBM Subjects	Adaptation Only Subjects
Classical Testing	Split-1	80.2	88.2
	Split-2	86.0	81.5
	Split-3	78.5	87.4
Intersession Testing	Split-1	79.8	80.3
	Split-2	78.0	84.4
	Split-3	83.6	79.1

Observe that, in Table 5, the classification accuracy is more or less stable, even when the subjects are not used to model the UBM. The UBM also models the task-dependent information and other noise in addition to the task-independent subject information. With sufficient number of subjects, this information can be removed using techniques similar to joint factor analysis (JFA) [36] and *i*-vector [37].

9. Conclusion

Subject-specific signatures can be detected in EEG signals independent of the task or cognitive state. The objective is to use EEG as a biometric or as a BCI. In the former, subject information can be used for authentication, while for the latter subject information must be filtered out to obtain signatures that discriminate mental states associated with tasks to build better brain-computer interfaces.

10. References

[1] H. Davis *et al.*, "Action potentials of the brain: In normal persons and in normal states of cerebral activity," *Archives of Neurology & Psychiatry*, vol. 36, no. 6, pp. 1214–1224, 1936. [Online]. Available: http://dx.doi.org/10.1001/archneurpsyc.1936.02260120061004

[2] T. F. Collura, "History and evolution of electroencephalographic instruments and techniques," *Journal of clinical neurophysiology*, vol. 10, no. 4, pp. 476–504, 1993.

[3] J. Klonovs *et al.*, "ID Proof on the Go: Development of a Mobile EEG-Based Biometric Authentication System," *IEEE Vehicular Technology Magazine*, vol. 8, no. 1, pp. 81–89, March 2013.

[4] S. Marcel and J. D. R. Millan, "Person Authentication Using Brainwaves (EEG) and Maximum A Posteriori Model Adaptation," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 29, no. 4, pp. 743–752, April 2007.

[5] P. Nguyen, "On EEG-based Person Recognition and Human Characteristics Classification," Ph.D. dissertation, University of Canberra, 2015.

[6] C. Ward *et al.*, "Applications of UBMs and I-vectors in EEG subject verification," in *2016 38th Annual International Conference of the IEEE Engineering in Medicine and Biology Society*, Aug 2016, pp. 748–751.

[7] D. Povey *et al.*, "Subspace Gaussian Mixture Models for speech recognition," in *2010 IEEE International Conference on Acoustics, Speech and Signal Processing*, March 2010, pp. 4330–4333.

[8] D. Povey *et al.*, "The subspace Gaussian Mixture Model-A structured model for speech recognition," *Computer Speech & Language*, vol. 25, no. 2, pp. 404 – 439, 2011. [Online]. Available: http://www.sciencedirect.com/science/article/pii/S088523081000063X

[9] J. Berkhout *et al.*, "Temporal Stability and Individual Differences in the Human EEG: An Analysis of Variance of Spectral Values," *IEEE Transactions on Biomedical Engineering*, vol. BME-15, no. 3, pp. 165–168, July 1968.

[10] H. V. Dis *et al.*, "Individual differences in the human electroencephalogram during quiet wakefulness," *Electroencephalography and Clinical Neurophysiology*, vol. 47, no. 1, pp. 87 – 94, 1979. [Online]. Available: http://www.sciencedirect.com/science/article/pii/001346947990035X

[11] P. Campisi *et al.*, "Brain waves for automatic biometric-based user recognition," *IEEE Transactions on Information Forensics and Security*, vol. 9, no. 5, pp. 782–800, 2014.

[12] M. D. Pozo-Banos *et al.*, "Electroencephalogram subject identification: A review," *Expert Systems with Applications*, vol. 41, no. 15, pp. 6537–6554, 2014. [Online]. Available: http://dx.doi.org/10.1016/j.eswa.2014.05.013

[13] M. D. Pozo-Banos *et al.*, "EEG biometric identification: a thorough exploration of the time-frequency domain," *Journal of Neural Engineering*, vol. 12, no. 5, p. 056019, 2015. [Online]. Available: http://stacks.iop.org/1741-2552/12/i=5/a=056019

[14] C. E. Henry, "Electroencephalographic individual differences and their constancy: I. During sleep." *Journal of Experimental Psychology*, vol. 29, no. 2, pp. 117–132, 1941.

[15] C. E. Henry, "Electroencephalographic individual differences and their constancy: II. During waking." *Journal of Experimental Psychology*, vol. 29, no. 3, pp. 236–247, 1941.

[16] T. Gasser *et al.*, "Test-retest reliability of spectral parameters of the EEG," *Electroencephalography and Clinical Neurophysiology*, vol. 60, no. 4, pp. 312 – 319, 1985. [Online]. Available: http://www.sciencedirect.com/science/article/pii/0013469485900057

[17] A. Kondacs *et al.*, "Long-term intra-individual variability of the background EEG in normals," *Clinical Neurophysiology*, vol. 110, no. 10, pp. 1708–1716, 1999.

[18] M. Näpflin *et al.*, "Test-retest reliability of EEG spectra during a working memory task," *Neuroimage*, vol. 43, no. 4, pp. 687–693, 2008.

[19] H. J. Lee *et al.*, "A study on the reproducibility of biometric authentication based on electroencephalogram (EEG)," in *2013 6th International IEEE/EMBS Conference on Neural Engineering (NER)*, Nov 2013, pp. 13–16.

[20] D. L. Rocca *et al.*, "On the Repeatability of EEG Features in a Biometric Recognition Framework using a Resting State Protocol," in *BIOSIGNALS*, 2013, pp. 419–428.

[21] K. Brigham *et al.*, "Subject identification from electroencephalogram (EEG) signals during imagined speech," in *2010 Fourth IEEE International Conference on Biometrics: Theory, Applications and Systems*, Sept 2010, pp. 1–8.

[22] R. Das *et al.*, "Eeg biometrics for user recognition using visually evoked potentials," in *2015 International Conference of the Biometrics Special Interest Group*, Sept 2015, pp. 1–8.

[23] R. Palaniappan *et al.*, "Biometrics from Brain Electrical Activity: A Machine Learning Approach," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 29, no. 4, pp. 738–742, April 2007.

[24] X. Bao *et al.*, "Method of Individual Identification Based on Electroencephalogram Analysis," in *2009 International Conference on New Trends in Information and Service Science*, June 2009, pp. 390–393.

[25] Q. Gui *et al.*, "Exploring EEG-based biometrics for user identification and authentication," in *2014 IEEE Signal Processing in Medicine and Biology Symposium*, Dec 2014, pp. 1–6.

[26] B. C. Armstrong *et al.*, "Brainprint: Assessing the uniqueness, collectability, and permanence of a novel method for ERP biometrics," *Neurocomputing*, vol. 166, pp. 59 – 67, 2015. [Online]. Available: http://www.sciencedirect.com/science/article/pii/S0925231215004725

[27] P. Nguyen, D. Tran, T. Le, X. Huang, and W. Ma, "EEG-based person verification using multi-sphere SVDD and UBM," in *Pacific-Asia Conference on Knowledge Discovery and Data Mining*. Springer, 2013, pp. 289–300.

[28] C. Ward *et al.*, "Feasibility of Identity Vectors for use as subject verification and cohort retrieval of electroencephalograms," in *2016 IEEE Signal Processing in Medicine and Biology Symposium*, Dec 2016, pp. 1–5.

[29] S. Altahat *et al.*, "Robust electroencephalogram channel set for person authentication," in *2015 IEEE International Conference on Acoustics, Speech and Signal Processing*, April 2015, pp. 997–1001.

[30] P. Davis *et al.*, "Subject identification based on EEG responses to video stimuli," in *2015 IEEE International Conference on Image Processing*, Sept 2015, pp. 1523–1527.

[31] "Electrical Geodesics, Inc," https://www.egi.com/.

[32] M. Poulos *et al.*, "Person identification via the EEG using computational geometry algorithms," in *9th European Signal Processing Conference*, Sept 1998, pp. 1–4.

[33] R. Palaniappan *et al.*, "Individual identification technique using visual evoked potential signals," *Electronics Letters*, vol. 38, no. 25, pp. 1634–1635, Dec 2002.

[34] M. Näpflin *et al.*, "Test-retest reliability of resting EEG spectra validates a statistical signature of persons," *Clinical Neurophysiology*, vol. 118, no. 11, pp. 2519–2524, 2007.

[35] D. A. Reynolds *et al.*, "Speaker verification using adapted Gaussian Mixture Models," *Digital signal processing*, vol. 10, no. 1-3, pp. 19–41, 2000.

[36] P. Kenny *et al.*, "Joint Factor Analysis Versus Eigenchannels in Speaker Recognition," *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 15, no. 4, pp. 1435–1447, May 2007.

[37] N. Dehak *et al.*, "Front-End Factor Analysis for Speaker Verification," *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 19, no. 4, pp. 788–798, May 2011.