

Augmented reality technologies, systems and applications

Julie Carmigniani · Borko Furht · Marco Anisetti ·
Paolo Ceravolo · Ernesto Damiani · Misa Ivkovic

Published online: 14 December 2010
© Springer Science+Business Media, LLC 2010

Abstract This paper surveys the current state-of-the-art of technology, systems and applications in Augmented Reality. It describes work performed by many different research groups, the purpose behind each new Augmented Reality system, and the difficulties and problems encountered when building some Augmented Reality applications. It surveys mobile augmented reality systems challenges and requirements for successful mobile systems. This paper summarizes the current applications of Augmented Reality and speculates on future applications and where current research will lead Augmented Reality's development. Challenges augmented reality is facing in each of these applications to go from the laboratories to the industry, as well as the future challenges we can forecast are also discussed in this paper. Section 1 gives an introduction to what Augmented Reality is and the motivations for developing this technology. Section 2 discusses Augmented Reality Technologies with computer vision methods, AR devices, interfaces and systems, and visualization tools. The mobile and wireless systems for Augmented Reality are discussed in Section 3. Four classes of current applications that have been explored are described in Section 4. These applications were chosen as they are the most famous type of applications encountered when researching AR apps. The future of augmented reality and the challenges they will be facing are discussed in Section 5.

Keywords Augmented reality · Augmented reality technologies · Augmented reality systems · Augmented reality applications · Augmented reality iphone4 · AR · Augmented reality on mobile devices

J. Carmigniani (✉) · B. Furht
Department of Computer and Electrical Engineering and Computer Sciences,
Florida Atlantic University, Boca Raton, USA
e-mail: jcarmign@gmail.com

M. Anisetti · P. Ceravolo · E. Damiani
Dipartimento di Tecnologie dell'Informazione, Università degli studi di Milano, Milano, Italy

M. Ivkovic
University of Novi Sad, Novi Sad, Serbia

1 Introduction

We define Augmented Reality (AR) as a real-time direct or indirect view of a physical real-world environment that has been enhanced / *augmented* by adding virtual computer-generated information to it [65]. AR is both interactive and registered in 3D as well as combines real and virtual objects. Milgram's Reality-Virtuality Continuum is defined by Paul Milgram and Fumio Kishino as a continuum that spans between the real environment and the virtual environment comprise Augmented Reality and Augmented Virtuality (AV) in between, where AR is closer to the real world and AV is closer to a pure virtual environment, as seen in Fig. 1 [46].

Augmented Reality aims at simplifying the user's life by bringing virtual information not only to his immediate surroundings, but also to any indirect view of the real-world environment, such as live-video stream. AR enhances the user's perception of and interaction with the real world. While Virtual Reality (VR) technology, or Virtual Environment as called by Milgram, completely immerses users in a synthetic world without seeing the real world, AR technology *augments* the sense of reality by superimposing virtual objects and cues upon the real world in real time. Note that, as Azuma et al. [4], we do not consider AR to be restricted to a particular type of display technologies such as head-mounted display (HMD), nor do we consider it to be limited to the sense of sight. AR can potentially apply to all senses, augmenting smell, touch and hearing as well. AR can also be used to augment or substitute users' missing senses by sensory substitution, such as augmenting the sight of blind users or users with poor vision by the use of audio cues, or augmenting hearing for deaf users by the use of visual cues. Azuma et al. [4] also considered AR applications that require removing real objects from the environment, which are more commonly called *mediated* or *diminished reality*, in addition to adding virtual objects. Indeed, removing objects from the real world corresponds to covering the object with virtual information that matches the background in order to give the user the impression that the object is not there. Virtual objects added to the real environment show information to the user that the user cannot directly detect with his senses. The information passed on by the virtual object can help the user in performing daily-tasks work, such as guiding workers through electrical wires in an aircraft by displaying digital information through a headset. The information can also simply have an entertainment purpose, such as Wikitude or other mobile augmented reality. There are many other classes of AR applications, such as medical visualization, entertainment, advertising, maintenance and repair, annotation, robot path planning, etc.

1.1 History

The first appearance of Augmented Reality (AR) dates back to the 1950s when Morton Heilig, a cinematographer, thought of cinema is an activity that would have the ability to draw the viewer into the onscreen activity by taking in all the senses in an effective manner. In 1962, Heilig built a prototype of his vision, which he described in 1955 in "The Cinema of the Future", named Sensorama, which predated digital computing [64]. Next, Ivan

Fig. 1 Milgram's Reality-Virtuality Continuum [65]



Sutherland invented the head mounted display in 1966. In 1968, Sutherland was the first one to create an augmented reality system using an optical see-through head-mounted display (Fig. 2) [31]. In 1975, Myron Krueger creates the Videoplace, a room that allows users to interact with virtual objects for the first time. Later, Tom Caudell and David Mizell from Boeing coin the phrase Augmented Reality while helping workers assemble wires and cable for an aircraft [65]. They also started discussing the advantages of Augmented Reality versus Virtual Reality (VR), such as requiring less power since fewer pixels are needed [31]. In the same year, L.B Rosenberg developed one of the first functioning AR systems, called Virtual Fixtures and demonstrated its benefit on human performance while Steven Feiner, Blair MacIntyre and Doree Seligmann presented the first major paper on an AR system prototype named KARMA [65]. The reality virtuality continuum seen in Fig. 1 is not defined until 1994 by Paul Milgram and Fumio Kishino as a continuum that spans from the real environment to the virtual environment. AR and AV are located somewhere in between with AR being closer to the real world environment and AV being closer to the virtual environment. In 1997, Ronald Azuma writes the first survey in AR providing a widely acknowledged definition of AR by identifying it as combining real and virtual environment while being both registered in 3D and interactive in real time [31]. The first outdoor mobile AR game, ARQuake, is developed by Bruce Thomas in 2000 and demonstrated during the International Symposium on Wearable Computers. In 2005, the Horizon Report [30] predicts that AR technologies will emerge more fully within the next four to five years; and, as to confirm that prediction, camera systems that can analyze physical environments in real time and relate positions between objects and environment are developed the same year. This type of camera system has become the basis to integrate virtual objects with reality in AR systems. In the following years, more and more AR applications are developed especially with mobile applications, such as Wikitude AR Travel Guide launched in 2008, but also with the development of medical applications in 2007. Nowadays, with the new advances in technology, an increasing amount of AR systems and applications are produced, notably with MIT 6th sense prototype and the recent and future release of the iPad and its successors and competitors, notably the Eee Pad, and the next iPhone, the iPhone 4, which promises to revolutionize mobile AR.

Fig. 2 Ivan Sutherland's HMD [31]



2 Augmented reality technologies

2.1 Computer vision methods in AR

Computer vision renders 3D virtual objects from the same viewpoint from which the images of the real scene are being taken by tracking cameras. Augmented reality image registration uses different method of computer vision mostly related to video tracking. These methods usually consist of two stages: tracking and reconstructing/recognizing. First, fiducial markers, optical images, or interest points are detected in the camera images. Tracking can make use of feature detection, edge detection, or other image processing methods to interpret the camera images. In computer vision, most of the available tracking techniques can be separated in two classes: feature-based and model-based [71]. Feature-based methods consist of discovering the connection between 2D image features and their 3D world frame coordinates [37]. Model-based methods make use of model of the tracked objects' features such as CAD models or 2D templates of the item based on distinguishable features [71]. Once a connection is made between the 2D image and 3D world frame, it is possible to find the camera pose by projecting the 3D coordinates of the feature into the observed 2D image coordinates and by minimizing the distance to their corresponding 2D features. The constraints for camera pose estimation are most often determined using point features. The reconstructing/ recognizing stage uses the data obtained from the first stage to reconstruct a real world coordinate system.

Assuming a calibrated camera and a perspective projection model, if a point has coordinates $(x, y, z)^T$ in the coordinate frame of the camera, its projection onto the image plane is $(x/z, y/z, 1)^T$.

In point constraints, we have two principal coordinate systems, as illustrated in Fig. 3, the world coordinate system W and the 2D image coordinate system. Let $p_i(x_i, y_i, z_i)^T$, where $i = 1, \dots, n$, with $n \geq 3$, be a set of 3D non-collinear reference points in the world

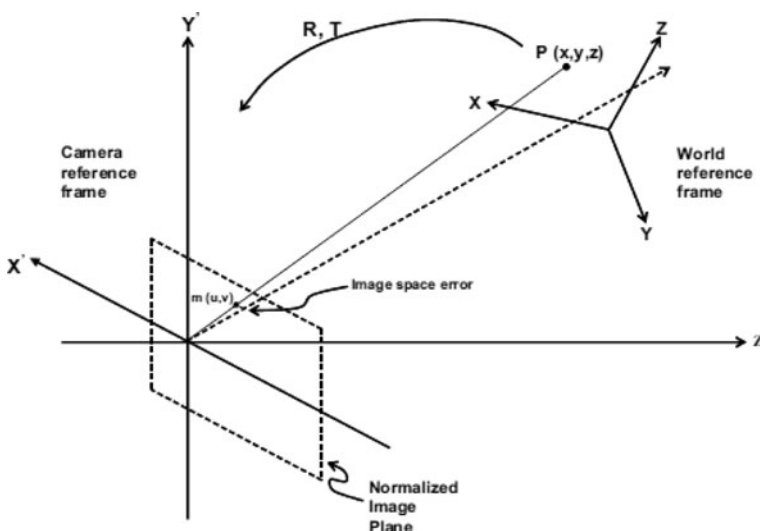


Fig. 3 Point constraints for the camera pose problem adapted from [1]

frame coordinate and $q_i(x_i', y_i', z_i')^T$ be the corresponding camera-space coordinates, p_i and q_i are related by the following transformation:

$$q_i = Rp_i + T \quad (1)$$

$$\text{where } R = \begin{pmatrix} r_1^T \\ r_2^T \\ r_3^T \end{pmatrix} \text{ and } T = \begin{pmatrix} t_x \\ t_y \\ t_z \end{pmatrix} \quad (2)$$

are a rotation matrix and a translation vector, respectively.

Let the image point $h_i(u_i, v_i, 1)^T$ be the projection of p_i on the normalized image plane. The *collinearity equation* establishing the relationship between h_i and P_i using the camera pinhole is given by:

$$h_i = \frac{1}{r_3^T p_i + t_z} (Rp_i + T) \quad (3)$$

The image space error gives a relationship between 3D reference points, their corresponding 2D extracted image points, and the camera pose parameters, and corresponds to the point constraints [1]. The image space error is given as follow:

$$E_i^p = \sqrt{\left(\hat{u}_i - \frac{r_1^T p_i + t_x}{r_3^T p_i + t_z} \right)^2 + \left(\hat{v}_i - \frac{r_2^T p_i + t_y}{r_3^T p_i + t_z} \right)^2} \quad (4)$$

where $\hat{m}_i(\hat{u}_i, \hat{v}_i, 1)^T$ are the observed image points.

Some methods assume the presence of fiducial markers in the environment or object with known 3D geometry, and make use of those data. Others have the scene 3D structure pre-calculated beforehand, such as Huang et al.'s device AR-View [32]; however, the device will have to be stationary and its position known. If the entire scene is not known beforehand, Simultaneous Localization And Mapping (SLAM) technique is used for mapping fiducial markers or 3D models relative positions. In the case when no assumptions about the 3D geometry of the scene can be made, Structure from Motion (SfM) method is used. SfM method can be divided into two parts: feature point tracking and camera parameter estimation.

Tracking methods in AR depend mostly on the type of environment the AR device will be introduced to as well as the type of AR system. The environment might be indoor, outdoor or a combination of both. In the same way, the system might be mobile or static (have a fixed-position). For example, if the AR device is a fixed-position device for an outdoor real environment, such as Huang et al.'s device AR-View [32], the developers can use mechanical tracking since the movements to be tracked will all be mechanical, as the position of the device is known. This type of environment and system makes tracking of the environment for augmenting the surroundings easier. On the other hand, if the AR device is mobile and designed for an outdoor environment, tracking becomes much harder and different techniques offer some advantages and disadvantages. For example, Nilsson et al. [51] built a pedestrian detection system for automotive collision avoidance using AR. Their system is mobile and outdoor. For a camera moving in an unknown environment, the problem for computer vision is to reconstruct both the motion of the camera and the structure of the scene using the image and additional sensor data sequences. In this case, since no assumption about the 3D geometry of the scene can be made, SfM method is used for reconstructing the scene.

Developers also have the choice to make use of existing AR libraries, such as the ARToolKit. ARToolKit, which was developed in 1999 by Hirokazu Kato from the Nara Institute of Science and Technology and was released by the University of Washington HIT Lab, is a computer vision tracking library that allows the user to create augmented reality applications [66]. It uses video tracking capabilities to calculate in real time the real camera position and orientation relative to physical markers. Once the real camera position is known, a virtual camera can be placed at the same exact position and 3D computer graphics model can be drawn to overlay the markers. The extended version of ARToolKit is ARToolKitPlus, which added many features over the ARToolKit, notably class-based APIs; however, it is no longer being developed and already has a successor: Studierstube Tracker.

Studierstube Tracker's concepts are very similar to ARToolKitPlus; however, its code base is completely different and it is not an open source, thus not available for download. It supports mobile phone, with Studierstube ES, as well as PCs, making its memory requirements very low (100 KB or 5–10% of ARToolKitPlus) and processing very fast (about twice as fast as ARToolKitPlus on mobile phones and about 1 ms per frame on a PC) [56]. Studierstube Tracker is highly modular; developers can extend it in anyway by creating new features for it. When first presenting Studierstube in [56], the designers had in mind a user interface that “uses collaborative augmented reality to bridge multiple user interface dimensions: Multiple users, contexts, and locales as well as applications, 3D-windows, hosts, display platforms, and operating systems”. More information about Studierstube can be found at [17–19].

Although visual tracking now has the ability to recognize and track a lot of things, it mostly relies on other techniques such as GPS and accelerometers. For example, for a computer to detect and recognize a car it is very hard. The surface of most cars is both shiny and smooth and most of the feature points come from reflections and thus are not relevant for pose estimation and even sometimes recognition [39]. The few stable features that one can hope to recognize, such as the windows corners or wheels, are extremely difficult to match due to reflection and transparent parts. While this example is a bit extreme, it shows the difficulties and challenges faced by computer vision with most objects that have irregular shape, such as food, flowers, and most objects of art.

A recent new approach for advances in visual tracking has been to study how the human brain recognizes objects, also called the Human Vision System (HVS), as it is possible for humans to recognize an infinite number of objects and persons in fractions of seconds. If the way of recognizing things by the human brain can be modeled, computer vision will be able to handle the challenges it is currently facing and keep going forward.

2.2 AR devices

The main devices for augmented reality are displays, input devices, tracking, and computers.

2.2.1 Displays

There are three major types of displays used in Augmented Reality: head mounted displays (HMD), handheld displays and spatial displays.

HMD is a display device worn on the head or as part of a helmet and that places both images of the real and virtual environment over the user's view of the world (Fig. 4). HMD can either be video-see-through or optical see-through and can have a monocular or binocular display optic. Video-see-through systems are more demanding than optical-see-through systems as they require the user to wear two cameras on his head and require the processing of both cameras to provide both the “real part” of the augmented scene and the

Fig. 4 HMD from [54]

virtual objects with unmatched resolution, while the optical-see-through employs a half-silver mirror technology to allow views of physical world to pass through the lens and graphically overlay information to be reflected in the user's eyes. The scene as well as the real world is perceived more naturally than at the resolution of the display. On the other hand, in video-see-through systems, augmented view is already composed by the computer and allows much more control over the result. Thus, control over the timing of the real scene can be achieved by synchronizing the virtual image with the scene before displaying it while in an optical-see-through application, the view of the real world cannot be delayed, so the time lag introduced in the system by the graphics and image processing is perceived by the user. This results in image that may not appear "attached" with the real objects they are supposed to correspond to, they appear to be unstable, jittering, or swimming around.

Handheld displays employ small computing devices with a display that the user can hold in their hands (Fig. 5). They use video-see-through techniques to overlay graphics onto the real environment and employ sensors, such as digital compasses and GPS units for their six degree of freedom tracking sensors, fiducial marker systems, such as ARToolKit, and/or computer vision methods, such as SLAM. There are currently three distinct classes of commercially available handheld displays that are being used for augmented reality system: smart-phones, PDAs and Tablet PCs [61]. Smart-phones are extremely portable and widespread, and with the recent advances present a combination of powerful CPU, camera, accelerometer, GPS, and solid state compass, making them a very promising platform for AR. However, their small display size is less than ideal for 3D user interfaces. PDAs present much of the same advantages and disadvantages of the smart-phones, but they are

Fig. 5 Handheld displays from [61]

becoming a lot less widespread than smart-phones since the most recent advances, with Android-based phones and iPhones. Tablet PCs are a lot more powerful than smart-phones, but they are considerably more expensive and too heavy for single handed, and even prolonged two-handed, use. However, with the recent release of iPad, we believe that Tablet PCs could become a promising platform for handheld AR displays.

Spatial Augmented Reality (SAR) make use of video-projectors, optical elements, holograms, radio frequency tags, and other tracking technologies to display graphical information directly onto physical objects without requiring the user to wear or carry the display (Fig. 6) [10]. Spatial displays separate most of the technology from the user and integrate it into the environment. This permits SAR to naturally scale up to groups of users, thus allowing collaboration between users, increasing the interest for such augmented reality systems in universities, labs, museums, and in the art community. There exist three different approaches to SAR which mainly differ in the way they augment the environment: video-see-through, optical-see-through and direct augmentation. In SAR, video-see-through displays are screen based; they are a common technique used if the system does not have to be mobile as they are cost efficient since only off-the-shelf hardware components and standard PC equipment is required. Spatial optical-see-through displays generate images that are aligned within the physical environment. Spatial optical combiners, such as planar or curved mirror beam splitters, transparent screens, or optical holograms are essential components of such displays [10]. However, much like screen-based video see-through, spatial optical-see-through does not support mobile applications due to spatially aligned optics and display technology. Finally, projector-based spatial displays apply front-projection to seamlessly project images directly onto physical objects' surfaces, such as in [49]. More details about SAR can be found in [10].

Table 1 shows a comparison of different types of displays' techniques for Augmented Reality.

Fig. 6 SAR from [43]

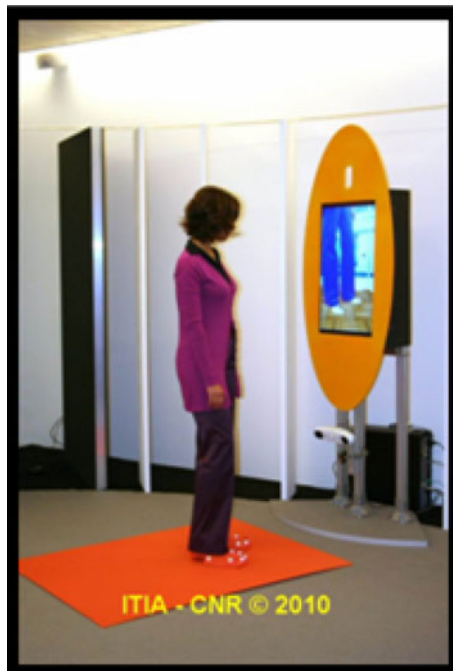


Table 1 Comparison of different techniques for different types of display

Types of Displays Techniques	HMD		Handheld		Spatial	
	Video-see-through		Optical-see-through		Video-see-through	
	Types of Displays		HMD		Handheld	
Advantages	complete visualization control, possible synchronization of the virtual and real environment	employs a half-silver mirror technology, more natural perception of the real environment	portable, widespread, powerful CPU, camera, accelerometer, GPS, and solid state compass	portable, powerful CPU, camera, accelerometer, GPS, and solid state compass	more powerful	displays directly onto physical objects' surfaces
Disadvantages	requires user to wear cameras on his/her head, requires processing of cameras video stream, unnatural perception of the real environment	time lag, jittering of the virtual image	small display	becoming less widespread, small display	more expensive and heavy	not user dependent: everybody sees the same thing (in some cases this disadvantage can also be considered to be an advantage)

2.2.2 Input devices

There are many types of input devices for AR systems. Some systems, such as Reitmayr et. al.'s mobile augmented system [54] utilizes gloves. Others, such as ReachMedia [24] use a wireless wristband. In the case of smart-phones, the phone itself can be used as a pointing device; for example, Google Sky Map on Android phone requires the user to point his/her phone in the direction of the stars or planets s/he wishes to know the name of. The input devices chosen depend greatly upon the type of application the system is being developed for and/or the display chosen. For instance, if an application requires the user to be hands free, the input device chosen will be one that enables the user to use his/her hands for the application without requiring extra unnatural gestures or to be held by the user, examples of such input devices include gaze interaction in [38] or the wireless wristband used in [24]. Similarly, if a system makes use of a handheld display, the developers can utilize a touch screen input device.

2.2.3 Tracking

Tracking devices consists of digital cameras and/or other optical sensors, GPS, accelerometers, solid state compasses, wireless sensors, etc. Each of these technologies has different level of accuracy and depends greatly on the type of system being developed. In [40], the authors identified the general tracking technology for augmented reality to be: mechanical, magnetic sensing, GPS, ultrasonic, inertia, and optics. In [52], the authors use a comparison from DiVerdi [21] based on range, setup, resolution, time, and environment. We further adopted their comparison method to this survey in Table 2.

2.2.4 Computers

AR systems require powerful CPU and considerable amount of RAM to process camera images. So far, mobile computing systems employ a laptop in a backpack configuration, but

Table 2 Comparison of common tracking technologies (adapted from Papagiannakis et. al. [52] and DiVerdi et. al. [21]). Range: size of the region that can be tracked within. Setup: amount of time for instrumentation and calibration. Precision: granularity of a single output position. Time: duration for which useful tracking data is returned (before it drifts too much). Environment: where the tracker can be used, indoors or outdoors

Technology	Range (m)	Setup time (hr)	Precision (mm)	Time (s)	Environment
Optical: marker-based	10	0	10	∞	in/out
Optical: markerless	50	0–1	10	∞	in/out
Optical: outside-in	10	10	10	∞	in
Optical: inside-out	50	0–1	10	∞	in/out
GPS	∞	0	5000	∞	out
WiFi	100	10	1000	∞	in/out
Accelerometer	1000	0	100	1000	in/out
Magnetic	1	1	1	∞	in/out
Ultrasound	10	1	10	∞	in
Inertial	1	0	1	10	in/out
Hybrid	30	10	1	∞	in/out
UWB	10–300	10	500	∞	in
RFID: active	20–100	when needed	500	∞	in/out
RFID: passive	0.05–5	when needed	500	∞	in/out

with the rise of smart-phones technology and iPad, we can hope to see this backpack configuration replaced by a lighter and more sophisticated looking system. Stationary systems can use a traditional workstation with a powerful graphics card.

2.3 AR interfaces

One of the most important aspects of augmented reality is to create appropriate techniques for intuitive interaction between the user and the virtual content of AR applications. There are four main ways of interaction in AR applications: tangible AR interfaces, collaborative AR interfaces, hybrid AR interfaces, and the emerging multimodal interfaces.

2.3.1 *Tangible AR interfaces*

Tangible interfaces support direct interaction with the real world by exploiting the use of real, physical objects and tools. A classical example of the power of tangible user interfaces is the VOMAR application developed by Kato et al. [36], which enables a person to select and rearrange the furniture in an AR living room design application by using a real, physical paddle. Paddle motions are mapped to intuitive gesture based commands, such as “scooping up” an object to select it for movement or hitting an item to make it disappear in order to provide the user with an intuitive experience.

A more recent example of a tangible AR user interface is TaPuMa [48]. TaPuMa is a table-top tangible interface that uses physical objects to interact with digital projected maps using real-life objects the user carries with him as queries to find locations or information on the map. The advantage of such an application is that using objects as keywords eliminates the language barrier of conventional graphical interfaces (although most of them do have multiple languages, they are often mistranslated). On the other hand, keywords using objects can also be ambiguous, as there can be more than one mapping to actions or information possible, and different people from different places, age-group, and culture have different meanings for different objects. So although this system might seem rather simple to use, it opens the door to a main problem in user interfaces: showing the user how to utilize the real objects for interacting with the system. White et al. [63]’s solution was to provide virtual visual hints on the real object showing how it should be moved.

Another example of tangible AR interactions includes the use of gloves or wristband such as in [24] and [17].

2.3.2 *Collaborative AR interfaces*

Collaborative AR interfaces include the use of multiple displays to support remote and co-located activities. Co-located sharing uses 3D interfaces to improve physical collaborative workspace. In remote sharing, AR is able to effortlessly integrate multiple devices with multiple locations to enhance teleconferences.

An example of co-located collaboration can be seen with Studierstube [29, 56, 57]. When first presenting Studierstube in [56], the designers had in mind a user interface that “uses collaborative augmented reality to bridge multiple user interface dimensions: Multiple users, contexts, and locales as well as applications, 3D-windows, hosts, display platforms, and operating systems”.

Remote sharing can be used for enhancing teleconferences such as in [6]. Such interfaces can be integrated with medical applications for performing diagnostics, surgery, or even maintenance routine.

2.3.3 Hybrid AR interfaces

Hybrid interfaces combine an assortment of different, but complementary interfaces as well as the possibility to interact through a wide range of interaction devices [71]. They provide a flexible platform for unplanned, everyday interaction where it is not known in advance which type of interaction display or devices will be used. In [55], Sandor et. al. developed a hybrid user interface using head-tracked, see-through, head-worn display to overlay augmented reality and provide both visual and auditory feedbacks. Their AR system is then implemented to support end users in assigning physical interaction devices to operations as well as virtual objects on which to perform those procedures, and in reconfiguring the mappings between devices, objects and operations as the user interacts with the system.

2.3.4 Multimodal AR interfaces

Multimodal interfaces combine real objects input with naturally occurring forms of language and behaviors such as speech, touch, natural hand gestures, or gaze. These types of interfaces are more recently emerging. Examples include MIT's sixth sense [49] wearable gestural interface, called WUW. WUW brings the user with information projected onto surfaces, walls, and physical objects through natural hand gestures, arms movement, and/or interaction with the object itself. Another example of multimodal interaction is the work from Lee et. al. [38], which makes use of gaze and blink to interact with objects. This type of interaction is now being largely developed and is sure to be one of the preferred type of interaction for future augmented reality application as they offer a relatively robust, efficient, expressive, and highly mobile form of human-computer interaction that represent the users' preferred interaction style. They have the ability to support users' ability to flexibly combine modalities or to switch from one input mode to another depending on the task or setting [23].

2.4 AR systems

Augmented reality systems can be divided into five categories: fixed indoor systems, fixed outdoor systems, mobile indoor systems, mobile outdoor systems, and mobile indoor and outdoor systems. We define a mobile system as a system that allows the user for movement that are not constrained to one room and thus allow the user to move through the use of a wireless system. Fixed system cannot be moved around and the user must use these systems wherever they are set up without having the flexibility to move unless they are relocating the whole system setup. The choice of the type of system to be built is the first choice the developers must make as it will help the developers in deciding which type of tracking system, display choice and possibly interface they should use. For instance, fixed systems will not make use of GPS tracking, while outdoor mobile system will. In [52], the authors conducted a study of different AR systems. We conducted a similar study using 25 papers that were classified according to their type of system, and determined what the tracking techniques, display type and interfaces were for each. Table 3 shows the meaning of the abbreviations used in Tables 4 and 5 and Tables 4 and 5 present the results of the study.

The papers used for the study were all published between 2002 and 2010 with a majority of papers published between 2005 and 2010 (17).

Note that in the mobile indoor and outdoor systems, one of the system studied (Costanza's eye-q [18]) does not use any tracking techniques, while others use multiple type of tracking techniques. This is due to the fact that this system was developed as a personal, subtle notification display. Also notice that there was only one paper studied that discussed

Table 3 Abbreviations

Abbreviation	Meaning	Abbreviation	Meaning
Adv	Advertising	IO	inside out
Ent. and Ed.	Entertainment and Education	OI	outside in
Med.	Medical	MB	marker-based
Nav. and Info.	Navigational and Informational	ML	markerless
Gen.	General	EC	electronic compass

fixed outdoor systems because this type of system is not popular due to its inflexibility. The results from this study thus can also be used to show the most popular type of system developed so far. However, we need to take into account the fact that mobile system are now on the rise and while mobile indoor and outdoor systems represented only 12% of the papers studied, developers are looking more and more into this type of system as they have the most chance for making it into the market.

Although these results cannot be used as a general rule when building an AR system, they can serve as a pointer of what type of tracking techniques, display, or interface is more popular for each system type. Developers should also keep in mind that these choices depend also on the type of applications, although as can be seen, the application does not necessarily guide the type of system.

From this study, we see that optical tracking is mostly preferred in fixed systems, while a hybrid approach is most often preferred for mobile systems. HMDs are often the preferred type of display choice; however, we predict that they will need to become more fashionably acceptable for systems using them to reach the market. When it comes to interfaces, the most popular choice is tangible interfaces, but we predict that multimodal interfaces will become more famous with developers within the next years as we believe that they also have a better chance to reach the public industry.

3 Augmented reality mobile systems

Augmented reality mobile systems include mobile phones applications as well as wireless systems such as MIT's sixth sense [49] eye-q [18]. AR mobile systems involve the use of wearable mobile interfaces for the user to interact with digital information overlapped on physical objects or surfaces in a natural and socially acceptable way. A successful AR mobile system should also enable the user to focus on the application or system rather than on the computing devices and provide the user with private information that can be shared if necessary. This suggests the need for lightweight, wearable or mobile devices that are fashionably acceptable and private and robust tracking technology.

3.1 Socially acceptable technology

Many research groups have raised the problem of socially acceptable technology. Mobile systems in particular are constantly faced with social acceptance issues to go from the laboratories to the industry. For systems to be successful in the market, developers need to take into account that the device needs to be socially acceptable, natural to interact with, and fashionably acceptable.

Table 4 AR System comparison

System Type	Method	Application Domain			Tracking and Registration				Display	Interface	
		Adv.	Ent. and Ed.	Nav. and Info.	Med.	Gen.	Optical	GPS			Mechanical
Fixed Indoor	Bichlmeier et al [9]				X		IO, OI, MB			HMD	tangible
	Luo et al [41]				X		IO			HMD	tangible
	Mistry et al [48]			X			OI			spatial	tangible
	Magic Mirror	X					OI, MB		RFID	spatial	tangible
	Botella et al [35]				X		IO, MB			HMD	tangible
	Cooper et al [17]		X				OI, MB			spatial	shared
	Takahashi et al [60]						MB			spatial	tangible
	Akinbiyi et al [2]			X	X				force	HMD	tangible
	Sandor et al [55]					X	IO			HMD	hybrid
Fixed Outdoor	Huang et al [32]	X						X	spatial	tangible	
Mobile Indoor	Miyashita et al [50]	X					ML		rotation, RFID	handheld	tangible
	Bruns et al [12]	X					ML			handheld	tangible
	Caruso et al [13]					X	MB		IR LEDs	HMD	tangible
	Lee et al [38]					X	IO			HMD	multimodal
	Arvanitis et al [3]	X					IO			HMD	tangible
	Reitmayr et al [54]			X			MB		inertial	HMD	tangible
	Stutzman et al [59]	X					X		inertial	handheld	shared
	Brown et al [11]			X			X	X	inertial	HMD	shared
	Dahne et al [19]		X				ML	X	EC	HMD	tangible
Mobile Outdoor	Chen et al [14]			X			ML	X	inertial	spatial	tangible
	Schneider et al [42]	X					X	X	rotation	HMD	tangible
	Wang et al [62]			X			X	X	inertial	handheld	tangible
	Mistry et al [49]					X	X			spatial	multimodal
	Feldman et al [24]					X			RFID, inertial	handheld	multimodal
Mobile Indoor and Outdoor	Costanza et al [18]					X				HMD	tangible

Table 5 Systems preferred type of tracking, display and interfaces

	Fixed Indoor Systems			Fixed Outdoor Systems			Mobile Indoor Systems			Mobile Outdoor Systems			Mobile Indoor and Outdoor Systems		
	Number	Percentage		Number	Percentage		Number	Percentage		Number	Percentage		Number	Percentage	
Tracking	Application Domain	Adv.	1	11%	0	0%	1	14%	0	0%	0	0%	0	0%	0%
		Ent. and Ed.	1	11%	1	100%	3	43%	2	40%	0	0%	0	0%	0%
		Nav. and Info.	2	22%	0	0%	1	14%	3	60%	0	0%	0	0%	0%
		Med.	4	44%	0	0%	0	0%	0	0%	0	0%	0	0%	0%
		Gen.	1	11%	0	0%	2	29%	0	0%	3	100%	0	0%	0%
		Optical	7	78%	0	0%	2	29%	0	0%	1	33%	0	0%	0%
		GPS	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0%
		Sensor based	1	11%	0	0%	0	0%	0	0%	0	0%	0	0%	0%
		Wireless	0	0%	0	0%	0	0%	0	0%	0	0%	0	0%	0%
		Mechanical	0	0%	1	100%	0	0%	0	0%	0	0%	0	0%	0%
Display Type		Hybrid	1	11%	0	0%	5	71%	5	100%	1	33%	1	33%	33%
		HMD	5	56%	0	0%	4	57%	3	60%	1	33%	1	33%	33%
		Handheld	0	0%	0	0%	3	43%	1	20%	1	33%	1	33%	33%
		Spatial Display	4	44%	1	100%	0	0%	1	20%	1	33%	1	33%	33%
Interface		Tangible	7	78%	1	100%	5	71%	5	100%	1	33%	1	33%	33%
		Shared	1	11%	0	0%	1	14%	0	0%	0	0%	0	0%	0%
		Hybrid	1	11%	0	0%	0	0%	0	0%	0	0%	0	0%	0%
		Multimodal	0	0%	0	0%	1	14%	0	0%	2	67%	2	67%	67%
Total Number of Papers:			9	36%	1	4%	7	28%	5	20%	3	12%	3	12%	12%

3.1.1 Social acceptance

Mobile phones and PDAs reminders, messages, calls, etc. have been judged to be distractions and are mostly considered not to be socially acceptable as they not only disrupt the person whose phone or PDA is receiving a message or reminding its owner of more or less important information, but also the other persons present in the same room, whether they are having a conversation with the disruptor (as this is how the person whose phone is disrupting the room will be seen) or the disruptor is in a public place, such as a bus. As a result, research groups such as [18, 24], [others], have decided that interaction with Augmented Reality systems implemented in mobile applications need to be subtle, discrete and unobtrusive, so to not disrupt the user if s/he is under a high load of work and the disruption is not of priority level. A system that is subtle, discrete and unobtrusive becomes socially acceptable. Indeed, the main problem with social acceptance comes from the level of disruption portable devices create in public places and during conversations. In [18], the authors study the peripheral vision and adapt their mobile device, eye-q, so that it does not occlude the foveal field of view, which is the main focus in the human field of view. The cues become less and less visible depending on the level of concentration and work-load of the user, making it naturally adaptive to users' cognitive workload and stress. And since the cues are only visible to the user, they can be considered socially acceptable as they will only disrupt the user depending on his level of concentration and he can choose not to answer to the cues.

3.1.2 Natural interaction

Another important factor to socially acceptable devices is that the user has to be able to interact with them in a natural way. If the interaction between the user and the device is unnatural, it will appear awkward of use in public places. In [24], the authors have created an augmented reality system that uses a wireless wristband that includes an RIFD reader, 3-axis accelerometer and RF communication facilities, a cell phone and a wireless earpiece to allow the user to interact with services related to objects using RFID tags through implicit touch-based gestures. Once an object is detected in the user's hand, the user can interact with information about this object using natural slight wrist gestures while previous commercial interfaces that supported hands-free and eyes-free operations required speech recognition, which not only suffers from poor performance and noisy conditions, but is also not socially acceptable.

3.1.3 Fashion acceptance

Mobile AR systems that wish to step from the laboratories to the industry will also be facing fashion issues as the users will not want to wear a HMD or other visible devices. As a result, developers of mobile systems should take into account fashion trends as this might be a big obstacle to overcome. Groups such as MIT Media Lab, constantly try to reduce the amount of undesirable visible devices or arrange them in different design choice. WUW's first development stage integrated the camera and projector into a hat and the second development integrated it into a pendant. The group is also researching a way to replace the need to wear colored markers on fingers' tips [49]. Although these might not yet look very fashionable, they are a good step in the direction of fashionably acceptable AR mobile systems. Another example is ReachMedia [24] which integrates a wristband with a smart-phone in order to interact with everyday objects using natural

hand and wrist slight gestures. Here the authors avoid the use of unstylish head mounted display for using acceptable wristband and phones. However, the audio interaction with the phone might require the use of headphones in order to remain discrete and subtle.

3.2 Personal and private systems

Augmented reality mobile systems need to be personal, meaning that the displayed information should only be viewed by others if the user allows it. MIT's SixthSense technology [49] although very advanced, does not offer such privacy to its user due to the use of direct augmentation technique without using any viewing device for protecting the information. Anyone can see the same thing as the user at any time. This poses a dilemma as not needing to wear or carry any extra viewing device for the WUW is an advantage for fashionable acceptable devices; however, it is a problem when it comes to privacy. Systems such as Costanza et. al. eye-q [18] or Babak Parviz's contact lens [5] offer such privacy to the user with information that can only be viewed by the user. These systems can also be considered socially acceptable as they are discrete and subtle as well as fashionably correct. However, these systems do not offer the ability of sharing information if the user desires to. A successful AR mobile system should provide the user with private information that can be shared when the user wishes to.

In addition, AR mobile systems need to be careful not to violate other users' and non-users' privacy in new ways. Indeed, information that are available and not considered private on social networks, for instance, can be considered private in everyday life. As a result, technologies such as WUW [49] that make use of online available information about other persons to display them for the user might face privacy issues due to the way the information are being disclosed.

3.3 Tracking technology for mobile AR systems

It is well known that for AR to be able to trick the human senses into believing that computer-generated information coexist with the real environment, very accurate position and orientation tracking is required.

As was seen in the AR systems section, the most common type of tracking systems for mobile systems is by combining a few complimentary tracking techniques to comprise the advantages of both and support the disadvantages of the other, which creates hybrid tracking. Outdoors systems make mostly use of GPS and inertial tracking technique with the use of accelerometers, gyroscopes, electronic compasses and/or other rotation sensors, along with some computer vision tracking techniques. GPS system, although lacking in precision, provide an easy tracking system for outdoor systems that allows for better estimating the position of the user and its orientation once coupled with some inertial sensors. In this way, the user's interest point is narrowed down and allows for easier visual tracking with fewer options. Indoors systems where GPS cannot be used unite visual tracking with inertial techniques only. Visual tracking achieve the best results with low frequency motion, but are highly likely to fail with rapid camera movement, such as the ones that will occur with HMDs. On the other hand, inertial tracking sensors perform best with high frequency motion while slow movements do not provide good results due to noise and bias drift. The complementary nature of these systems leads to combining them together in most hybrid systems.

Other systems, such as [38] and [3], rely on computer vision for tracking, but most are indoor systems with which the environment can be somewhat controlled. When it comes to visual outdoor tracking, a couple of factors, such as lightning, make tracking extremely difficult. Moreover, some objects present tracking difficulties. One of the most advanced visual tracking mobile systems is Google Goggles [28]; however, this application can only track objects of regular form such as barcodes and books, or places thanks to its GPS and accelerometer that help the application recognize where the user is standing and the user's orientation to narrow down the options. Google Goggles cannot recognize things of irregular shapes such as leaves, flowers or food.

4 Applications

While there are many possibilities for using augmented reality in an innovative way, we have cornered four types of applications that are most often being used for AR research: advertising and commercial, entertainment and education, medical, and mobile application for iPhones. Below, we study why AR could bring a better solution to some areas, a cheaper solution to others, or simply create a new service. We also discuss the challenges augmented reality is facing to go from the laboratories to the industry.

Note that it was decided here to replace the navigational and informational domain application that was encountered in the AR systems section by a study of the augmented reality mobile applications as these applications most often have navigational and informational use Fig 4, 5 and 6.

4.1 Advertising and commercial

Augmented reality is mostly used by marketers to promote new products online. Most techniques use markers that the users present in front of their webcam either on special software or simply on the advertising company's website. For example, in December 2008, MINI [47], the famous car company, ran an augmented reality advertisement in several German automotive magazines [26]. The reader simply had to go to the MINI's website [47], show the ad in front of their webcam, and a 3-D MINI appeared on their screen, as seen in Fig. 7. Beyond Reality [8] released a marker less advertisement magazine of 12 pages that could be recognized and animated by a software the user could download on the

Fig. 7 MINI advertisement [26]



publisher's website as a starting point to their Augmented Reality Games. They see that with such a system, they could add a "paid" option on the software that would allow the user to access additional content, such as seeing a trailer and then being able to click on a link to view the full movie, turning the magazine into a movie ticket [8].

AR also offers a solution to the expensive problem of building prototypes. Indeed, industrial companies are faced with the costly need to manufacture a product before commercialization to figure out if any changes should be made and see if the product meets the expectations. If it is decided that changes should be made, and this is more often than not the case, a new prototype has to be manufactured and additional time and money are wasted. A group of the Institute of Industrial Technologies and Automation (ITIA) of the National Council of Research (CNR) of Italy [43] in Milan works on AR and VR systems as a tool for supporting virtual prototyping. The ITIA-CNR is involved in the research for industrial contexts and application using VR, AR, realtime 3D, etc. as a support for product testing, development and evaluation. Some examples of applied research projects where the above technologies have been applied include motorcycle prototyping (Fig. 8), virtual layout of a factory and an office (Figs. 9 and 10), virtual light simulation (Fig. 11), and virtual trial of shoes with the Magic Mirror interface, which will be discussed next (Fig. 12).

Shoes are the accessories that follow fashion trends the most and are renewed annually, especially for those who live in fashion capitals, such as Milan, New York and Paris. For these people, it is more important to wear trendy shoes at the sacrifice of comfort. With the Magic Mirror, the ITIA of CNR in Milan [43] has created a system which, combined with high-tech footwear technology for measurement, enables the user to virtually try on shoes prior to buying/ordering them. The user is able to see his/her reflection in the Magic Mirror with a virtual model of the pair of shoes s/he would like to try on. The advantage of such a system over going to the store is that once the user selects shoes for trial, s/he has the ability to change a few details, such as the color, the heel, and/or even the stitching. To do so, the user puts on some special "socks" with spherical, infrared reflective painted-on markers that serve as a tracking system for the Magic Mirror, which is in fact an LCD screen that actually processes the information from the electronic catalog and inputs data from the client to see if the model chosen is approved, to detect and mirror the movements of the customer.

To build such a system, the ITIA-CNR in Milan created their library, called GIOVE library. The GIOVE library has been developed (and is continuously under development)

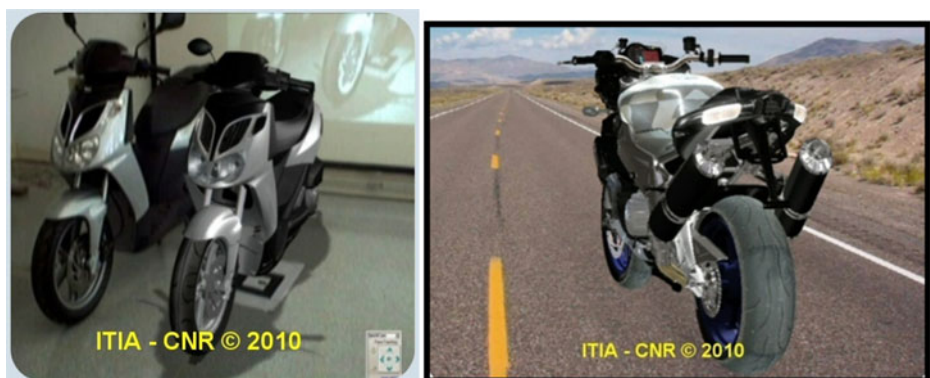


Fig. 8 right picture: Picture of a virtual motorcycle prototype (on the right) next to a physical motorcycle prototype (on the left) in the real environment; left picture: virtual prototype in a virtual environment [43]



Fig. 9 Virtual factory prototype [43]

not only to approach this specific project, but for the ITIA-CNR to use as a software library when needed for any application since any type of functionality can be added to the GIOVE library as it has been made from scratch by the ITIA-CNR. The system first has to be calibrated using a bigger version of ARToolKit markers onto which one of the small tracking sphere (similar to the ones placed on the “socks”) is placed in the middle. The marker is then laid on the orange pad that is used to help the system recognize the position where virtual elements have to be inserted. A couple of infrared lights camera track the IR lights reflected from the markers and since the system knows in advance the geometric placement of the markers, the virtual position can be reconstructed accurately. The “socks” are of the same orange color, which is the color specified to the system for tracking. This color was chosen by the group because it is an unusual color for pants; however, the system could track any color it is indicated. Another challenge the ITIA group had to face with such a system was due to the camera lens distorting the real image while the virtual image to be added to the environment would remain perfect. This detail is not always perceived in every system, but with the Magic Mirror application, it was too noticeable. The solution to such a problem is to either compensate the real image so that the distortion is not so

Fig. 10 Virtual office prototype [43]



Fig. 11 Virtual testing of a lighting system [43]



perceptible anymore or to distort the virtual image so that it is not so perfect anymore. The ITIA group chose to compensate their real image using some of the MatLab's software formulas to figure out the degrees of distortion to compensate are.

Similar examples to Magic Mirror use of AR for advertising and commercial applications lies in fully replacing the need to try on anything in stores, thus saving considerable amount of time for clients, which would most likely be used for trying on more clothing (shirts, dresses, watches, pants, etc.) and thus increasing the stores chances for selling.

Augmented reality has not fully reached the industrial market in advertisement application mostly because a few improvements need to be made to systems similar to the Magic Mirror (Fig. 12) or Cisco's retail fitting room (Fig. 13). Indeed, for the product to

Fig. 12 User trying on virtual shoes in front of the Magic Mirror [43]



Fig. 13 Cisco's AR commercial where a client is trying on clothes in front of a "magic" screen



be viable in the market it needs to provide the user with a flawless representation of the prototype; the user should have the impression that they are looking at a physical prototype. In the case of the Magic Mirror system, this would mean flawless tracking so that when the user looks at the magic mirror s/he feels like s/he is actually wearing the shoes and can really see what the shoes would look like.

4.2 Entertainment and education

Entertainment and education applications include cultural apps with sightseeing and museum guidance, gaming apps with traditional games using AR interfaces, and some smart-phone apps that make use of AR for an entertainment and/or educational purpose.

In cultural application, there exists a few systems that uses AR for virtually reconstructing ancient ruins (Fig. 14), such as in [32], or for virtually instructing user about site's history such as in [42].

Fig. 14 Augmented view of Dashuifa from [32]


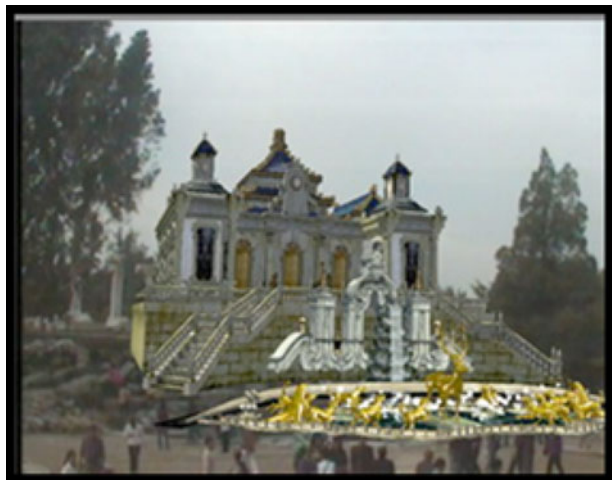



Fig. 15 Mobile phone-enabled guidance in a museum from [12]

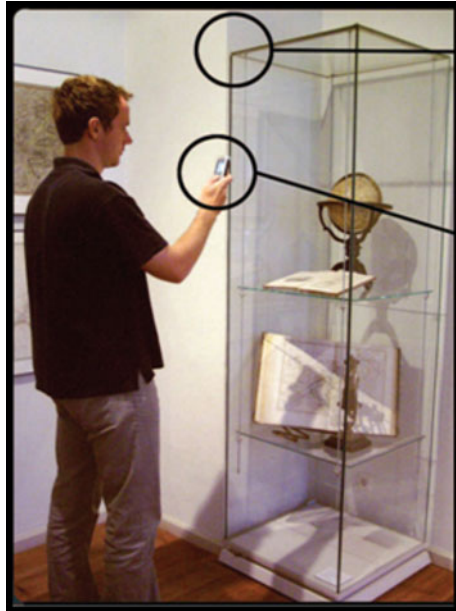

There are also a few systems that exploit AR for museum guidance such as [12] and [50]. In [12] and [50], both systems are mobile, but [12] also uses a mobile phone as an interface (Fig. 15) while [50] simply uses a magic lens configuration (Fig. 16). In [12], the authors identified the benefits of using augmented reality as an interface for their cultural applications as: efficient communication with the user through multimedia presentations, natural and intuitive technique and low maintenance and acquisition costs for the museum operators' presentation technology in the case of smart-phone being used as an interface. And indeed, using a smart-phone or even another hand-held display is a more intuitive and natural technique than looking up a number randomly assigned to the object in a small written guide, especially when the user can simply make use of his/her own phone in a world where everybody already possesses one. Similarly, users can relate easier to multimedia presentations brought to them and will more willingly listen, watch and/or read

Fig. 16 Visitor with guidance system from [50]



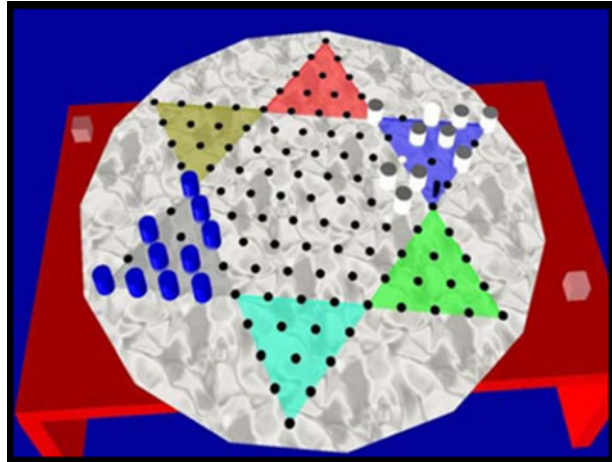Fig. 17 ARCC from [17]

about information that they can acquire by simply pointing at an object using their phone rather than have to look it up in a guide.

AR gaming applications present many advantages other physical board with, for example, the ability to introduce animations and other multimedia presentations. The ability to introduce animations can not only add excitement to a game, but it can also serve a learning purpose with, for example, indication to help players learn the game or know when they are making an invalid move. In [17], the authors create an augmented reality Chinese checkers game, called ARCC that uses three fiducial markers and cameras fixed on the roof to track the markers (Fig. 17). Two of their fiducial markers are used for positioning the checkerboard and the third is used for manipulating the game pieces. Having only one tool for manipulating the pieces allows the authors to adapt their setup to different types of games as all they have to change is the GUI (Graphic User Interface) that is the board game and the game's logic.

Beyond Reality [8], which was the first to introduce a marker less magazine, presents two board games, PIT Strategy and Augmented Reality Memory. In PIT Strategy, the player is the “pit boss” in a NASCAR race and must act according to given weather condition, forecast and road condition. In Augmented Reality Memory, the player turns a card and sees a 3D object, turns a second card and sees another 3D object. If they match, a celebration animation will appear; otherwise, the player can keep looking for matches. These two games are still under development and further information can be found on [8].

Here again, augmented reality has not fully reached its potential to enter the industrial market. Once again, this is mostly due to technological advances such as tracking system. For example, we saw that the few museum guidance systems developed were only applicable to the museum or exhibition they were developed for and could not be utilized for other museums. This is due to the fact that both these systems relied on the organization of the museum or the exhibition to recognize the artifacts as opposed to detecting the artifacts solely using computer vision. So why hasn't computer vision been used to recognize the objects instead of relying on knowing the user's position in the museum? As was seen in the Computer Vision Methods in AR section, some objects have irregular forms and although it might seem easy for us to recognize them, it is very hard for a computer to detect what these objects are, and this is the case of most artifacts. Paintings do not present such a big trouble for system such as Google Goggles [28] due to their regular shape, but

objects, such as objects of modern art have very irregular shape that makes it hard to track a defined feature.

4.3 Medical applications

Most of the medical applications deal with image guided and robot-assisted surgery. As a result, significant research has been made to incorporate AR with medical imaging and instruments incorporating the physician's intuitive abilities. Significant breakthrough has been provided by the use of diverse types of medical imaging and instruments, such as video images recorded by an endoscopic camera device presented on a monitor viewing the operating site inside the patient. However, these breakthroughs also limit the surgeon's natural, intuitive and direct 3D view of the human body as the surgeons now have to deal with visual cues from an additional environment provided on the monitor [9]. AR can be applied so that the surgical team can see the imaging data in real time while the procedure is progressing. Bichlmeier et al. [9] introduced an AR system for viewing through the "real" skin onto virtual anatomy using polygonal surface models to allow for real time visualization (Fig. 18). The authors also integrated the use of navigated surgical tools to augment the physician's view inside the human body during surgery.


Teleoperated robot-assisted surgery provide the surgeons with additional advantages over minimally invasive surgery with improved precision, dexterity, and visualization [67, 68]; however, implementing direct haptic feedback has been limited by sensing and control technology and thus is restricting the surgeon's natural skills. The lack of haptic feedback has been proved to affect the performance of several surgical operations [7]. In [2], the authors propose a method of sensory substitution that provides an intuitive form of haptic feedback to the user. The force applied by the surgeon is graphically represented and overlaid on a streaming video using a system of circles that discretely change colors across three pre-determined ranges (Low Force Zone (green), Ideal Force Zone (yellow) and Excessive Force Zone (red)) according to the amount of bending forces detected by strain gages (Fig. 19).

The need to reduce surgical operations is not the only one to depend upon seeing medical imaging data on the patient in real time; the necessity to improve medical diagnosis also relies on it. In this research field, the ICAR-CNR group of Naples [22, 58] is working on an AR interactive system for checking patient's hand and wrist for arthritis by overlaying in real time 3D MR imaging data directly on top of the patient's hand. Since arthritis disabilities are strongly associated with pain intensity and so require a

Fig. 18 Bichlmeier et. al. system for viewing through the skin [9]



Fig. 19 Sequential shots of knot tying task from [2]

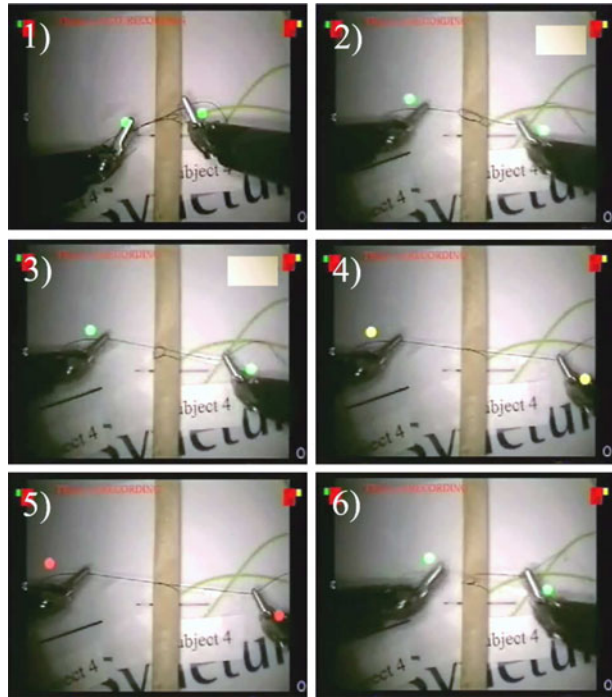

direct manipulation of the hand and wrist region to be diagnosed, the system may support physicians by allowing them to perform morphological and functional analyses at the same time [25]. AR could also be used to manage clients' medical history. Imagine if all a doctor had to do to check a patient's medical history was to put on a head mounted display and look over the patient to see virtual labels showing the patient's past injuries and illnesses.

The use of AR in the medical field to provide better solutions to current problems than already existing solutions is infinite. In [41], the authors use AR to provide a low cost and smaller in size solution to the post-stroke hand rehabilitation problem, which has the potential to being use in clinics and even at home. In [35], the authors use AR to help patients fight against the phobia of cockroaches and thus show that AR can be used to treat psychological disorders as well.

Unfortunately, on top of facing a few technological advances issues such as displays and tracking issues, medical applications also face privacy concerns. Displays challenges mostly arise from the fact that the preferred type of display to use for medical applications is a HMD as it allows the physician not only to use both hands, but it is also easier to track where the doctor is looking to augment the right surfaces; however, it is challenging to implement HMD to medical applications. There are challenges that arise because of the HMD itself, such as accurately placing and applying depth perception to 3D models, and challenges that are due to the medical field itself, such as for a surgeon to still be able to see his tools through the projected images. Another possible type of display that could be used would be spatial display to allow the whole surgical team to see the same thing at the same time; however, it is then very hard to track where the surgeon is looking and what the desired place for augmenting is.

Privacy concerns always arise in the medical field, especially when discussing the treatment of the very confidential medical history of patients.

Another type of issues that medical application in augmented reality will most likely have to face is the problems that arise with retraining the medical staff for using new tools. Most AR applications aim at simplifying the use of AR tools such that they correspond to what the physician is used to; for instance in [2], the feedback system developed by the authors did not require the surgeons to truly learn how to use it as the application was easily integrated onto the da Vinci Surgical System that most surgeons know how to use. Even with this system, the surgeons still have to get use to this type of haptic feedback system, although the training is rather short and inexpensive. However, there are some systems that will require a complete retraining of the staff to interact with the application. For example, applications that will require the user to interact with a 3D input device as opposed to 2D input devices such as a mouse, will present some training problems as they might be too costly for the medical field to judge them viable.

4.4 Mobile (iPhone) applications

Many AR mobile applications for iPhone already exist; however, no development has been done for the iPad due to the lack of camera in the first generation of iPad. Moreover, most iPhone applications either have an entertainment and/ or educational purpose or a navigational and/ or informative purpose, such as orienting the user.

Examples of such applications include WikitudeDrive (Fig. 20) [69], which is a GPS-like application that allows the user to keep his/her eyes on the road while glancing at the GPS; Firefighter 360 (Fig. 21), which has an entertainment purpose that permits the user to fight a virtual fire like a real firefighter; and Le Bar Guide (Fig. 22) that has a navigational function to guide the user to the nearest bar that serves Stella Artois beer. Websites such as Mashable, the Social Media Guide [44] and iPhoneNess [34] have all come up with the best augmented reality applications for iPhone and we encourage interested readers to have a look at them.

Due to the relatively new side of adding AR to mobile applications, there currently are not many libraries, kits or codes available for iPhone program developers to add some augmented reality to their application. Studierstube Tracker and Studierstube ES support iPhone platforms; however, they are not open sources [29]. We found two sources to help iPhone developers in using AR for the mobile application. [58] is a slideshow presentation

Fig. 20 WikitudeDrive [69]



Fig. 21 Firefighter 360 [44]

that shows the viewer how to develop augmented reality applications on iPhone with codes for retrieving GPS position, using the compass and accelerometer, and getting the image from the camera. iPhone ARKit [27] is a small set of class that can offer developers augmented reality on any iPhone application by overlaying information, usually geographic, over the camera view. The iPhone ARKit's APIs were modeled after Map Kit's [33], which is a framework for providing an interface to embed maps directly into the windows and views and to support annotating the map, adding overlays, and performing reverse-geocoding lookups to determine place mark information for a given map coordinate.

Augmented reality mobile applications are one of the only augmented reality applications that we can find in the general public. However, even these applications are facing a few challenges issues. There are, for instance, problems due to GPS systems not being accurate enough for other applications that require very precise placement of virtual tags. There are issues with working with limited hardware capability when we require image processing power. In the iPhone category, there were challenges due to accessing the

Fig. 22 Le Bar Guide [44]

video APIs as Apple would not open its APIs enough for the developers to be able to get in there and work with the video. However, with the recent release of the iPhone 4, augmented reality sees more doors opening for AR applications on mobile phones: the developers now have the ability to access the camera images APIs, enhanced image tracking, gyroscopic motion sensing, and faster processor and high resolution display [53].

Similar to mobile systems, mobile applications also face social acceptance issues, as the applications also need to be subtle and discrete. Mobile applications should not be able to make random noises at inopportune times for the user. No matter how accustomed to mobile phones our society has become, it is still considered to be rude and obnoxious when someone is on the phone in a public place; when a person's phone is ringing in public, the first reflex for this person is to search for their phone to turn off the sound and then check who is calling or what the reminder is. Of course, social acceptance has the advantage of changing through the generations much like fashion.

5 Future of augmented reality applications

AR is still in infancy stage, and as such, future possible applications are infinite. Advanced research in AR includes use of head-mounted displays and virtual retinal displays for visualization purposes, and construction of controlled environments containing any number of sensors and actuators [65]. MIT Media Lab project "Sixth Sense" (Fig. 23) [49] is the best example of AR research. It suggests a world where people can interact with information directly without requiring the use of any intermediate device. Other current research also include Babak Parviz AR contact lens (Fig. 24) [5] as well as DARPA's

Fig. 23 From top to bottom and left to right: DARPA's contact lens project [70], MIT's Sixth Sense [49], Contactum's AR solutions [16]



Fig. 24 From top to bottom and left to right: Examples of futuristic augmented reality [15] and [30] and Babak Parviz's contact lens [5]



contact lens project (Fig. 23) [70], MIT Media Lab multiple research applications such as My-Shopping Guide [20] and TaPuMa [48]. Parviz's contact lens opens the door to an environment where information can only be viewed by the user. Of course, this can also be done by using glasses as opposed to contact lens, but the advantage in both cases over using a cell phone, for instance, is that no one else but the user can see the information projected, making it very personal. Cisco has imagined a world where AR could be used for replacing the traditional fitting rooms by trying on virtual clothes, thus saving time and providing the ability to try on more clothes, increasing the chance for stores to sell.

Augmented reality also brings the possibility of enhancing missing senses for some users. For example, AR could be used as a sense substitution device. Hearing-impaired users could receive visual cues informing them of missed audio signals and sightless users could receive audio cues notifying them of unknown visual events.

We believe that new mobile devices, such as iPhone, Android-based devices, and iPad are not well used in AR. Indeed, most of the current applications include gaming, entertainment and education, and while most already believe that these are “amazing apps” [44]...

Even the future is not far from challenges for augmented reality. We see social acceptance issues, privacy concerns, and ethical concern arising with the future of augmented reality applications in the industry.

Social acceptance mostly arise from mobile devices with the need for the devices to be subtle, discrete and unobtrusive as well as fashionably acceptable as was discussed in the Augmented Reality Mobile Systems section, but also with systems that will require retraining of the personnel and staff in order to be utilized. We have seen that this might be the case with some medical applications and that the health system might decide against the use of augmented reality if they decide that the retraining is too costly. A system for easy integration of such system will have to be developed to avoid such issues.

Privacy concerns arise not only with medical applications, but also with technologies that have the ability to detect and recognize people. For instance, MIT's WUW technology video presentation [45] has an application that is capable of recognizing people and displaying information about these persons for the user to see. Although those information could be found online by anyone on websites such as social networks, it will raise problems as a lot of people will not appreciate being spotted that way, even if they do not mind having these information available online for anyone to see. A solution for applications like ones similar to WUW recognizable feature would be to create a social network within the users of this technology for them to decide whether or not they want to be recognized or what information about them they allow to be displayed. Non users of this technology should not be recognized by the system unless they allow it by joining the social network.

When it comes to ethical concerns, the apprehension mostly comes from the fact that people tend to get carried away by technologies with things they see in Hollywood movies. We do not know where to put down limits for the use of technology and keep researching as we see the potential grow. However, with augmented reality, it will be very important for the developers to remember that AR aims at simplifying the user's life by enhancing, *augmenting* the user's senses, not interfering with them. For instance, when reading the comments following Babak Parviz's contact lens (Fig. 24) article [5], there were suggestions from readers including "tapping the optic nerve" or "plugging in to the optic nerves and touch and smell receptors" and suggested that these would eventually be "more marketable approach" and a "much more elegant solution". Although the commentators do realize that as of today research simply does not know enough about the human nervous system do such things, the fact that thoughts and ideas have started to emerge in this direction raises questions about ethical concerns: is having technology coming in direct interaction with our human senses something we want? As was mentioned earlier, AR is about augmenting the real environment with virtual information; it is about augmenting people's skills and senses not replacing them.

Acknowledgements This material is based upon work supported by the National Science Foundation under Grant No. OISE-0730065.

References

1. Ababsa F, Mallem M (2008) Robust camera pose estimation combining 2D/3D points and lines tracking. *Industrial Electronics*, 2008. ISIE 2008. IEEE International Symposium on, vol., no., pp.774–779, June 30 2008-July 2 doi: [10.1109/ISIE.2008.4676964](https://doi.org/10.1109/ISIE.2008.4676964) URL:<http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=4676964&isnumber=4676877>
2. Akinbiyi T, Reiley CE, Saha S, Burschka D, Hasser CJ, Yuh DD, Okamura AM (2006) Dynamic augmented reality for sensory substitution in robot-assisted surgical systems. *Engineering in Medicine and Biology Society*, 2006. EMBS '06. 28th Annual International Conference of the IEEE, vol., no., pp.567–570, Aug. 30 2006-Sept. 3
3. Arvanitis TN, Petrou A, Knight JF, Savas S, Sotiriou S, Gargalakos M, Gialouri E (2009) Human factors and qualitative pedagogical evaluation of a mobile augmented reality system for science education used by learners with physical disabilities. *Personal and Ubiquitous Computing* 13(3):243–250
4. Azuma R, Baillot Y, Behringer R, Feiner S, Julier S, MacIntyre B (2001) Recent Advances in Augmented Reality. *IEEE*, November/December
5. Babak A. Parviz (2009) Augmented reality in a contact lens (<http://spectrum.ieee.org/biomedical/bionics/augmented-reality-in-a-contact-lens/0>) *IEEE Spectrum*, September

6. Barakonyi I, Fahmy T, Schmalstieg D (2004) Remote collaboration using Augmented Reality Videoconferencing. *Proceedings of Graphics Interface*. p.89–96, May 17–19, 2004, London, Ontario, Canada
7. Bethea BT, Okamura AM, Kitagawa M, Fitton TP, Cattaneo SM, Gott VL, Baumgartner WA, Yuh DD (2004) Application of haptic feedback to robotic surgery. *Journal of Laparo Endoscopic and Advanced Surgical Techniques* 14(3):191–195
8. Beyond Reality, <http://www.augmented-reality-games.com>
9. Bichlmeier C, Wimmer F, Heining SM, Navab N (2007) Contextual anatomic mimesis: hybrid in-situ visualization method for improving multi-sensory depth perception in medical augmented reality. *IEEE*
10. Bimber O, Raskar R, Inami M (2007) Spatial Augmented Reality. SIGGRAPH 2007 Course 17 Notes
11. Brown D, Julier S, Baillot Y, Livingston MA (2003) An event-based data distribution mechanism for collaborative mobile augmented reality and virtual environments. *Virtual Reality*, 2003. Proceedings IEEE, vol., no., pp. 23–29, 22–26 March
12. Bruns E, Brombach B, Zeidler T, Bimber O (2007) Enabling mobile phones to support large-scale museum guidance. *Multimedia*, IEEE 14(2):16–25
13. Caruso G, Re GM (2010) AR-Mote: A wireless device for Augmented Reality environment. 3D User Interfaces (3DUI), 2010 IEEE Symposium on. vol., no., pp.99–102, 20–21 March
14. Chen IYH, MacDonald B, Wünsche B (2008) Markerless augmented reality for robotic helicopter applications. *Lecture Notes In Computer Science*, Proceedings of the 2nd international conference on Robot vision, pp 125–138
15. Compute Scotland, <http://www.computescotland.com/optical-ingenuity-from-fraunhofer-ipms-2321.php>, Optical ingenuity from Fraunhofer IPMS, May 8th, 2009.
16. Contactum, Augmented Reality Solutions (2006) <http://www.augmented-reality.com/>, Where reality meets the virtual world
17. Cooper N, Keatley A, Dahlquist M, Mann S, Slay H, Zucco J, Smith R, Thomas BH (2004) Augmented reality chinese checkers. *The Australasian Computing Education Conference*; Vol. 74, Proceedings of the 2004 ACM SIGCHI International Conference on Advances in computer entertainment technology, Singapore, pp 117–126
18. Costanza E, Inverso SA, Pavlov E, Allen R, Maes P (2006) eye-q: Eyeglass Peripheral Display for Subtle Intimate Notifications. *Mobile HCI 2006*, September 13–15,
19. Dahne P, Karigiannis JN (2002) Archeoguide: system architecture of a mobile outdoor augmented reality system. *Mixed and Augmented Reality*, 2002. ISMAR 2002. Proceedings. International Symposium on, vol., no., pp. 263–264, 2002
20. Merrill D, Maes P (2007) Augmenting looking, pointing and reaching gestures to enhance the searching and browsing of physical objects. *Proceedings of the 5th International Conference on Pervasive Computing (Pervasive '07)*, Toronto, Canada, May 13–16
21. DiVerdi S, Hollerer T (2007) GroundCam: A Tracking Modality for Mobile Mixed Reality. *Virtual Reality Conference*, 2007. VR '07. IEEE, vol., no., pp.75–82, 10–14 March
22. Dr. Giuseppe De Pietro and Dr. Luigi Gallo of ICAR-CNR group, National Research Council, Italy
23. Encyclopodia, <http://encyclopedia.jrank.org/articles/pages/6843/Multimodal-Interfaces.html>, Multimodal Interfaces.
24. Feldman A, Tapia EM, Sadi S, Maes P, Schmandt C (2005) ReachMedia: On-the-move interaction with everyday objects. *iswc*, pp.52–59, *Ninth IEEE International Symposium on Wearable Computers (ISWC '05)*, 2005
25. Gallo L, Minutolo A, De Pietro G (2010) A user interface for VR-ready 3D medical imaging by off-the-shelf input devices. *Computers in Biology and Medicine* 40(3):350–358. doi:10.1016/j.combiomed.2010.01.006
26. Geekology (2008) <http://www.geekologie.com/2008/12/14-week>, Cool: Augmented Reality Advertisements, Dec. 19
27. Github, Social Coding (2009) <http://github.com/zac/iphonearkit/>, iPhone ARKit
28. Google, <http://www.google.com/mobile/goggles/#text>, Google Goggles, 2010
29. Handheld Augmented Reality (2010) http://studierstube.icg.tu-graz.ac.at/handheld_ar/stbtracker.php, Studierstube Tracker
30. Horizon Report Johnson LF, Smith, RS (2005) Horizon Report. Austin, TX: The New Media Consortium, 2005.
31. <https://www.icg.tugraz.at/~daniel/HistoryOfMobileAR/> (2009) History of mobile augmented reality
32. Huang Y, Liu Y, Wang Y (2009) AR-View: and Augmented Reality Device for Digital Reconstruction of “Yuangmingyuan”, *IEEE International Symposium on Mixed and Augmented Reality*
33. iPhone OS Reference Library, http://developer.apple.com/iphone/library/documentation/MapKit/Reference/MapKit_Framework_Reference/index.html, Map Kit Framework Reference, 2010.

34. iPhoneNess, <http://www.iphoneness.com/iphone-apps/best-augmented-reality-iphone-applications/>, 26 Best Augmented Reality iPhone Applications.
35. Juan MC, Botella C, Alcaniz M, Banos R, Carrion C, Melero M, Lozano JA (2004) An augmented reality system for treating psychological disorders: application to phobia to cockroaches. *Mixed and Augmented Reality*, 2004. ISMAR 2004. Third IEEE and ACM International Symposium on, vol., no., pp. 256–257, 2–5 Nov
36. Kato H, Billinghurst M, Poupyrev I, Imamoto K, Tachibana K (2000) Virtual object manipulation on a table-top AR environment. *ISAR '00*, 111–119
37. Lee B, Chun J (2010) Interactive manipulation of augmented objects in marker-less AR using vision-based hand interaction. *itng*, pp.398–403, 2010 Seventh International Conference on Information Technology
38. Lee J-Y, Lee S-H, Park H-M, Lee S-K, Choi J-S, Kwon J-S (2010) Design and implementation of a wearable AR annotation system using gaze interaction. *Consumer Electronics (ICCE), 2010 Digest of Technical Papers International Conference on*, vol., no., pp.185–186, 9–13 Jan
39. Lepetit V (2008) On computer vision for augmented reality. *Ubiquitous Virtual Reality*, 2008. ISUVR 2008. International Symposium on, vol., no., pp.13–16, 10–13 July
40. Li Y-bo, Kang S-p, Qiao Z-h, Zhu Q (2008) Development actuality and application of registration technology in augmented reality. *Computational Intelligence and Design*, 2008. ISCID '08. International Symposium on. Vol.2, No., pp.69–74, 17–18 Oct. 2008
41. Luo X, Kline T, Fischer HC, Stubblefield KA, Kenyon RV, Kamper DG (2005) Integration of augmented reality and assistive devices for post-stroke hand opening rehabilitation. *Engineering in Medicine and Biology Society*, 2005. IEEE-EMBS 2005. 27th Annual International Conference of the, vol., no., pp.6855–6858
42. Malaka R, Schneider K, Kretschmer U (2004) Stage-based augmented edutainment. *Smart Graphics*, pp.54–65
43. Marco Sacco, Stefano Mottura, Luca Greci, Giampaolo Viganò, Insitute of Industrial Technologies and Automation, National Research Council, Italy.
44. Mashable, The Social Media Guide (2009) <http://mashable.com/2009/12/05/augmented-reality-iphone/>, 10 amazing Augmented Reality iPhone Apps
45. Sixth Sense—a wearable gestural interface (MIT Media Lab) (2010) <http://www.pranavmistry.com/projects/sixthsense/>, Sixth Sense—integrating information with the real world, Pranav Mistry, Fluid Interface Group, MIT Media Lab
46. Milgram P, Kishino AF (1994) Taxonomy of mixed reality visual displays (http://vered.rose.utoronto.ca/people/paul_dir/IEICE94/ieice.html). *IEICE Transactions on Information Systems* E77-D(12):1321–1329
47. MINI, www.mini.com
48. Mistry P, Kuroki T, Chuang C (2008) TaPuMa: Tangible Public Map for Information Acquirement through the Things We Carry. MIT Media Lab, *Ambi-sys'08*, February
49. Mistry P, Maes P, Chang L (2009) WUW – Wear Ur World – A Wearable Gestural Interface”, *ACM, CHI 2009*, Boston, April 4-9
50. Miyashita T, Meier P, Tachikawa T, Orlic S, Eble T, Scholz V, Gapel A, Gerl O, Arnaudov S, Lieberknecht S (2008) An augmented reality museum guide. *Mixed and Augmented Reality*, 2008. ISMAR 2008. 7th IEEE/ACM International Symposium on, vol., no., pp.103–106, 15–18 Sept
51. Nilsson J, Odblom ACE, Fredriksson J, Zafar A, Ahmed F (2010) Performance evaluation method for mobile computer vision systems using augmented reality. *IEEE Virtual Reality*
52. Papagiannakis G, Singh G, Magnenat-Thalmann N (2008) A survey of mobile and wireless technologies for augmented reality systems. *Computer Animation and Virtual Worlds* 19(1):3–22
53. Read Write Web, http://www.readwriteweb.com/archives/how_iphone_4_could_change_augmented_reality.php, How iPhone 4 Could Change Augmented Reality, Chris Cameron, June 10, 2010
54. Reitmayr G, Schmalstieg D (2003) Location based applications for mobile augmented reality. *AUIC2003*
55. Sandor C, Olwal A, Bell B, Feiner S (2005) Immersive mixed-reality configuration of hybrid user interfaces. In *ISMAR '05*, pp. 110–113
56. Schmalstieg D, Fuhrmann A, Hesina G (2000) bridging multiple user interface dimensions with augmented reality. *IEEE*
57. Schmalstieg D, Fuhrmann A, Hesina G, Zsalavari Z, Encarnacao LM, Gervautz M, Purgathofer W (2002) The studierstube augmented reality project. *Massachusetts Institute of Technology* 11(1):33–54

58. SlideShare, Present Yourself, <http://www.slideshare.net/OmarCaf/augmented-reality-on-iphone-applications>, Augmented Reality on iPhone Applications, Paolo Quadrani, Omar Caffini, 2010.
59. Stutzman B, Nilsen D, Broderick T, Neubert J (2009) MARTI: Mobile Augmented Reality Tool for Industry. Computer Science and Information Engineering, 2009 WRI World Congress on, vol.5, no., pp.425–429, March 31 2009–April 2
60. Takahashi H, Shimazaki S, Kawashima T (2007) Augmented reality system for development of handy information device with tangible interface”, In: Shumaker (ed.) Virtual Reality, HCII2007. LNCS, vol. 4563, pp. 564–573. Springer, Berlin
61. Wagner D, Schmalstieg D handheld augmented reality displays. Graz University of Technology, Austria
62. Wang PP, Wang T, Ding D, Zhang Y, Bi W, Bao Y (2009) Mirror world navigation for mobile users based on augmented reality. International Multimedia Conference, Proceedings of the seventeen ACM international conference on Multimedia, pp 1025–1026
63. White S, Lister L, Feiner S (2007) Visual hints for tangible gestures in augmented reality. In ISMAR '07, 47–50
64. Wikipedia, the free encyclopedia (2009) <http://en.wikipedia.org/wiki/Sensorama>, Sensorama
65. Wikipedia, the free encyclopedia (2010) http://en.wikipedia.org/wiki/Augmented_reality, Augmented Reality,
66. Wikipedia, the free encyclopedia (2010) <http://en.wikipedia.org/wiki/Sensorama><http://en.wikipedia.org/wiki/ARToolKit>, ARToolKit
67. Wikipedia, the free encyclopedia, http://en.wikipedia.org/wiki/Invasiveness_of_surgical_procedures, Invasiveness of surgical procedures, 2010
68. Wikipedia, the free encyclopedia, http://en.wikipedia.org/wiki/Robotic_surgery, Robotic surgery, 2010
69. Wikitude, <http://www.wikitude.org/dewikitude-drive-eyes-road-again>, WikitudeDrive: Never take your eyes off the road again, 2009.
70. Wired, <http://www.wired.com/dangerroom/2008/03/darpa-wants-con/>, Pentagon: ‘Augment’ Reality with ‘Videogame’ Contact Lenses (Updated), Noah Shachtman, March 20th, 2008.
71. Zhou F, Duh HBL, Billinghurst M (2008) Trends in augmented reality tracking, interaction and display: a review of ten years of ISMAR



Julie Carmigniani is a Master student in Computer Engineering at Florida Atlantic University where she graduated with a Bachelor of Science in Mechanical Engineering in the Fall 2009. During her undergraduate years, Julie was a member of Florida Atlantic University Swimming and Diving Team and during her freshman and sophomore years the team won the Sun Belt Conference. In the summer of 2010, Julie was awarded the National Science Foundation Grant No. OISE-0730065 under the CI-PIRE program, which gave her the occasion to travel and work closely with Italian researchers in her field and write her first paper on Augmented Reality.



Borko Furht is a professor and chairman of the Department of Computer Science and Engineering at Florida Atlantic University in Boca Raton. He is also Director of the NSF-sponsored Industry/University Cooperative Research Center at FAU. His current research is in multimedia systems, video coding and compression, 3D video and image systems, video databases, wireless multimedia, and Internet and cloud computing. He has been Principal Investigator and Co-PI of several multiyear, multimillion dollar projects including the Center for Coastline Security Technologies, funded by the Department of Navy, One Pass to Production, funded by Motorola, the NSF PIRE project on Global Living Laboratory for Cyber Infrastructure Application Enablement, and the NSF funded High-Performance Computing Center. He is the author of numerous books and articles in the areas of multimedia, computer architecture, real-time computing, and operating systems. He is a founder and editor-in-chief of *the Journal of Multimedia Tools and Applications* (Springer, 1993). His latest books include “Handbook of Multimedia for Digital Entertainment and Arts” (Springer, 2009) and “Handbook of Media Broadcasting” (CRC Press, 2008). He has received several technical and publishing awards, and has consulted for many high-tech companies including IBM, Hewlett-Packard, Xerox, General Electric, JPL, NASA, Honeywell, and RCA, and has been an expert witness for Cisco and Qualcomm. He has also served as a consultant to various colleges and universities. He has given many invited talks, keynote lectures, seminars, and tutorials. He serves on the Board of Directors of several high-tech companies.



Marco Anisetti received the M.S. and Ph.D. degrees in computer science from the University of Milan, Italy, in 2004, and 2009, respectively. He is currently working as post-doc in the Department of Information Technology, University of Milan. His main research interests are computer vision, image processing with special regard to tracking strategies, and emotional state estimation by facial analysis. He is also involved in several research projects regarding GSM protocol, and mobile phone electromagnetic fields prediction.



Paolo Ceravolo holds a degree of Laurea in Philosophy from the Philosophy Department of the Catholic University of Milan, Italy and a PhD. in Computer Science from the Department of Information Technologies of the University of Milan, Italy. Currently, he is an Assistant Professor at the same Department. His research interests include Ontology-based Knowledge Extraction and Management, Process Measurement, Semantic Web technologies, Emergent Process applied to Semantics, Uncertain Knowledge and Soft Computing. On these topics he has published several scientific papers and book chapters.

Recently he has been conducting research activities within the research project MAPS (Agile Methodologies for Software Production), and in the research project KIWI. Currently, Paolo Ceravolo is directly involved in the TEKNE and SecureSCM projects.

He is involved in the organization of different conferences such as: Innovation in Knowledge-Based & Intelligent Engineering Systems (KES), IEEE/IES Conference on Digital Ecosystems and Technologies (IEEE-DEST), Knowledge Management in Organizations (KMO). Since 2008 he is secretary of the IFIP 2.6 Working Group on Database Semantics.



Ernesto Damiani is currently a Professor at the Università degli Studi di Milano and the director of the Università degli Studi di Milano's Ph.D. program in computer science. Prof. Damiani leads the SESAR lab of the Università degli Studi di Milano, whose researchers have been involved in several projects funded by the EC under FP5 (FASTER), FP6 (PRIME) and FP7 (Aristotele, SecureSCM, PrimeLife). He is an Associate Editor of the IEEE Transactions on Service Oriented Computing, Area Editor of the Journal of System Architecture and a member of various editorial boards. He has published several books and about 200 papers and international patents. Prof. Damiani is a senior member of the IEEE and ACM Distinguished Scientist, and he received the Chester Hall Award for the best paper published in the IEEE Transaction on Consumer Electronics.



Miodrag Ivkovic is Professor at the University of Novi Sad, Serbia, in the subject of ebusiness, e-marketing, and Project Management. Professor Ivkovic was a Senior Manager in Telekom Serbia from 2003 to 2008.. He is an author of over 50 research and scientific papers in IT field and author and co-author of 5 books and a monograph. Professor Ivkovic was also a member of the High Level Group for EU Eureka Program Brussel, 2002-2003, a member of UNESCO National Commission, 2002-2005, and member of the Forum of Centre for e Governance for SEE from 2008-2009 and member of the board Pexom Foundation.