
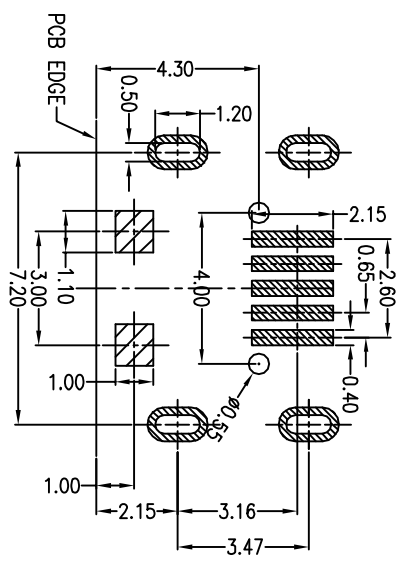
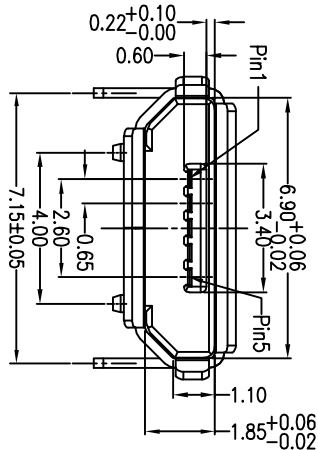

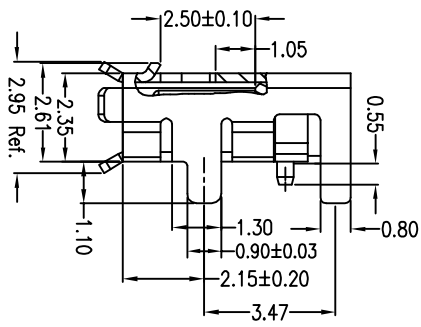
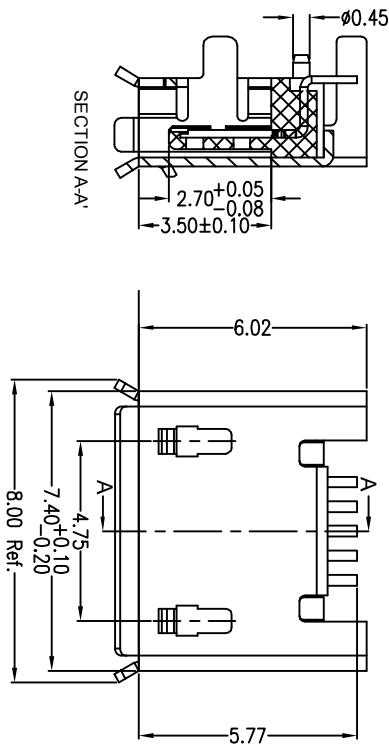


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

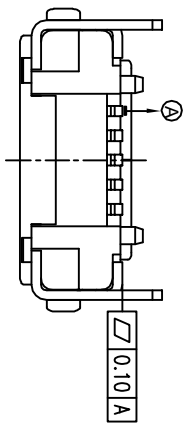

- Note:
1. Material:
- 1.1 Housing: High temperature thermoplastic with g.f.U.L94V-0
 - 1.2 Contact: copper alloy,t=0.20mm
 - 1.3 Shell: copper alloy,t=0.25mm
2. Specification:
- 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 50 mW Max.
 - 2.4 Insulation resistance: 100 MW Min.
 - 2.5 Total mating force: 3.57 Kgf Max.
 - 2.6 Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
 - 2.7 Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 1-261

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① 产品代号 A: 产品
- ② 产品系列 01: micro usb 5pin
- ③ 产品类别 S: 母座
- ④ 产品类型 B: B TYPE
- ⑤ 外壳材料 1: 02800R-H
- ⑥ 端子材质 4: 05101R-BH
- ⑦ 主体材质 1: 1.0P
- ⑧ 主体颜色 B: 黑色
- ⑨ 下板类型 1: dip (插板)
- ⑩ 细节流水 201: micro usb 5P/F B Type dip 有导线焊柱/2脚侧边加线/插板/1脚侧全插

PART NO:	A01SB141B1-261	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED		DR:	夏友红
.x	0.25	CHK:	
.xx	0.20	APP:	
.xxx	0.15	SCALE:	5:1
Ang.	2°	DATE:	2013.04.16
TITLE:		DWG NO:	A261
Micro usb 5P/F B Type dip 有导线有柱7.2加焊盘加长0.75脚长1.14脚全插		REV:	A

深圳市艾立信电子有限公司

