

SECTION : 501-08 Exterior Trim and Ornamentation

VEHICLE APPLICATION : 2008.0 Falcon

CONTENTS

DESCRIPTION AND OPERATION

Exterior Trim and Ornamentation..... 501-08-1

REMOVAL AND INSTALLATION

Radiator Grille..... 501-08-2

Licence Plate Housing..... 501-08-2

Rear Decklid Moulding - High Series, Sedan 501-08-3

Rear Decklid Moulding - Low Series, Sedan 501-08-3

Front Door Frame Moulding - Sedan and Ute 501-08-4

Rear Door Frame Moulding - Sedan..... 501-08-4

Front Door Pillar Appliqué - Sedan and Ute..... 501-08-4

Rocker Panel Moulding - Sedan 501-08-5

Roof Ditch Moulding - Sedan..... 501-08-5

Roof Ditch Moulding - Ute..... 501-08-5


Decklid Spoiler..... 501-08-6



DESCRIPTION AND OPERATION

Exterior Trim and Ornamentation

Component Location

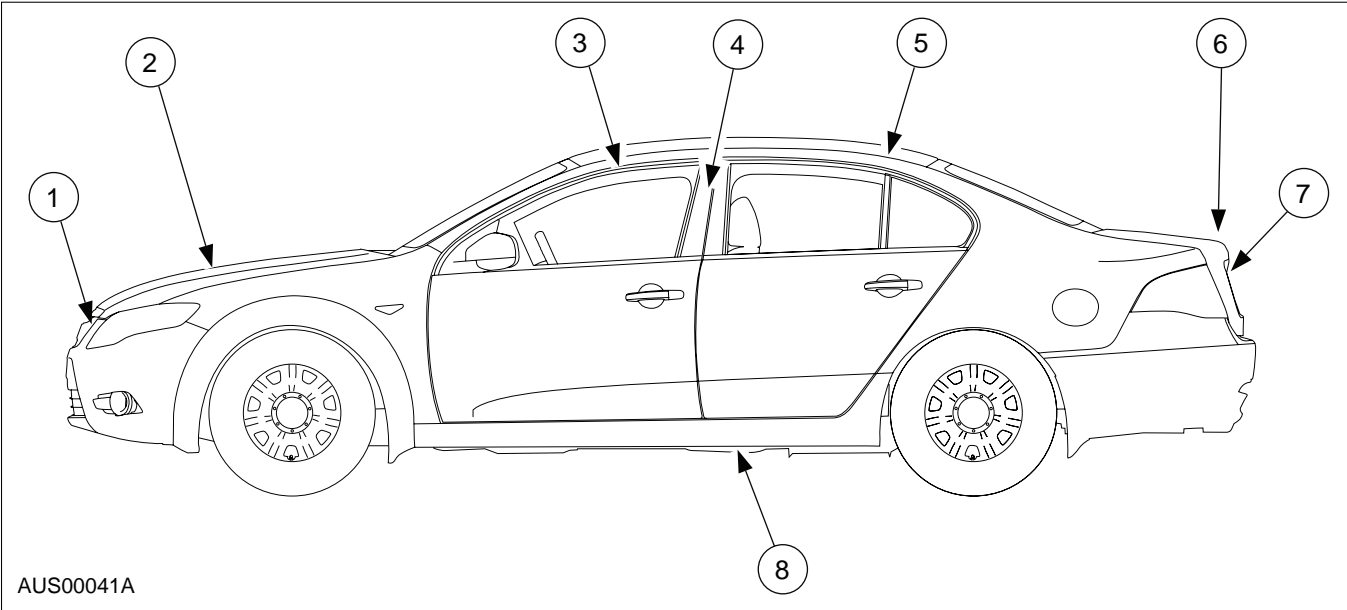

Item	Description
1	Radiator Grille
2	Hood Moulding
3	Door Moulding
4	Window Moulding
5	Roof Ditch Moulding
6	Decklid Spoiler
7	Licence Plate Moulding
8	Rocker Pane Moulding




REMOVAL AND INSTALLATION

Radiator Grille

Removal

1. Raise the hood.
2. Remove the air intake.
3. Remove the sight cover and grille retaining scrivenets.
4. Remove the sight cover and grille as one piece from the vehicle.

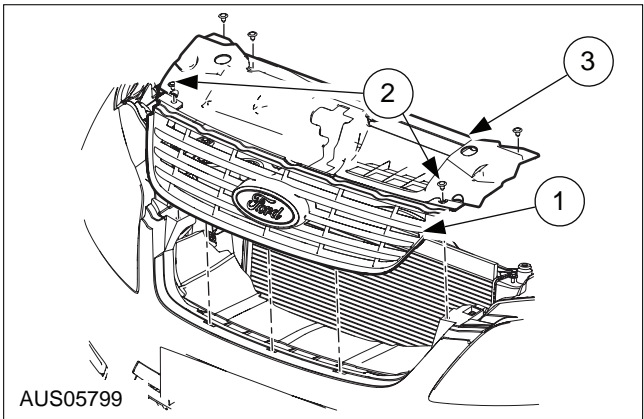

Item	Description
1	Scrivet - 8mm
2	Grille - SWB/UTE
3	Sight cover

5. On a suitable workbench, disengage the radiator grille to sight cover retaining clips.

Installation


1. To install, reverse the removal procedure.

Licence Plate Housing

Removal


High Series

1. Gently use a screwdriver to depress the clip tab on the side of the lamp housing to remove it from the appliqué.
NOTE: The lamp will still be attached to the appliqué by the bulb holder and wiring.

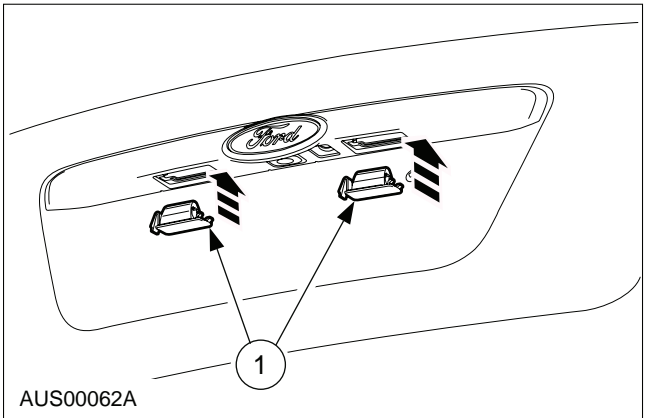

Item	Description
1	Number Plate Lamp

Low Series

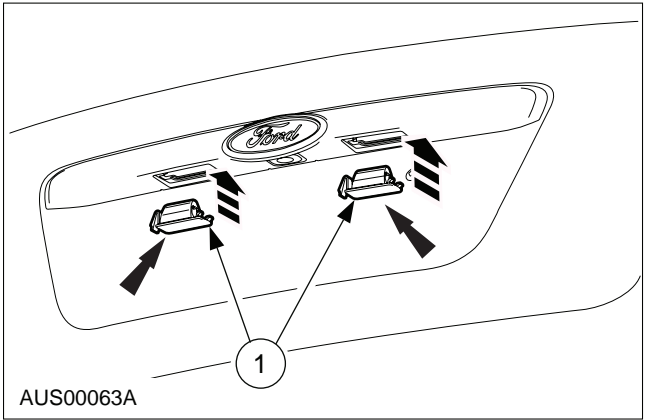

Item	Description
1	Number Plate Lamp

2. Turn the bulb holder approximately 1/8 of a turn anti-clockwise until it is free of the lamp housing.

Installation


1. To install, reverse the removal procedure.
NOTE: Tabs prevent the bulb holder from being inserted into the lamp housing at the incorrect orientation. Do not apply force.



Rear Decklid Moulding —
High Series, Sedan

Removal

1. Remove the 4 nuts from inside decklid.
NOTE: Use care when handling rear decklid moulding with reverse camera fitted.

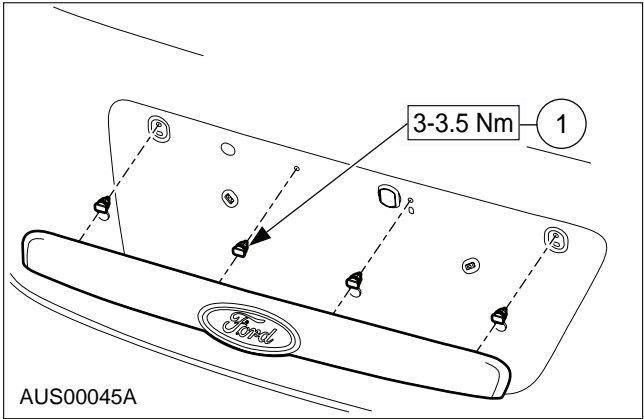

Item	Description
1	Nut - M5

2. Pull out the wiring grommet and unplug the wiring connector for license plate lamps and the reverse camera (if fitted).


Installation

1. Feed in license plate lamp and reverse camera (if fitted) wire into decklid and insert lamp wire grommet.
2. Plug in connector.
3. Line up the 4 off studs with the decklid and insert. (Insure seals are fitted to the appliqué).
4. Install the nuts and torque.

Rear Decklid Moulding —
Low Series, Sedan

Removal

1. Remove 4 off nuts from inside decklid.

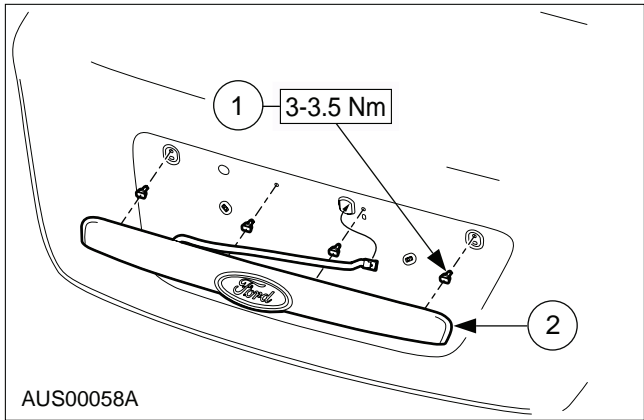

Item	Description
1	Nut - M5
2	Ornament Assy Lugg Comp Door

2. Carefully remove the moulding.
3. Pull out wiring grommet and unplug wiring connector for license plate lamps.

Installation


1. Feed in license plate lamp wire into decklid and insert lamp wire grommet.
2. Plug in connector.
3. Line up the 4 off studs with decklid and insert (Insure seals are fitted to appliqué).
4. Install the nuts and torque.



Front Door Frame Moulding – Sedan & Ute

Removal

1. Lower the front window.
2. Remove the front door trim. Refer to section 501-05.
3. Remove the rear view mirror. Refer to section 501-09.
4. Pull the front window weatherstrip from the door frame.
5. Remove the front window moulding from the vehicle.

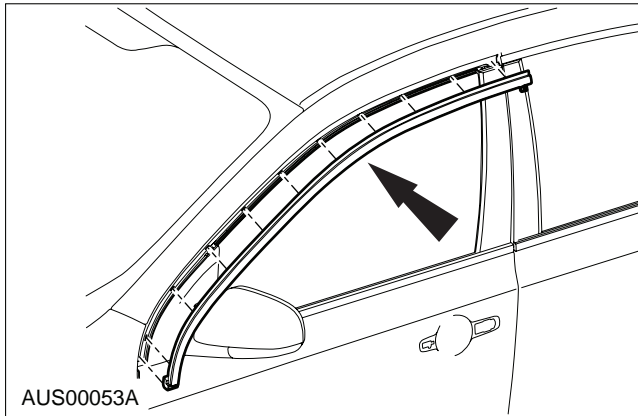


Installation

1. To install, reverse the removal procedure.

Rear Door Frame Moulding - Sedan

Removal

1. Lower the rear window.
2. Pull the rear window weatherstrip from the door frame.
3. Remove the rear window moulding from the vehicle.

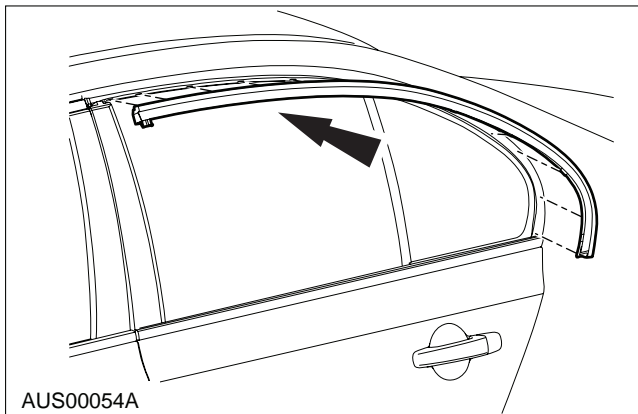

Installation


1. To install, reverse the removal procedure.

Front Door Pillar Appliqué – Sedan and Ute


Removal

1. Lower the front window
2. Remove the front door trim. Refer to section 501-05.
3. Remove the rear view mirror. Refer to section 501-09.
4. Remove the front door inner beltline. Refer to section 501-03.
5. Remove the front door outer beltline. Refer to section 501-03.
6. Remove the front window weatherstrip from the door frame. Refer to section 501-03.
7. Remove the front door frame moulding. Refer to the procedure in this section.
8. Remove the blackout trim.
9. Remove the 3 screws.
NOTE: The screws should be removed middle first, then the bottom and finally the top.
10. Pull the appliqué away from the door flange, removing the last remaining section of the window weatherstrip from the channel.

Sedan

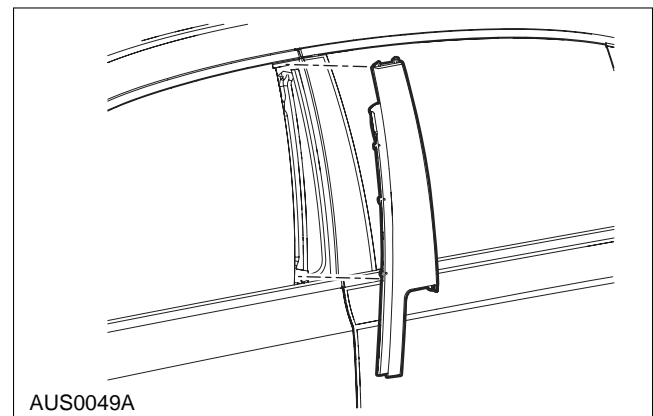

Ute

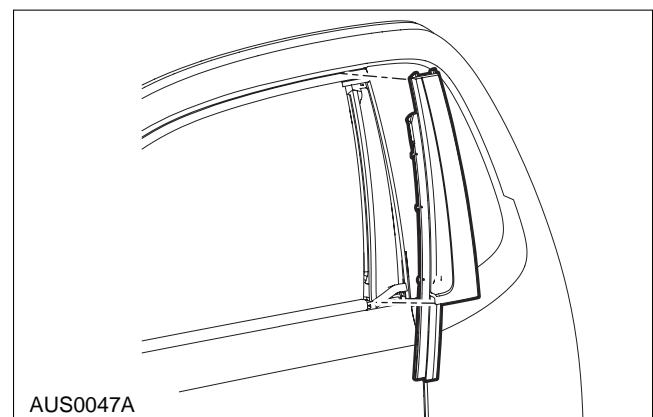

Installation


1. To install, reverse the removal procedure.




Rocker Panel Moulding - Sedan

Removal

1. Remove the front fender splash shield. For additional information, refer to 501-02.
2. Remove the scriveners and screws attaching rear of the rocker panel to the body.

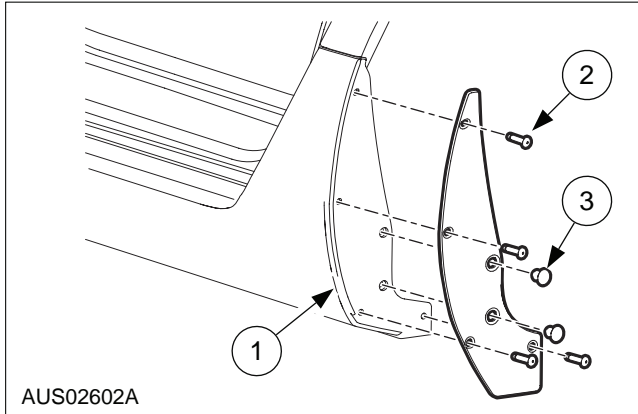

3. Remove all rocker moulding seal clips from the top slots.
4. Remove fir trees from underneath the rocker (2 in the drawing below).

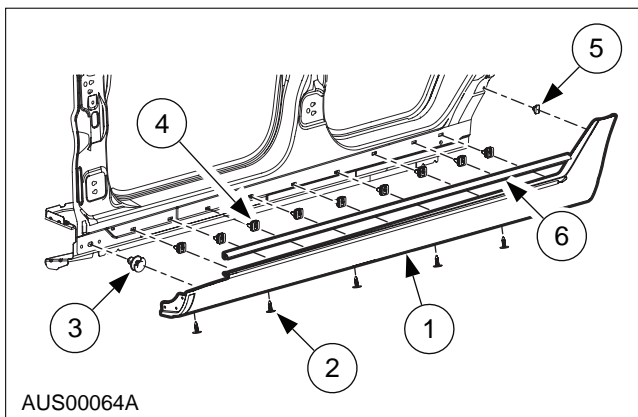

5. Remove rocker panel moulding.
NOTE: Easiest to open the doors and pull from the front.


Installation

1. Locate rocker moulding lower fixing channel onto rocker panel weld seam.
2. Roll rocker panel in vertical position to locate rocker seal clips into corresponding top slots.
3. Fully insert all rocker moulding clips starting from the first front clip.
4. Ensure all clips are fully located home.
5. Fully insert the three fir tree clips on the underside, to the floor in corresponding holes.
6. Install the scriveners and screws attaching rear of the rocker panel to the body.
7. Install front splash shield. For addition information, refer to section 501-05.

Roof Ditch Moulding - Sedan

Removal

1. Remove the existing roof ditch moulding.

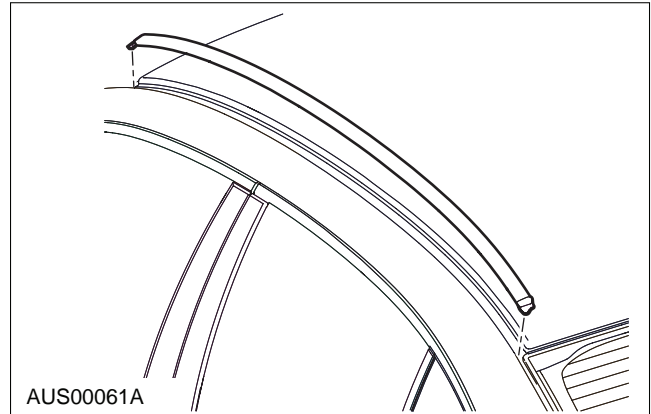

2. Use an adhesive cleaner to remove tape residue from the channel.


Installation

1. Remove the backing tape from the new moulding.
2. Align corner of moulding front tab underneath windscreen seal
3. Place body of moulding in channel, aligned to body side, gap at roof-side
4. Before completely adhering tape at rear of moulding, insert the tab at the rear of the moulding under the backlight seal.
5. Ensure uniform pressure is applied to moulding using a roller.

Roof Ditch Moulding - Ute

Removal

1. Remove the existing roof ditch moulding.

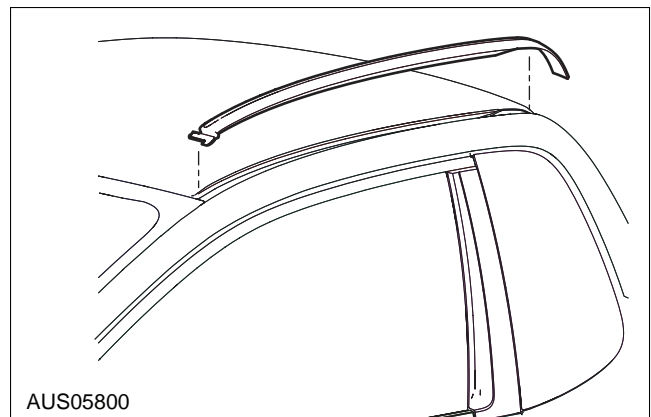

2. Use an adhesive cleaner to remove tape residue from the channel.

Installation

1. Remove the backing tape from the new moulding.
2. Align corner of moulding front tab underneath windscreen seal.




3. Place body of moulding in channel.
4. Ensure uniform pressure is applied to moulding using a roller.

Decklid Spoiler


Removal

1. Disconnect the wiring loom from the license plate lamp via the rear of inside left hand side decklid panel.
2. Remove the screws from each spoiler foot via the inside edges of decklid.

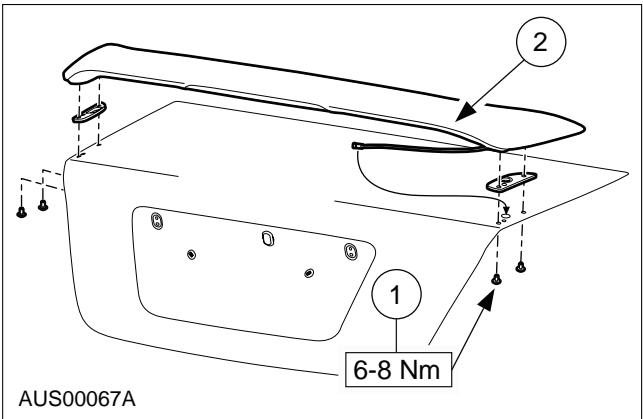

Item	Description
1	Nut
2	Rear Spoiler

3. Lift the spoiler assembly off the decklid, pulling the wiring loom through the hole.

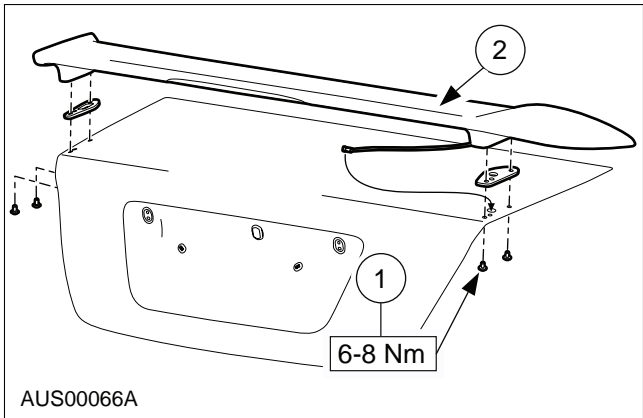

Item	Description
1	Nut
2	Rear Spoiler

Installation

1. To install, reverse the removal procedure.

