2.3.2. Card Form Factors Intended for WWAN Socket 2

2.3.2.1. Type 3042 Specification

Type 3042 is an extended-width M.2 Add-in Card size used for WWAN solutions.


In principle the board is still comprised of three sections:

- Host interface section
- RF connector and mounting hole section
- Active Component section

The active component section is 8 mm wider making it wider than other Add-in Card alternatives intended for Socket 2 with the same overall length of 42 mm.

An example of the Type 3042 Add-in Card mechanical outline drawing is shown in Figure 2-8.

The wider board size will support a greater number of RF connectors. Up to six (6) RF connectors are permitted to be populated while maintaining the recommended 4.5 mm center-to-center distances. See Section 2.3.7 in this document for recommended locations and assignments.

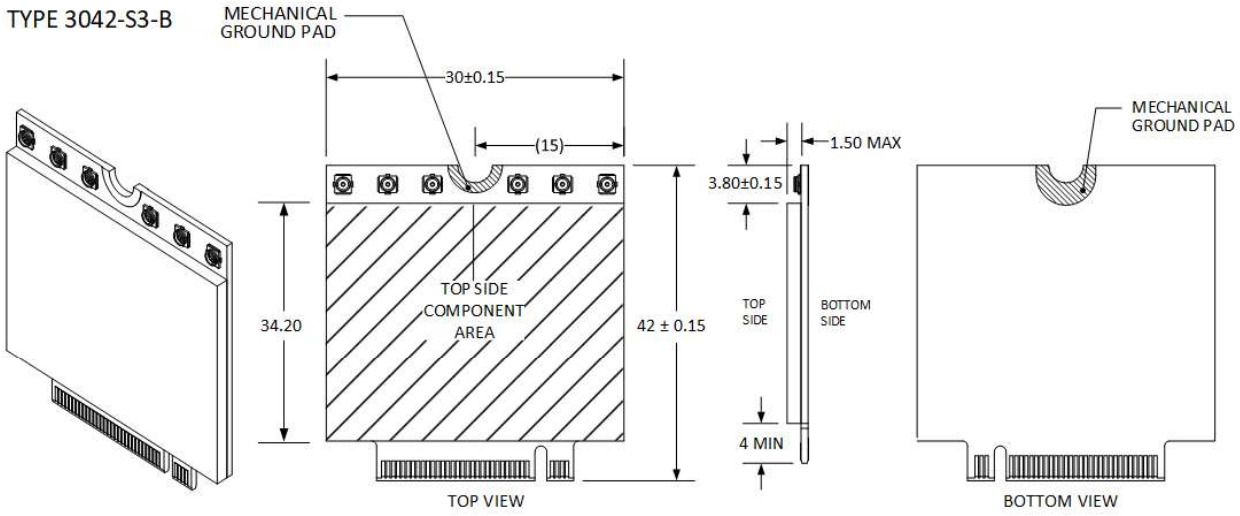

Note: For card-edge details, see Section 2.3.4.

Figure 2-8. M.2 Type 3042-S3 Mechanical Outline Drawing (Key B example shown)

2.3.2.2. Type 3052 Specification

Type 3052 is an extended-width-length M.2 Add-in Card size used for WWAN solutions.

In principle the board is still comprised of three sections:

- Host interface section

Keying is required to provide configurability as well as preventing incompatible Add-in Card insertion. See the following figures and tables for dimensional values.

- Table 2-3. Key Location/Pin Block Dimensions for Keys A to F
- Table 2-4. Key Location/Pin Block Dimensions for Keys G to M
- Figure 2-36. Key Detail for Keys A to F
- Figure 2-37. Key Detail for Keys G to M
- Figure 2-38. Dual Key A-E Example
- Figure 2-39. Dual Key B-M Example

The key locations and pin block dimensions for Keys A to F are listed in Table 2-3**.** Table 2-4 lists Keys G to M. The key designation identifier should be marked with either Silk Screen, reverse copper etching, or solder mask removal on the Top-side of the Add-in Card to the right of the Add-in Card key, as shown in Figure 2-36 and Figure 2-37. The letter size should be at least 1 mm tall.


Table 2-3. Key Location/Pin Block Dimensions for Keys A to F

Dimension	Key ID					
	A	B	C	D	E	F
Q	6.625	5.625	4.625	3.625	2.625	1.625
R	1.50	2.50	3.50	4.50	5.50	6.50
S	14.50	13.50	12.50	11.50	10.50	9.50
T	1.00	2.00	3.00	4.00	5.00	6.00
U	14.50	13.50	12.50	11.50	10.50	9.50

Table 2-4. Key Location/Pin Block Dimensions for Keys G to M

Dimension	Key ID					
	G	H	J	K	L	M
V	1.125	2.125	3.125	4.125	5.125	6.125
W	9.00	10.00	11.00	12.00	13.00	14.00
X	7.00	6.00	5.00	4.00	3.00	2.00
Y	9.00	10.00	11.00	12.00	13.00	14.00
Z	6.50	5.50	4.50	3.50	2.50	1.50

Two Key designation identifiers should be marked when the Add-in Card employs a dual Add-in Card key scheme as shown in Figure 2-37 and Figure 2-38 respectively.

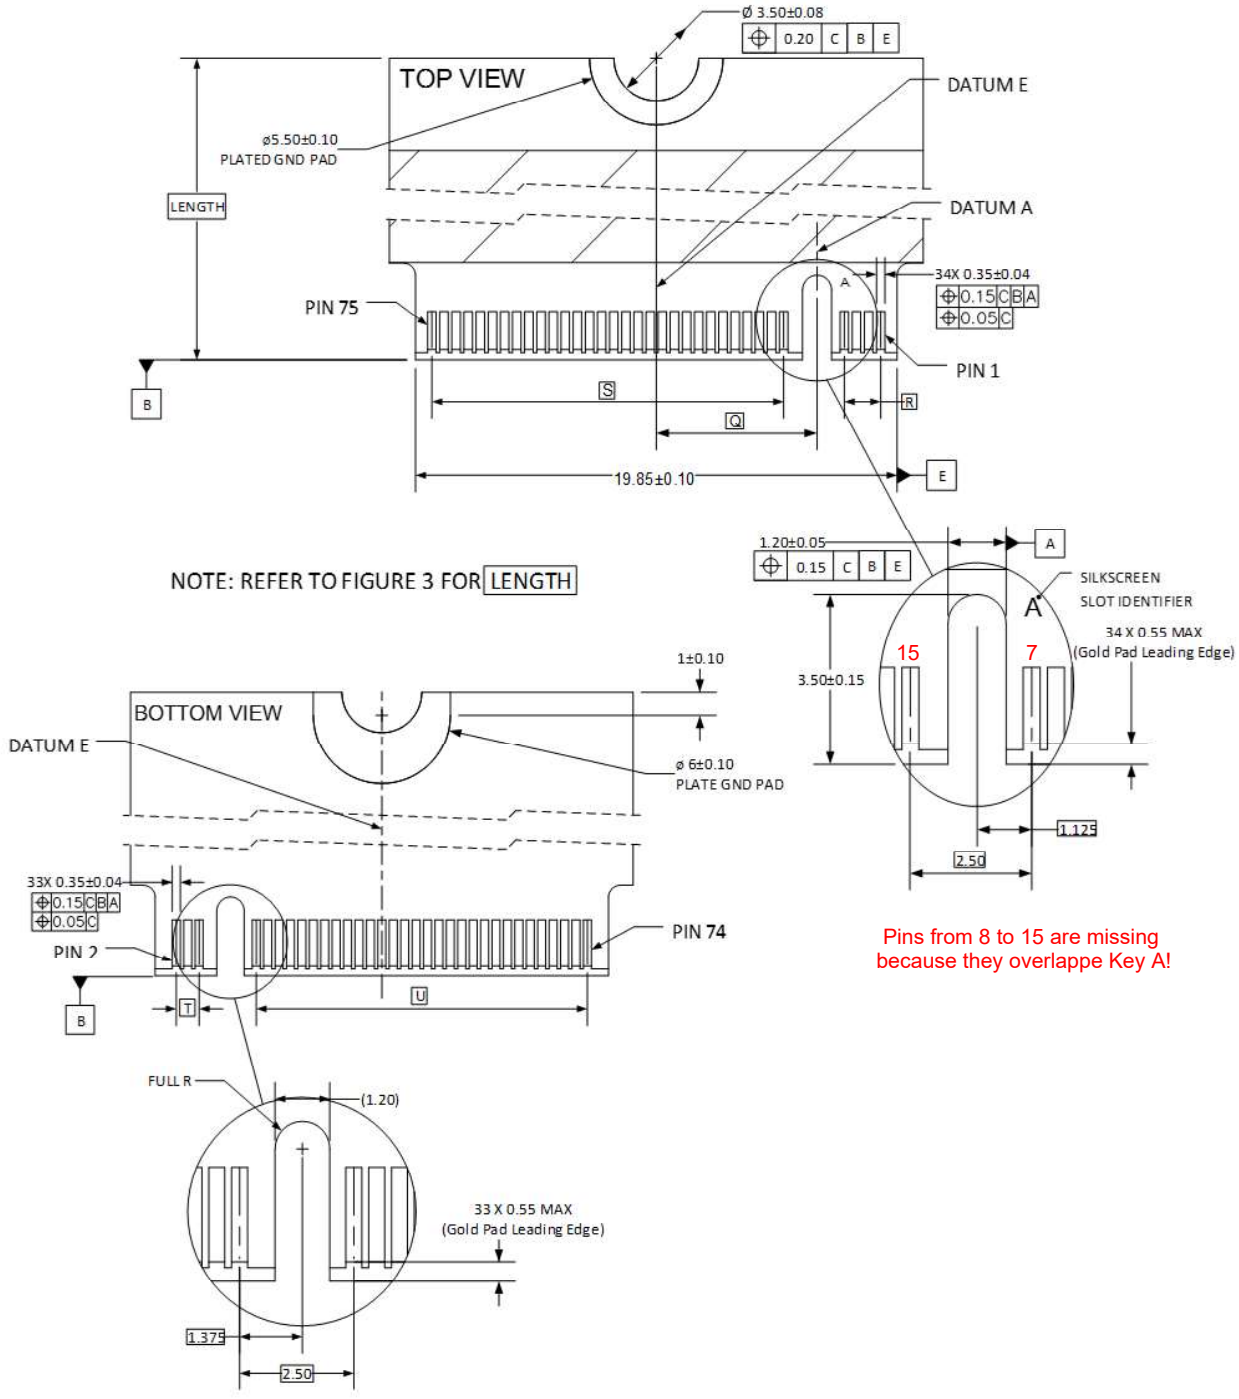

Note: See Figure 2-2 for LENGTH

Figure 2-36. Key Detail for Keys A to F