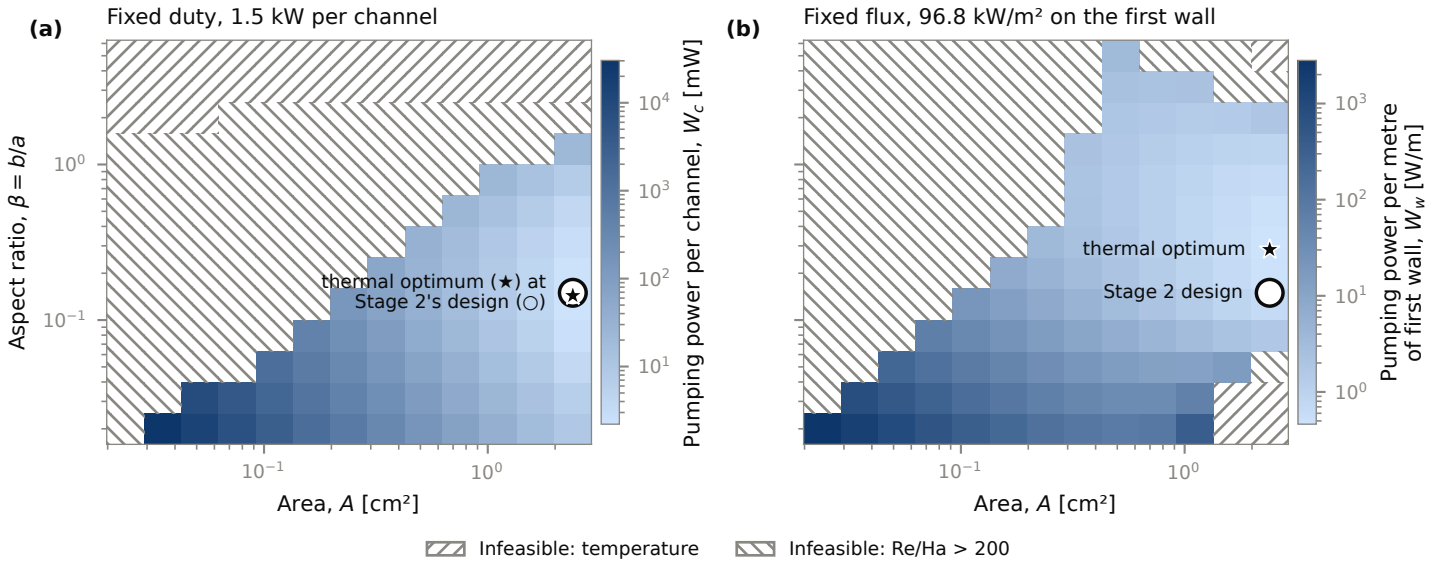
(a)
Fixed duty, 1.5 kW per channel
Aspect ratio, $\beta = b/a$
10^0
10^{-1}
thermal optimum (★) at
Stage 2's design (○)
10^{-1}
10^0
Area, A [cm²]
10^4
10^3
10^2
10^1
Pumping power per channel, W_c [mW]
(b)
Fixed flux, 96.8 kW/m² on the first wall
thermal optimum ★
Stage 2 design
10^{-1}
10^0
Area, A [cm²]
10^3
10^2
10^1
10^0
Pumping power per metre
of first wall, W_w [W/m]
Infeasible: temperature
Infeasible: Re/Ha > 200