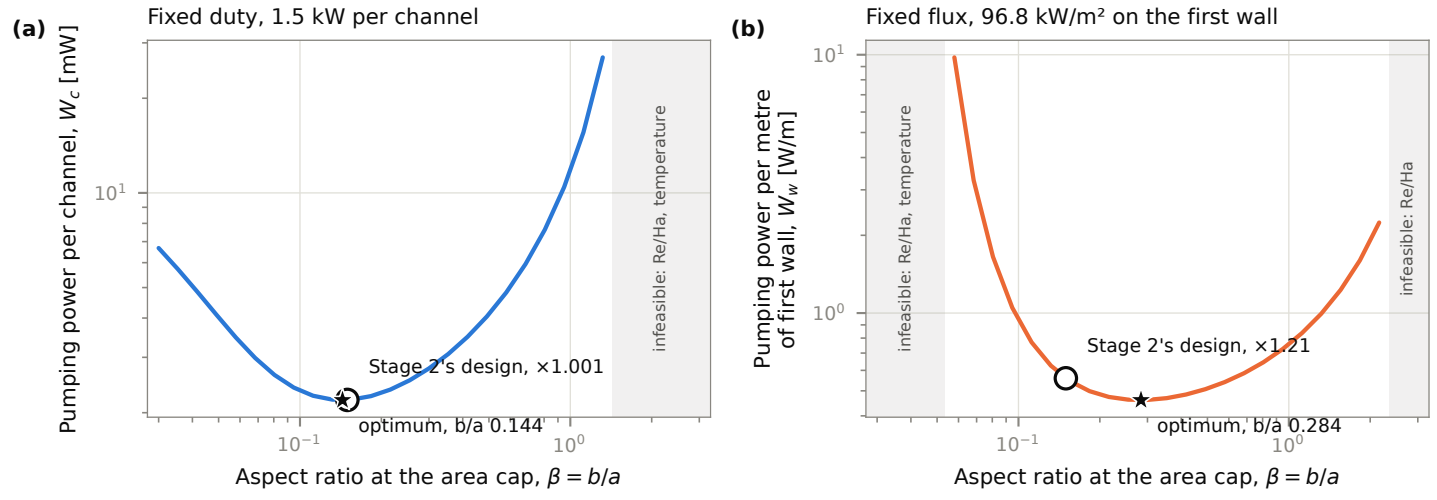
(a)
Fixed duty, 1.5 kW per channel
Pumping power per channel, W_c [mW]
10^1
infeasible: Re/Ha, temperature
Stage 2's design, ×1.001
optimum, b/a 0.144
10^{-1}
10^0
Aspect ratio at the area cap, $\beta = b/a$
(b)
Fixed flux, 96.8 kW/m² on the first wall
Pumping power per metre of first wall, W_w [W/m]
10^1
10^0
infeasible: Re/Ha, temperature
infeasible: Re/Ha
Stage 2's design, ×1.21
optimum, b/a 0.284
10^{-1}
10^0
Aspect ratio at the area cap, $\beta = b/a$