TIM OESTERREICH

BUILDING LARGE DYNAMIC TRUSS STRUCTURES

BUILDING LARGE DYNAMIC TRUSS STRUCTURES

TIM OESTERREICH

Using TrussFormer

April 2018 – version 4.5

Ohana means family.
Family means nobody gets left behind, or forgotten.

— Lilo & Stitch

Dedicated to the loving memory of Rudolf Miede.

$1939 - 2005$

ABSTRACT

Short summary of the contents in English. . . a great guide by Kent Beck how to write good abstracts can be found here:

https://plg.uwaterloo.ca/~migod/research/beckOOPSLA.html

ZUSAMMENFASSUNG

Kurze Zusammenfassung des Inhaltes in deutscher Sprache. . .

We have seen that computer programming is an art,
because it applies accumulated knowledge to the world,
because it requires skill and ingenuity, and especially
because it produces objects of beauty.

— Donald E. Knuth [1]

ACKNOWLEDGMENTS

Put your acknowledgments here.

Many thanks to everybody who already sent me a postcard!

Regarding the typography and other help, many thanks go to Marco Kuhlmann, Philipp Lehman, Lothar Schlesier, Jim Young, Lorenzo Pantieri and Enrico Gregorio[1], Jörg Sommer, Joachim Köstler, Daniel Gottschlag, Denis Aydin, Paride Legovini, Steffen Prochnow, Nicolas Repp, Hinrich Harms, Roland Winkler, Jörg Weber, Henri Menke, Claus Lahiri, Clemens Niederberger, Stefano Bragaglia, Jörn Hees, Scott Lowe, Dave Howcroft, José M. Alcaide, and the whole LATEX-community for support, ideas and some great software.

Regarding LyX: The LyX port was intially done by *Nicholas Mariette* in March 2009 and continued by *Ivo Pletikosić* in 2011. Thank you very much for your work and for the contributions to the original style.

---

1 Members of GuIT (Gruppo Italiano Utilizzatori di TEX e LATEX)

CONTENTS

LIST OF FIGURES

LIST OF TABLES

LISTINGS

ACRONYMS

INTRODUCTION

Personal fabrication devices, such as 3D printers, are already widely used for rapid prototyping and allow non-expert users to create interactive machines, tools and art. As consumer-grade 3D printers are usually desktop-sized, the size of these objects is, however, fairly limited. TrussFormer aims to enable users to create large-scale dynamic objects using desktop-sized 3D printers. Scale can be achieved by creating multiple small-sized objects and connecting them to each other. If all parts of a large object would be 3D printed, this process would take a long time and special large-size 3D printers would be needed. Our solution to this problem is to take ready-made objects, like empty plastic bottles, and only print the connectors that keep them together. To aid users in this process, we developed a software simulation that can create objects which are capable of handling the substantial forces large object intrinsically have. We achieve this by providing stable primitives which can be attached together. These primitives resemble truss structures - beam-based constructions creating closed triangle surfaces, which are intrinsically sturdy and material-efficient.
In order to build the simulated objects, we provide export-functionalities. Our software also provides tools to evaluate the magnitude of force acting on the links.
- TODO:
- node-link-structure
- export
- force

1.1 TRUSSFAB

- create big structures
- create them quickly and cheaply
- explain concept of nodes and edges

1.2 TRUSSFORMER

- make structures move
- observe forces during movement
- create animation
- define hinges

1.3   TRUSSCONTROL

- closed-loop movement control
- automatic conversion of simulation animation to arduino code

1.3   TRUSSCONTROL

- closed-loop movement control
- automatic conversion of simulation animation to arduino code

RELATED WORK

2

2.1 LARGE-SCALE PERSONAL FABRICATION

2.2 CONSTRUCTION KITS

2.3 PROTOTYPING WITH READY-MADE OBJECTS

2.4 BUILDING WITH VARIABLE GEOMETRY TRUSSES

- Steward Platform
- Walking Octa

2.5 SOFTWARE PIPELINE FOR ANIMATRONICS

2.6 SKETCHUP

WALKTHROUGH

3.1 DESIGNING STATIC STRUCTURES

- placement of structurally stable primitives
- importing previously built objects
- edit object (grow/shrink, move tool)

3.2 ADDING MOVEMENT TO THE STRUCTURES

- placing actuators
- placing primitives with variable geometry trusses
- demonstrate movement tool

3.2.1 *Force Analysis*

- check tension force on edges
- check acceleration and speed on nodes
- add loads to object
- check tension while moving
- automatically fix movement when object is exceeding force

3.3 CONTROLLING THE STRUCTURE

- closed-loop control -> more sophisticated and complex movements possible

3.3.1 *PID Control*

- short intro: how does PID work?
- how do we use it?
- i.e. position control of actuators
- forward reference to section 4 (setup of length measurement)

3.4   BUILDING THE FINAL OBJECT

After the object was sufficiently tested in the editor, it is time to print the connectors and assemble the final object.

3.4.1   *OpenSCAD*

At first, our abstract description of the object has to be converted into a physical representation. In order to achieve this, we used a modeling language called *OpenSCAD*. The *Export Hubs and Hinges* button will automatically morph the structure into a statically sound object, i.e. it will elongate and shorten edges so, that the ideal amount of movement is possible.

This needs to be more detailed for sure!!

The resulting arrangement of nodes and edges will be transferred to OpenSCAD. Using templates, we can create parameterized representations of hubs and hinges, which, when assembled, will exactly represent the object in the editor. This will be explained in more detail in 5.2.5.

3.4.2   *Printing the Parts*

Each OpenSCAD file represents a single part in the structure. These files can easily be converted to *.stl* files, which are typically used for 3D printing. These files have to be imported into any 3D printing software, arranged efficiently and send to a 3D printer.

put conversion script in here somehow

add some time reference here?

3.4.3   *Assembling the Structure*

The resulting hubs and hinges contain an ID system for easy assembly. Each part of a node has the node ID printed on. That way it is easy to find out which hinge-parts belong together. Additionally, each "extended" edge-line (elongation) contains the id of the connected edge. A compound elongation, which is the usual case for a hinge, is therefore assembled by finding two parts with the same node and edge ID. For static hubs, this concept is similar, but of course these do not have to be assembled.

Verlängerung einer Edge, also quasi die Elongation. FIND A BETTER NAME!

Two connectors with different node IDs but the same edge IDs will be connected by a link.

HARDWARE

- chapter will talk about challenges we faced in finding stable connectors
- material used: PLA (biodegradable, sturdy enough, ...)
- assembled based on ID system
- no special requirements to printer
- we used: UltiMaker3, UltiMaker2 and _____

> remember name of other printer

4.1 BUILDING PARTS

We can differentiate between three essential building parts for our truss structures. *Links* are the connecting and shaping parts. We used PET bottles for these parts, because they are readily available, cheap and sturdy.

These links can be connected in two different ways. If the truss primitive is static, i.e. it does not allow deformation, we connect them by *hubs*. Hubs are single-part connectors for an arbitrary number of edges. They do not allow movement.

> make sure people understand what that means

If the structure is intended to allow deformation, we can not use this single-part approach. In this case, movement is created having multiple parts that can hinge around each other. These *hinge chains* are generated according to the number of edges connected to the node and the angle of each edge relative to each other edge. In contrast to hubs, hinge chains have to be assembled manually using nuts and bolts.

Links and hubs or hinge chains, respectively, are connected by specially-printed connecting *cuffs*, which fit over the bottles thread and a fitting counter-part on the connecting end of the node.

4.1.1 *Links*

We opted to use 1l (big) and 0.5l (small) reusable PET bottles because of their intrinsic stability and abundant availability. Two bottles are connected on their bottom side by a wood screw, which is inserted using a special long-necked screwdriver. The resulting link-lengths are:

1. 60 cm - two big bottles

2. 53 cm - one big and one small bottle

3. 46 cm - two small bottles

4.1.2   *Hubs*

4.1.3   *Hinge Chains*

- beginning: open hinge chains
- later: closed hinge loops

4.1.4   *Cuffs*

In order to connect links to nodes, we developed a custom coupling system. These cuffs fit exactly over the neck of the bottle and special connecting parts on the hubs. - something about sizes of bottle neck
- size of connecting part
- little dimple for extra stability

4.2   CONTROLS

4.2.1   *Electric vs. Pneumatic Actuators*

4.2.2   *Open Loop vs. Closed Loop*

IMPLEMENTATION

We implemented TrussFormer as a plug-in for the 3D modeling software *SketchUp*. It is primarily written in Ruby and JavaScript.

5.1 ARCHITECTURE

The software can be divided into four components. The most user-facing one is the designer. The other components handle the physics simulation of the created structures, minimization logic for the created hubs and hinges and the 3D print export.

5.1.1 *Designer*

All components are stored in a graph structure. The building parts are *Edges*, *Nodes* and *Triangles*. They all inherit *GraphObject*. The purpose of these objects is providing user-facing functionalities and storing lower-level components. An overview of the graph structure can be seen in 5.1.

The *Graph* is implemented as a Singleton that stores and provides access to all GraphObjects, creates new ones and provides convenience functions for user interactions, such as finding the node closest to the mouse cursor. As this class is a singleton, every module of the software has access to the objects.

explain what a Singleton is

Each of these objects has access to its underlying logic-bearing component, called *SketchupObject*. The access to this functionality is, however, not implemented in this superclass, but in each subclass, having the specific name as an accessor. This design decision was made to improve code readability, and decrease coding errors caused by accessing the wrong SketchupObject.

Clarify. Either explain what that means (Hubs, Links, Surfaces) or at least have a forward reference

Show before and after code snippet

The responsibility of the GraphObject class is primarily unifying the way the appearance in SketchUp of the underlying object can be changed as much as possible. This includes highlighting a specific object if the mouse hovers over it, resetting the object to its default state and creating and deleting it. More complex methods need to be implemented in the respective subclass.

Nodes are the connecting components of the structure. *Edges*, as well as *Triangles* are created based on Nodes. Apart from storing adjacent Edges and Triangles, a Node can specify their positions in the SketchUp world. The Nodes' adjacent objects constantly check if their
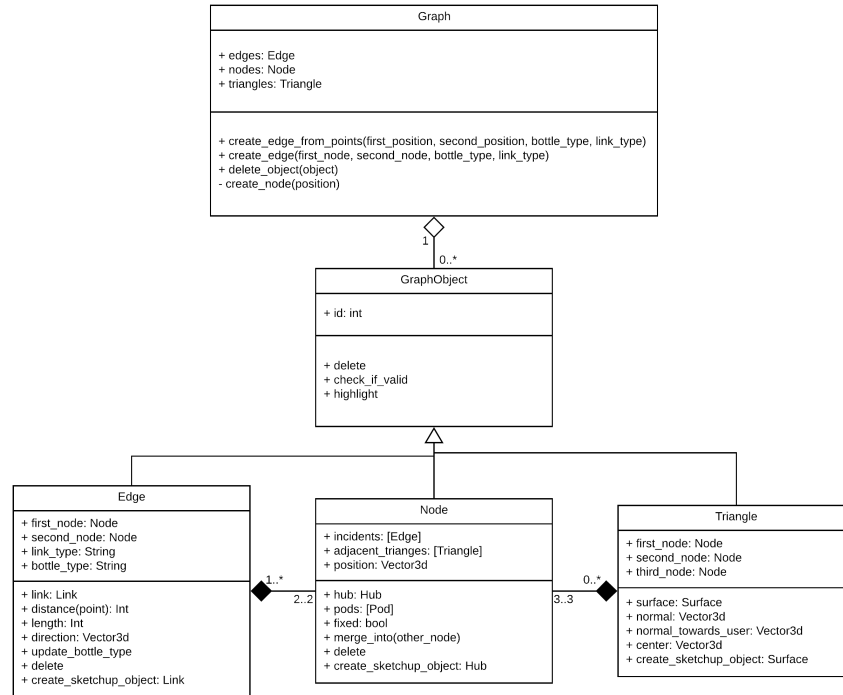
Figure 5.1: Class Diagram showing the high-level Graph Structure of the
            TrussFab Designer

position has changed and update their SketchUp representation ac-
cordingly. If the structure is deformed in such a way that a Node will
be at the same position as another one, the Node object can automat-
ically merge into the other Node. The Node will iterate over all its
adjacent Edges and tell each one, apart from the Edges that run from
the other Node to the Edge the Node is hinging around (i.e. the Edge
that is opposite the Node), to exchange itself with the Node it wants
to merge into. These Edges are removed from its own adjacent Edges
and added to the collection of the new Node. The same happens for
all adjacent Triangles. As a last step, the Node deletes itself and all
remaining adjacent Edges and Triangles (which will be the Edges and
Triangles that got merged). The object will then be adapted according
to the new positions using the *Relaxation algorithm*, described in sec-
tion 5.2.4.

```ruby
def merge_into(other_node)
  merged_incidents = []
  @incidents.each do |edge|
    edge_opposite_node = edge.opposite(self)
    next if other_node.edge_to?(edge_opposite_node)
    edge.exchange_node(self, other_node)
    other_node.add_incident(edge)
    merged_incidents << edge
  end
  @incidents -= merged_incidents

  merged_adjacent_triangles = []
  @adjacent_triangles.each do |triangle|
    new_triangle = triangle.nodes - [self] + [other_node]
    next unless Graph.instance.find_triangle(new_triangle).
  nil?
    triangle.exchange_node(self, other_node)
    other_node.add_adjacent_triangle(triangle)
    merged_adjacent_triangles << triangle
  end
  @adjacent_triangles -= merged_adjacent_triangles

  delete
end
```

Listing 5.1: Merging of two Nodes

Another component that is tightly coupled to Nodes are *Pods*. A Pod acts as a stand for the object and tells TrussFab that this Node should not change its position.

The *Edges* are the most visual components of TrussFab. They are visualized by bottles of different lengths, if they are static links, or as two cylinders forming an actuator, if they can have variable lengths. The Edges handle creating the correct model and changing it if the user decides to place a different kind of Edge. Edges play a big role in the simulation. The last high-level component in TrussFab is the *Triangle*. A Triangle is primarily used as a convenient access to multiple Nodes or Edges. Most tools that work on Nodes, such as the *Add Weight Tool*, can also be applied to Triangles, adding weight to all three connected Nodes. The Triangle also provides functions for telling the *MouseInput* in where a certain face is directed.

- tight coupling to SketchUp (uses SketchUp Elements, SketchUp rendering engine, ...)

5.1.2 *Physics Simulation*

- Based on *MSPhysics* by Anton Synytsia - Ruby wrapper around C++ physics engine *Newton Dynamics* - Implemented as a *SketchUp Animation* - implements *nextFrame* method - this method is called every time SketchUp has finished rendering a frame - this method does:

1. tell Sketchup to render new frame (SketchUp will render the positions calculated in the previous world update: make use of calculate new update while sketchup already renders new positions)

2. call *update_world*, which does, world_iterations times:

   - update forces, i.e. call apply predetermined forces (e.g. weights on hubs, calculations of PID controller)

   - call *world.advance*: Tell MSPhysics, that a new world update is available and let it calculate new forces after positional updates

   - record tensions on links, for visualization later. This has to be recorded, because for each render step, a number of world updates are done. We don't want to miss crucial force updates

   - visualize forces: send color information to SketchUp, indicating the strength of the tension on links

3. update entity positions: tell SketchUp where components have to be rendered next time

4. send data to ui: send sensor data to ui charts, if needed

5.1.3 *Minimization Logic*

- elongates and shortens edges so that maximum movement is possible with minimum material use
- uses iterative relaxation algorithm, will be explained in 5.2.4

5.1.4 *Export*

5.2 TRUSSFAB DESIGNER

The TrussFab Designer provides static sketching functionalities. It can create and display different predefined models, has knowledge about the connections of different components and can modify the resulting objects structure.

5.2.1 *User Interface*

5.2.2 *Structure Creation*

Terminology:

1. Edge:

    a) Connects two nodes

    b) Can be:

        i. Bottle Link

       ii. Actuator

     iii. PID link

5.2.3 *Modifying the Structure*

5.2.4 *Relaxation Algorithm*

5.2.5 *OpenSCAD Export*

5.3 TRUSSFORMER PHYSICS ENGINE

5.3.1 *Simulation*

- only hubs are simulated to improve performance

5.3.2 *Automatic Actuator Placement (if it works soon-ish)*

5.4 FORCE CONTROL

5.4.1 *PID*

CONCLUSION

6

BIBLIOGRAPHY

[1] Donald E. Knuth. "Computer Programming as an Art." In: *Communications of the ACM* 17.12 (1974), pp. 667–673.

DECLARATION

I certify that the material contained in this thesis is my own work and does not contain unreferenced or unacknowledged material. I also warrant that the above statement applies to the implementation of the project.

Hiermit versichere ich, dass ich die vorliegende Arbeit selbstständig verfasst und keine anderen als die angegebenen Hilfsmittel verwendet habe. Ich erkläre hiermit weiterhin die Gültigkeit dieser Aussage für die Implementierung des Projekts.

Potsdam, April 2018

_____
Tim Oesterreich