




SmartRate

Building Energy Efficiency Specialists and Software Training

Exsulite Cavity System



PH 1300 662 841

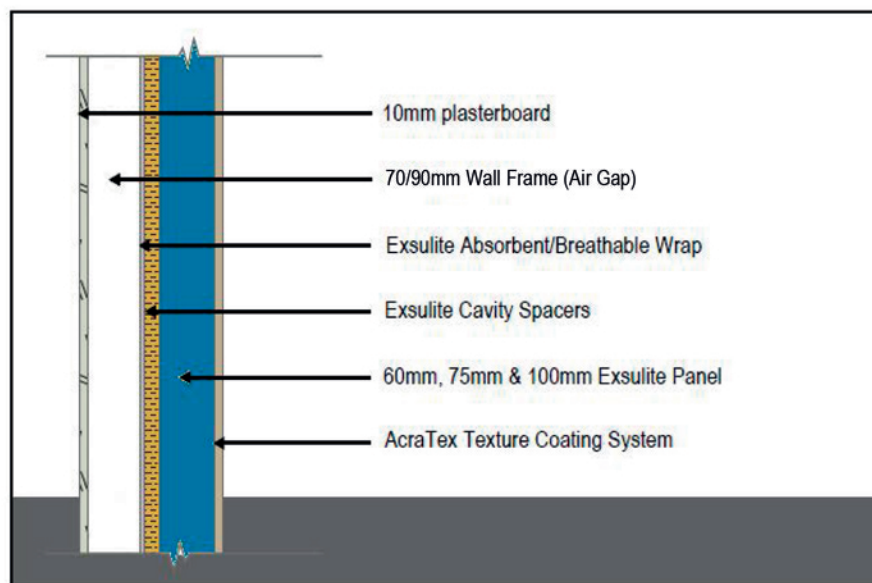

60mm Exsulite Panel		75mm Exsulite Panel		100mm Exsulite Panel	
	R- Value		R- Value		R- Value
Airfilm (Still Air)	0.12	Airfilm (Still Air)	0.12	Airfilm (Still Air)	0.12
10mm plasterboard	0.059	10mm plasterboard	0.059	10mm plasterboard	0.059
70/90mm Air gap (0.9/0.9)	0.16	70/90mm Air gap (0.9/0.9)	0.16	70/90mm Air gap (0.9/0.9)	0.16
Exsulite Wrap	0	Exsulite Wrap	0	Exsulite Wrap	0
25mm Air gap (0.9/0.9)	0.16	25mm Air gap (0.9/0.9)	0.16	25mm Air gap (0.9/0.9)	0.16
Exsulite Panel (60mm)	1.566	Exsulite Panel (75mm)	1.958	Exsulite Panel (100mm)	2.611
AcraTex Texture Coating System	0	AcraTex Texture Coating System	0	AcraTex Texture Coating System	0
Airfilm (7m/s)	0.04	Airfilm (7m/s)	0.04	Airfilm (7m/s)	0.04
Total R-Value	2.105	Total R-Value	2.497	Total R-Value	3.15

The above calculations are in presented in accordance with the principles outlined in the Building Code of Australia (2012)

Exsulite R Values are calculated on M Grade EPS to Australian Standard 1366.3 with a conductivity value of 0.0383 W/m².K

Issued 19 June 2013

Michael Plunkett - ABSA Accredited Assessor N°.40116