


Ezi 90 SI

Insulated Steel Roller Shutter

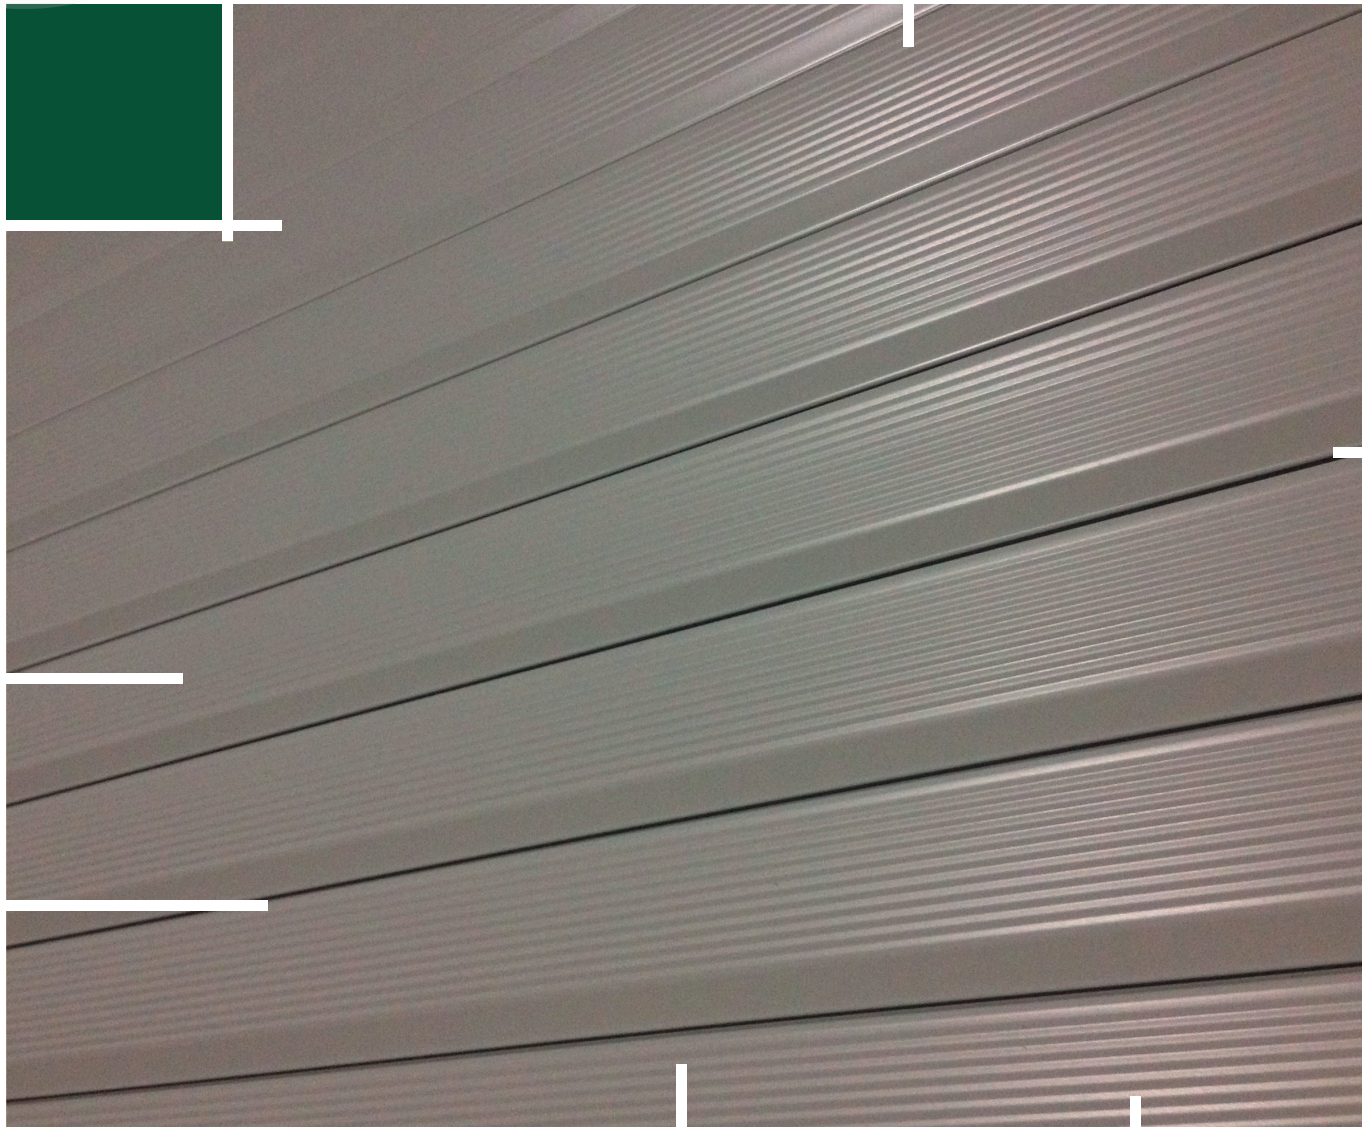

EZI-ROLL SHUTTERS | AUSTRALIAN LEADERS QUALITY | INNOVATION | DESIGN

The **Ezi 90 SI** insulated steel roller shutter is manufactured by Ezi Roll Doors Australia and compliments the steel roller shutter range. This heavy duty insulated roller shutter is manufactured from a twin wall interlocked steel slat with internal polyurethane insulation

The **Ezi 90 SI** has been specifically designed to suit commercial and industrial applications requiring either acoustic or thermal conductivity benefits. Sleek and stylish in appearance the **Ezi 90 SI** is extremely strong due to the rigidity of the interlocking sections. Nylon end clips are fitted to the curtain to allow for smooth and quiet operation. The door is complimented with a direct drive motor system and fall arrest electronic brake system for added safety.



HISTORY

Ezi-roll steel roller shutters have been manufactured in Australia since 1971 and since its inception the ezi-roll roller shutter has been continuously developed in both design and manufacturing efficiencies. The Ezi 90 SI roller shutter is one example and its features are listed below.

RECOMMENDED APPLICATION

The Ezi 90 SI is suitable for openings up to 6m high and up to 8m wide with a maximum coverage area of 45m². This insulated steel roller shutter is ideal for commercial & Industrial applications requiring acoustic or temperature regulation.

DOOR CURTAIN - INSULATION ADVANTAGES

The Ezi 90 SI slats are constructed from durable steel casing with a polyurethane foam core. The interlocking slats ensure maximum strength and durability of the door while the foam core provides reliable thermal and acoustic properties for all applications. The Ezi 90 SI provides a thermal conductivity reading of U Value = 4.2W/m²K (R Value = 0.24m²KV) and an acoustic performance reduction of 20db. This insulated roller shutter is available in a durable white enamelled finish and may be powdercoated to suit consumer preference.

OPTIONAL SPRING ASSISTED DRUM ASSEMBLY - SMALLER DOORS

The Ezi 90 SI may be fitted with a spring assisted counterbalanced roller drum, fabricated from high quality steel spiral ducted tube or spiral welded tube. In this option, the central shaft carries helical torsion drum springs to ensure a smooth and effortless, spring assisted operation. Spring assisted doors may be used in manual or hand lift applications. Size restrictions apply to this option.

EFFECTIVE TRACK SYSTEM

The Ezi 90 SI is supplied with a robust aluminium guide track which is factory fitted with extruded rubber silencing strips on both sides of the curtain, to assist in the reduction of heat transfer between the curtain and the guide. Guide track is supplied in powder coated white as standard. Fitted to the guide tracks is a set of guide rollers to assist in the doors alignment and to facilitate smooth, quiet operation and reduce wear on components. A lintel seal is also fitted to the wall at the head to further assist in the prevention of heat transfer through the door cavity.

AUTOMATIC OPERATION

The Ezi 90 SI is electrically operated. There is a range of electric motors available depending on application and usage. Direct drive, springless door systems are fitted with electronic lockout brake mechanisms for added safety.

COMMERCIAL GRADE BOTTOM RAIL AND SEAL

The Ezi 90 SI is supplied with a rectangular hollow section aluminium bottom rail to provide additional strength to the door. The bottom rail is complimented by a large 60mm double tongued durable rubber weather seal to assist in the prevention of ingress or foreign particles.

WARRANTY

A 12 month limited material, labour and workmanship warranty applies to the Ezi 90 SI.

ARCHITECTURAL SPECIFICATION

Proprietary Item: Ezi-roll "Insulated Steel Roller Shutter" Ezi 90 SI or equal approved. Refer to drawings for locations.

Door Curtain: 90mm x 23mm nominal twin wall steel slat injected with polyurethane foam. Each slat shall be fitted with nylon end clips to reduce friction. Enamel white finish or third party painted to suit individual preferences.

Thermal Rating: Roller shutter will have thermal conductivity rating of U Value = 4.2W/m²K (R Value = 0.24m²KV).

Size: To suit openings up to 6m high and 8m wide.


Tracks: 43mm x 105mm aluminium guide track including internal rubber silencing strips. Finish in white.

Bottom Rail: 23mm x 100mm aluminium rectangular hollow section, including heavy duty weather seal.


Roller Drum: Steel drum rotating on a heavy duty shaft bearings fitted with a motor incorporating safety brake mechanism as per the manufactures specifications.

Operation: Roller Shutter can be either manually operated or motorised depending upon size requirements.

TECHNICAL DETAIL

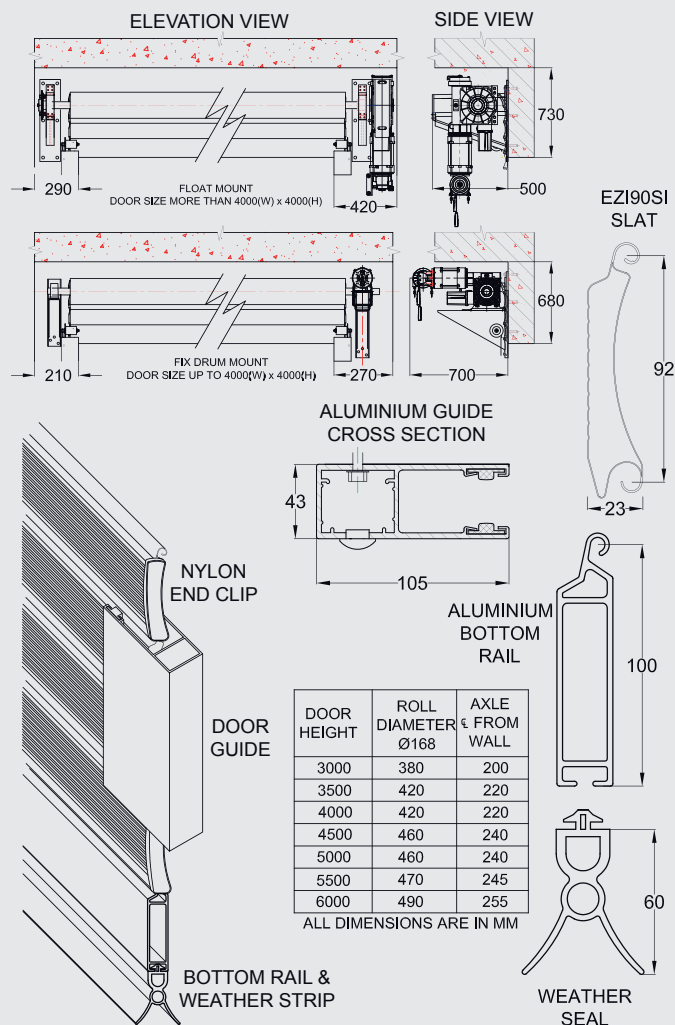

DISTRIBUTED BY



DISCLAIMER

Ezi-roll Doors Australia reserves the right to alter and or improve its products or any accessories at any time without notice and without incurring any obligation to make similar improvements to products previously ordered or sold.



HEAD OFFICE

20 Randle Rd
Pinkenba QLD 4008
Ph: +61 7 3260 1080
Fax: +61 7 3260 1027
email: sales@eziroll.com.au

VICTORIA

94-98 Micro Circuit
Dandenong South VIC 3175
Ph: +61 3 9357 0749
Fax: +61 3 9357 6988
email: vicsales@eziroll.com.au

ABN 96 132 559 105

www.eziroll.com.au



Service and Value for Money... We Guarantee It!