

# Table of Contents

1. Background .....	4
2. Design guide .....	9
2.1. Prerequisite .....	9
3. Technical .....	11
3.1. Definition List .....	11
3.2. System overview.....	11
3.3. Part & assembly overview .....	13
3.3.1. Part 1 front plane .....	13
3.3.2. Part 2 midplane.....	14
3.3.3. Part 3 backplane.....	14
3.3.4. Part 4 bin .....	15
3.3.5. Part 5 bin opening.....	15
3.3.6. Part 6 speaker grill .....	16
3.3.7. Assembly 1 computer housing.....	16
3.3.8. Assembly 2 fan.....	17
3.3.9. Assembly 3 frame .....	17
3.3.10. Assembly 4 front bumper.....	18
3.3.11. Assembly 5 rear bumper.....	18
3.3.12. Assembly 6 wheelchair .....	19
3.4. Design choices .....	19
3.4.1. Parts design choices .....	20
3.4.2. Assembly design choices.....	20
4. Realisation .....	22
4.1. Steel work .....	22
4.1.1. Frame .....	22
4.1.2. Mounting .....	22
4.1.3. Bumper preparation .....	23
4.2. Mold .....	24
4.2.1. Wooden frame .....	24
4.2.2. Styrofoam board .....	27
4.3. Polyester work .....	32
4.3.1. Preparation .....	32
4.3.2. Polyesterng .....	35
4.3.3. Sanding/Sawing/Filling .....	39
4.4. Cooling .....	42



## Welcome

### Project Willy

- History of Willy
- Project Willy
- Publicity
- Sponsors

### Getting started

- Development Guide
- Driving Willy
- Documentation

### Build of Willy

- Design history
- Requirements
- Design reference
- Physical build
- Hardware

### Robotic Operating System

- Introduction to ROS
- ROS Tutorials
- Multi master

### Architecture

- Software Architecture
- Hardware Architecture
- Skylab Architecture
- ROS topic design

### Hardware nodes

- sensor node
- si node
- power node
- WillyWRT

### Components

- ROS master
- New ROS master on Lubuntu
- Brain

- Sonar
- Lidar
- Localization and navigation
- Motor controller
- Joystick
- Social interaction
- Speech
- Speech recognition

## **Skylab**

- Setup Skylab
- Python scripts
- Webserver
- Functions of the webserver
- Skylab servers
- ROS installation on Ubuntu VMs in Skylab
- DNS,DHCP, pfSense & Ubuntu

## **Radeffect App**

- Radeffect App

## **Lessons learned**

- Todo & Advice
- Lessons Learned

## **Archive**

- Previous Groups
- Research Archive

## **Welcome**

### **Project Willy**

- History of Willy
- Project Willy
- Publicity
- Sponsors

### **Getting started**

- Development Guide
- Driving Willy
- Documentation

## **Build of Willy**

- Design history
- Requirements
- Design reference
- Physical build
- Hardware

## **Robotic Operating System**

- Introduction to ROS
- ROS Tutorials
- Multi master

## **Architecture**

- Software Architecture
- Hardware Architecture
- Skylab Architecture
- ROS topic design

## **Hardware nodes**

- sensor node
- si node
- power node
- WillyWRT

## **Components**

- ROS master
- New ROS master on Lubuntu
- Brain
- Sonar
- Lidar
- Localization and navigation
- Motor controller
- Joystick
- Social interaction
- Speech
- Speech recognition

## **Skylab**

- Setup Skylab

- Python scripts
- Webserver
- Functions of the webserver
- Skylab servers
- ROS installation on Ubuntu VMs in Skylab
- DNS,DHCP, pfSense & Ubuntu

## Radeffect App

- Radeffect App

## Lessons learned

- Todo & Advice
- Lessons Learned

## Archive

- Previous Groups
- Research Archive


# 1. Background

The original design is made by students of Industrial Product Design. One of the first things they produced was a morphological chart. The chart is made to create an overview of all options and functions of the robot.


# Morphological chart

Detect Human					
Interaction with Human					
Detect waste					
Pick up small waste					
Pick up big waste					
Waste disposal					
Charge battery					
Move around					
Protect against damage					

With the morphological chart in mind they started brainstorming and made sketches from the ideas they had.

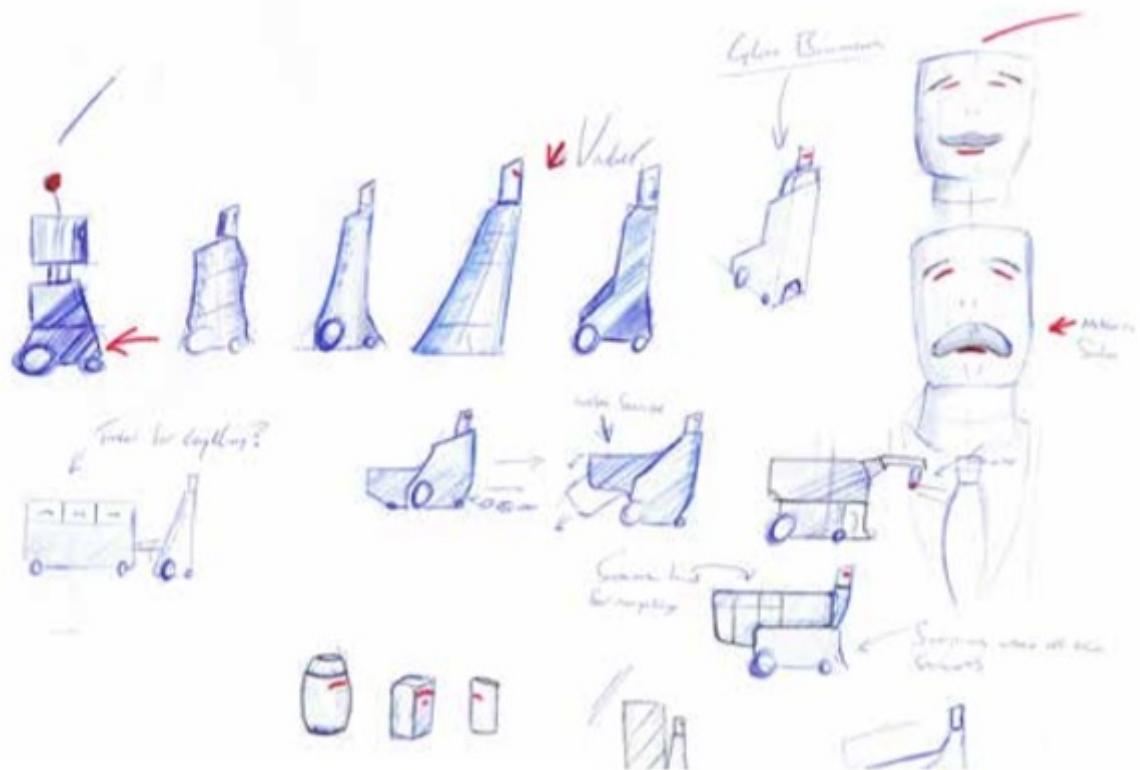

One of the early designs is the one below. In this design a large tv screen is already installed. The idea of a butler like robot came to mind. Willy has to be polite, informative and have a strong character.

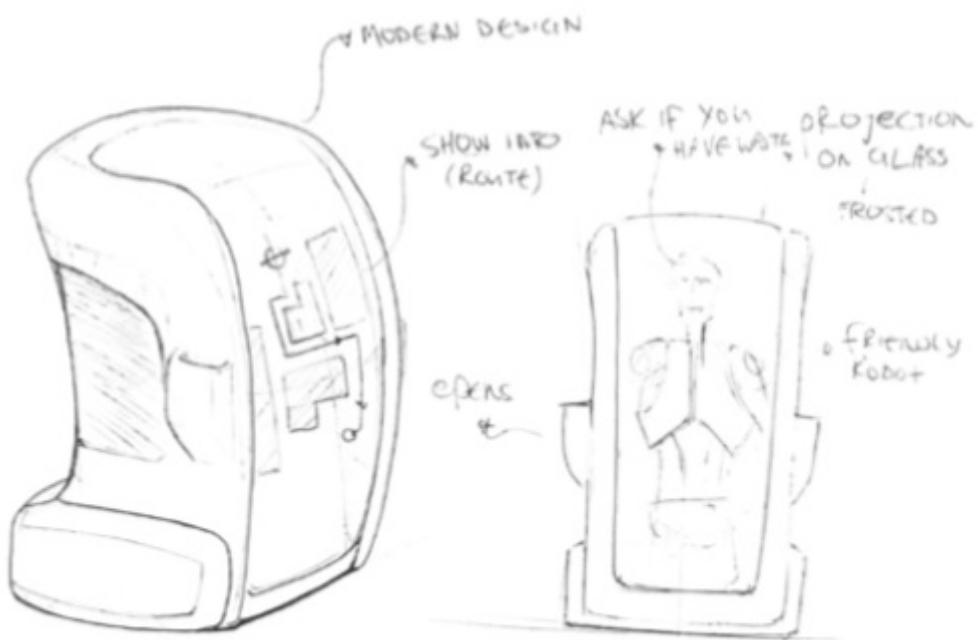

Because of the complexity the idea above was not realistic to make as a prototyping project. This is one of the reasons why they made a less complex version which certainly is realistic to make.



## Welcome

### Project Willy

- History of Willy
- Project Willy
- Publicity
- Sponsors

### Getting started

- Development Guide
- Driving Willy
- Documentation

### Build of Willy

- Design history
- Requirements
- Design reference
- Physical build
- Hardware

## **Robotic Operating System**

- Introduction to ROS
- ROS Tutorials
- Multi master

## **Architecture**

- Software Architecture
- Hardware Architecture
- Skylab Architecture
- ROS topic design

## **Hardware nodes**

- sensor node
- si node
- power node
- WillyWRT

## **Components**

- ROS master
- New ROS master on Lubuntu
- Brain
- Sonar
- Lidar
- Localization and navigation
- Motor controller
- Joystick
- Social interaction
- Speech
- Speech recognition

## **Skylab**

- Setup Skylab
- Python scripts
- Webserver
- Functions of the webserver
- Skylab servers
- ROS installation on Ubuntu VMs in Skylab
- DNS,DHCP, pfSense & Ubuntu

## Radeffect App

- Radeffect App

## Lessons learned

- Todo & Advice
- Lessons Learned

## Archive

- Previous Groups
- Research Archive

# 2. Design guide

## 2.1. Prerequisite

SolidWorks is a 3D CAD software system. The program is used to design and test parts. SolidWorks has a render extension which makes it possible to make picture like images from the 3D models.

Student edition: <https://store.solidworks.com/studentstore/default.php?command=Step1>

Download: [https://www.solidworks.com/sw/education/SDL\\_form.html](https://www.solidworks.com/sw/education/SDL_form.html)



For a student license: Mechanical Engineering has licenses which can be used. Ask at T1 for more information.

Install SolidWorks following their install guide.



It might be useful to look at <http://www.3dleerlijn.nl/solidworks-leren-gebruiken/> for learning the basics.

## Welcome

## Project Willy

- History of Willy
- Project Willy
- Publicity
- Sponsors

## Getting started

- Development Guide
- Driving Willy
- Documentation

## Build of Willy

- Design history

- Requirements
- Design reference
- Physical build
- Hardware

## Robotic Operating System

- Introduction to ROS
- ROS Tutorials
- Multi master

## Architecture

- Software Architecture
- Hardware Architecture
- Skylab Architecture
- ROS topic design

## Hardware nodes

- sensor node
- si node
- power node
- WillyWRT

## Components

- ROS master
- New ROS master on Lubuntu
- Brain
- Sonar
- Lidar
- Localization and navigation
- Motor controller
- Joystick
- Social interaction
- Speech
- Speech recognition

## Skylab

- Setup Skylab
- Python scripts
- Webserver

- Functions of the webserver
- Skylab servers
- ROS installation on Ubuntu VMs in Skylab
- DNS,DHCP, pfSense & Ubuntu

## Radeffect App

- Radeffect App

## Lessons learned

- Todo & Advice
- Lessons Learned

## Archive

- Previous Groups
- Research Archive


# 3. Technical

## 3.1. Definition List

Part	SolidWorks file which is a 3D drawing of a part of the robot.
Drawing	2D drawing of a Part which contains dimensions
Assembly	3D SolidWorks file which contains multiple Parts which are tied together with ‘mates’
Render	JPEG image file of a Part or Assembly in high resolution.

## 3.2. System overview

The render below contains all the parts and sub-assemblies that are included in our design. The 42” Display is used for interaction with people and as a way to bring information about the garbage problem and the robot. The speakers in the front are used to let Willy speak and can be used for the sound when displaying a video.

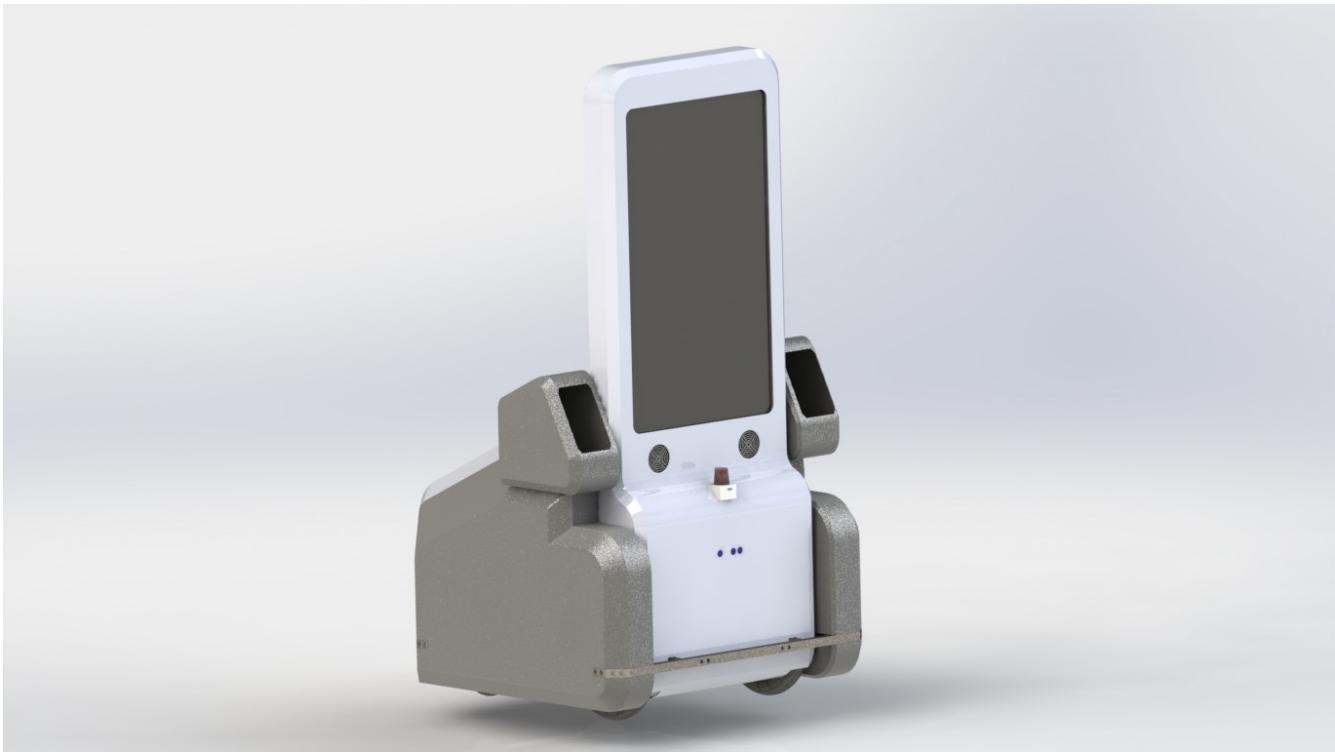

The bins on each side of Willy will be used to encourage people to throw away their garbage. Willy will ask for trash.



The Kinect is used to look for people (skeletons) so that Willy can interact with them. The LiDAR which is placed on the front of the robot is used for indoor navigation and might be used for outdoor obstacle detection.

Behind the LiDAR there is a LEAP-motion controller which can be used to control the display with gestures. The bumpers in the front and in the back of the robot are filled with ultrasonic sensors. Six in the front, six in the back and four downwards to look for kerbstones and potholes. Inside the robot there are six 33Ah car batteries which supply the necessary power. In the rear and top of

Willy there are fans to cool the whole robot.



### 3.3. Part & assembly overview

#### 3.3.1. Part 1 front plane


The front plane is one of three pieces which are made out of glass-fibre in combination with a polyester resin. A mould is made out of Styrofoam plates. The front plane contains the tv screen, place for a Kinect sensor, a LEAP motion controller, a SICK TIM551 LiDAR and two speakers with grills. The frame goes through the two holes at the bottom of the front plane.



This part is made together with the midplane and backplane using the same mould. The front plane is fixed by the front of the frame.

### **3.3.2. Part 2 midplane**


The mid plane is a frame on which the front and back plane are fixed. There are possibilities to fix the tv screen as well. At the bottom there are notches for the swivel wheels on both sides.

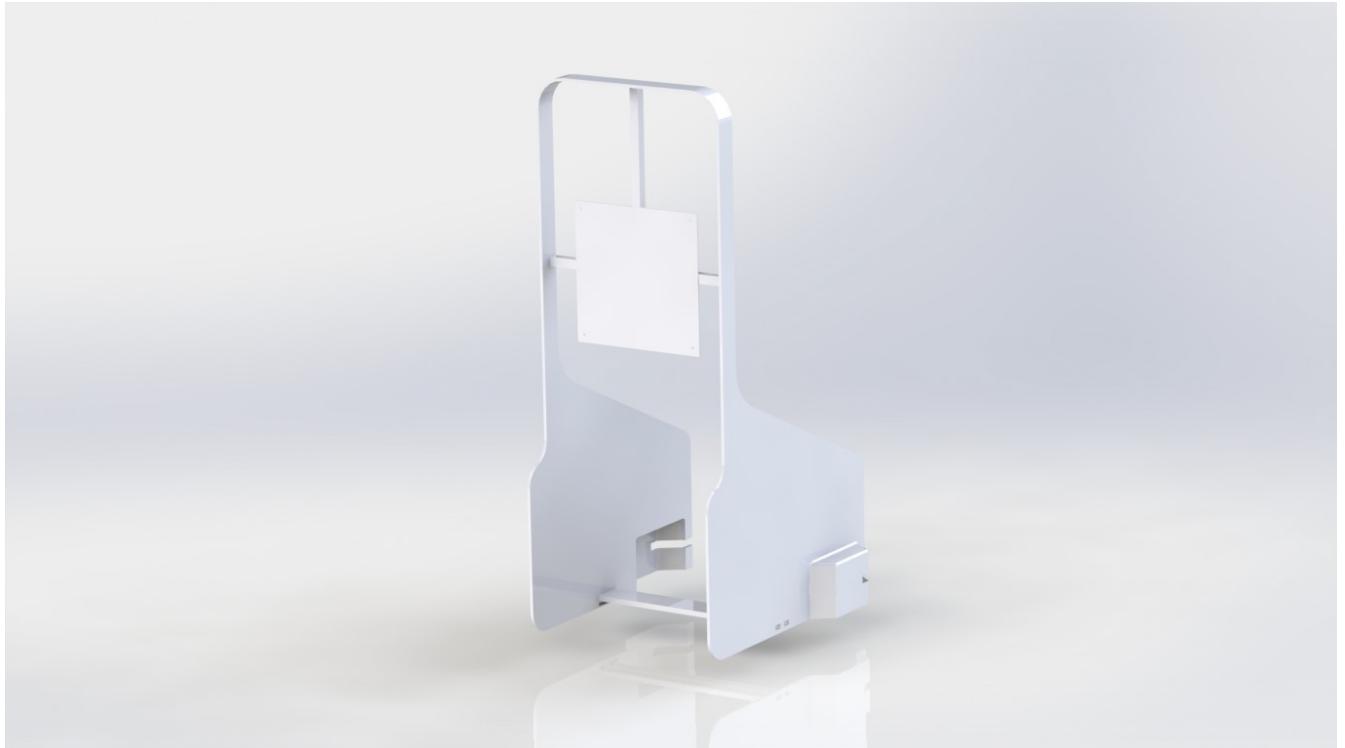

The midplane is made together with the front and backplane with the same mould.

### **3.3.3. Part 3 backplane**


The backplane contains slots where the fans can be placed. The design of the backplane improves the flow of air from the bottom to the top of the robot where the air is blown out.

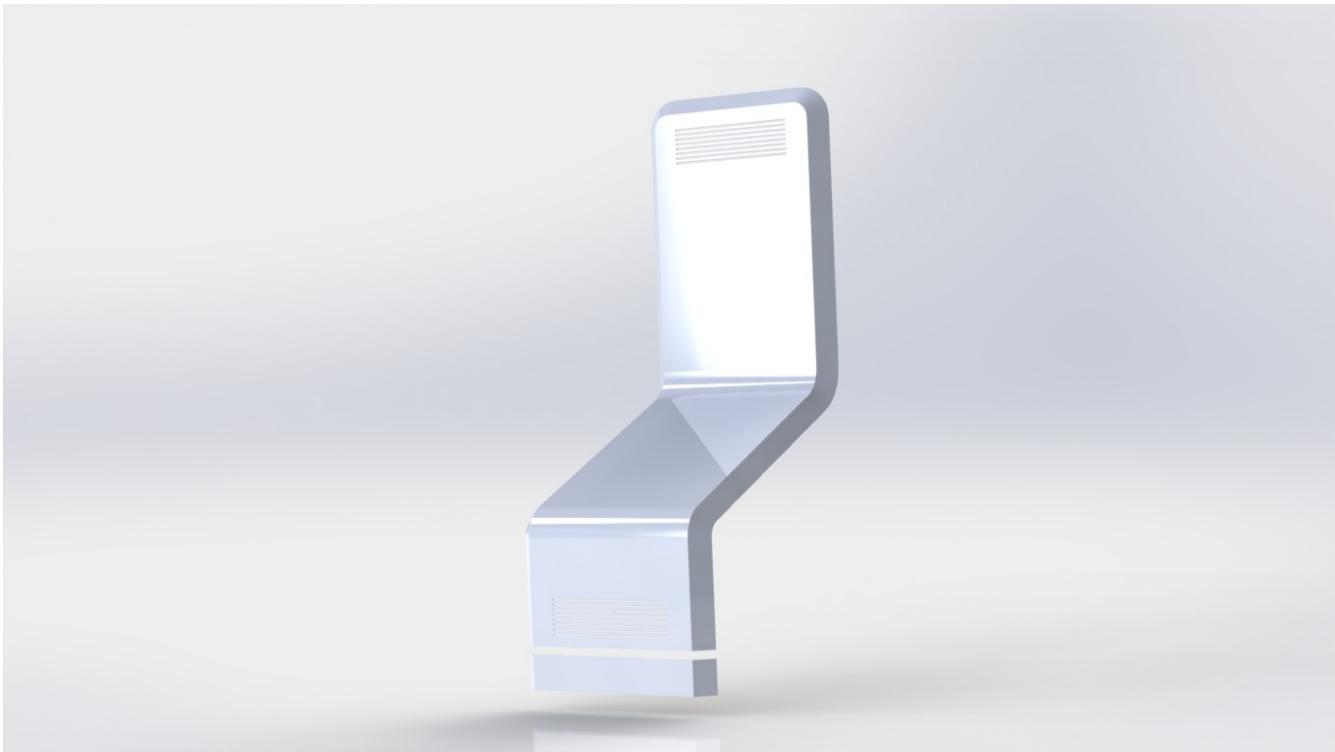

The slanted part is used as a hood so there is still a possibility to work on the electronics. The backplane is made together with the front plane and midplane with the same mould.


### 3.3.4. Part 4 bin

The bin is a part which is placed on both sides of the robot. It will be used to encourage people to throw away their garbage. There is a special bin opening part which is fitted on top of this bin.

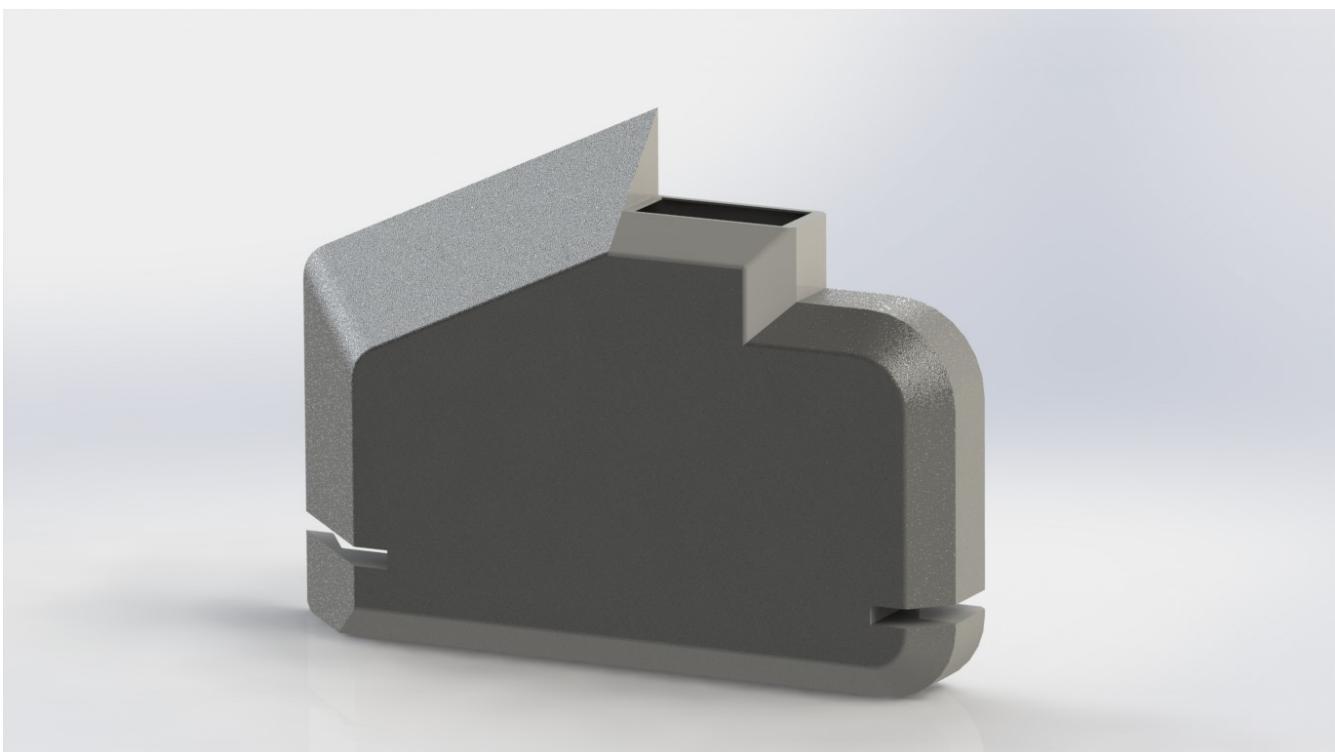

### 3.3.5. Part 5 bin opening

The bin opening part is made to have access at the front of the robot.

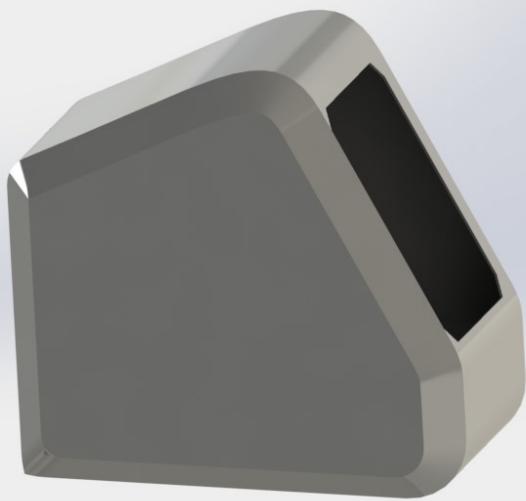


### 3.3.6. Part 6 speaker grill

The speaker grill is a part that protects the speaker from most of the larger items like rocks, cans and bottles. Besides that it protects the vulnerable speaker material from peoples' fingers.



### 3.3.7. Assembly 1 computer housing

This is a example of how the housing of the computer could be made. The brackets fit between the frame and the holes provide the computer with a cooler airflow.

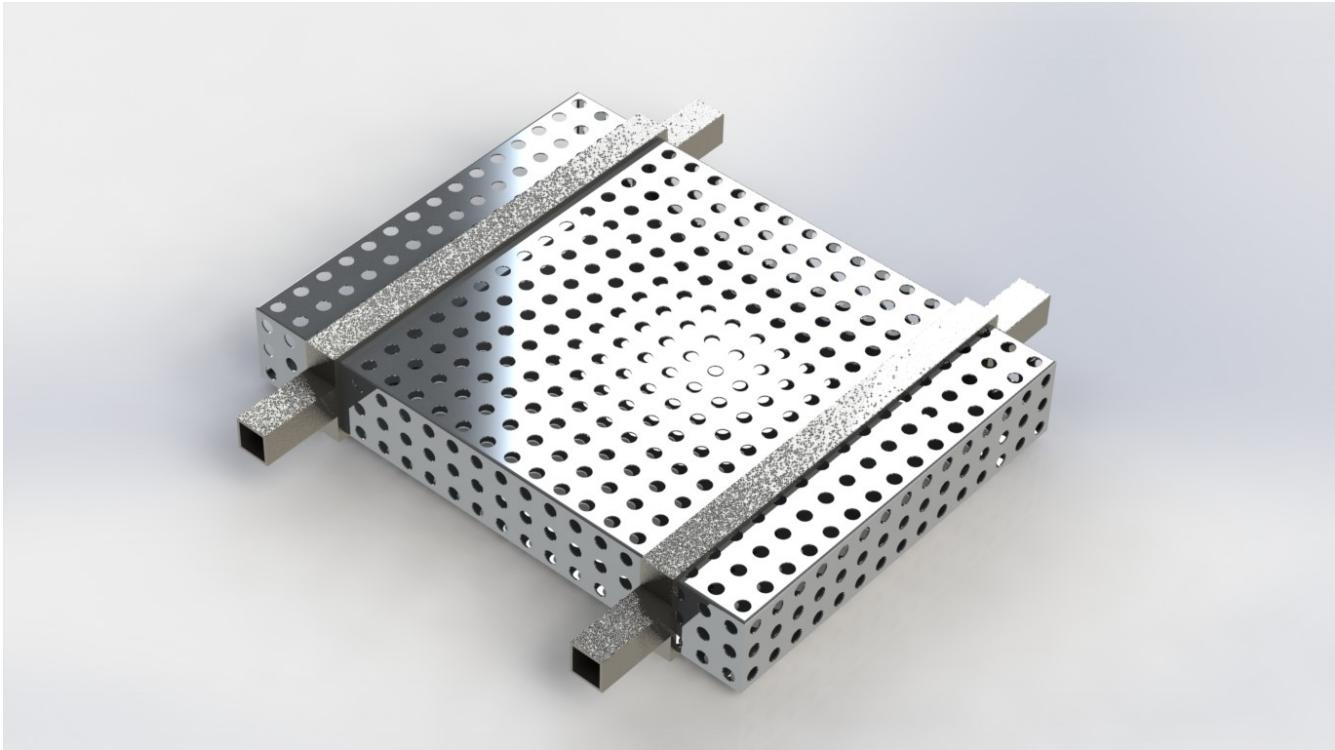


### 3.3.8. Assembly 2 fan

These fans are standard 140mm case fans which suck up air at the bottom rear of the robot while at the top they blow the hotter air back out.




### 3.3.9. Assembly 3 frame

The frame is a part that provides the whole robot with a certain firmness. Parts like the batteries and the outer housing are fixed on the frame. The frame is in that case fixed on top of the wheelchair. The frame is made out of 25x25mm square steel tubes with a thickness of 1.5mm. The tubes are welded in place.

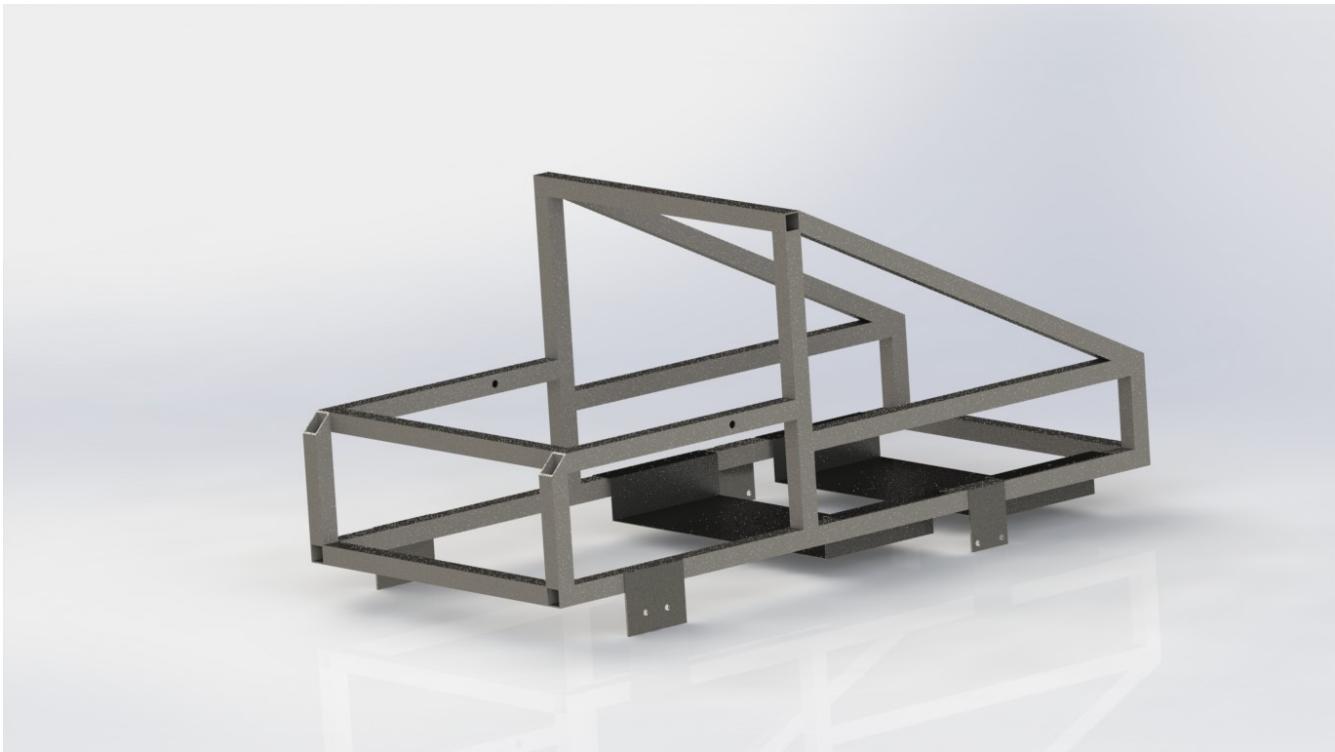

### 3.3.10. Assembly 4 front bumper

The front bumper contains six ultrasonic sensors for a wide view. It also has two sensors aimed to the ground. With these sensors things like a sidewalk or potholes can be detected.

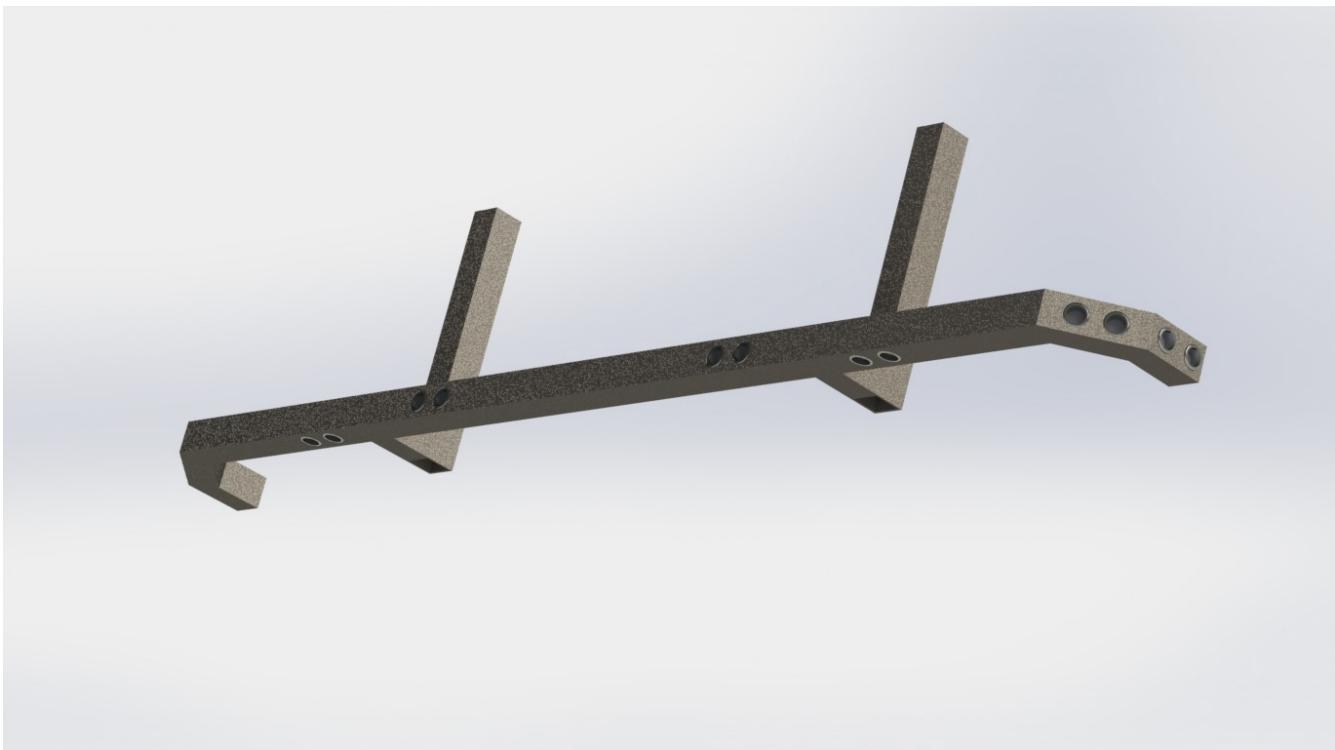

### 3.3.11. Assembly 5 rear bumper

The rear bumper also has six sensors placed outwards and two aimed at the ground. With the front and rear bumper combined there is an almost full 360 degrees view around the robot.



### 3.3.12. Assembly 6 wheelchair

The wheelchair assembly contains the motors and wheels combined with a frame that holds these parts fixed together. This is the base of Willy at the current state.



## 3.4. Design choices

The first choice we had to make with the design is which design we wanted to use. We made a design ourselves and there was a design available. The design that was available was not yet usable on the current frame. The design we made was usable in the current frame.

Together with the productowner we concluded that the available design should be the one. The reasons for that are that there was a team behind that design that had researched that idea and that it is a quite simple design to build.

### 3.4.1. Parts design choices

The bin had a problem that the opening was too small for bottles and cans. Because of that we made it a bit bulkier than the original design. The bin opening part is adjusted accordingly.

### 3.4.2. Assembly design choices

The front bumper and rear bumper were an aluminium plate in which the ultrasonic sensors were mounted. Because of the design this had to be changed. We made it in the shape of the plating itself. In this way there is only a little gap between the plating and the bumper. This also ment that it needed a sixth ultrasonic sensor because of the widened front part.

Besides the 360 degrees ultrasonic view it needed sensors which had to be aimed at the ground. This helps with finding curbs and unevennesses in the road. Both the front and rear bumper are adjusted to fit two sensors downwards.

## Welcome

### Project Willy

- History of Willy
- Project Willy
- Publicity
- Sponsors

### Getting started

- Development Guide
- Driving Willy
- Documentation

### Build of Willy

- Design history
- Requirements
- Design reference
- Physical build
- Hardware

### Robotic Operating System

- Introduction to ROS
- ROS Tutorials
- Multi master

## **Architecture**

- Software Architecture
- Hardware Architecture
- Skylab Architecture
- ROS topic design

## **Hardware nodes**

- sensor node
- si node
- power node
- WillyWRT

## **Components**

- ROS master
- New ROS master on Lubuntu
- Brain
- Sonar
- Lidar
- Localization and navigation
- Motor controller
- Joystick
- Social interaction
- Speech
- Speech recognition

## **Skylab**

- Setup Skylab
- Python scripts
- Webserver
- Functions of the webserver
- Skylab servers
- ROS installation on Ubuntu VMs in Skylab
- DNS,DHCP, pfSense & Ubuntu

## **Radeffect App**

- Radeffect App

## **Lessons learned**

- Todo & Advice

- Lessons Learned


## Archive

- Previous Groups
- Research Archive

# 4. Realisation

## 4.1. Steel work

### 4.1.1. Frame

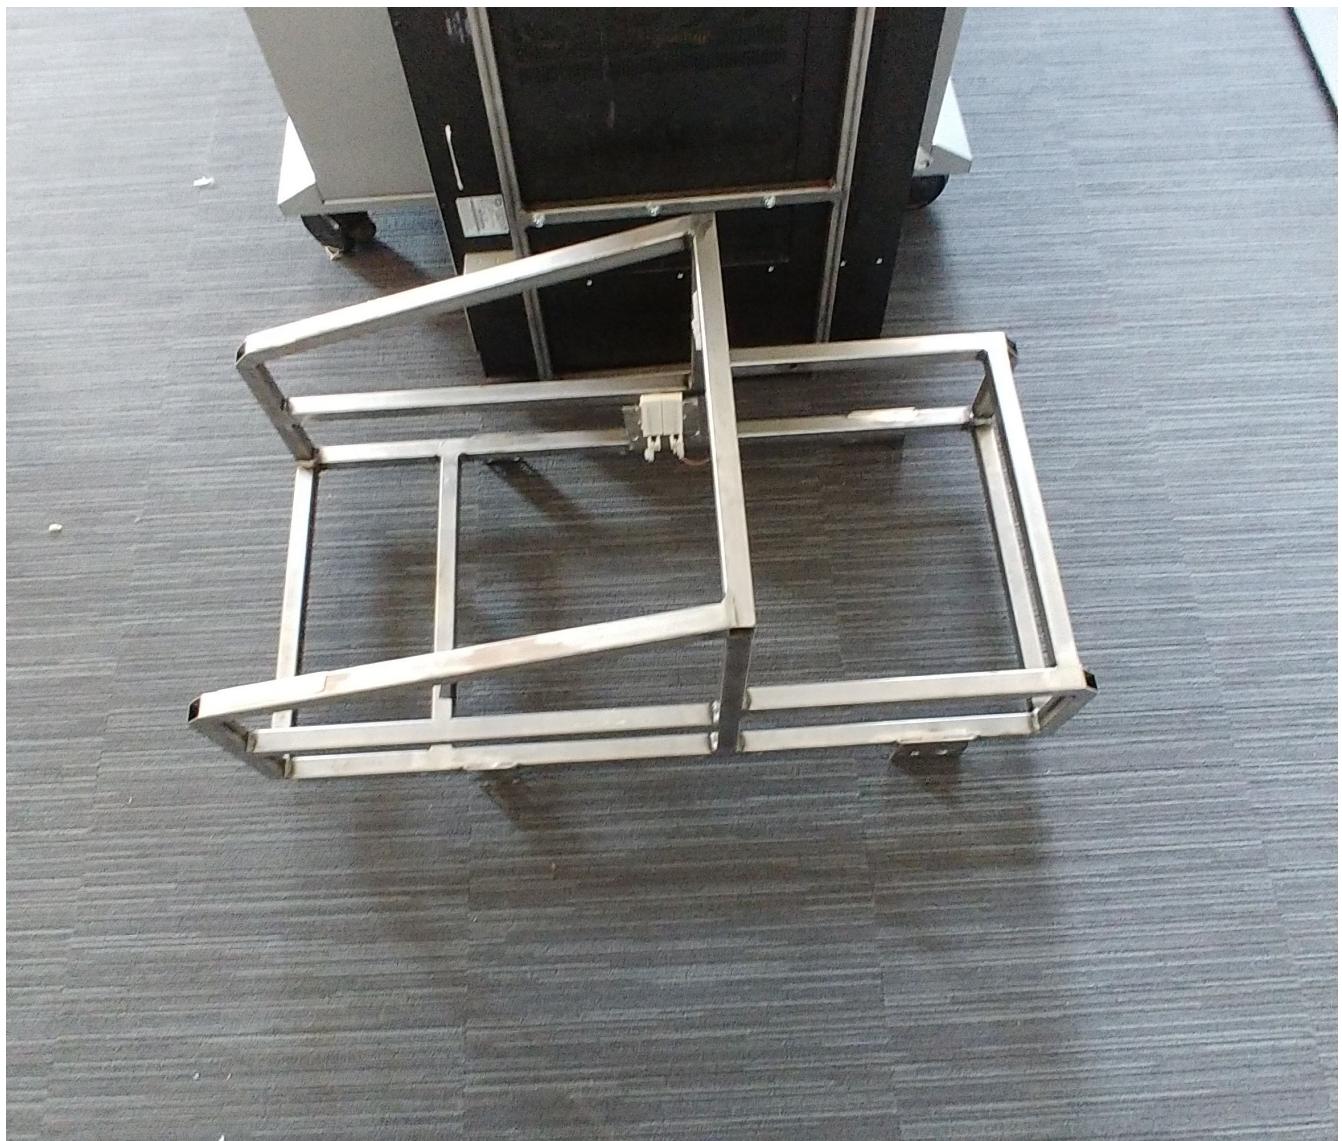


### 4.1.2. Mounting



#### 4.1.3. Bumper preparation



## 4.2. Mold

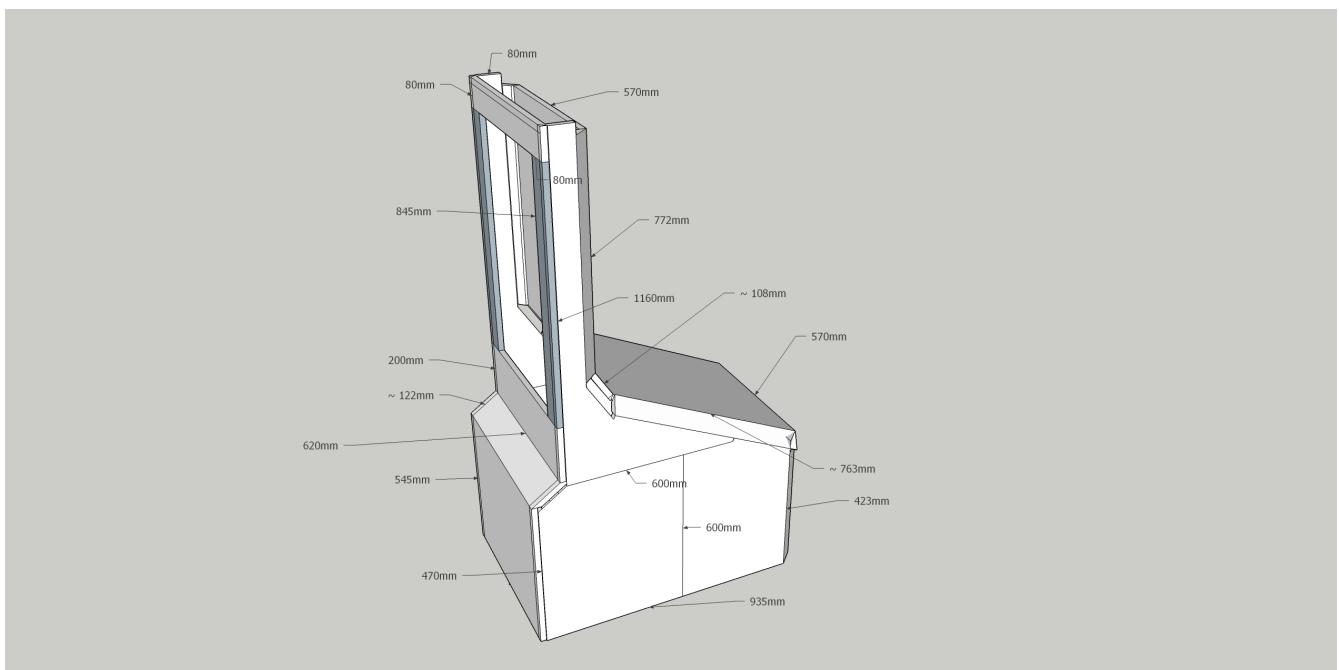

### 4.2.1. Wooden frame





#### **4.2.2. Styrofoam board**









## 4.3. Polyester work

We used the workshop of Koers Polyester Techniek in Nieuwleusen.  
<http://koerspolyestertechniek.nl/>



The mold is covered with glass fiber and polyester resin. Starting with one base layer with a 225 gr/m<sup>2</sup> and following with four layers of 600 gr/m<sup>2</sup>.

### 4.3.1. Preparation





#### **4.3.2. Polyestering**







#### **4.3.3. Sanding/Sawing/Filling**





## 4.4. Cooling

Cooling is done by 9 140mm fans in sets of 3 across the robot, at every arrow a set can be found. We have not yet found a sponsor for fans after many tries.

