

# Modeling the impacts of replacing car trips with Reproducible methods for modeling combined public transport and cycling : Reproducible methods, results trips and actionable associated benefits: evidence from the biclaR tool

---

## Abstract

A high proportion of car trips can be replaced by a combination of public transit and cycling for the first-and-last mile. This paper estimates the potential for cycling combined with public transit as a substitute for car trips in the Lisbon metropolitan area and assesses its socio-environmental impacts using open data and open source tools. A decision support tool that facilitates the design and development of a metropolitan cycling network was developed (*biclaR*). The social and environmental impacts were assessed using ~~the HEAT for Cycling and the HEAT as a Service~~ Health World Organization tools. The impacts of shifting car trips to public transport were also estimated and monetized. The results show that 10% of all trips could be made by cycling in combination with public transport. Shifting to cycling for the shorter first and last mile stages can reduce annual CO<sub>2</sub>eq emissions from 3,000 to 7,500 tons/day, while for the public transport leg, the transfer from car avoids of up to 20,500 tons of CO<sub>2</sub>eq emissions per year. The estimated socio-environmental benefits are of €125 million to €325 million over 10 years. This evidence can support policymakers to prioritize interventions that reduce the reliance on private motor vehicles.

*Keywords:* Active transport, Intermodality, First and last mile, Health economic assessment, Environmental impacts, Open data and methods

---

## 1. Introduction

Combining public transportation (PT) and cycling for the first and last mile in metropolitan areas can replace a high proportion of private car trips (~~(Martens, 2007)~~(Martens, 2007; van Mil et al., 2021). In The Netherlands, which has the highest mode share of cycling in the world, cycling accounts for more than a third of all trips to and from rail stations at the ‘home’ end of the journey, greatly increasing the ability of the transport system (Rietveld, 2000). This approach to reducing car dependency and associated externalities requires interventions and programs to make bicycling more appealing (La Paix et al., 2021). The resulting public investments can have significant social and environmental benefits (International Transport Forum, 2017). Despite the benefits of cycling-PT intermodality, the potential of this combination is often overlooked in transport planning (La Paix et al., 2021).

The potential of cycling as a complementary mode of PT is substantial worldwide, especially in cities with established public transport networks or substantial ambitions to develop them. In the Lisbon metropolitan area (LMA) the largest metropolitan area in Portugal, the modal share of cycling is low, but the potential for cycling as a complementary mode of PT is high. ~~According to the latest mobility survey conducted in 2018 (INE, 2018), the LMA registered a total of 5.3 million daily trips, with only 0.5% by bicycle. Car modal share was 58.4%, while PT accounted for 15.5% (see Figure 2). The number of intra-municipal trips —with origin and destination in the same municipality— amounts to 3.5 million trips. This exceeds the number of inter-municipal trips (1.8 million trips), involving travel between different municipalities. Cars and public transport are the most used modes for intercity trips, with cars being the predominant choice for all journeys. 53% trips are up to 5 km distance, and 71% up to 10 km. Nevertheless, 29% of trips are longer than 10 km, which requires the use of motorized modes, or active modes in combination with public transport.~~

~~Trips in the LMA by inter/intra-municipal and mode, according to the travel survey.~~

~~To achieve the cycling targets set by the Portuguese national cycling strategy for~~ The Portuguese Government has established a national cycling strategy, which outlines targets for the percentage of trips to be made by bicycle in urban areas. Specifically, these targets aim for 4% of all trips in 2025 and ~~2030 (4% and 10%, respectively)~~ (Presidência do Conselho de Ministros, 2019) % by 2030 (Presidência do Conselho de Ministros, 2019). Moreover, the strategy emphasizes that this increase should be achieved by substituting car trips for bicycle trips, as a way to reduce the environmental and social impacts of car use.

To support the implementation of this strategy, the Lisbon’s Metropolitan Department of Transport commissioned *biclaR*<sup>1</sup>, a decision support tool that facilitates the planning, design, and development of a metropolitan cycling network (Félix et al., 2022).

*biclaR* builds on the Propensity to Cycle Tool<sup>2</sup> (PCT), a web application and research project funded by the UK’s Department for Transport in 2015 which launched nationally in 2017 as part of the government’s Cycling and Walking Investment Strategy. The PCT initially used only origin-destination data for commuting trips as the basis of estimates of cycling potential at zone, route and route network levels (Lovelace et al., 2017). The PCT has been extended to include cycling potential for travel to school in England (Goodman et al., 2019) and other trip types in other countries.<sup>3</sup> However, to the best of our knowledge, this is the first time that the method has been integrated with public transport data using multi-modal routing to estimate the potential and benefits of multi-stage cycling and PT trips.

It has become progressively more common to establish strategic plans, at national, regional or municipal

---

<sup>1</sup>See [biclar.tmlmobilidade.pt](http://biclar.tmlmobilidade.pt).

<sup>2</sup>See [pct.bike](http://pct.bike).

<sup>3</sup>See [npt.scot](http://npt.scot) and [cruse.bike](http://cruse.bike) for examples of the PCT in Scotland and Ireland that include estimates of cycling for other purposes.

level, to mitigate climate change. Among these, the Sustainable Urban Mobility Plans (SUMP<sup>4</sup>), promoted by the European Commission, are becoming popular in Europe, although authorities are designing documents of this sort all over the world. The definition of targets associated with a timeframe for reducing dependence on the individual motorized vehicle, or targets for the use of active modes such as walking and cycling, are too often not accompanied by estimates of their social, environmental and economic impacts. It is important for authorities and practitioners to know how to estimate those impacts, which tools are available to support them in the process, and what results to expect.

This paper estimates the potential for combining cycling and PT to substitute car trips in the LMA, while achieving the national cycling targets. After presenting the methods used, it assesses Methods used in Section 2, we assess its socio-environmental impacts using open data and open-source tools, presenting the Results and Discussion in Section 3, followed by Section 4 where we discuss the Generalizability and Limitations of the methods. We Conclude the paper in Section 5 with the main findings and policy implications.

## 2. Methods

### 2.1. Case Study

The Lisbon metropolitan area (LMA), in Portugal, is the case study, comprising 18 municipalities, with a total area of 3,015 km<sup>2</sup> and a population of 2.8 million residents, according to the 2021 census (INE, 2022). The LMA is the most populous and economically active region in Portugal, with the city of Lisbon as the central node of the LMA, with a high concentration of jobs and services, and a high demand for mobility (see Figure 1).

As shown, the number of trips is proportional to the population of each municipality, with the highest number of trips originating in Lisbon, followed by the municipalities of Sintra, Cascais, Loures, and Almada. The Public Transport network is well developed, although very much Lisbon-centric, with a high level of service, including inter-municipal trains, buses, trams, and ferries (see Figure 4), and a metro system that serves Lisbon and surrounding municipalities.

The LMA is a low cycling maturity area, characterised by a sparse and fragmented cycling network totalling 378 km, primarily concentrated within Lisbon, and a low cycling modal share. According to the latest mobility survey conducted in 2018 (INE, 2018), the LMA registered a total of 5.3 million daily trips, with only 0.5% by bicycle.

The survey also showed that 58.4% of trips were made by car, 15.5% by public transport, and 23.9% by walking (see Figure 2). The number of intra-municipal trips — with origin and destination in the same

---

<sup>4</sup>See [eltis.org/mobility-plans/sump-concept](https://eltis.org/mobility-plans/sump-concept)

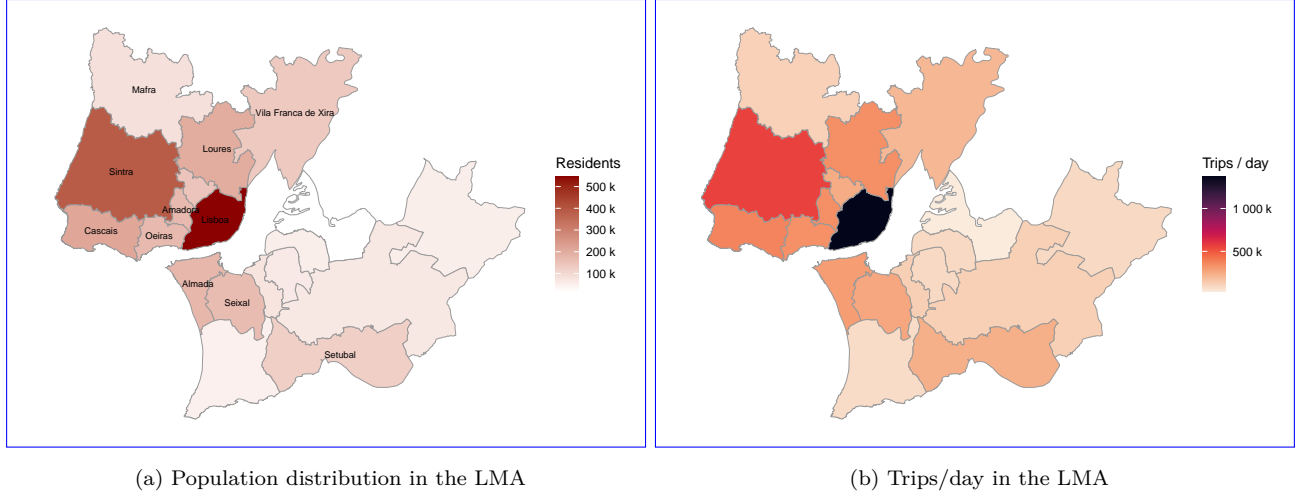


Figure 1: Population and daily trips (origins) at each Municipality of the LMA, according to the 2021 census and the 2017 travel survey.

municipality — amounts to 3.5 million trips. This exceeds the number of inter-municipal trips (1.8 million trips), involving travel between different municipalities. Cars and public transport are the most used modes for intercity trips, with cars being the predominant choice for all journeys. 53% trips are up to 5 km distance, and 71% up to 10 km. Nevertheless, 29% of trips are longer than 10 km, which requires the use of motorized modes, or active modes in combination with public transport.

Regarding cycling trips in the LMA, 55% are up to 5 km, and 88% are up to 10 km. These values are not in line with the typically found in cycling distance decay curves, which show a high percentage of trips are up to 5 km (~75%), and a smaller proportion up to 10 km (Krizek et al., 2007; Larsen et al., 2010; D’Apuzzo et al., 2023). This may be due to the low cycling modal share in the LMA - even more limited in the sample survey, which may be biased towards shorter trips.

## 2.2. Modeling Origin-Destination trips

The mobility survey data (INE, 2018) is the basis of the baseline scenario and trip rates presented in this paper. Conducted in the pre-pandemic period (2017), this OD dataset represents the most comprehensive and up-to-date information on urban mobility in Portuguese metropolitan areas (Lisbon and Porto).

We used ‘jittering’ to disaggregate the OD data, resulting in a wide spatial distribution of trip origins and destinations (Lovelace et al., 2022b). The method works by sampling ‘sub-points’ (nodes on the transport network represented in OpenStreetMap in this case) and using these instead of a single point (typically the centroid) to represent trip origins and destinations for each zone. This method then distributes the trips to desire lines connecting the subpoints based on a ‘disaggregation threshold’ which determines the maximum number of trips that can be represented by a single desire line.

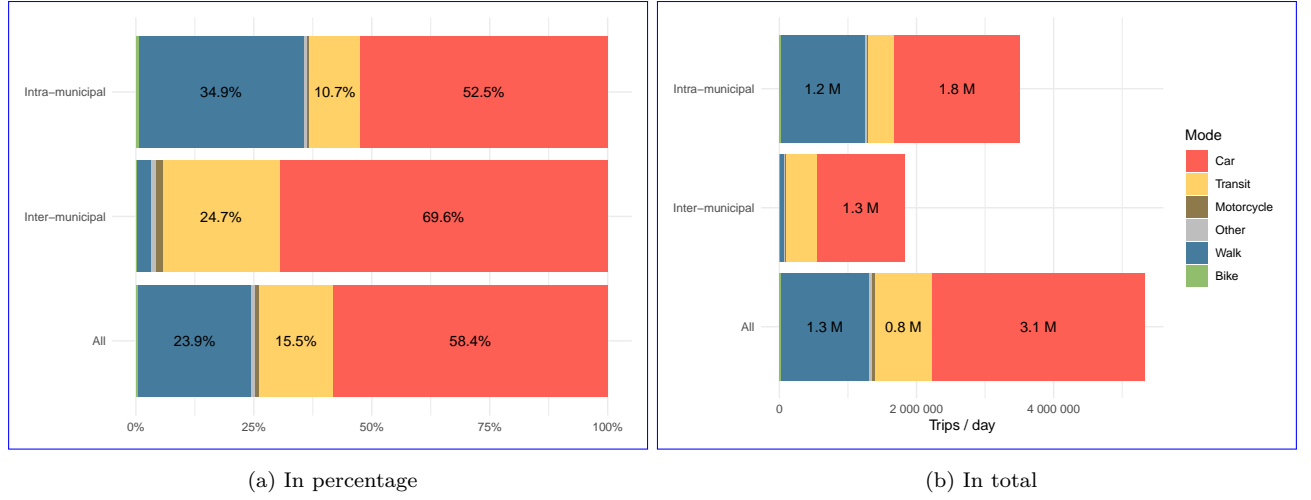


Figure 2: Trips in the LMA by inter/intra municipal and mode, according to the travel survey.

Using the `odjitter` R package, we disaggregated the OD data into desire lines representing a maximum of 100 trips each. Figure 3 illustrates the contrast between trip representation through the traditional method, which connects a single desire line between each district, and the presentation achieved through the randomization and disaggregation of trips between districts, specifically for the Lisbon metropolitan area. As shown, the city of Lisbon (in the centre) is the main attractor of trips, with a high number of trips to and from the other municipalities.

The jittering pre-processing stage generates a more realistic representation of the trips undertaken than the traditional centroid-based approach but does not precisely capture the exact spatial distribution of trips. Even where such datasets exist, they cannot be shared for research due to data privacy regulations.

### 2.3. Modeling routes

The mobility survey collects the origin and destination of trips but does not include the respective routes. Modeling the realistic cycling-PT routes between OD pairs depends on assumptions regarding the characteristics of the cycling and road networks and the location of public transport interfaces. Other constraints regarding the behavior of potential cyclists determine the routing results. For example, such restrictions can favor low speed, low traffic streets, more direct routes, and less steep paths, among others, which are suitable for cycling.

The selected route choice algorithm was the `r5r` R package (Pereira et al., 2021), which allows for great flexibility in configuring estimated route types, and which proven to provide most accurate route networks for the city of Lisbon (Lovelace et al., 2022a). `r5r` can calculate multi-modal routes using PT combined with other modes. It enables the identification of the most direct or safest cycling routes, using the Level of Traffic

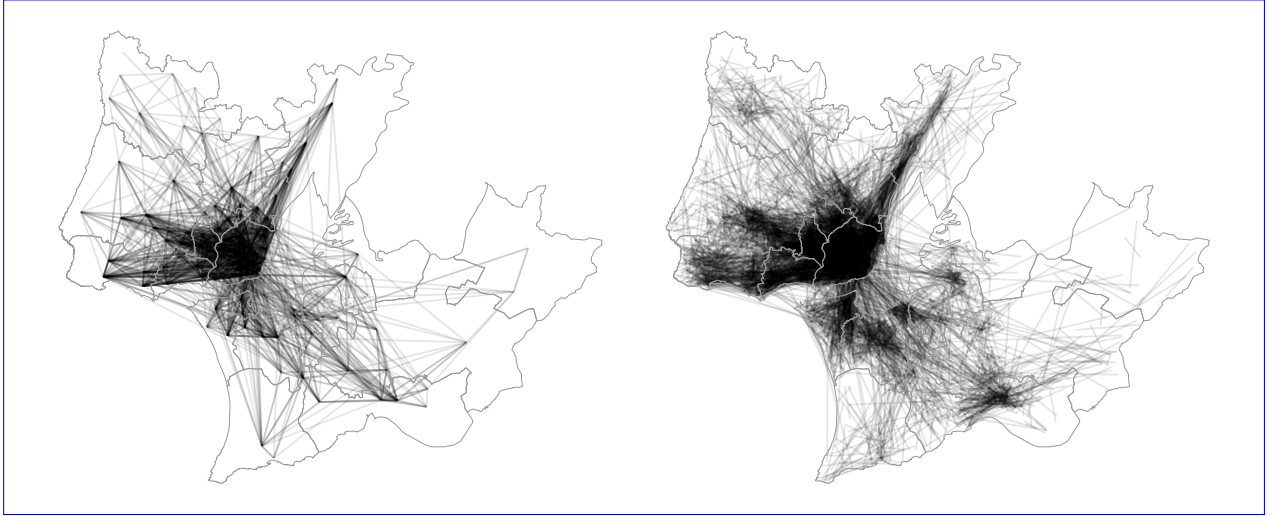


Figure 3: ~~Representation~~ Flow-weighted random sample of 10,000 desire lines in the Lisbon metropolitan area between districts of the 18 municipalities, without jittering (left) and with jittering (right).

Stress<sup>5</sup> (LTS) scale, ranging from 1 to 4, where 1 corresponds to the quietest (e.g., off-road cycle paths) and 4 corresponds to the least quiet (e.g., routes shared with motorized traffic). The routes were estimated for the base scenario for both types of networks: *direct* and *safe*, using LTS 4 and LTS 3, respectively. Different routing profiles enable decision-makers to plan for different bicycle user typologies and/or for different city cycling maturity levels (Félix et al., 2017).

The `r5r` model used the OpenStreetMap road network and the GTFS metropolitan data aggregated and validated. This information is crucial for an accurate PT trip and route estimation. A digital elevation model, from the European Space Agency’s COPERNICUS mission, was used to include street gradient information, as a weight in cycling routing. The cycling potential trips for the two national strategic targets (4% and 10%) were estimated from the 2017 cycling and car trips (both as a driver and as a passenger), the baseline scenario.

The routes were then overlaid and aggregated by segments, using `stplanr overline()` R function.

#### 2.4. Modeling intermodality

The intermodality scenario considers trips made by PT in which cycling is used for the first and last legs. We restricted our analysis to the first and last legs with a combined length of up to 5 km (for example: 1 km from origin to interface *A* plus 4 km from interface *B* to destination) ~~or up to 25 minutes on bike travel time.~~ ~~This conservative approach was adopted to capture the fact that cycling stages as part of a multi-modal trip are likely to be shorter than cycling-only trips (van Mil et al., 2021).~~ Furthermore, we have imposed

<sup>5</sup>see [docs.conveyal.com/learn-more/traffic-stress](https://docs.conveyal.com/learn-more/traffic-stress).

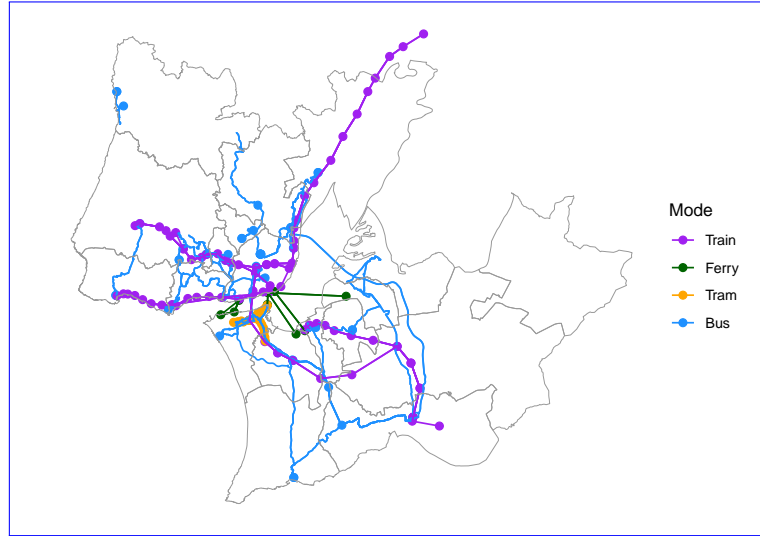


Figure 4: Interfaces and lines considered, by transport mode, in the Lisbon metropolitan area.

restrictions on PT usage, limiting it to trips without PT transfers, and within a duration of up to 2 hours (120 minutes). Additionally, we have only included PT modes that can easily accommodate bicycles, such as trains, ferries, trams, and inter-municipal bus lines equipped with bike racks (Figure 4). This map shows that some of the municipalities are not served by PT modes that can easily accommodate bicycles, which may limit the potential for intermodality in these areas.

This conservative approach was adopted to capture the fact that cycling stages as part of a multi-modal trip are likely to be shorter than cycling-only trips (van Mil et al., 2021). Additionally, Leferink (2017) found that the bicycle is most attractive option as a first and last mile mode when the distance ranges from 3 to 5 km, as observed across various comparative studies. This restrictions are based on the assumption that 5 km is a plausible maximum distance that people are willing to travel by bike as part of a longer journey. This applies especially for cycling beginners shifting from cars, who are less likely to be confident and experienced cyclists than the existing cyclists.

These restrictions can be eased in the future when testing more developed policy interventions to enhance intermodality between cycling and PT, considering both the vehicle and infrastructure perspectives.

Figure 5 illustrates the ~~resulting bicycle routes to access the main PT interfaces in the LMA~~ routes with greatest cycling potential to access nodes on the public transport network. The interactive version of the map is publicly available in the *biclaR* tool, allowing detailed exploration of local areas. At *biclaR*, users and local authority practitioners have the option to download the results as a spatial dataset for further analysis concerning the prioritization of cycling interventions. It is noticeable the high potential of the train interfaces to attract car-to-PT substituting trips.

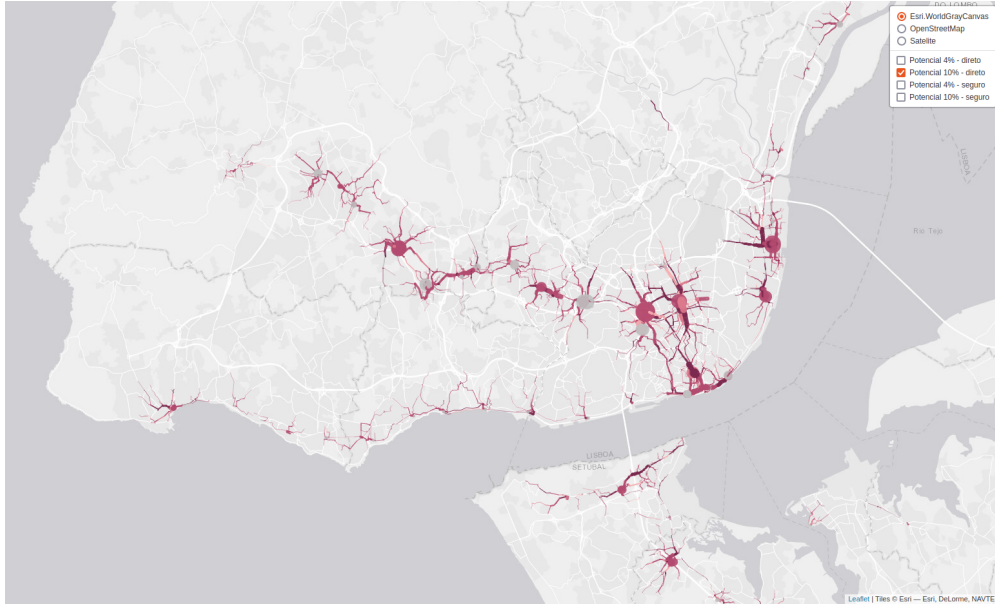


Figure 5: Bike routes with the highest potential to serve as first and last leg when replacing cycling and PT from car trips (screenshot of the interactive online tool). Larger the line width, higher the segment’s car to bicycle shift potential. Darker the line color, lower the quietness level.

## 2.5. Modelling car shift to bicycle-PT

It is essential to note that our approach is not predictive but scenario-based, providing a range of potential outcomes regarding the target (% of cycling tips) and the routing profile (safe or direct routes), rather than a single forecast. These scenarios are rooted in the explicit national cycling targets, assuming that the potential for cycling is proportional to the reduction of car trips. Thus said, we do not predict the generation of new trips, but the substitution of car trips by cycling in combination with PT, considering the potential of the first and last mile of these journeys to be made by bicycle. Additionally, we do not model changes in the baseline PT trips, under the implicit assumption that the initial and final stages of these trips remain unaltered.

A strength of this *backcasting* approach is that we can simulate the aggregate travel patterns that would meet particular policy objectives, and explore what the implications could be for the public transport system and provision of safe cycling infrastructure to public transport nodes at regional, local authority and, importantly from a local transport planning practitioner perspective, corridor level.

## 2.6. Assessing socio-environmental benefits

Following the clearly established national strategy, we estimated the socio-environmental potential impacts of shifting car trips by bicycle in combination with PT, in the LMA, for the two targets (4% and 10%).



For the *cycling legs of the journey* (first and last legs), socio-environmental impacts were estimated, using the Health Economic Assessment Tool (HEAT) for Cycling v5.2 (Kahlmeier et al., 2017), from the World Health Organization, and the [HEATaaS R package](#)<sup>6</sup>. The use of this package made it possible to run multiple scenarios with few changes in input values, making the interaction with HEAT more reliable when reproducing runs.

The HEAT tool provided estimates on the shifting from car to cycling for a short term time horizon (i.e., one year) and the long term (i.e., ten years). It estimates the differences between two considered scenarios. In this case: one baseline scenario, with data from the mobility survey, and one cycling potential scenario in which targets of 4% and 10% of cycling levels were achieved, transferred from car trips. We considered two dimensions: *social* — including the physical activity, air pollution exposure, and road casualties; and *environmental* — including CO<sub>2</sub>eq emissions and other pollutants.

For the *second leg of the journey*, we estimate the environmental impacts of shifting car trips to PT (between the PT interfaces).

To estimate the car emissions, we used the EMEP/EEA’s COPERT software v5 methods and reference values (Ntziachristos and Samaras, 2020) for a Tier 3 detail level. We used a family-size vehicle, EURO standard, and gasoline or diesel fuel. All trips were considered to be made under urban conditions and at an average speed of 15 km/h during rush hour periods. Since the average distance traveled per trip influences the overconsumption and emissions from cold-start engine operation, we estimated energy and emission factors for different ranges of trips at 500-meter intervals.

An equation was then used to calculate emission factors for the two types of fuel, for each type of pollutant, whose explanatory variables are driving speed (*speed*, in km/h) and average trip distance (*l<sub>trip</sub>*, in km/trip). Thus, the emission factors ( $EF_{fuel,l_{trip},speed}$ , in g/km) can be calculated using equation 1.

$$EF_{fuel,l_{trip},speed} = a + b \cdot speed + c \cdot l_{trip} \quad (1)$$

Emission factors are estimated for the following air pollutants: CO, NO<sub>x</sub>, VOC, and PM<sub>10</sub>. Emission factors of the main greenhouse gases (GHG) are also estimated: CO<sub>2</sub>, CH<sub>4</sub> and N<sub>2</sub>O, converted in CO<sub>2</sub>eq by the following relationship<sup>7</sup>:  $EF_{CO_2eq} = EF_{CO_2} + 28 \cdot EF_{CH_4} + 265 \cdot EF_{N_2O}$ . The CH<sub>4</sub> and N<sub>2</sub>O emission factors do not vary with travel speed. The PM<sub>10</sub> emission factor does not vary with trip distance.

The used values consider that 64% of the car fleet was diesel in 2022<sup>8</sup>. In addition, we assumed an occupancy rate of 1.6 passengers *per* car (INE, 2018). Finally, the final emissions for each trip ( $E_{pollutant}$ , in g/trip) are derived from the equation 2.

<sup>6</sup>HEATaaS is under development. For more information contact [heatwalkingcycling.org](http://heatwalkingcycling.org).

<sup>7</sup>The weights correspond to the Global Warming Potentials (GWP) defined for a 100-year period by the IPCC in its 5th Assessment Report.

<sup>8</sup>See [Statistics Portugal: Stock road vehicles statistic](#).

Table 1: Summary of the cycling potencial of the intermodality scenario. Values in 'trips/day'.

Target	Routing	Total trips	Baseline Cycling + PT	Potencial Cycling + PT
4%	safe	538 514	2 312	20 385
4%	direct	500 880	2 274	18 944
10%	safe	538 514	2 312	52 323
10%	direct	500 880	2 274	48 609

$$E_{pollutant} = EF_{fuel, l_{trip}, speed} \cdot l_{trip} \quad (2)$$

Regarding PT, we considered the emission factor values reported in the environmental and sustainability reports of the PT operators in the LMA (Carris, 2020; Metropolitano de Lisboa, 2020; CP, 2020; Transtejo, 2014). In particular, for the urban train and tram – with 100% electric traction – only CO<sub>2</sub>eq emissions were considered (resulting from the production of electricity, considering a “well-to-tank” approach), since the other pollutants are not emitted locally.

The conversion of avoided emissions into avoided welfare loss and respective monetary valuation was based on the EU Guide to Cost-benefit Analysis (Sartori et al., 2014) and the best up-to-date reference values for the various gases (Sartori et al., 2014; Bickel et al., 2006; Nash et al., 2003): 8.44 €/ton for CO, 2,867.85 €/ton for NO<sub>x</sub>, 340,969.27 €/ton for PM<sub>10</sub>, 7,169.62 €/ton for VOC and 35.85 €/ton for CO<sub>2</sub>eq. The social impacts are in avoided premature mortality. This result is finally monetized using the *Statistical Value of Life* for Portugal: €3,055,358/fatality (Silva et al., 2021). We updated all the monetary reference values of the literature based on the annual inflation rate in Portugal for 2022<sup>9</sup>, and our 10-years estimations assumed a discount rate of 5% and inflation of 3%. See [Research Data](#) for all the input values we used.

### 3. Results and Discussion

Table 1 presents the LMA total daily trips that can be made with cycling + TP combination (with the aforementioned restrictions), the trips in the baseline scenario and corresponding new daily trips to achieve the national strategy targets (4% and 10%), for different route profiles, at an aggregate level of the LMA. For the cycling legs of the journey (first and last legs), the environmental avoided emissions and monetized socio-environment (SE) benefits are presented in Table 2, resulting from replacing car trips with cycling.

For both *direct* and *safe* route profiles, 10% of the daily trips have the potential to be made by a combination of PT and cycling, even given the travel restrictions considered (up to 5 km on bike, up to 2

<sup>9</sup>See [Statistics Portugal tool for inflation rate estimates between years](#).

Table 2: Summary of the cycling potencial of intermodality scenario and its socio-environmental benefits for the cycling legs.

Target	Routing	Avoided Mortality (deaths/yr)	Social benefits (k€/yr)	Avoided CO2eq (ton/yr)	Environmental benefits (k€/yr)
4%	safe	4.1	12 717	2 958	238
4%	direct	4.0	12 441	3 004	241
10%	safe	10.0	32 820	7 590	610
10%	direct	10.0	31 800	7 694	618

Table 3: Summary of the potential of replacing car trips with cycling in combination with PT, disaggregated by PT mode. Values in 'trips/day'.

Target	Routing	Potential	Bus	Ferry	Train	Tram
4%	safe	20 385	573	285	17 716	1 811
4%	direct	18 944	593	313	17 093	946
10%	safe	52 323	1 452	712	45 588	4 571
10%	direct	48 609	1 520	781	43 932	2 375

hours, no possible transfers between PT). This unveils the potential of cycling as a complementary mode of PT, with the potential to uptake the number of PT trips within the LMA area by as much as 6.3% (in addition to the 825 thousand PT trips reported in the mobility survey).

Table 3 shows the potential trips by PT mode to replace the second leg of the journey, in combination with cycling. Train offers the greatest potential for substitution (88%). When comparing the existing PT interfaces (Figure 4) with the bike routes with highest potential to serve as first and last legs (Figure 5) it becomes clear that the Train interfaces are the ones that have the highest potential to attract car-to-PT substituting trips, if their accessibility by bicycle is improved to become safer.

Another relevant aspect is that the higher potential (Figure 6.a) is in the municipalities with the highest number of trips (Figure 1.b), such as Lisbon, Sintra, Amadora, and Almada, which are also the ones with the highest number of PT interfaces (Figure 4). On another hand, the municipalities with little PT interfaces connecting to Lisbon, such as Mafra and Setubal, have a lower potential for car to Bike-PT substitution (Figure 6.a), even if they have a high number of trips, such as Setubal. This findings are aligned with their local travel patterns, where the majority of trips are intra-municipal (67% for both municipalities), and not to the city of Lisbon, despite the high car-dependency (79% in Mafra, 67% in Setubal).

The potential and the resulting benefits are spatially unevenly distributed across the LMA, as shown in

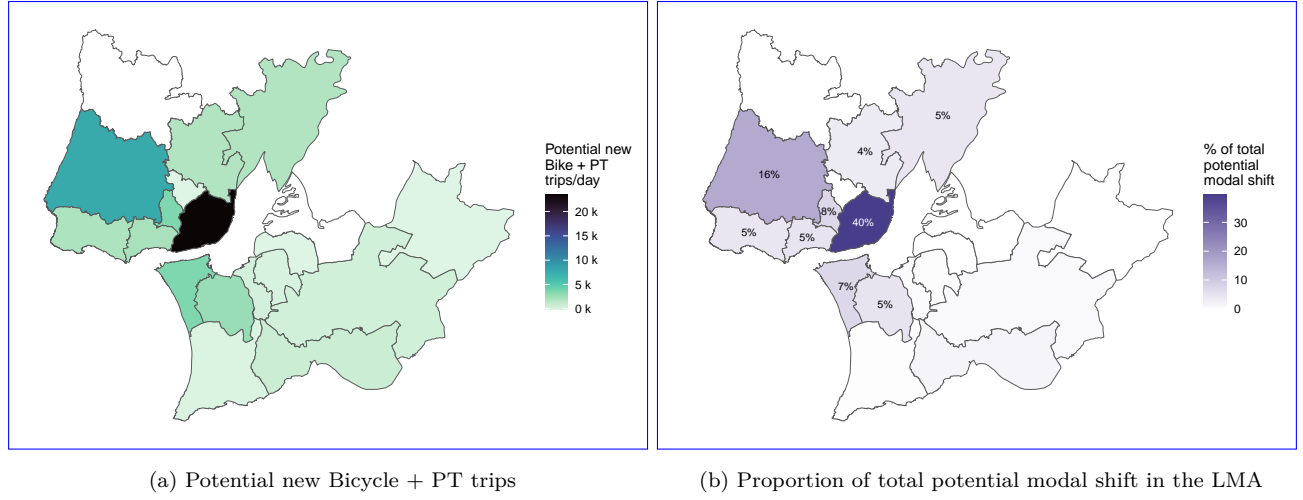


Figure 6: Potential Bicycle + PT daily trips for the 10% target and direct routing, by municipality (origins). The percentages are shown for municipalities with values above 4%.

Table 4: Summary of the avoided emissions (ton/year) and corresponding monetization (thousand €) by replacing car trips with PT, in the second leg.

Target	Routing	CO <sub>2</sub> eq	CO	PM <sub>10</sub>	NO <sub>x</sub>	VOC	Value (k€)
4%	safe	8 593	17	1.9	27	0.8	1 425
4%	direct	8 702	18	2.0	28	0.8	1 453
10%	safe	20 627	42	4.6	65	2.0	3 431
10%	direct	20 793	42	4.7	66	1.9	3 487

Figure 6.b, concentrating 40% in Lisbon, where the highest number of trips are made.

Table 4 presents emissions reductions and associated economic benefits associated with the second (PT) leg of trips. The shift from private car associated with ~~thes~~ the PT segments would reduce CO<sub>2</sub> equivalent emissions by 8,500 to 20,800 tons annually, valued in €1.4 million to €3.5 million yearly, for the 4% and 10% targets, respectively.

The sum of CO<sub>2</sub>eq avoided emissions from the potential car trips shifted to bike (first-and-last legs) in combination with PT (second leg) in the LMA is presented in Table 5, for both national cycling strategy targets and routing profiles, and the socio-environmental benefits monetized in €, for a 1-year and 10-year time periods.

Shifting from car to cycling in combination with PT can reduce annual CO<sub>2</sub>eq emissions by 11,500 to 28,500 tons per year. These figures represent a 2.7% reduction in Lisbon's transport emissions (Lisboa E-Nova, 2023), a small but important component of wider transport decarbonization measures. The 10-year

Table 5: Summary of the avoided CO<sub>2</sub>eq emissions (ton/year) and the estimated social and environmental benefits (monetized in thousand €) by replacing car trips with cycling in combination with PT.

Target	Routing	Avoided CO <sub>2</sub> eq (tons)	SE Benefits 1yr (k€)	SE Benefits 10yrs (k€)
4%	safe	11 551	14 380	127 534
4%	direct	11 706	14 135	125 016
10%	safe	28 217	36 861	325 814
10%	direct	28 487	35 905	318 062

socio-environmental benefits account for €125 million to €325 million, depending on the cycling targets.

The environmental impacts represent less than 2% of the socio-environmental benefits (in value) from replacing car trips to bicycle in first-and-last legs. For the PT segment, we did not estimate the social impacts from substituting car trips. One of the main socio-environmental benefits, valued after monetization, comes from the increase in physical activity (Félix et al., 2023). Although there are also social benefits from shifting car trips to PT, its health benefits would not be as high as shifting to cycling. The literature shows that the Metabolic Equivalent Tasks (MET) for “riding in a bus or a train” is 1.3 plus the “walking for transportation” as 3.5, while “driving a car” is 2.5 (Ainsworth et al., 2011). The difference between these activities - shifting from car to PT - is not very obvious when compared to shifting from car to cycling, whose MET is about 6.8. Nevertheless, future works should also encompass the estimation of the social impacts for the PT leg of the journey, shifting from car.

The emissions of CO<sub>2</sub>eq that are avoided during both the initial and final journey segments account for about 74% of the emissions avoided during the PT segment. This finding, while expected – due the zero cycling emissions, should not be overlooked when promoting the PT use. Improving the safe accessibility to PT interfaces to cyclists and providing bicycle-friendly amenities such as parking facilities can potentially lead to a higher reduction in CO<sub>2</sub>eq emissions, compared to a scenario where individuals shift from car travel to car + PT combination.

Our findings show that cycling *in combination* with PT could replace 10% of current LMA trips, with an additional 6% of PT journeys prone to further substitution, based on conservative assumptions, highlighting the municipalities of Lisbon, Sintra, Almada, Amadora, and Oeiras as the ones with the highest potential for car to bike-PT substitution. Although this paper does not address the designing specific solutions, our findings indicate a potential surge in demand (+6.3%) of public transport interfaces to align with the national strategies. This added demand is conceptually driven from individuals utilising bicycles, either personal or shared, which would be parked at the PT stations. Consequently, operators and public space managers would face the challenge of accommodating this increased demand for bicycle parking and/or

docks from a bike sharing system, since this availability plays a crucial role in the decision-making process of individuals to use combined bike-train (Jonkeren et al., 2021). Additionally, they may need to explore options to enhance bicycle carriage capacity on public transport services, ensuring alignment with national targets.

#### 4. ~~Conclusion~~ Generalizability and Limitations

This paper ~~estimated~~ focus primarily on the potential for ~~combining cycling and PT~~ replacing trips currently made by car with combined cycling and public transport trips, and the associated social and environmental benefits, showcasing the potential impact of facilitating the first-and-last mile to PT interfaces. While the results are specific to the Lisbon Metropolitan Area, the approach is designed to be generalizable to other metropolitan areas.

An important aspect of the approach from a generalizability perspective is that it has specific data requirements, including origin-destination, road network, and the GTFS data. Such datasets are available to transport planners in many areas. In areas where such datasets do not exist, the value of research such as this could provide a motivation to collect and open-up transport data. For this study we have used Portugal's national cycling targets as the basis of the scenarios; the approach can be adapted to other targets, or to ~~substitute car trips in the LMA, while achieving the national cycling targets and supporting decarbonization goals. It has become progressively more common to establish strategic plans, at national, regional or municipal level, to mitigate climate change. Among these, the Sustainable Urban Mobility Plans (SUMP<sup>10</sup>), promoted by the European Commission, are becoming popular in Europe, although authorities are designing documents of this sort all over the world. The definition of targets associated with a timeframe for reducing dependence on the individual motorized vehicle, or targets for the use of active modes such as walking and cycling, are too often not accompanied by estimates of their social, environmental and economic impacts. It is important for authorities and practitioners to know how to estimate those impacts, which tools are available to support them in~~ other policy goals, such as reducing congestion or improving air quality.

Nevertheless, the extent of the potential shift from car to PT is highly dependent on the distances typically travelled in such contexts, and the availability of PT services - which can vary significantly between regions, and for which we are not assuming any change in this study. For instance, we considered only the inter-municipal bus services that accommodate bicycles on board. Future research could explore the potential of equipping other regional bus services with this feature and analyse their attractiveness, combined with cycling, to address current car trip demands.

A strength of the approach is that there is no requirement for sensitive individual trip level data to reproduce the approach in other cities. However, we acknowledge that this approach has limitations. The

---

<sup>10</sup>~~See [eltis.org/mobility-plans/sump-concept](https://eltis.org/mobility-plans/sump-concept)~~

approach cannot show exactly which trips are being replaced, in terms of the ~~process, and what results~~  
to expect age of people making the trips, the types of car they drive, and other individual or vehicle level  
variables. We assumed uniformity in the type of vehicle for all replaced car journeys, albeit with variations  
in the fuels utilised. Additionally, we assumed consistency in the health impacts across all individuals for  
the replaced car trips. This approach is a simplification of reality to enable the analysis of a large region on  
available computing resources. Future work could seek to increase the resolution of the results, and move  
towards a more individual-level analysis, for example by using agent and activity-based models using tools  
such as MATSim (Horni et al., 2016). This option would require substantial resources outside the scope  
of this study; another way to improve the spatial resolution of results would be to use higher resolution  
‘subpoints’ as the basis of the desire line ‘jittering’ process. We would also like to explore the potential for  
probabilistic routing to improve the spatial resolution of the results.

A further refinement could be to differentiate between ‘simpler’ no-transfer PT trips (which require less  
person effort) and more arduous multi-transfer PT trips, using the same methods, by relaxing the assumption  
of no-transfers between PT modes in the routing engine. This would lead to a larger number of total daily  
trips that can be made by cycling + PT, in particular in locations where the PT network is less complex  
and requires more transfers. We could also set a different maximum length of cycling stage, extending the  
bicycle catchment area. However, despite the added value of a sensitivity analyses, they would also increase  
the overall complexity, and would have an impact on the explainability of the results to be used by policy  
makers.

~~This paper quantifies the benefits of replacing car trips with cycling, in combination with public transport~~

## 5. Conclusion

This paper estimates the potential for combining cycling and PT to substitute car trips in the LMA,  
while achieving the national cycling targets and supporting decarbonization goals. The case study of the  
Lisbon metropolitan area demonstrates that cycling-PT integration can help meet the national targets set  
for bicycle use of 4% and 10% by 2025 and 2030, respectively.

This research also quantifies the socio-environmental benefits of achieving such targets, exploring an  
intermodality scenario, where car trips are potentially substituted by bicycle in combination with PT.

The findings indicate that cycling combined with public transport has the potential to account for 10%  
of total trips. Transitioning to cycling for the first and last segments could lead to a decrease in annual  
CO<sub>2</sub>eq emissions by a substantial margin, ranging from 3,000 to 7,500 tons per day, depending on the cycling  
target and routing profile. Moreover, for the second trip segment, the shift from car to public transport  
contributes to avoiding up to 20,500 tons of CO<sub>2</sub>eq emissions annually. These changes are estimated to yield  
socio-environmental benefits totaling €125 million to €325 million over a decade. The quantification of such

benefits can support policy-makers in prioritizing interventions to reduce the reliance on private motorized modes of transportation.

Additionally, the results suggest that the potential for cycling-PT intermodality is spatially unevenly distributed across the LMA. The highest potential occurs in the municipalities with the highest number of trips and PT interfaces with connecting modes to Lisbon that allow for carrying bicycles on board, such as Lisbon, Sintra, Amadora, and Almada.

We opted to detail all the steps of the methodology, from data requirements to the final results, to ensure transparency and generalization of the approach, for instance making sensitivity analysis to the bike trip distances and the PT number of transfers. We acknowledge the limitations of the used methods and propose avenues for future research.

The presentation of the results in an open access web application will help to inform and explain decisions. Furthermore, the provision of datasets resulting from this project provides a foundation for further research and development of new tools and methods. The methods are reproducible and based on open source software, which can be applied to other cities and metropolitan areas, supporting the decarbonization of transport systems internationally.

## Acknowledgements

[*blind*]

## Research data

The data and the code to reproduce the results will be made available upon publication.

## References

- Ainsworth, B.E., Haskell, W.L., Herrmann, S.D., Meckes, N., Bassett Jr, D.R., Tudor-Locke, C., Greer, J.L., Vezina, J., Whitt-Glover, M.C., Leon, A.S., 2011. 2011 Compendium of Physical Activities: A second update of codes and MET values. *Medicine & science in sports & exercise* 43, 1575–1581. URL: <https://sites.google.com/site/compendiumofphysicalactivities/>, doi:10.1249/MSS.0b013e31821ece12.
- Bickel, P., Friedrich, R., Burgess, A., Fagiani, P., Hunt, A., Jong, G., Laird, J., 2006. HEATCO - Developing Harmonised European Approaches for Transport Costing and Project Assessment. Deliverable 5, Proposal for Harmonised Guidelines. Technical Report. URL: [https://trimis.ec.europa.eu/sites/default/files/project/documents/20130122\\_113653\\_88902\\_HEATCO\\_D5\\_summary.pdf](https://trimis.ec.europa.eu/sites/default/files/project/documents/20130122_113653_88902_HEATCO_D5_summary.pdf).
- Carris, 2020. Relatório de Sustentabilidade 2019 - Demonstração Não Financeira. Technical Report. Carris - Companhia Carris de Ferro de Lisboa, E.M., S.A. URL: [https://www.carris.pt/media/dkdp2wbq/dnf\\_carris2019\\_rv5.pdf](https://www.carris.pt/media/dkdp2wbq/dnf_carris2019_rv5.pdf).
- CP, 2020. Relatório de Sustentabilidade 2019. Technical Report. CP - Comboios de Portugal, E.P.E. URL: [https://www.cp.pt/StaticFiles/Institucional/2\\_gestao\\_sustentavel/1\\_RelatoriosSustentabilidade/relatorio-de-sustentabilidade-2019.pdf](https://www.cp.pt/StaticFiles/Institucional/2_gestao_sustentavel/1_RelatoriosSustentabilidade/relatorio-de-sustentabilidade-2019.pdf).



376 D'Apuzzo, M., Cappelli, G., Nardoiani, S., Nicolosi, V., Evangelisti, A., 2023. A preliminary effort to develop a framework  
377 of distance decay functions for new urban active mobility, in: International Conference on Computational Science and Its  
378 Applications, Springer. pp. 194–208. doi:[10.1007/978-3-031-37123-3\\_16](https://doi.org/10.1007/978-3-031-37123-3_16).

379 Félix, R., Lovelace, R., Moura, F., 2022. biclaR - Ferramenta de apoio ao planeamento da rede ciclável na área metropolitana  
380 de Lisboa. URL: <https://biclar.tmlmobilidade.pt>.

381 Félix, R., Moura, F., Clifton, K.J., 2017. Typologies of urban cyclists: Review of market segmentation methods for planning  
382 practice. Transportation Research Record 2662, 125–133. doi:[10.3141/2662-14](https://doi.org/10.3141/2662-14).

383 Félix, R., Orozco-Fontalvo, M., Moura, F., 2023. Socio-economic assessment of shared e-scooters: do the benefits overcome the  
384 externalities? Transportation Research Part D: Transport and Environment 118, 103714. doi:[10.1016/j.trd.2023.103714](https://doi.org/10.1016/j.trd.2023.103714).

385 Goodman, A., Rojas, I.F., Woodcock, J., Aldred, R., Berkoff, N., Morgan, M., Abbas, A., Lovelace, R., 2019. Scenarios of  
386 cycling to school in england, and associated health and carbon impacts: Application of the 'propensity to cycle tool'. Journal  
387 of Transport & Health 12, 263–278. doi:[10.1016/j.jth.2019.01.008](https://doi.org/10.1016/j.jth.2019.01.008).

388 Horni, A., Nagel, K., Axhausen, K. (Eds.), 2016. Multi-Agent Transport Simulation MATSim. Ubiquity Press, London.  
389 doi:[10.5334/baw](https://doi.org/10.5334/baw).

390 INE, 2018. Mobilidade e funcionalidade do território nas Áreas Metropolitanas do Porto e de Lisboa: 2017. Technical Report.  
391 Instituto Nacional de Estatística. Lisboa. URL: [https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine\\_publicacoes&](https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine_publicacoes&PUBLICACOESpub_boui=349495406&PUBLICACOESmodo=2&xlang=pt)  
392 [PUBLICACOESpub\\_boui=349495406&PUBLICACOESmodo=2&xlang=pt](https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine_publicacoes&PUBLICACOESpub_boui=349495406&PUBLICACOESmodo=2&xlang=pt).

393 INE, 2022. Censos 2021- XVI Recenseamento Geral da População. VI Recenseamento Geral da Habitação. Technical Report.  
394 Instituto Nacional de Estatística. Lisboa. URL: <https://censos.ine.pt/xurl/pub/65586079>.

395 International Transport Forum, 2017. Integrating Urban Public Transport Systems and Cycling. Technical Report. Organisation  
396 for Economic Co-operation and Development. Paris.

397 Jonkeren, O., Kager, R., Harms, L., Te Brömmelstroet, M., 2021. The bicycle-train travellers in the netherlands: personal  
398 profiles and travel choices. Transportation 48, 455–476. doi:[10.1007/s11116-019-10061-3](https://doi.org/10.1007/s11116-019-10061-3).

399 Kahlmeier, S., Götschi, T., Cavill, N., Castro Fernandez, A., Brand, C., Rojas Rueda, D., Woodcock, J., Kelly, P., Lieb, C.,  
400 Oja, P., et al., 2017. Health economic assessment tool (HEAT) for walking and for cycling: Methods and user guide on  
401 physical activity, air pollution, injuries and carbon impact assessments URL: [https://www.euro.who.int/\\_\\_data/assets/](https://www.euro.who.int/__data/assets/pdf_file/0010/352963/Heat.pdf)  
402 [pdf\\_file/0010/352963/Heat.pdf](https://www.euro.who.int/__data/assets/pdf_file/0010/352963/Heat.pdf).

403 Krizek, K.J., El-Geneidy, A., Thompson, K., 2007. A detailed analysis of how an urban trail system affects cyclists' travel.  
404 Transportation 34, 611–624. doi:[10.1007/s11116-007-9130-z](https://doi.org/10.1007/s11116-007-9130-z).

405 La Paix, L., Cherchi, E., Geurs, K., 2021. Role of perception of bicycle infrastructure on the choice of the bicycle as a train  
406 feeder mode. International Journal of Sustainable Transportation 15, 486–499. doi:[10.1080/15568318.2020.1765223](https://doi.org/10.1080/15568318.2020.1765223).

407 Larsen, J., El-Geneidy, A., Yasmin, F., 2010. Beyond the quarter mile: Re-examining travel distances by active transportation.  
408 Canadian Journal of Urban Research: Canadian Planning and Policy 19, 70–88.

409 Leferink, T., 2017. Why cycle to the railway station?: A station scanner based on factors that influence bicycle-rail use. with  
410 a study on stakeholders in scotland. URL: <https://resolver.tudelft.nl/uuid:7653ce93-3a2a-4a1f-b804-0b1c4c206eb1>.

411 Lisboa E-Nova, 2023. Observatórios Lisboa - Infos Emissões Gases com Efeito Estufa. URL: [https://observatorios-lisboa.](https://observatorios-lisboa.pt/info-emissoes.html)  
412 [pt/info-emissoes.html](https://observatorios-lisboa.pt/info-emissoes.html).

413 Lovelace, R., Félix, R., Carlino, D., 2022a. Exploring jittering and routing options for converting origin-destination data into  
414 route networks: towards accurate estimates of movement at the street level. The International Archives of the Photogramme-  
415 try, Remote Sensing and Spatial Information Sciences XLVIII-4/W1-2022, 279–286. doi:[10.5194/isprs-archives-XLVIII-](https://doi.org/10.5194/isprs-archives-XLVIII-4-W1-2022-279-2022)  
416 [4-W1-2022-279-2022](https://doi.org/10.5194/isprs-archives-XLVIII-4-W1-2022-279-2022).

417 Lovelace, R., Félix, R., Carlino, D., 2022b. Jittering: A computationally efficient method for generating realistic route networks  
418 from origin-destination data. Findings doi:[10.32866/001c.33873](https://doi.org/10.32866/001c.33873).

419 Lovelace, R., Goodman, A., Aldred, R., Berkoff, N., Abbas, A., Woodcock, J., 2017. The propensity to cycle tool: An open  
 420 source online system for sustainable transport planning. *Journal of Transport and Land Use* 10. doi:[10.5198/jtlu.2016.862](https://doi.org/10.5198/jtlu.2016.862).  
 421 Martens, K., 2007. Promoting bike-and-ride: The dutch experience. *Transportation Research Part A: Policy and Practice* 41,  
 422 326–338. doi:[10.1016/j.tra.2006.09.010](https://doi.org/10.1016/j.tra.2006.09.010).  
 423 Metropolitano de Lisboa, 2020. Relatório Integrado 2019. Technical Report. Metropolitano de Lisboa, E.P.E. URL: [https:  
 424 //www.metrolisboa.pt/wp-content/uploads/2021/01/relatorio\\_integrado\\_2019.pdf](https://www.metrolisboa.pt/wp-content/uploads/2021/01/relatorio_integrado_2019.pdf).  
 425 Nash, C., et al., 2003. UNification of accounts and marginal costs for Transport Efficiency: Final report. Technical Report.  
 426 Institute for Transport Studies, University of Leeds. URL: [https://www.its.leeds.ac.uk/projects/unite/downloads/  
 427 Unite%20Final%20Report.pdf](https://www.its.leeds.ac.uk/projects/unite/downloads/Unite%20Final%20Report.pdf).  
 428 Ntziachristos, L., Samaras, Z., 2020. EMEP/EEA air pollutant emission inventory guidebook 2019. URL: [https://www.emisia.  
 429 com/utilities/copert/documentation/](https://www.emisia.com/utilities/copert/documentation/).  
 430 Pereira, R.H.M., Saraiva, M., Herszenhut, D., Braga, C.K.V., Conway, M.W., 2021. r5r: Rapid realistic routing on multimodal  
 431 transport networks with r5 in r. Findings URL: <https://doi.org/10.32866/001c.21262>, doi:[10.32866/001c.21262](https://doi.org/10.32866/001c.21262).  
 432 Presidência do Conselho de Ministros, 2019. Resolução do conselho de ministros n.º 131/2019. URL: [https://files.dre.pt/  
 433 1s/2019/08/14700/0004600081.pdf](https://files.dre.pt/1s/2019/08/14700/0004600081.pdf).  
 434 Rietveld, P., 2000. The accessibility of railway stations: the role of the bicycle in the netherlands. *Transportation Research  
 435 Part D: Transport and Environment* 5, 71–75. doi:[10.1016/S1361-9209\(99\)00019-X](https://doi.org/10.1016/S1361-9209(99)00019-X).  
 436 Sartori, D., Catalano, G., Genco, M., Pancotti, C., Sirtori, E., Vignetti, S., Del Bo, C., 2014. Guide to cost-benefit analysis  
 437 of investment projects. Economic appraisal tool for Cohesion Policy 2014-2020. Technical Report. European Commission  
 438 - Directorate General for Regional and Urban Policy. URL: [https://ec.europa.eu/regional\\_policy/sources/docgener/  
 439 studies/pdf/cba\\_guide.pdf](https://ec.europa.eu/regional_policy/sources/docgener/studies/pdf/cba_guide.pdf).  
 440 Silva, C., Bravo, J.V., Gonçalves, J., 2021. Impacto Económico e Social da Sinistralidade Rodoviária em Portugal. Technical  
 441 Report. Centro de Estudos de Gestão do ISEG, Autoridade Nacional de Segurança Rodoviária (ANSR). URL: [http:  
 442 //www.ansr.pt/Documents/Impacto\\_Economico\\_Social\\_Sinistralidade\\_Rodoviaria.pdf](http://www.ansr.pt/Documents/Impacto_Economico_Social_Sinistralidade_Rodoviaria.pdf).  
 443 Transtejo, 2014. Relatório de Sustentabilidade 2014. Technical Report. Grupo Transtejo, S.A. URL: [https://tts1.pt/wp-  
 444 content/uploads/2018/01/rs\\_2014\\_min.pdf](https://tts1.pt/wp-content/uploads/2018/01/rs_2014_min.pdf).  
 445 van Mil, J.F.P., Leferink, T.S., Annema, J.A., van Oort, N., 2021. Insights into factors affecting the combined bicycle-transit  
 446 mode. *Public Transport* 13, 649–673. doi:[10.1007/s12469-020-00240-2](https://doi.org/10.1007/s12469-020-00240-2).